

The Drive & Control Company

Rexroth
 Bosch Group


Valve amplifiers for proportional pressure valves

Type VT-VSPA1-1-1X/005 (mod. VT-VSPA1-1-1X)

RE 30111-05

Edition: 2013-11

Replaces: 01.08

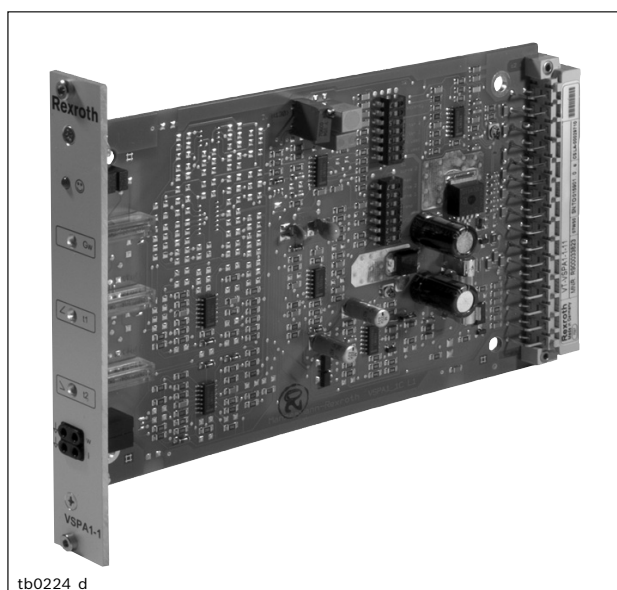

tb0224_d

- ▶ Component series 1X
- ▶ Suitable for the control of all direct and pilot operated proportional pressure valves without electrical position feedback and only one solenoid as actuating element available at the time of the data sheet publication

Features

- ▶ Basic amplifier: VT-VSPA1-1-1X
- ▶ Changes as compared to basic: Clock frequencies 100 and 160 Hz
- ▶ Differential input, switchable from voltage to current input
- ▶ Additional command value input 0 to +9 V
- ▶ Ramp generator, separately adjustable for upwards and downwards direction
- ▶ Clocked power output stage
- ▶ "Ready for operation" message
- ▶ Reverse polarity protection for voltage supply
- ▶ Cable break detection for current input 4 to 20 mA
- ▶ Short-circuit protection of the solenoid conductor
- ▶ Cable break detection of the solenoid conductor

Contents

Features	1
Ordering code	2
Function	2
Block diagram/pin assignment	4
Technical data	5
Characteristic curves	6
Display/adjustment elements	7
Meaning of the DIL switches	9
Dimensions	10
Project planning/maintenance instructions/additional information	10
Troubleshooting	11

RE 30111-05, edition: 2013-11, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2/12 VT-VSPA1-1-1X/005 | Valve amplifiers

Ordering code

Type VT-VSPA1-1-1X/005

Material number: R900978827

Available accessories:

Card holder:


- Type VT 3002-1-2X/32D, see data sheet 29928
Single card holder without power supply unit

Function

The command value voltage is specified at the command value input 1 either directly or via an external command value potentiometer by means of the regulated voltage +9 V of the power supply unit [14].

To this input, the following applies: $+9\text{ V} \pm 100\text{ \% }^{1)}$.


External command value presetting

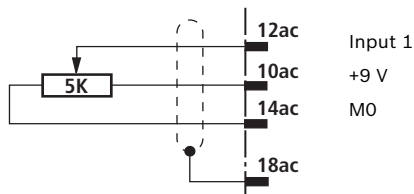


Notice:

If an external command value potentiometer is used, the internal potentiometer "Gw" [3] must be set to maximum or to the desired maximum pressure.

Internal command value presetting

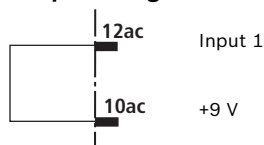

Differential input (input 2)

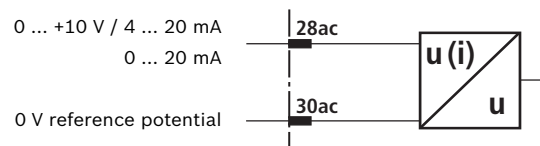

The amendment of the connection designations in brackets only applies to type VT-VSPA1-1.


The command value input 2 is a differential input [1] (0 to +10 V). By means of DIL switches ²⁾, it can be configured as current input (4 to 20 mA or 0 to 20 mA). If the command value is specified by external electronics with a different reference potential (e.g. by a PLC), this input has to be used. When disconnecting or connecting the command value voltage, it has to be ensured that both signal lines are in each case separated from or connected with the input.

Before they are forwarded, both command values are summed up [2] and then reach a potentiometer [3] accessible at the front plate of the card which acts as attenuator and thus limits the maximum command value.

Function (continued)

The down-stream ramp generator [4] generates a ramp-shaped output signal from a given stepped input signal. The time constant of this signal can be separately adjusted for the upwards and downwards direction by means of two potentiometers. The specified ramp time refers to a command value step of 100 % and may be approx. 1 s or 5 s, depending on the setting by means of a DIL switch ²⁾. If a command value step of less than 100 % is switched to the ramp generator input or if the attenuator [3] is effective, the ramp time will be correspondingly shorter. By means of the external "ramp up/down off" contacts, the upwards and downwards ramp times can be separately set to their minimum value (approx. 30 ms).

Ramp "up/down" off

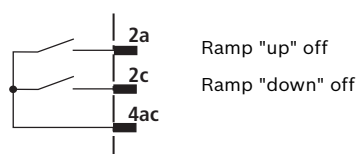

The ramp generator [4] output signal is forwarded to the summing amplifier [5] as current command value. Here, a voltage of +6 V corresponds to a command value of 100 %.

In the summing amplifier [5], the output signals of the characteristic curve generators [6] or [7] are added to the command value (can be selected by means of DIL switches ²⁾ depending on the valve to be controlled). The current command value can be filtered by means of a connectible low pass. The current output stage [9] is controlled using the current controller [8].

In the current controller, the current command value is moreover modulated with the clock generator signal [10] (frequency can be programmed using the DIL switch ²⁾). In the valve solenoid, the clocked actual current value acts like a constant current with superimposed dither signal. The amplifier has measuring sockets for the internal command value and the actual value.

The following is true for the command value: +6 V \pm 100 %

The following is true for the actual value: 1 mV \pm 1 mA

The "ready for operation" signal is output and the "H2" LED on the front plate is illuminated if:

- there is no short-circuit of the solenoid conductors and no overload of the output stage,
- a command value is available (cable break detection),
- there is no cable break of the solenoid conductor.

In case of a fault, the following applies:


	Output	LED
Short-circuit	Low	Off
Cable break	Clocking	Flashing

¹⁾ The reference potential for command value 1 is M0 (measurement zero).

²⁾ For the DIL switch settings see from page 7

[] ... assignment to the block diagram on page 4

Block diagram/pin assignment

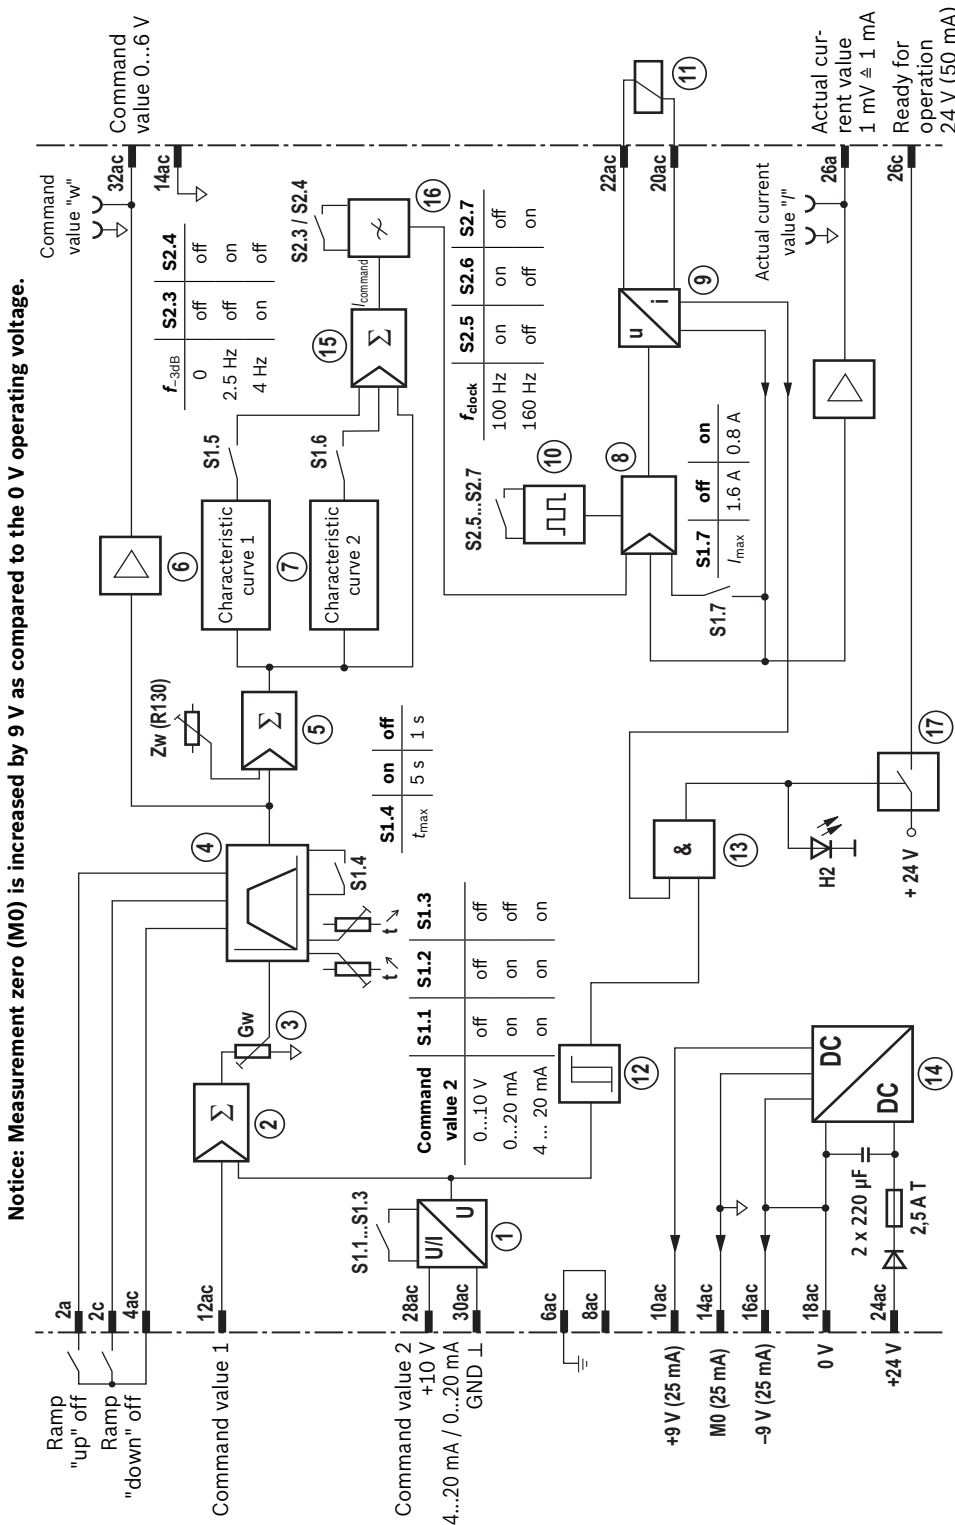

Bosch Rexroth AG, RE 30111-05, edition: 2013-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Technical data (For applications outside these parameters, please consult us!)


Operating voltage	U_B	+24 VDC + 40 % – 5 %	
Upper limit value	$u_B(t)_{\max}$	+35 V	
Lower limit value	$u_B(t)_{\min}$	+22 V	
Max. power consumption	P_s	50 VA	
Max. current consumption	I	1.8 A	
Fuse	I_s	2.5 A slow-blow	
Inputs	Command value 1	U_e	0 to +9 V (reference potential is M0)
	Command value 2 (differential input)	U_e	0 to +10 V; $R_e = 100 \Omega$
	or	I_e	4 to 20 mA (load $R_B = 100 \Omega$)
	or	I_e	0 to 20 mA (load $R_B = 100 \Omega$)
			Depending on the setting by means of S11 to S13
Ramp time (setting range)	t	30 ms to approx. 1 s or 5 s (depending on the setting by means of S14)	
Outputs			
Output stage			
Solenoid current/resistance	I_{\max}	800 mA + 20 %, $R_{20} = 19.5 \Omega$	Depending on the setting by means of S17 ¹⁾
or	I_{\max}	1600 mA + 20 %, $R_{20} = 5.4 \Omega$	
Pilot current	with $I_{\max} = 800$ mA	I_v	50 mA or 100 mA
	with $I_{\max} = 1600$ mA	I_v	100 mA
			Depending on the setting by means of S17 and "Zw" (R130)
Additionally	with $I_{\max} = 800$ mA	I_v	0 to 300 mA + 20 %
	with $I_{\max} = 1600$ mA	I_v	0 to 600 mA + 20 %
			Adjustable by means of "Zw" (R130) on the printed circuit board
Clock frequency	f	100 Hz or 160 Hz in each case ± 10 % (depending on the setting by means of S25 to S27)	
"Ready for operation" signal			
High	U	Approx. U_B , 50 mA	
Low	U	0 V, $R_i = 10 \text{ k}\Omega$	
Regulated voltage	U	$\pm 9 \text{ V} \pm 1 \text{ %}$, $\pm 25 \text{ mA}$ externally loadable	
Measuring sockets			
Command value "w"	U	0 to +6 V (+6 V \triangleq 100 % solenoid current), $R_i = 1 \text{ k}\Omega$	
Actual current value "I"	U	0 to 1600 mV \triangleq 0 to 1600 mA ± 20 mA	
Type of connection		32-pole male multipoint connector, DIN 41612, design D	
Card dimensions		Euro-card 100 x 160 mm, DIN 41494	
Front plate dimensions			
Height		3 HE (128.4 mm)	
Width soldering side		1 TE (5.08)	
Width component side		3 TE	
Admissible operating temperature range	ϑ	0 to +50 °C	
Storage temperature range	ϑ	-25 to +85 °C	
Weight	m	0.1 kg	

¹⁾ The maximum current I_{\max} can be set to the required value by means of the "Gw" command value attenuator potentiometer.

6/12 VT-VSPA1-1-1X/005 | Valve amplifiers

Characteristic curves


Linear output characteristic curve (basic characteristic curve)

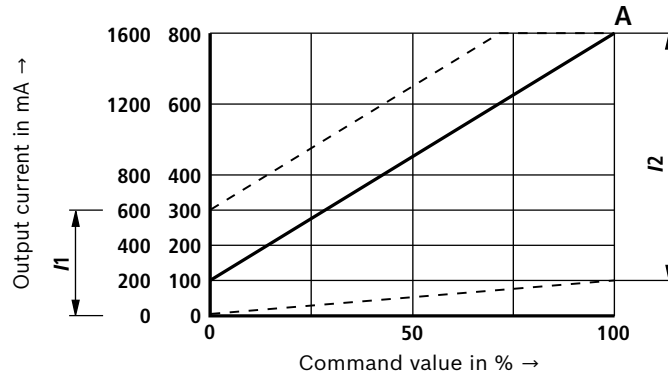

- /1 Pilot current setting range I_v with potentiometer "Zw" (R130) on the printed circuit board
- /2 Setting range of the maximum command value with potentiometer "Gw"
- A Characteristic curve in the condition as supplied

Output characteristic curve with fixedly set characteristic

(see setting instructions page 9 and 10)

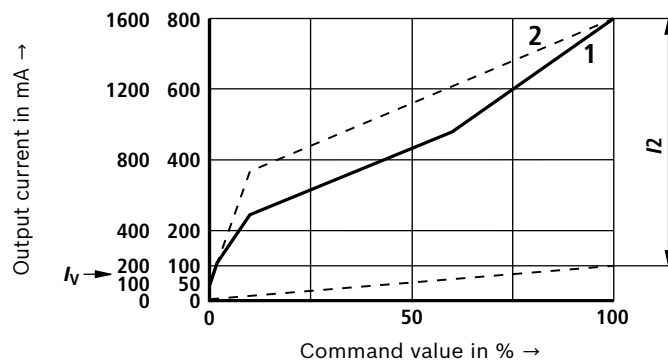

- I_v Pilot current characteristic curve 2 (qualitative representation)
- /2 Setting range of the maximum command value with potentiometer "Gw"
- 1 Characteristic curve 1 (qualitative representation)
- 2 Characteristic curve 2 (qualitative representation)


Bosch Rexroth AG, RE 30111-05, edition: 2013-11

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Display/adjustment elements

VT-VSPA1-1, component series 10

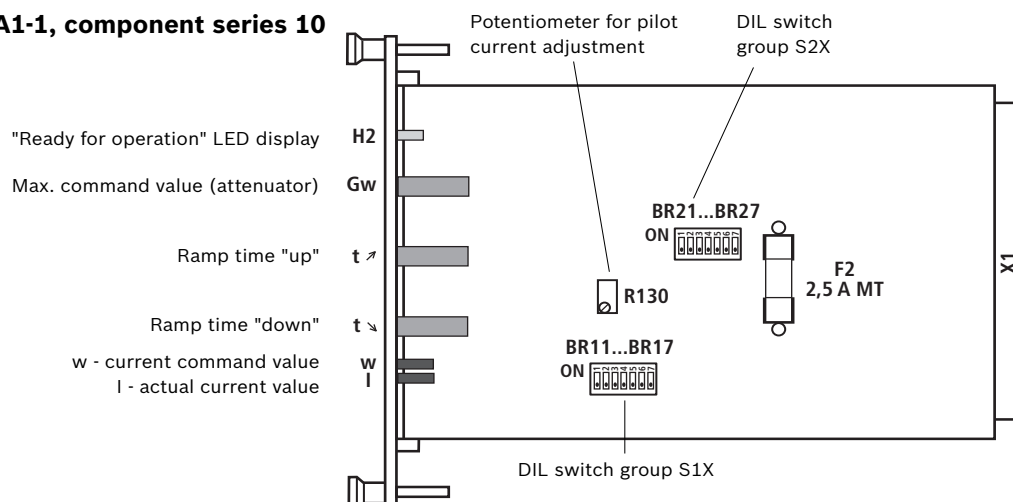

VT-VSPA1-1, from component series 11

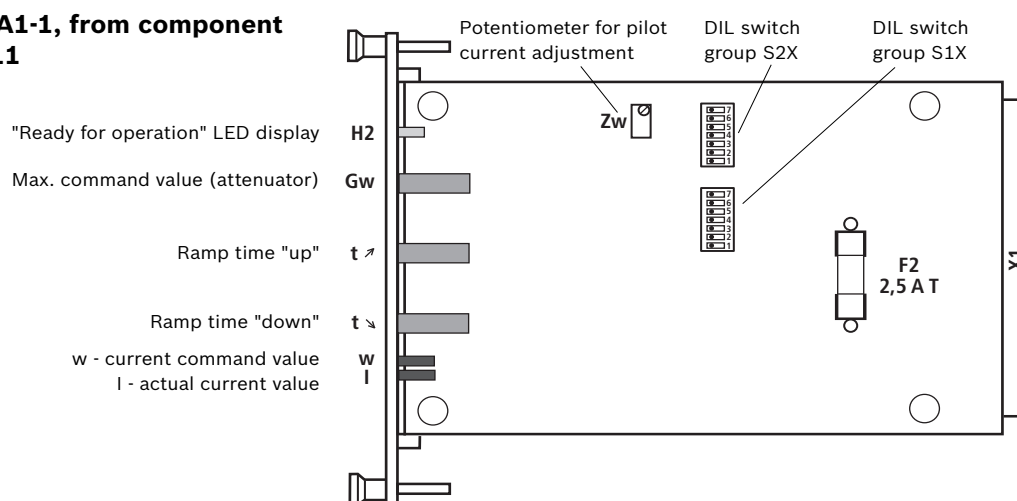

Display/adjustment elements (continued)

Assignment of the DIL switch settings on the card to the valve types (see also sign on the printed circuit board)

Setting for valve types:	S15 ... S17 (BR15 ... BR17)	S21 ... S27 ²⁾ (BR21 ... BR27)	Setting valid for all valve types:	S11 ... S14 (BR11 ... BR14)
DBE(M)T, DBE(M)30, DRE(M)30, 3DRE(M)10 ¹⁾ , 3DRE(M)16 ¹⁾ , DBEP6A, DBEP6B, 3DREP6A, 3DREP6B Pumps	ON	ON	Ramp time 5 s 1 s	ON
DRE(M)10-5X, DRE(M)20-5X	ON	ON	Command value 2 +10 V	ON
DBE(M)10-5X, DBE(M)20-5X, 3DRE(M)10P-6X, 3DRE(M)16P-6X, ZDRE10, (Z)DBE6	ON	ON	0 ... 20 mA	ON
DRE6, ZDRE6	ON	ON	4 ... 20 mA	ON

¹⁾ To component series 5X

²⁾ S25 bis S27 determine the clock frequency, see page 9

Meaning of the "Zw" (R130) and "Gw" potentiometers:

- ▶ Pilot current setting by means of the "Zw" (R130) potentiometer
 - Clockwise rotation → increase in pilot current
 - Counterclockwise rotation → reduction of pilot current
- ▶ Setting of the max. command value using the "Gw" potentiometer
 - Clockwise rotation → increase in command value
 - Counterclockwise rotation → reduction of command value

Notice (X):

With type VT-VSPA1-1 (component series 10), the BR22 switch must be set to "ON" and the "R130" potentiometer must be rotated to the left stop in order to set the correct characteristic curve.

With type VT-VSPA1-1 (from component series 11), switch S22 does not have any effect. The "Zw" potentiometer does not have to be operated.

Meaning of the DIL switches

Notice:

It has to be ensured before commissioning of the amplifiers that the DIL switches on the printed circuit board are set according to the relevant application.

Switch settings with regard to current valve types

Switch	Valve types/amplifier cards			
	DBE(M)T, DBE(M)30 DRE(M)30, DRE(M)10 ²⁾ DRE(M)16 ²⁾ DBEP6A, DBEP6B 3DREP6A, 3DREP6B Pumps	DRE(M)10-5X DRE(M)20-5X	DBE(M)10-5X DBE(M)20-5X ZDRE10 (Z)DBE6 3DRE(M)10P-6X 3DRE(M)16P-6X	DRE, ZDRE6
Characteristic curves				
S15 (BR15)	Basic characteristic curve OFF	Characteristic curve 1 ON	Characteristic curve 1 ON	Characteristic curve 2 OFF
S16 (BR16)	OFF	OFF	OFF	ON
Command value filter				
S23 (BR23)	OFF	$f_{3dB} = 4 \text{ Hz}$ ON	$f_{3dB} = 4 \text{ Hz}$ ON	$f_{3dB} = 2.5 \text{ Hz}$ OFF
S24 (BR24)	OFF	OFF	OFF	ON
Max. output current ¹⁾				
S17 (BR17)	$I_{max} = 800 \text{ mA}$ ON	$I_{max} = 800 \text{ mA}$ ON	$I_{max} = 1.6 \text{ A}$ OFF	$I_{max} = 1.6 \text{ A}$ OFF
Clock frequency				
S25 (BR25)		$f = 100 \text{ Hz}$ ON	$f = 160 \text{ Hz}$ OFF	
S26 (BR26)		ON	OFF	
S27 (BR27)		OFF	ON	
Pilot current basic setting				
"Zw" (R130)	100 mA	50 mA	100 mA	100 mA

¹⁾ Any doubling of the maximum output current will double the setting range and the set pilot current.

²⁾ To component series 5X

Pilot current setting range by means of the "Zw" (R130) potentiometer:

$I_{max} = 800 \text{ mA} \rightarrow I_v = 0 \text{ to } 300 \text{ mA}$

$I_{max} = 1600 \text{ mA} \rightarrow I_v = 0 \text{ to } 600 \text{ mA}$

() applies to VT-VSPA1-1, component series 10

Upon operation of switch BR22, the pilot current is increased by 50 mA or 100 mA.

Adjustment options independent of the valve type (command value 2 and ramp time)

	Configuration of the differential input			
	Command value 2: +10 V	Command value 2: 0 to 20 mA	Command value 2: 4 to 20 mA	DRE, ZDRE6
S11 (BR11)	OFF	ON	ON	
S12 (BR12)	OFF	ON	ON	
S13 (BR13)	OFF	OFF	ON	
Max. ramp time				
S14 (BR14)	OFF $\triangleq 1 \text{ s}$		ON $\triangleq 5 \text{ s}$	


RE 30111-05, edition: 2013-11, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

10/12 VT-VSPA1-1-1X/005 | Valve amplifiers

Dimensions (dimensions in mm)

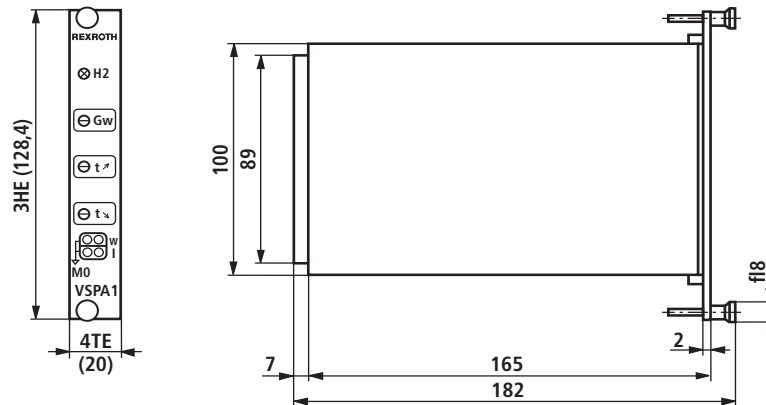

Project planning/maintenance instructions/additional information

- ▶ It has to be ensured before commissioning of the amplifiers that the DIL switches on the printed circuit board are set according to the relevant application.
- ▶ In the condition as supplied the parameters are set as follows (for the parameter setting refer to pages 8 to 10):
Max. ramp time = 5 s, pilot current = 100 mA, max. output current = 800 mA, clock frequency = 160 Hz.
- ▶ The amplifier card may only be assembled when de-energized.
- ▶ No connectors with free-wheeling diodes or LED displays must be used for solenoid connection.
- ▶ Only carry out measurements at the card using instruments $R_i > 100 \text{ k}\Omega$.
- ▶ Measurement zero (M0) is increased by +9 V compared to 0 V operating voltage and not isolated, i.e. -9 V regulated voltage \neq 0 V operating voltage. Thus, do not connect measurement zero (M0) to 0 V operating voltage.
- ▶ For switching command values, relays with gold-plated contacts have to be used (low voltages, low currents).
- ▶ Always shield command value lines, connect shielding to earth on the card-side, other side open. The card has to be connected to the earth via terminal 6 or 8. If no system earth exists, connect 0 V operating voltage.
- ▶ Recommendation:
Also shield the solenoid conductor. For solenoid conductors up to 50 m in length, use the line type LiYCY 1.5 mm².
For greater lengths, please contact us.
- ▶ The distance to aerial lines, radios, and radar systems has to be 1 m at least.
- ▶ Do not lay solenoid conductors and signal lines near power lines.
- ▶ The charging power of the smoothing capacitor on the card requires the pre-fuses to be of a slow-blowing nature.
- ▶ **Notice:**
If the differential input is used, both inputs must always be connected or disconnected at the same time.

Bosch Rexroth AG, RE 30111-05, edition: 2013-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Troubleshooting

If the amplifier cards do not function, the following steps are required for troubleshooting:

1. Operating voltage available?
Measure contact 24ac against 18ac
2. Fuse on the card faulty?
3. Internal ± 9 V operating voltage available on the card?
4. If the internal command value potentiometers are used, is the bridge from 10ac to 12ac available?
5. Is the external potentiometer correctly connected?
6. Is the differential input correctly connected?
Control: Reference potential to 30ac
 0 to +10 V to 28ac
7. Is the solenoid correctly connected?
If the card is removed, a resistance of approx. 20 Ω to 30 Ω or 5 Ω to 8 Ω has to be measurable between contacts 22ac and 20ac depending on the valve type.

Notice:

The output stage switches off at overtemperature (e.g. due to overload). This error is displayed by the "H2" LED going out!

In case of cable break of input "4 to 20 mA", the "ready for operation" signal is reset and the "H2" LED will go out, as well.

The following applies from component series 11:

In case of short-circuit or cable break of the solenoid conductor, the ready for operation output will clock and the "H2" LED will flash with a frequency of 0.5 to 2 Hz as soon as the command value is simultaneously $> 2\%$.