

## Hydraulic oil, high-pressure filters

- E** Mangueras, Filtros, Aceite, Acoplamiento
- F** Flexibles, Filtres, Huile, Raccords
- D** Schläuche, Filter, Öl, Kupplungen

### Options

#### Fittings



#### Hoses



### Premium hydraulic oil

- Ensures effective lubricity
- Protects essential parts
- Prevents pump cavitation
- Maximum internal heat transfer
- Additives prevent rust, oxidation and sludge.

### High-pressure filters

- Plated stainless steel wire mesh screen construction provides large filter area in a compact size
- Bi-directional design allows filtration of oil in either flow direction
- Two piece body construction for easy replacement of filter elements
- High flow rates are obtainable with a minimum pressure drop
- Threaded port connections on each end simplify installation.

Shown: HF-95T, HF-95X, HF-95Y



### HF-serie, Hydraulic oil

Genuine Enerpac hydraulic oil to guarantee optimal performance and long life of your hydraulic equipment.

### FL-series, High-pressure filters

Compact in line high pressure filters prevent chips and debris that have entered the hydraulic fluid system from damaging hydraulic system components.

### Important

**Do not exceed the maximum pressure.**

**Use only genuine Enerpac hydraulic oil. The use of any other fluid will render your Enerpac warranty null and void.**

### Hydraulic oil



Jerry can content litres	Model number	kg
1	HF-95X	1,1
5	HF-95Y	5,3
20	HF-95T	21,5

### HF-95 Hydraulic Oil Specification

Viscosity Index	100 min
Viscosity (cSt @ 40 °C)	32
API Gravity	31-33
Density (cSt @ 15 °C)	875
Flash point	204 °C
Pour point	32 °C
Colour	Blue
Working Temperature Range	0 - 60 °C
Ideal working temperature	40 °C

### Filtration

**20 micron filter** provides the longest service life before element replacement.  
**10 micron filter** recommended for more sensitive hydraulic components.

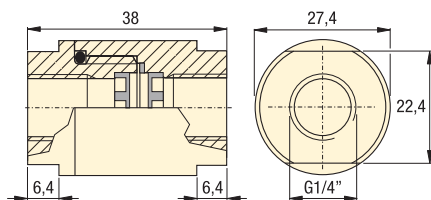

### High in-line pressure filters

Model number *	Filtration micron		Filter element set	Maximum Pressure bar	kg
	Nominal	Absolute			
FL-2102	10	25	FL-2101K	350	0,25
FL-2202	20	40	FL-2201K	350	0,25

\* Also available with Viton seals; model numbers FL-2102V and FL-2202V.

Hydraulic power is distributed by manifolds and transported by hoses and tubing.

