

XC-Series, Cordless Hydraulic Pumps

ENERPAC
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ Shown: XC-1201ME



- Lightweight design with integrated handle and carrying strap for portability
- Bladder reservoir prevents contamination and allows pump usage in any position
- Powerful 0,37 kW motor and 28 Volt Lithium-Ion battery deliver exceptional speed and run time
- High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments
- Cordless technology eliminates tripping hazards found in other electric or air powered pumps
- Available in both single-and double-acting valve configurations.



Performance of a Powered Pump

Portability of a Hand Pump



GA45GC Gauge Adaptor Assembly

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



28-Volt Battery

The XC-28V with Lithium-Ion technology for maximum battery performance.



Battery Charger

1-hour quick charger.

Model Nr.	Voltage
XC-115VC	115 VAC
XC-230VC	230 VAC



3/8" Swivel Connector

Customer installed 360 degree swivel coupler for optimal orientation of the hydraulic hose.

Order Model Number ¹⁾ **XC1**

¹⁾ Accessories must be ordered separately.

◀ Power and simplicity for the toughest jobs.

Cordless Hydraulic Pumps



XC-Series Cordless Hydraulic Pumps

The XC-Series cordless pump is ideal for jobs that require a combination of portability, speed, and safety. These cordless pumps are perfect for remote locations without access to power, but also indoors where trip hazards, ergonomics or size is a concern.

The XC-Series cordless pump is compatible with all Enerpac hydraulic tools and small to medium sized cylinders.

The XC-Series cordless pump is CSA and CE compliant.



The Lithium-Ion battery provides superior run time:

- 250 cuts of 10 mm reinforcing bar using a WHC-750 Cutter
- 112 lifts with a WR-5 Spreader
- 45 splits on M27 - 8.8 nuts using a NC-3241 Nut Cutter
- 30 times lifting with a RC-104 cylinder (10 ton, 100 mm stroke).

Note: Actual number of cycles per charge will vary depending on condition of battery, tool and ambient conditions. Battery life with double-acting tools is approximately 75% of that for comparable, single-acting tools.

XC Series





Reservoir Capacity:
1,0 - 2,0 litres


Flow at Rated Pressure:
0,25 l/min

Maximum Operating Pressure:
700 bar

- ① Outlet "Advance" Port 3/8"-18 NPTF
- ② Oil Fill (must use funnel)
- ③ User Adjustable Relief Valve Access Port
- ④ Directional Control Valve
- ⑤ Shoulder Strap Connection Points
- ⑥ Safety Lock Feature
- ⑦ On/Off Switch
- ⑧ Inlet "Retract" Port (double-acting models only)

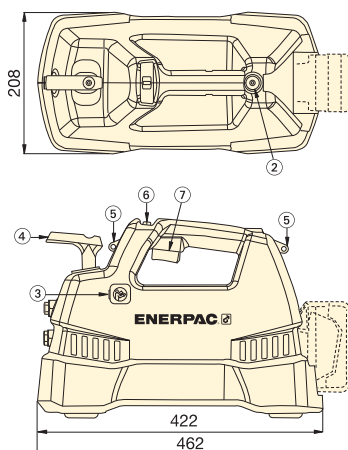

OIL FLOW vs. PRESSURE

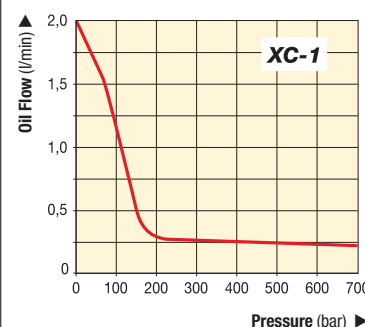

SELECTION CHART

Useable Oil Capacity (litres)	Model Number	Output Flow Rate (l/min)			Valve Function **	Charger Voltage (VAC)	Weight (kg)
		No Load	140 bar	700 bar			
1,0	XC-1201MB	2,0	0,50	0,25	3-way, 2-pos.	115	10
2,0	XC-1202MB	2,0	0,50	0,25	3-way, 2-pos.	115	11
1,0	XC-1201ME	2,0	0,50	0,25	3-way, 2-pos.	230	10
2,0	XC-1202ME	2,0	0,50	0,25	3-way, 2-pos.	230	11
1,0	XC-1201M *	2,0	0,50	0,25	3-way, 2-pos.	—	10
2,0	XC-1202M *	2,0	0,50	0,25	3-way, 2-pos.	—	11
1,0	XC-1401MB	2,0	0,50	0,25	4-way, 3-pos.	115	10
2,0	XC-1402MB	2,0	0,50	0,25	4-way, 3-pos.	115	11
1,0	XC-1401ME	2,0	0,50	0,25	4-way, 3-pos.	230	10
2,0	XC-1402ME	2,0	0,50	0,25	4-way, 3-pos.	230	11
1,0	XC-1401M *	2,0	0,50	0,25	4-way, 3-pos.	—	10
2,0	XC-1402M *	2,0	0,50	0,25	4-way, 3-pos.	—	11

* Batteries and charger not included.

** 3/2-valves for single-acting cylinders or tools,
4/3 valves for double-acting cylinders or tools.

▼ Take the battery pump anywhere without power cords or air hoses.

