


Hydraulic Wedgie and Spread Cylinders


▼ Shown clockwise from top: WR15, WR5, A92




- **WR5:** For use in very confined work areas
- **WR15:** For long stroke spreading applications
- **Single-acting, spring return**
- **A92:** Spreader attachment; threads on 10 ton RC-Series cylinders * (except RC101).




WR5

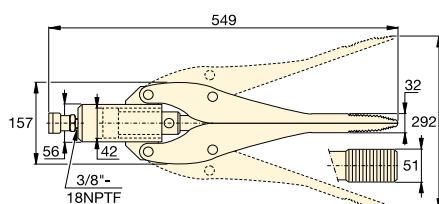

WR15



A92

Cylinder Capacity ton (kN)	Tip Clearance (mm)	Model Number	Maximum Spread (mm)	Cylinder Effective Area (cm ²)	Oil Capacity (cm ³)	 (kg)
1,0 (8,9)	12,8	WR5	94	6,5	10	2,3
0,75 (6)	32,0	WR15	292	14,5	64	11,3
1,0 (8,9)	35,0	A92 *	158	—	—	3,6

* Maximum system pressure must be limited to half the rated pressure (350 bar).

www.enerpac.com

A WR Series



Capacity:
0,75 - 1,0 ton

Tip Clearance:
12,8 - 35 mm

Maximum Spread:
94 - 292 mm

Maximum Operating Pressure:
700 bar



RC-Series Cylinders

10 ton RC-Series cylinders (except RC-101) fit into A92 Spreader Attachment.

Page: 6



Power Box

Tool box with **P392** hand pump, gauge adaptor assembly, hose and **WR5**.

Page: 65



Best Match Hand Pump

To power your WR5 and WR15 the **P392** hand pump is an ideal choice. Use Enerpac H700-Series hose (page 128) for hydraulic connection.

Page: 76

▼ A WR5 wedgie cylinder is used to loosen a bridge bearing.



ENERPAC 187

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK