

## FORGED CLAMP STRAPS

FORGED STEEL, 70,000 PSI YIELD STRENGTH, BLACK OXIDE FINISH



**Straight  
Locator Nose**




**Straight  
Plain Nose**




**Gooseneck  
Locator Nose**




**Gooseneck  
Plain Nose**

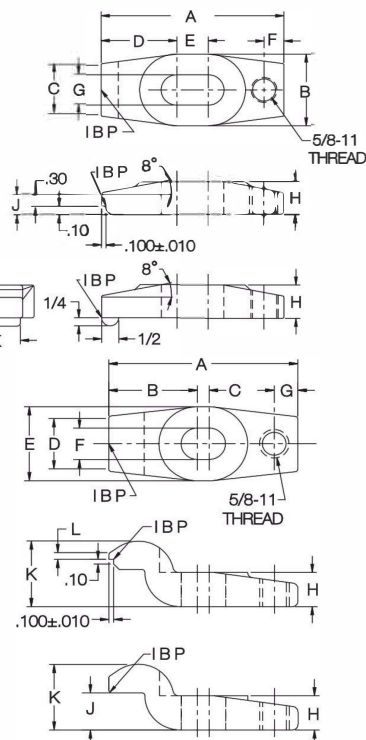

High-strength Tapped-Heel Clamp Strap available in straight or gooseneck design, with locator nose or plain nose. Locator-nose version is ideal for workpieces with machined sides. The accurately machined notch ensures precise, repeatable clamp location for increased machining clearance.



**Straight  
Locator Nose  
Clamp**



**Gooseneck  
Locator Nose  
Clamp**

### STRAIGHT — LOCATOR NOSE (INCH)

| PART NO.  | STUD SIZE | A     | B     | C      | D       | E     | F     | G     | H     | J    | K |
|-----------|-----------|-------|-------|--------|---------|-------|-------|-------|-------|------|---|
| CL-4-FSCS | 5/8-11    | 4     | 1-5/8 | 1-3/16 | 1-21/32 | 11/16 | 7/16  | 11/16 | 3/4   | 1/2  | - |
| CL-6-FSCS | 6         | 1-3/4 | 1-1/4 | 2-5/16 | 1-3/8   | 9/16  |       |       | 7/8   | 9/16 | - |
| CL-8-FSCS | 3/4-10    | 8     | 2-1/8 | 1-1/2  | 3       | 2     | 11/16 | 13/16 | 1-1/8 | 3/4  | - |

### STRAIGHT — PLAIN NOSE (INCH)

|           |        |       |       |        |         |       |       |       |       |      |       |
|-----------|--------|-------|-------|--------|---------|-------|-------|-------|-------|------|-------|
| CL-4-FRCS | 5/8-11 | 4     | 1-5/8 | 1-3/16 | 1-21/32 | 11/16 | 7/16  | 11/16 | 3/4   | 1/2  | 1     |
| CL-6-FRCS | 6      | 1-3/4 | 1-1/4 | 2-5/16 | 1-3/8   | 9/16  |       |       | 7/8   | 9/16 |       |
| CL-8-FRCS | 3/4-10 | 8     | 2-1/8 | 1-1/2  | 3       | 2     | 11/16 | 13/16 | 1-1/8 | 3/4  | 1-1/4 |

### GOOSENECK — LOCATOR NOSE (INCH)

| PART NO.   | STUD SIZE | A       | B       | C     | D      | E     | F     | G   | H     | J     | K      | L   |
|------------|-----------|---------|---------|-------|--------|-------|-------|-----|-------|-------|--------|-----|
| CL-40-FGNS | 5/8-11    | 4       | 1-31/32 | 3/16  | 1-3/16 | 1-3/4 | 11/16 | 1/2 | 3/4   | 3/4   | 1-7/16 | .15 |
| CL-60-FGNS | 6         | 2-17/32 | 1       | 1-1/4 | 1-3/4  |       |       | 5/8 | 7/8   | 15/16 | 1-9/16 | .25 |
| CL-80-FGNS | 3/4-10    | 8       | 3-9/32  | 1-5/8 | 1-9/16 | 2-1/4 | 13/16 | 1   | 1-1/8 | 1-1/8 | 2      | .35 |

### GOOSENECK — PLAIN NOSE (INCH)

|           |        |         |         |       |        |       |       |     |       |       |        |   |
|-----------|--------|---------|---------|-------|--------|-------|-------|-----|-------|-------|--------|---|
| CL-4-FGNS | 5/8-11 | 4       | 1-31/32 | 3/16  | 1-3/16 | 1-3/4 | 11/16 | 1/2 | 3/4   | 3/4   | 1-7/16 | - |
| CL-6-FGNS | 6      | 2-17/32 | 1       | 1-1/4 | 1-3/4  |       |       | 5/8 | 7/8   | 15/16 | 1-9/16 | - |
| CL-8-FGNS | 3/4-10 | 8       | 3-9/32  | 1-5/8 | 1-9/16 | 2-1/8 | 13/16 | 1   | 1-1/8 | 1-1/8 | 2      | - |