
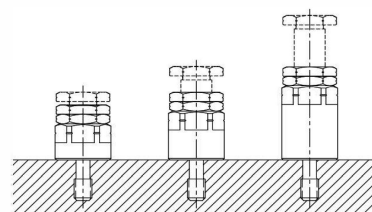


HEAVY-DUTY SCREW JACKS

JACK SCREW: 4135 STEEL, HEAT TREATED, BLACK OXIDE FINISH
TIP: 1144 OR 1045 STEEL, HEAT TREATED, BLACK OXIDE FINISH
BODY: 1045 STEEL, BLACK OXIDE FINISH

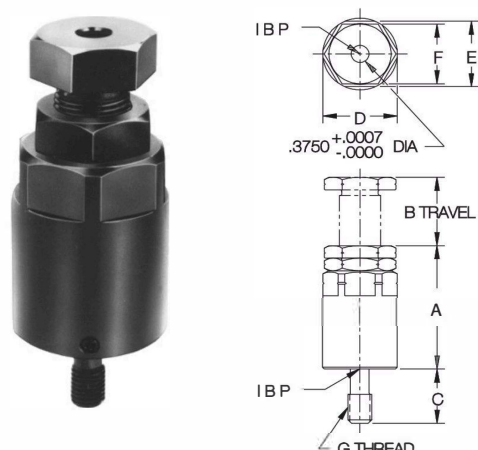


Heavy-duty adjustable support that accepts any of the three tips shown below. Choice of three heights in each size cover the full range of height possibilities.

SCREW JACKS (INCH)


PART NO.	MOUNTING SCREW SIZE	A	B	C	D DIA	E	F	G
CL-MF40-3401	1/2-13	1-5/8	3/8					
CL-MF40-3402		2	3/4	1-1/4	1-9/16	1-7/16	1-5/16	1/2-13
CL-MF40-3403		2-3/4	1-1/2					
CL-MF50-3401	5/8-11	1-5/8	3/8					
CL-MF50-3402		2	3/4	1-3/8	1-9/16	1-7/16	1-5/16	5/8-11
CL-MF50-3403		2-3/4	1-1/2					

SCREW JACKS (METRIC)

CL-MF12-3401	M12	1-5/8	3/8					
CL-MF12-3402		2	3/4	1-1/4	1-9/16	1-7/16	1-5/16	M12
CL-MF12-3403		2-3/4	1-1/2					
CL-MF16-3401	M16	1-5/8	3/8					
CL-MF16-3402		2	3/4	1-3/8	1-9/16	1-7/16	1-5/16	M16
CL-MF16-3403		2-3/4	1-1/2					

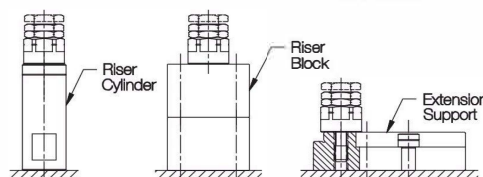

INFO+: For additional height and/or mounting flexibility, use Riser Cylinders (page 284).

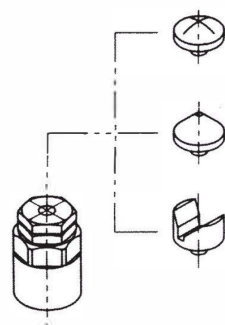

INFO+:
Also see pages 597,605-606 for Roemheld hydraulically operated work supports.




Radius Tip



Conical Tip



V-Shaped Tip

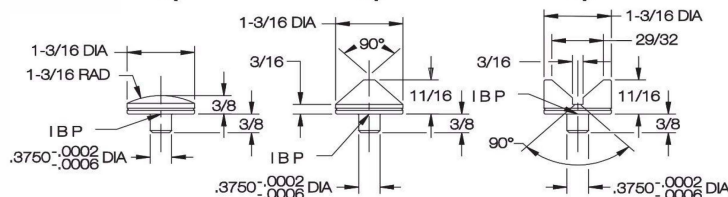

SCREW-JACK TIPS

PART NO.	TYPE	FITS SCREW JACKS
CL-MF10-3501	RADIUS	ALL SIZES
CL-MF10-3502	CONICAL	
CL-MF10-3503	V-SHAPED	