



ROEMHELD
HILMA ■ STARK

Issue 11-18 E

D 8.0115

Power unit


ready for connection*, energy-saving intermittent cycling

max. flow rate 0.82/2.1/3.5 l/min, max. operating pressure 500/250/160 bar



Advantages

- Very compact design
- Energy-saving intermittent cycling
- Many control variants
- Electronic pressure switch
- Digital pressure display
- Quick pressure adjustment by teach-in function
- Electric control optimally adapted
- High-quality leakage-free poppet valves
- Pressure generator also without valves available
- Useful accessory already mounted
- Alternatively manual switch or foot switch
- Ready for connection*

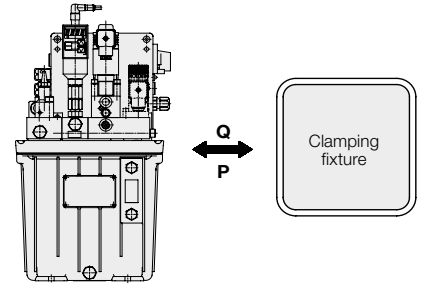

Application

These power units are especially suitable for the operation of small to medium-sized hydraulic clamping fixtures.

Maximally two clamping circuits for single or double-acting cylinders are available, that can be controlled independently of each other.

Thereby also "shuttle machining" is possible, i.e. that during machining of the workpiece in one fixture, workpiece change on the second fixture can be made.

Description

A special feature is the mounting of pump and electric motor in the reservoir. Thus hydraulic and electric control can be arranged in a space-saving way and easily accessible on the reservoir cover. The modular design enables a multitude of control variants.

The radial piston pump is available with three different flow rates and operating pressures.

To allow an energy-saving intermittent cycling only leakage-free poppet valves are used.


Energy-saving intermittent cycling

The electric motor is only running, as long as hydraulic oil is really required, that means to

- extend and retract the clamping cylinder
- build up the operating pressure

Example

Pressure-time diagram for single-acting clamping cylinders

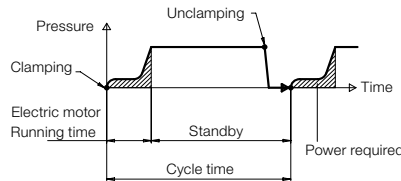

In this example of a hydraulic clamping fixture the running time of the electric motor corresponds to the clamping time, which is only a few seconds. In standby mode the power consumption is relatively low (see Electrical data).


Prerequisites are leakage-free clamping elements, valves and accessories.

The pressure control is made by an electronic pressure switch, that switches on the electric motor for a short time in case of a pressure drop.


Control variants

1 clamping circuit

single acting




double acting




2 clamping circuits


single acting



double acting



Without valve



Important notes

These power units are exclusively designed for the industrial use of pressure generators for hydraulic clamping fixtures that allow intermittent cycling (see example).

All connected hydraulic components must be leakage-free and designed for the maximum operating pressure of the power unit.

The power unit supplies very high pressures. The connected clamping cylinders generate very high forces so that there is a permanent danger of crushing in the effective area of the piston rod. The manufacturer of the fixture or the machine is obliged to provide effective protection devices.

Installation, start up and maintenance have to be made according to the supplied operating instructions by authorised experts.


Safety features

- Operating pressure infinitely adjustable, therefore precisely defined clamping force
- Electronic pressure switch with digital pressure display
- Repeatability ± 1 bar
- Pressure drop max. 10 %
- Hermetically sealed poppet valves
- Screen disks in the valve ports
- No pressure drop in case of power failure (see page 4)
- Control voltage 24 V DC
- Machine tool interlock (optional)
- Oil level and temperature control (optional)

* Delivery

The power units are delivered ready for connection, i.e. after filling of hydraulic oil and connection of the hydraulic and electric lines they are ready for operation.

Dimensions Technical data

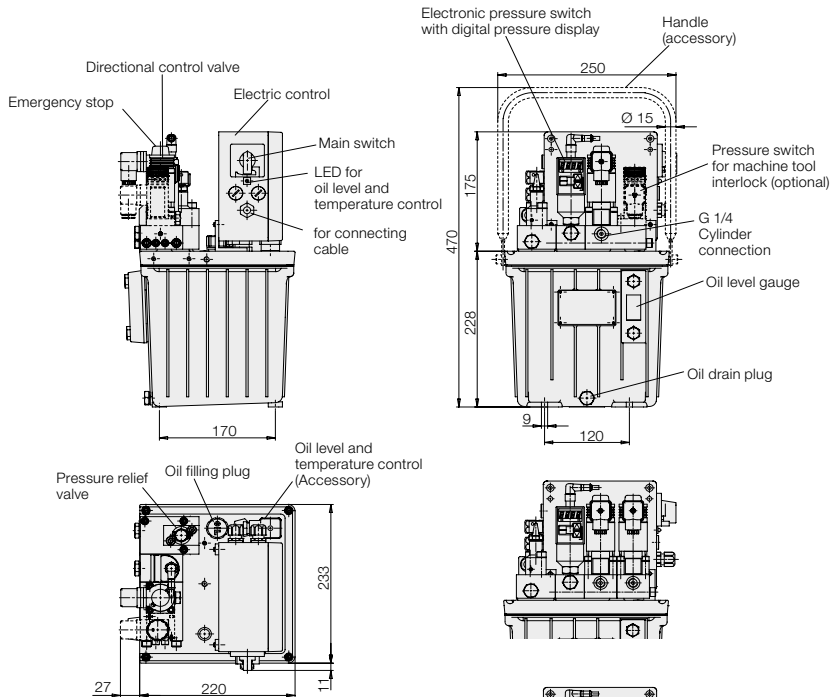

Switch (Clamping-Unclamping)


The power units are alternatively delivered with connected manual or foot switch (see chart). The pilot light in the switch signals:

1. Switch in clamping position
2. The adjusted clamping pressure is available


Important note!

This message signals that the clamping pressure is available at the electronic pressure switch of the power unit. The actual pressure of the clamping fixture can only be controlled by an installed pressure switch installed on the fixture (see machine tool interlock).

Manual switch



Foot switch



For start up it is imperative to pay attention to the supplied operating instructions!

Note
Power unit with manual switch for coupling systems see data sheet F 9.425.


Hydraulic circuit diagrams

SA = Single-acting cylinders


DA = Double-acting cylinders

MI = Machine tool interlock by additional pressure switch


SA + MI (optional)




2 x SA




2 x SA + 2 x MI




DA + MI (optional)

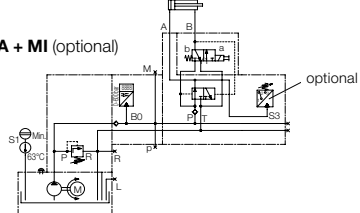


2 x DA



2 x DA + 2 x MI

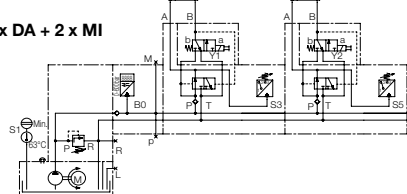

Without valves



Versions Options • Accessories


Cylinder type SA / DA without / with Pressure switch MI* (at power unit)	Directional control valve		Electric control	Terminal box	Manual switch	Foot switch	with- out	Flow rate / max. operating pressure			Weight [kg]
	3/2	4/2						13.67	35	58.5	
								0.82	2.1	3.51	
								500	250	160	
								Part no.	Part no.	Part no.	
	1		•		1			8405121	8405221	8405321	29.5
	1		•			1		8405122	8405222	8405322	30.5
	1		•				•	8405131	8405231	8405331	28.5
	1		•	•			•	8405141	8405241	8405341	28
	1		•		1			8405181	8405281	8405381	30.5
	1		•			1		8405182	8405282	8405382	31.5
	1		•				•	8405187	8405287	8405387	29.5
	1		•	•			•	8405143	8405243	8405343	29
	2		•		2			8405105	8405225	8405325	31.5
	2		•			2		8405106	8405226	8405326	33.5
	2		•				•	8405113	8405233	8405333	29.5
	2		•	•			•	8405142	8405242	8405342	29
	2		•		2			8405185	8405285	8405385	32.5
	2		•			2		8405186	8405286	8405386	33.5
	2		•				•	8405189	8405289	8405389	31.5
	2		•	•			•	8405145	8405245	8405345	29
		1	•		1			8405109	8405209	8405309	30
		1	•			1		8405111	8405211	8405311	31
		1	•				•	8405112	8405212	8405312	29
		1	•	•			•	8405147	8405247	8405347	28.5
		1	•		1			8405117	8405217	8405317	31
		1	•			1		8405118	8405218	8405318	32
		1	•				•	8405119	8405219	8405319	30
		1	•	•			•	8405148	8405248	8405348	29.5
		2	•		2			8405107	8405207	8405307	32.5
		2	•			2		8405108	8405208	8405308	33.5
		2	•				•	8405115	8405215	8405315	31.5
		2	•	•			•	8405146	8405246	8405346	31
		2	•		2			8405137	8405237	8405337	34
		2	•			2		8405138	8405238	8405338	35
		2	•				•	8405139	8405239	8405339	33
		2	•	•			•	8405140	8405240	8405340	33
-	-	-	•					8405110	8405210	8405310	27.5
-	-	-	•	•				8405149	8405249	8405349	27

*) Machine tool interlock

As an option, every clamping circuit is checked by an additional pressure switch, which has to be electrically connected directly to the control of the processing machine.

Messages:

- Clamping pressure available
→ Workpiece can be machined
- Clamping pressure dropped below 80 %
→ Stop machining immediately

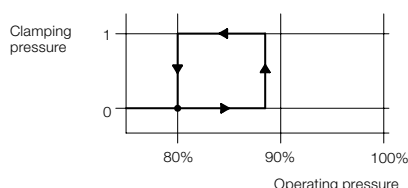

The switching point must be adjusted to 80% of the adjusted clamping pressure.

Note

If the pressure must be frequently changed, the electronic pressure switch is easier to adjust (identification letter "E").

Handle "B"

With the handle, the power unit can be easily transported by two persons to different places of installation.

Example of ordering


Power unit 8405221 with handle

Part no. 8405221B

Electronic pressure switch for machine tool interlock "E"

(instead of the mechanical pressure switch)

The lower switching point (80 % of the clamping pressure) of electronic pressure switches is firmly programmed and can be stored in teach mode for every desired clamping pressure by pressing a button.

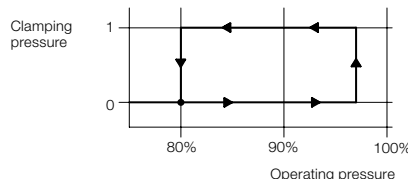


Example of ordering

Power units 8405-185 with two electronic pressure switches for machine tool interlock

Part no. 8405185E

Oil level and temperature control "T"



The oil level and temperature control is installed in the reservoir cover and electrically connected to the control box. In case of an error message, the control LED below the main switch is lit.

Possible errors:

- Oil filling quantity < 2.3 l
Shortage 0.7 l below the minimum oil level gauge.
Required refilling quantity min.1.5 l
- Oil temperature > 63°C

Important note!

As long as the error message is available the electric motor does no longer start to avoid damages due to overheating. This means that in the case of a pressure drop the pump does not deliver!!!

Recommendation

Above all with automated operation the oil level and temperature control should only be used for machine tool interlock in combination with pressure switches. This is the only way to ensure that during the switch-off of the electric motor the workpiece machining will be interrupted in the case of a pressure drop of more than 20 %.

Example of ordering

Power unit 8405238 with machine tool interlock and oil level and temperature control

Part no. 8405238T

Different combinations

The three options described above are also available in combination. When placing the order please stick to the following sequence :

"T" + "B" 8405-XXXXTB
"T" + "E" 8405-XXXXTE
"B" + "E" 8405-XXXXBE
"T" + "B" + "E" 8405-XXXXTBE

Technical data Relative duty cycle

General data

Design	radial piston pump
Direction of rotation	any
Porting connection	fittings with G1/4 with screw-in plugs form B or E as per DIN 3852
Mounting	3 screws M 8
Mounting position	upright
Environment temperature	+5...+35 °C
Max. oil temperature	+60 °C
Noise level	max. 82 dB(A) (at a distance and height of 1 m above the ground standing on insulation felts)

Hydraulic data

Min. operating pressure	30 bar
Viscosity range	4...800 mm²/s
Recommended viscosity range	10...200 mm²/s
Recommended viscosity class	ISO VG 22 as per DIN 51524
Recommended hydraulic oil	HLP 22 as per DIN 51524-2 (not suitable for liquids of type HFA, HFB, HFC and HFD)

	Filling quantity	usable quantity
Content of the reservoir max.	5.0 l	3.2 l
Oil level gauge max.	3.8 l	2.0 l
min.	3.0 l	1.2 l
Electrical oil level control	2.3 l	0.5 l

Electrical data

Motor type	2-pole three-phase motor
Rating power	0.75 kW
Rated speed	2830 min⁻¹
Supply voltage	3 ~ 230/400 V ΔY 50 Hz ± 10 %
Nominal current at 400 V	2 A
Power factor cos φ	0.82
Standby	
Power consumption	"Clamped" 5 W "Unclamped" 28 - 50 W
Isolation class	B as per VDE 0530
Main switch	with thermal overload protection, can be padlocked
Control Electric motor	circuit breaker, control by pressure switch
Control voltage	24 V DC
3/2 directional control valve	controlled by manual switch or foot switch
Fuses	external required 3 x 6 A slow internal primary 2 x 4 A slow (5x30mm) secondary 1 x 2 A slow (5x20mm)
Code class	IP 54
Supply line required	4 x 1 mm²
Manual switch	5 x 1 mm² approx. 3m long
Foot switch	4 x 1 mm² approx. 3m long
EMC	tested

Hydraulic control

The hydraulic control is designed for direct manifold mounting without pipes and consists of the following components:

The connecting block with pressure relief valve to adjust the desired operating pressure. The maximum operating pressure (chart page 3) is mechanically limited in the factory.

Series mounting plate with electronic pressure switch and digital pressure display to adjust the switch-off pressure for the electric motor. The adjustment is made in teach-in mode independent of the adjustment of the pressure relief valve.

A pressure drop of approx. 10 % will cause the pump motor to start again.

Series mounting plate with directional control valve for control of single or double-acting cylinders.

Alternative:

Series mounting plate with directional control valve and pressure switch for machine tool interlock (see page 3)

Valves

Only leakage-free poppet valves are used to allow the energy-saving intermittent cycling (see page 1). The electric control is designed for maximally two solenoid valves.

Single-acting cylinders

One 3/2 directional control valve per clamping circuit is directly operated by a manual switch or a foot switch.

Double-acting cylinder

The 4/2 directional control valve is a combination of an electrically and a hydraulically operated 3/2 directional control valve. The control is made by a manual switch or a foot switch.

Operation of two clamping fixtures


The control enables the operation of two clamping fixtures by means of two manual switches or two foot switches. Prerequisite is the same operating pressure of both fixtures.

Safety in case of power failure

The solenoid valves are de-energized in "clamping position". In the case of power failure this switching position is remained and thereby also the hydraulic pressure in the clamping line. A pressure drop is only to be feared with leaking clamping elements or valves.

Relative duty cycle

These power units are only suitable for intermittent cycling (intermittent cycling S3 as per VDE 0530).

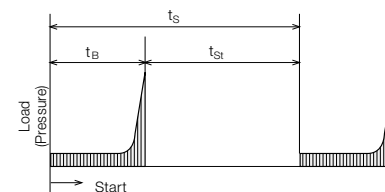

t_B = Running time of the electric motor from start to switching off (clamping time)

t_{St} = Downtime (workpiece machining time)

t_s = Cycle time

The relative duty cycle is

$$\% ED = \frac{t_B}{t_B + t_{St}} \cdot 100 = \frac{t_B}{t_s} \cdot 100$$

Example

Clamping fixture with double-acting cylinders

Clamping time	$t_{B1} = 5s$
Unclamping time	$t_{B2} = 3s$
Workpiece machining time	$t_{St1} = 60s$
Workpiece changing time	$t_{St2} = 12s$
Cycle time	$t_s = 80s$

Relative duty cycle

$$ED = \frac{t_{B1} + t_{B2}}{t_s} \cdot 100 = \frac{5s + 3s}{80s} \cdot 100 = 10 \%$$

The maximum duty cycle is a function of the motor load. Apart from the load, the motor winding temperature of the submerged motor is in principle dependent on oil temperature and oil level. With maximum oil level, the complete winding is submerged in oil and optimally cooled. With decreasing oil surface a part of the winding is in the air. Since air is a poor heat conductor, the winding temperature increases considerably. Therefore the load of the motor must be reduced. The following chart indicates the relative cycle time as a function of the oil level in the reservoir. The maximum oil temperature of 60 °C must not be exceeded (see "Oil level and temperature control").

Maximum relative cycle time [%ED] (at room temperature 23 °C)

Oil level	84051XX	-2XX	-3XX
maximum	5.0 l	40	25
minimum	3.0 l	25	20

Maximum running time of the electric motor [s] (with different oil levels)

Reservoir	5.0 l	4.0 l	3.0 l	2.0 l
maximum	120 s	91 s	54 s	
usable	3.2 l			
Anzeige	3.8 l	2.0 l	1.2 l	
maximum	120 s	57 s	34 s	
usable	2.0 l			
Anzeige	3.0 l	1.2 l		
minimal	87 s	34 s	20 s	
usable	1.2 l			