

## HYDAC INTERNATIONAL

### Filter Clogging Indicators



#### 1. TECHNICAL SPECIFICATIONS

##### 1.1 GENERAL

HYDAC clogging indicators are designed to indicate visually and/or electrically when the filter elements must be cleaned or changed. The operational safety of a system and efficient utilisation of a filter element can only be guaranteed if clogging indicators are used.

Depending on the type of filter, vacuum, return line or differential pressure clogging indicators are used.

##### 1.2 SEALS

NBR (= Perbunan) or V (= Viton)

##### 1.3 INSTALLATION

Some users install filters without clogging indicators and prefer instead to replace or clean the elements according to a specified time schedule or according to a set number of operating hours. However, this involves some risk.


Fitting a clogging indicator has two main advantages:

- The operator no longer has to estimate when the element is clogged.
  - The unnecessary costs of changing the element too early are avoided.
- All standard filters can be fitted with a clogging indicator at any time, by simply screwing it in.

##### 1.4 DESIGN

###### Return line indicators

These are used for return line and suction filters. In return line filters they react to the increasing static pressure before the filter element, and in suction filters to the decreasing pressure after the filter element, which is caused by increasing contamination.

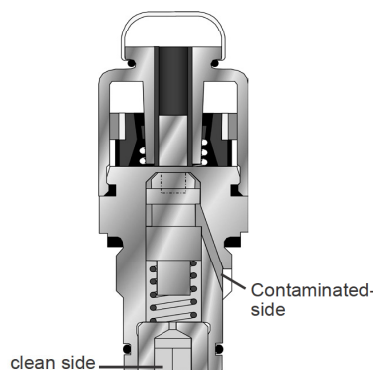


###### Differential pressure indicators

These are used for all inline filters and react to the increasing pressure differential caused by increasing contamination of the filter element.

The simplest installation of the differential clogging indicator is via G 1/2" cavity (according to HYDAC works standard HN 28-22)

The differential pressure indicator type V02 is piped up separately.



##### 1.5 SPECIAL INDICATORS

###### Mobile indicators

These indicators have been developed for special applications and are fitted with AMP Junior Power Timer, AMP Superseal or Deutsch plugs.

###### ATEX indicators

These indicators are used in potentially explosive locations and are subject to the ATEX Equipment Directive 2014/34/EU and the ATEX Operator Directive 1999/92/EG.



###### UL and CSA indicators

Indicators which are exported to the USA and Canada often require classification according to current UL and CSA standards. The UL and CSA symbols are found on many products, particularly in the field of electrical engineering.



##### 1.6 TABLE OF CONTENTS

| Contents                                              | Page:     |
|-------------------------------------------------------|-----------|
| <b>Quick selection table:</b>                         |           |
| <b>by indicator type</b>                              | <b>2</b>  |
| <b>Quick selection table:</b>                         |           |
| <b>by filter type</b>                                 | <b>3</b>  |
| <b>Standard indicators</b>                            |           |
| Vacuum                                                | 4         |
| Return line                                           | 7         |
| Differential pressure                                 | 21        |
| <b>Indicator (VL...GW.x) for Condition Monitoring</b> | <b>24</b> |
| <b>Mobile indicators</b>                              |           |
| Return line                                           | 29        |
| Differential pressure                                 | 31        |
| <b>ATEX indicators</b>                                |           |
| Return line                                           | 34        |
| Differential pressure                                 | 36        |
| <b>UL/CSA indicators</b>                              |           |
| Differential pressure                                 | 38        |
| Return line                                           | 39        |
| <b>Model code - Standard</b>                          | <b>40</b> |
| <b>Adapters</b>                                       | <b>42</b> |
| <b>DESINA Specification</b>                           | <b>44</b> |

## 2. QUICK SELECTION TABLES FOR CLOGGING INDICATORS

### 2.1 BY INDICATOR TYPE

Please select the type of indicator you require from the table.

| Type                 |     | Vacuum indicator | Permitt. operating pressure [bar] | Return line indicator | Permitt. operating pressure [bar] | Differential pressure indicator | Permitt. operating pressure [bar] |
|----------------------|-----|------------------|-----------------------------------|-----------------------|-----------------------------------|---------------------------------|-----------------------------------|
| Visual               | B   |                  |                                   | ●                     | 7                                 | ●                               | 210/420                           |
|                      | BF  |                  |                                   |                       |                                   | ●                               | 40                                |
|                      | BM  |                  |                                   | ●                     | 7                                 | ●                               | 210/420                           |
|                      | E   |                  |                                   | ●                     | 7 (11)                            |                                 |                                   |
|                      | ES  |                  |                                   | ●                     | 7                                 |                                 |                                   |
|                      | K   | ●                | *                                 | ●                     | *                                 |                                 |                                   |
|                      | R   |                  |                                   | ●                     | 7                                 |                                 |                                   |
|                      | UBM | ●                | 0                                 |                       |                                   |                                 |                                   |
|                      | UE  | ●                | 0                                 |                       |                                   |                                 |                                   |
|                      | UED | ●                | 0                                 |                       |                                   |                                 |                                   |
|                      | V   |                  |                                   |                       |                                   | ●                               | 100                               |
| Electrical           | C   |                  |                                   | ●                     | 40                                | ●                               | 210/420                           |
|                      | D   |                  |                                   | ●                     | 40                                | ●                               | 210/420                           |
|                      | F   |                  |                                   | ●                     | 40                                |                                 |                                   |
|                      | LE  |                  |                                   | ●                     | 7                                 | ●                               | 420                               |
|                      | LZ  |                  |                                   | ●                     | 7                                 | ●                               | 420                               |
|                      | UF  | ●                | 0                                 |                       |                                   |                                 |                                   |
|                      | VE  |                  |                                   |                       |                                   | ●                               | 100                               |
|                      | VZ  |                  |                                   |                       |                                   | ●                               | 100                               |
| Electronic           | GC  |                  |                                   | ●                     | 7                                 | ●                               | 420                               |
|                      | GW  |                  |                                   |                       |                                   | ●                               | 25                                |
| Mobile               | CD  |                  |                                   |                       |                                   | ●                               | 210                               |
|                      | CJ  |                  |                                   |                       |                                   | ●                               | 210/420                           |
|                      | CM  |                  |                                   | ●                     | 40                                | ●                               | 210                               |
|                      | CS  |                  |                                   |                       |                                   | ●                               | 210/420                           |
|                      | FD  |                  |                                   | ●                     | 40                                |                                 |                                   |
|                      | FJ  |                  |                                   | ●                     | 40                                |                                 |                                   |
|                      | FS  |                  |                                   | ●                     | 40                                |                                 |                                   |
|                      | LEM |                  |                                   | ●                     | 7                                 | ●                               | 420                               |
|                      | M   |                  |                                   |                       |                                   | ●                               | 210                               |
|                      |     |                  |                                   |                       |                                   |                                 |                                   |
| ATEX                 | B   |                  |                                   | ●                     | 7                                 | ●                               | 210/420                           |
|                      | C   |                  |                                   | ●                     | 40                                | ●                               | 210/420                           |
| UL Approval (=CRUUS) | C   |                  |                                   |                       |                                   | ●                               | 210/420                           |
| CSA Approval         | C   |                  |                                   | ●                     | 40                                |                                 |                                   |

\* Dependent on application.

## 2.2 BY FILTER TYPE

Please select the clogging indicator required for your filter from the table.

| Type  | BF | BL | BLT | DF<br>DFF | DFDK<br>DFDKN | DF<br>MA/QE<br>MP | DFM | DFN<br>DFNF | DFP<br>DFPF<br>DFFX | DFZ | ELF | FLN             | FLND<br>FMND | HDF<br>HDF | HDP | HFM | LF<br>LFF       | LFM | LFN<br>LFNF |
|-------|----|----|-----|-----------|---------------|-------------------|-----|-------------|---------------------|-----|-----|-----------------|--------------|------------|-----|-----|-----------------|-----|-------------|
| B     |    |    |     | •         | •             | •                 | •   | •           |                     |     |     | •               | •            |            |     | •   | •               | •   | •           |
| BF    |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| BM    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| E     |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| ES    |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| K     | •  | •  | •   |           |               |                   |     |             |                     |     | •   |                 |              |            |     |     |                 |     |             |
| R/RS  |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| UBM   | •  | •  | •   |           |               |                   |     |             |                     |     | •   |                 |              |            |     |     |                 |     |             |
| UE    |    |    |     |           |               |                   |     |             |                     |     |     | • <sup>1)</sup> |              |            |     |     | • <sup>1)</sup> |     |             |
| UED   |    |    |     |           |               |                   |     |             |                     |     |     |                 |              | •          |     |     |                 |     |             |
| V     |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| C     |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| D     |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| F     |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| LE    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| LZ    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| UF    |    |    |     |           |               |                   |     |             |                     |     |     | • <sup>1)</sup> |              |            |     |     | • <sup>1)</sup> |     |             |
| VE    |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| VZ    |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| GC    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| GW    |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| CD    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| CJ/CS |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| CM    |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |
| FJ/FS |    |    |     |           |               |                   |     |             |                     |     |     |                 |              |            |     |     |                 |     |             |
| M     |    |    |     |           |               |                   |     |             |                     |     |     | •               | •            |            |     |     | •               | •   | •           |
| LEM   |    |    |     | •         | •             | •                 | •   | •           | •                   | •   |     | •               | •            | •          |     | •   | •               | •   | •           |

| Type  | LPF             | MDF | MF              | MFD             | MFM | MFx | NF | NFD | RF | RFD | RFL             | RFLD | RFN | RFND | RFM | RKM | SF | SFF | SFM |
|-------|-----------------|-----|-----------------|-----------------|-----|-----|----|-----|----|-----|-----------------|------|-----|------|-----|-----|----|-----|-----|
| B     | •               | •   |                 |                 | •   |     |    |     | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| BF    | •               |     |                 |                 |     | •   |    |     |    |     |                 |      |     |      |     |     |    |     |     |
| BM    | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| E     |                 |     | • <sup>2)</sup> | • <sup>2)</sup> |     |     |    |     | •  | •   |                 |      | •   | •    | •   |     |    |     |     |
| ES    |                 |     |                 |                 |     |     |    |     | •  | •   |                 |      | •   | •    | •   |     |    |     |     |
| K     |                 |     |                 |                 |     |     |    |     |    |     |                 |      |     |      |     |     |    |     |     |
| R/RS  |                 |     |                 |                 |     |     |    |     |    |     |                 |      |     |      |     | •   |    |     |     |
| UBM   |                 |     |                 |                 |     |     |    |     |    |     |                 |      |     |      |     |     |    |     |     |
| UE    | • <sup>1)</sup> |     | • <sup>1)</sup> | • <sup>1)</sup> |     |     |    |     |    |     | • <sup>1)</sup> |      |     |      |     | •   | •  | •   | •   |
| V     |                 |     |                 |                 |     |     |    |     |    |     | •               | •    |     |      |     |     |    |     |     |
| C     | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| D     | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| F     |                 |     | •               | •               |     |     |    |     | •  | •   |                 |      | •   | •    | •   | •   |    |     |     |
| LE    | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| LZ    | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| UF    | • <sup>1)</sup> |     | • <sup>1)</sup> | • <sup>1)</sup> |     |     |    |     |    |     | • <sup>1)</sup> |      |     |      |     | •   | •  | •   | •   |
| VE    |                 |     |                 |                 |     |     |    |     |    |     | •               | •    |     |      |     |     |    |     |     |
| VZ    |                 |     |                 |                 |     |     |    |     |    |     | •               | •    |     |      |     |     |    |     |     |
| GC    | •               | •   |                 |                 | •   |     | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| GW    | •               |     |                 |                 |     |     | •  | •   |    |     | •               | •    |     |      |     |     |    |     |     |
| CD    | •               | •   |                 |                 | •   |     | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| CJ/CS | •               | •   |                 |                 | •   |     | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| CM    | •               | •   |                 |                 |     | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |
| FJ/FS |                 |     | •               | •               |     |     |    |     | •  | •   |                 |      | •   | •    | •   | •   |    |     |     |
| M     | •               |     |                 |                 |     | •   |    |     |    |     |                 |      |     |      |     |     |    |     |     |
| LEM   | •               | •   |                 |                 | •   | •   | •  | •   | •  | •   | •               | •    | •   | •    | •   | •   |    |     |     |

<sup>1)</sup> Can only be used for suction operation

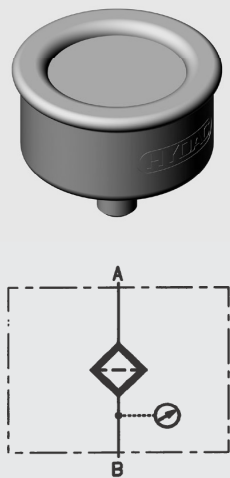
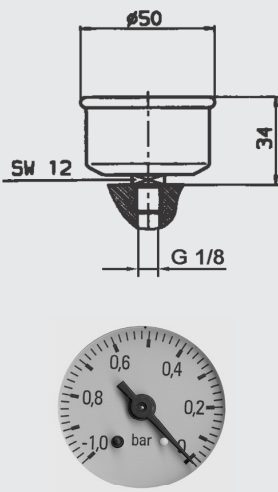
<sup>2)</sup> Use VMF 16 E.0 only

E 7.050.15/11.16

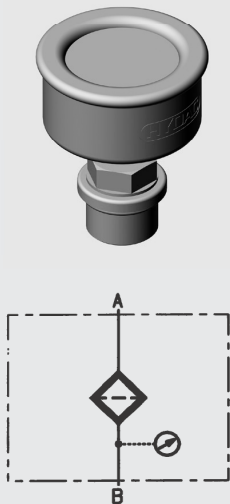
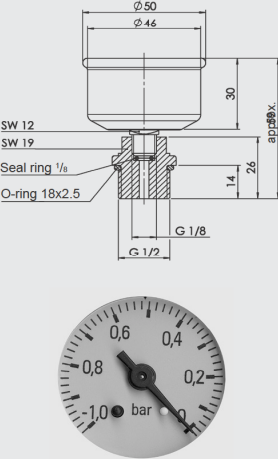
## 3. SPECIFICATIONS

### 3.1 VACUUM INDICATORS

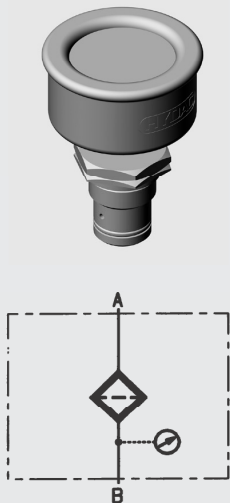
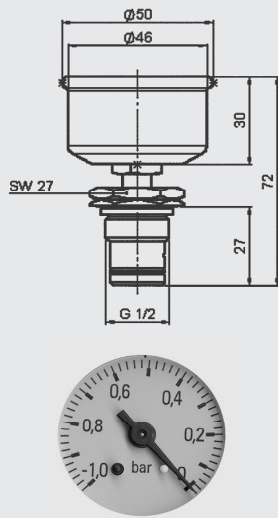
#### VMF x UE.x

|                                                                                   |                                          |                                   |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual-analogue, scale indication |  |
|                                                                                   | Weight                                   | 53 g                              |                                                                                     |
|                                                                                   | Pressure setting or indication range     | -1 bar to 0 bar                   |                                                                                     |
|                                                                                   | Permitt. operating pressure              | -0.7 to 0 bar continuous          |                                                                                     |
|                                                                                   | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                     |
|                                                                                   | Thread                                   | G 1/8                             |                                                                                     |
|                                                                                   | Max. torque                              | 10 Nm                             |                                                                                     |
|                                                                                   | Switching type                           | -                                 |                                                                                     |
|                                                                                   | Max. switching voltage                   | -                                 |                                                                                     |
|                                                                                   | Electrical connection                    | -                                 |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | -                                 |                                                                                     |
|                                                                                   | switching capacity                       | -                                 |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | -                                 |                                                                                     |
|                                                                                   | Order example                            | VMF 1 UE.0                        |                                                                                     |


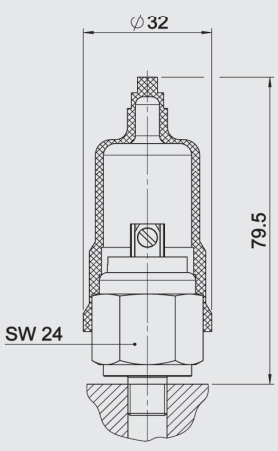
#### VR x UE.x

|                                                                                    |                                          |                                   |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual-analogue, scale indication |  |
|                                                                                    | Weight                                   | 125 g                             |                                                                                      |
|                                                                                    | Pressure setting or indication range     | -1 bar to 0 bar                   |                                                                                      |
|                                                                                    | Permitt. operating pressure              | -0.7 to 0 bar continuous          |                                                                                      |
|                                                                                    | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                             |                                                                                      |
|                                                                                    | Max. torque                              | 30 Nm                             |                                                                                      |
|                                                                                    | Switching type                           | -                                 |                                                                                      |
|                                                                                    | Max. switching voltage                   | -                                 |                                                                                      |
|                                                                                    | Electrical connection                    | -                                 |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | -                                 |                                                                                      |
|                                                                                    | switching capacity                       | -                                 |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | -                                 |                                                                                      |
|                                                                                    | Order example                            | VR 1 UE.0                         |                                                                                      |


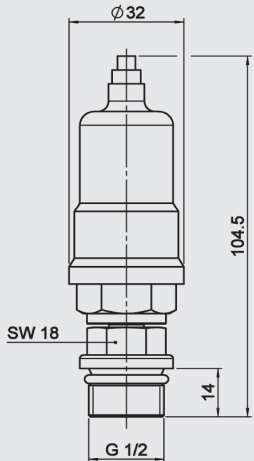
#### VRD x UE.x

|                                                                                     |                                          |                                   |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | visual-analogue, scale indication |  |
|                                                                                     | Weight                                   | 133 g                             |                                                                                       |
|                                                                                     | Pressure setting or indication range     | -1 bar to 0 bar                   |                                                                                       |
|                                                                                     | Permitt. operating pressure              | -0.7 to 0 bar continuous          |                                                                                       |
|                                                                                     | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                             |                                                                                       |
|                                                                                     | Max. torque                              | 33 Nm                             |                                                                                       |
|                                                                                     | Switching type                           | -                                 |                                                                                       |
|                                                                                     | Max. switching voltage                   | -                                 |                                                                                       |
|                                                                                     | Electrical connection                    | -                                 |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | -                                 |                                                                                       |
|                                                                                     | switching capacity                       | -                                 |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | -                                 |                                                                                       |
|                                                                                     | Order example                            | VRD 1 UE.0                        |                                                                                       |


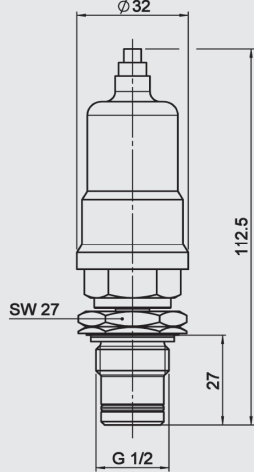
## VMF x UF.x

|                                                                                                                                                                     |                                          |                                             |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                           |  |
|                                                                                                                                                                     | Weight                                   | 75 g                                        |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | -0.2 bar ±0.1 bar                           |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 40 bar                                      |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                           |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/8                                       |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 10 Nm                                       |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/O contact (N/C as an option)              |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 48 V                                        |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | threaded connection                         |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 60 W = 100 VA ~                             |                                                                                     |
|                                                                                                                                                                     | switching capacity                       | ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~ |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65, terminals IP 00                      |                                                                                     |
|                                                                                                                                                                     | Order example                            | VMF 0.2 UF.1                                |                                                                                     |

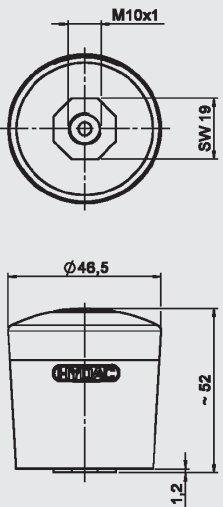
## VR x UF.x

|                                                                                                                                                                        |                                          |                                             |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                           |  |
|                                                                                                                                                                        | Weight                                   | 146 g                                       |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | -0.2 bar ±0.1 bar                           |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 40 bar                                      |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +100 °C                           |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/2                                       |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 30 Nm                                       |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/O contact (N/C as an option)              |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | 48 V                                        |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | threaded connection                         |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 60 W = 100 VA ~                             |                                                                                      |
|                                                                                                                                                                        | switching capacity                       | ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~ |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65, terminals IP 00                      |                                                                                      |
|                                                                                                                                                                        | Order example                            | VR 0.2 UF.1                                 |                                                                                      |



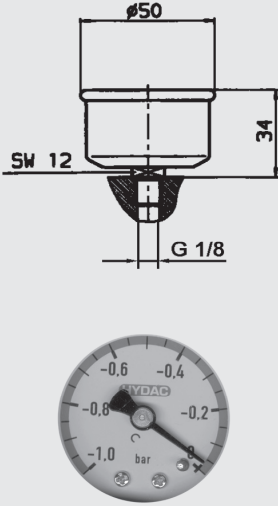
## VRD x UF.x

|                                                                                                                                                                         |                                          |                                             |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                           |  |
|                                                                                                                                                                         | Weight                                   | 154 g                                       |                                                                                       |
|                                                                                                                                                                         | Pressure setting or indication range     | -0.2 bar ±0.1 bar                           |                                                                                       |
|                                                                                                                                                                         | Permitt. operating pressure              | 40 bar                                      |                                                                                       |
|                                                                                                                                                                         | Permitt. temperature range               | -30 °C to +100 °C                           |                                                                                       |
|                                                                                                                                                                         | Thread                                   | G 1/2                                       |                                                                                       |
|                                                                                                                                                                         | Max. torque                              | 33 Nm                                       |                                                                                       |
|                                                                                                                                                                         | Switching type                           | N/O contact (N/C as an option)              |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage                   | 48 V                                        |                                                                                       |
|                                                                                                                                                                         | Electrical connection                    | threaded connection                         |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | 60 W = 100 VA ~                             |                                                                                       |
|                                                                                                                                                                         | switching capacity                       | ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~ |                                                                                       |
|                                                                                                                                                                         | Protection class to DIN 40050            | IP 65, terminals IP 00                      |                                                                                       |
|                                                                                                                                                                         | Order example                            | VRD 0.2 UF.1                                |                                                                                       |

## VMF x UBM.x

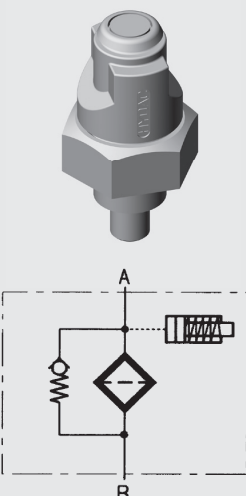
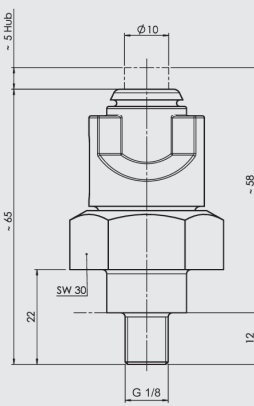
|                                                                                   |                                          |                    |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|--------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, yellow pin |  |
|                                                                                   | Weight                                   | 54 g               |                                                                                     |
|                                                                                   | Pressure setting or indication range     | -0.035 bar         |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 1 bar              |                                                                                     |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C  |                                                                                     |
|                                                                                   | Thread                                   | M10 x 1            |                                                                                     |
|                                                                                   | Max. torque                              | 2 Nm               |                                                                                     |
|                                                                                   | Switching type                           | -                  |                                                                                     |
|                                                                                   | Max. switching voltage                   | -                  |                                                                                     |
|                                                                                   | Electrical connection                    | -                  |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | -                  |                                                                                     |
|                                                                                   | switching capacity                       | -                  |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | -                  |                                                                                     |
|                                                                                   | Order example                            | VMF 0.035 UBM.0    |                                                                                     |

## VMF x UED.x

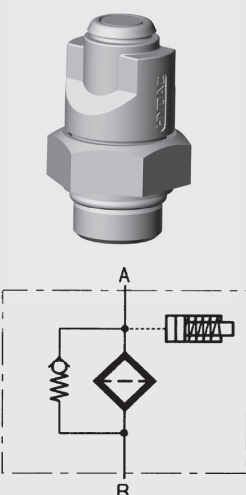
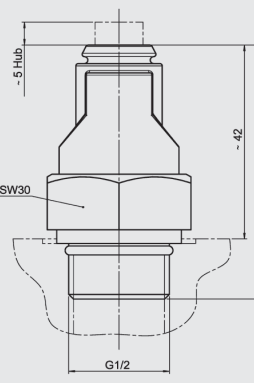
|                                                                                                                                                                           |                                          |                                                              |                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual-analogue, scale indication (filled with silicone oil) |  |
|                                                                                                                                                                           | Weight                                   | 85 g                                                         |                                                                                      |
|                                                                                                                                                                           | Pressure setting or indication range     | -1 bar to 0 bar                                              |                                                                                      |
|                                                                                                                                                                           | Permitt. operating pressure              | -0.7 to 0 bar continuous                                     |                                                                                      |
|                                                                                                                                                                           | Permitt. temperature range               | -20 °C to +90 °C                                             |                                                                                      |
|                                                                                                                                                                           | Thread                                   | G 1/8                                                        |                                                                                      |
|                                                                                                                                                                           | Max. torque                              | 10 Nm                                                        |                                                                                      |
|                                                                                                                                                                           | Switching type                           | -                                                            |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage                   | -                                                            |                                                                                      |
|                                                                                                                                                                           | Electrical connection                    | -                                                            |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage at resistive load | -                                                            |                                                                                      |
|                                                                                                                                                                           | switching capacity                       | -                                                            |                                                                                      |
|                                                                                                                                                                           | Protection class to DIN 40050            | -                                                            |                                                                                      |
|                                                                                                                                                                           | Order example                            | VMF 1 UED.0                                                  |                                                                                      |

## 3.2 RETURN LINE INDICATORS

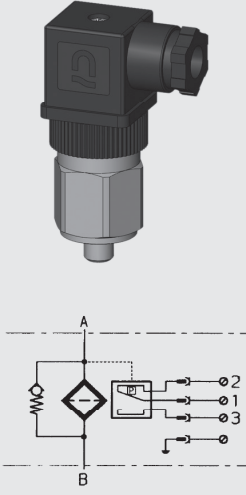

### VMF x B.x

|                                                                                     |                                          |                   |
|-------------------------------------------------------------------------------------|------------------------------------------|-------------------|
|    | Type of indication                       | visual, red pin   |
|                                                                                     | Weight                                   | 81 g              |
|                                                                                     | Pressure setting or indication range     | 2 bar -0.2 bar    |
|                                                                                     | Permitt. operating pressure              | 7 bar             |
|                                                                                     | Permitt. temperature range               | -10 °C to +100 °C |
|                                                                                     | Thread                                   | G 1/8             |
|                                                                                     | Max. torque                              | 10 Nm             |
|                                                                                     | Switching type                           | -                 |
|                                                                                     | Max. switching voltage                   | -                 |
|                                                                                     | Electrical connection                    | -                 |
|                                                                                     | Max. switching voltage at resistive load | -                 |
|                                                                                     | switching capacity                       | -                 |
|                                                                                     | Protection class to DIN 40050            | -                 |
|                                                                                     | Order example                            | VMF 2 B.1         |
|  |                                          |                   |




### VR x B.x

|                                                                                      |                                          |                   |
|--------------------------------------------------------------------------------------|------------------------------------------|-------------------|
|    | Type of indication                       | visual, red pin   |
|                                                                                      | Weight                                   | 42 g              |
|                                                                                      | Pressure setting or indication range     | 2 bar -0.2 bar    |
|                                                                                      | Permitt. operating pressure              | 7 bar             |
|                                                                                      | Permitt. temperature range               | -10 °C to +100 °C |
|                                                                                      | Thread                                   | G 1/2             |
|                                                                                      | Max. torque                              | 15 Nm             |
|                                                                                      | Switching type                           | -                 |
|                                                                                      | Max. switching voltage                   | -                 |
|                                                                                      | Electrical connection                    | -                 |
|                                                                                      | Max. switching voltage at resistive load | -                 |
|                                                                                      | switching capacity                       | -                 |
|                                                                                      | Protection class to DIN 40050            | -                 |
|                                                                                      | Order example                            | VR 2 B.1          |
|  |                                          |                   |




### VMF x C.x

|                                                                                       |                                          |                                                              |
|---------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|
|    | Type of indication                       | electrical switch                                            |
|                                                                                       | Weight                                   | 121 g                                                        |
|                                                                                       | Pressure setting or indication range     | 2 bar -0.3 bar                                               |
|                                                                                       | Permitt. operating pressure              | 40 bar                                                       |
|                                                                                       | Permitt. temperature range               | -30 °C to +100 °C                                            |
|                                                                                       | Thread                                   | G 1/8                                                        |
|                                                                                       | Max. torque                              | 10 Nm                                                        |
|                                                                                       | Switching type                           | N/C or N/O (change-over contacts)                            |
|                                                                                       | Max. switching voltage                   | 230 V                                                        |
|                                                                                       | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |
|                                                                                       | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |
|                                                                                       | switching capacity                       | Ohmic 6 A at 24 V –<br>Ohmic 0.03 to 6 A at max. 230 V ~     |
|                                                                                       | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |
|                                                                                       | Order example                            | VMF 2 C.1                                                    |
|  |                                          |                                                              |




## VR x C.x

|                                                                                                                                                                     |                                          |                                                              |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                                            |  |
|                                                                                                                                                                     | Weight                                   | 192 g                                                        |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 40 bar                                                       |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                        |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 33 Nm                                                        |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/C or N/O (change-over contacts)                            |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 230 V                                                        |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                     |
|                                                                                                                                                                     | switching capacity                       | Ohmic 6 A at 24 V<br>Ohmic 0.03 to 6 A at max. 230 V ~       |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                     |
|                                                                                                                                                                     | Order example                            | VR 2 C.1                                                     |                                                                                     |

## VRD x C.x

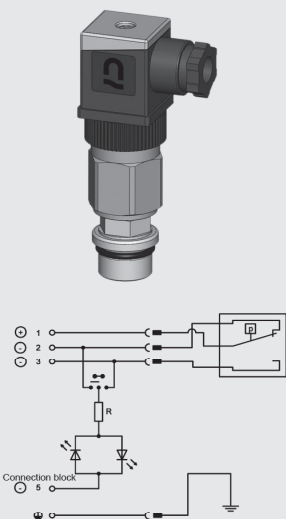

|                                                                                                                                                                        |                                          |                                                              |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                                            |  |
|                                                                                                                                                                        | Weight                                   | 208 g                                                        |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 40 bar                                                       |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                        |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 33 Nm                                                        |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/C or N/O (change-over contacts)                            |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | 230 V                                                        |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                      |
|                                                                                                                                                                        | switching capacity                       | Ohmic 6 A at 24 V<br>Ohmic 0.03 to 6 A at max. 230 V ~       |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                      |
|                                                                                                                                                                        | Order example                            | VRD 2 C.1                                                    |                                                                                      |

## VMF x D.x /-L...

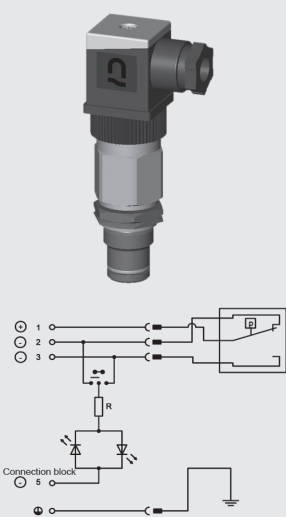

|                                                                                                                                                                         |                                          |                                                               |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                        |  |
|                                                                                                                                                                         | Weight                                   | 127 g                                                         |                                                                                       |
|                                                                                                                                                                         | Pressure setting or indication range     | 2 bar -0.3 bar                                                |                                                                                       |
|                                                                                                                                                                         | Permitt. operating pressure              | 40 bar                                                        |                                                                                       |
|                                                                                                                                                                         | Permitt. temperature range               | -30 °C to +100 °C                                             |                                                                                       |
|                                                                                                                                                                         | Thread                                   | G 1/8                                                         |                                                                                       |
|                                                                                                                                                                         | Max. torque                              | 10 Nm                                                         |                                                                                       |
|                                                                                                                                                                         | Switching type                           | N/C or N/O (change-over contacts)                             |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage                   | 24, 48, 115, 230 V<br>(depending on the type of light insert) |                                                                                       |
|                                                                                                                                                                         | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803  |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                           |                                                                                       |
|                                                                                                                                                                         | switching capacity                       | Ohmic 6 A at 230 V =<br>Ohmic 0.03 to 6 A at max. 230 V ~     |                                                                                       |
|                                                                                                                                                                         | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)   |                                                                                       |
|                                                                                                                                                                         | Order example                            | VMF 2 D.1 /-L24                                               |                                                                                       |

E 7.050.15/11.16

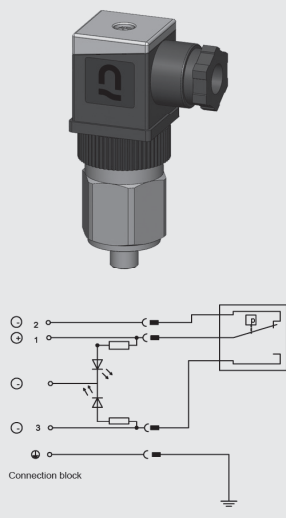

## VR x D.x /-L...

|                                                                                   |                                          |                                                              |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                   | Weight                                   | 200 g                                                        |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 40 bar                                                       |                                                                                     |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                                        |                                                                                     |
|                                                                                   | Max. torque                              | 33 Nm                                                        |                                                                                     |
|                                                                                   | Switching type                           | N/C or N/O (change-over contacts)                            |                                                                                     |
|                                                                                   | Max. switching voltage                   | 24, 48, 115, 230 V (depending on the type of light insert)   |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 6 A at 24 V =<br>Ohmic 0.03 to 6 A at max. 230 V ~     |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                     |
|                                                                                   | Order example                            | VR 2 D.1 /-L110                                              |                                                                                     |




## VRD x D.x /-L...

|                                                                                    |                                          |                                                              |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                    | Weight                                   | 215 g                                                        |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 40 bar                                                       |                                                                                      |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                                        |                                                                                      |
|                                                                                    | Max. torque                              | 33 Nm                                                        |                                                                                      |
|                                                                                    | Switching type                           | N/C or N/O (change-over contacts)                            |                                                                                      |
|                                                                                    | Max. switching voltage                   | 24, 48, 115, 230 V (depending on the type of light insert)   |                                                                                      |
|                                                                                    | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                      |
|                                                                                    | switching capacity                       | Ohmic 6 A at 24 V =<br>Ohmic 0.03 to 6 A at max. 230 V ~     |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                      |
|                                                                                    | Order example                            | VRD 2 D.1 /-L110                                             |                                                                                      |




## VMF x D.x /-LED

|                                                                                     |                                          |                                                              |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                     | Weight                                   | 120 g                                                        |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 40 bar                                                       |                                                                                       |
|                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                       |
|                                                                                     | Thread                                   | G 1/8                                                        |                                                                                       |
|                                                                                     | Max. torque                              | 10 Nm                                                        |                                                                                       |
|                                                                                     | Switching type                           | N/O contact                                                  |                                                                                       |
|                                                                                     | Max. switching voltage                   | 24 V                                                         |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 6 A at 24 V =                                          |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                       |
|                                                                                     | Order example                            | VMF 2 D.1 /-LED                                              |                                                                                       |



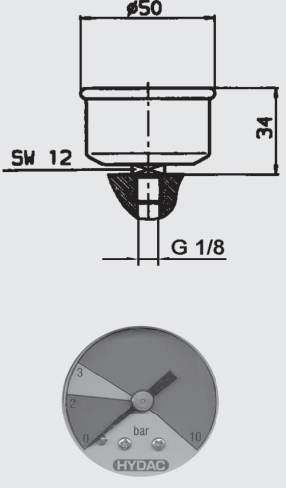
## VR x D.x /-LED

|                                                                                                                                                                     |                                          |                                                              |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                                                                                                     | Weight                                   | 191 g                                                        |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 40 bar                                                       |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                        |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 33 Nm                                                        |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/O contact                                                  |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 24 V                                                         |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                     |
|                                                                                                                                                                     | switching capacity                       | Ohmic 6 A at 24 V =                                          |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                     |
|                                                                                                                                                                     | Order example                            | VR 2 D.1 /-LED                                               |                                                                                     |

## VRD x D.x /-LED




|                                                                                                                                                                        |                                          |                                                              |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                                                                                                        | Weight                                   | 207 g                                                        |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -0.3 bar                                               |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 40 bar                                                       |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                        |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 33 Nm                                                        |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/O contact                                                  |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | 24 V                                                         |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                          |                                                                                      |
|                                                                                                                                                                        | switching capacity                       | Ohmic 6 A at 24 V =                                          |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                      |
|                                                                                                                                                                        | Order example                            | VRD 2 D.1 /-LED                                              |                                                                                      |

## VMF x E.x



|                                                                                                                                                                         |                                          |                                   |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |  |
|                                                                                                                                                                         | Weight                                   | 54 g                              |                                                                                       |
|                                                                                                                                                                         | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                       |
|                                                                                                                                                                         | Permitt. operating pressure              | 7 bar continuous                  |                                                                                       |
|                                                                                                                                                                         | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                       |
|                                                                                                                                                                         | Thread                                   | G 1/8                             |                                                                                       |
|                                                                                                                                                                         | Max. torque                              | 10 Nm                             |                                                                                       |
|                                                                                                                                                                         | Switching type                           | -                                 |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage                   | -                                 |                                                                                       |
|                                                                                                                                                                         | Electrical connection                    | -                                 |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | -                                 |                                                                                       |
|                                                                                                                                                                         | switching capacity                       | -                                 |                                                                                       |
|                                                                                                                                                                         | Protection class to DIN 40050            | -                                 |                                                                                       |
|                                                                                                                                                                         | Order example                            | VMF 2 E.0                         |                                                                                       |

E 7.050.15/11.16



## VMF 16 E.x

|                                                                                                                                                                     |                                          |                                   |                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |   |
|                                                                                                                                                                     | Weight                                   | 55 g                              |                                                                                                                                                                         |
|                                                                                                                                                                     | Pressure setting or indication range     | 0 bar to +16 bar                  |                                                                                                                                                                         |
|                                                                                                                                                                     | Permitt. operating pressure              | 11 bar continuous                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                         |
|                                                                                                                                                                     | Thread                                   | G 1/8                             |                                                                                                                                                                         |
|                                                                                                                                                                     | Max. torque                              | 10 Nm                             |                                                                                                                                                                         |
|                                                                                                                                                                     | Switching type                           | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Max. switching voltage                   | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Electrical connection                    | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | switching capacity                       | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Protection class to DIN 40050            | -                                 |                                                                                                                                                                         |
|                                                                                                                                                                     | Order example                            | VMF 16 E.0                        |                                                                                                                                                                         |





## VR x E.x

|                                                                                                                                                                        |                                          |                                   |                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |   |
|                                                                                                                                                                        | Weight                                   | 125 g                             |                                                                                                                                                                            |
|                                                                                                                                                                        | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                                                                                                            |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar continuous                  |                                                                                                                                                                            |
|                                                                                                                                                                        | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                            |
|                                                                                                                                                                        | Thread                                   | G 1/2                             |                                                                                                                                                                            |
|                                                                                                                                                                        | Max. torque                              | 33 Nm                             |                                                                                                                                                                            |
|                                                                                                                                                                        | Switching type                           | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | Max. switching voltage                   | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | Electrical connection                    | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | switching capacity                       | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | Protection class to DIN 40050            | -                                 |                                                                                                                                                                            |
|                                                                                                                                                                        | Order example                            | VR 2 E.0                          |                                                                                                                                                                            |



## VRD x E.x

|                                                                                                                                                                         |                                          |                                   |                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |   |
|                                                                                                                                                                         | Weight                                   | 141 g                             |                                                                                                                                                                             |
|                                                                                                                                                                         | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                                                                                                             |
|                                                                                                                                                                         | Permitt. operating pressure              | 7 bar continuous                  |                                                                                                                                                                             |
|                                                                                                                                                                         | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                             |
|                                                                                                                                                                         | Thread                                   | G 1/2                             |                                                                                                                                                                             |
|                                                                                                                                                                         | Max. torque                              | 33 Nm                             |                                                                                                                                                                             |
|                                                                                                                                                                         | Switching type                           | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | Max. switching voltage                   | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | Electrical connection                    | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | switching capacity                       | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | Protection class to DIN 40050            | -                                 |                                                                                                                                                                             |
|                                                                                                                                                                         | Order example                            | VRD 2 E.0                         |                                                                                                                                                                             |





## VMF x ES.x

|                                                                                                                                                                     |                                          |                                   |                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |    |
|                                                                                                                                                                     | Weight                                   | 59 g                              |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Permitt. operating pressure              | 7 bar continuous                  |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Thread                                   | G 1/8                             |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Max. torque                              | 10 Nm                             |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Switching type                           | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Max. switching voltage                   | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Electrical connection                    | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | switching capacity                       | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Protection class to DIN 40050            | -                                 |                                                                                                                                                                                                                                                             |
|                                                                                                                                                                     | Order example                            | VMF 2 ES.0                        |                                                                                                                                                                                                                                                             |

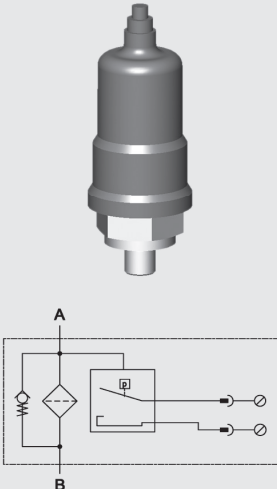
## VR x ES.x

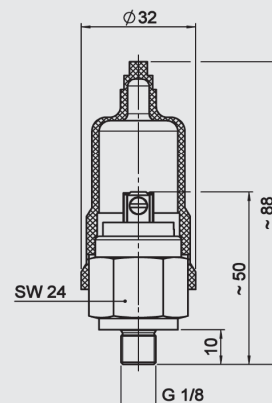
|                                                                                                                                                                        |                                          |                                   |                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |    |
|                                                                                                                                                                        | Weight                                   | 130 g                             |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar continuous                  |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Thread                                   | G 1/2                             |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Max. torque                              | 33 Nm                             |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Switching type                           | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Max. switching voltage                   | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Electrical connection                    | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | switching capacity                       | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Protection class to DIN 40050            | -                                 |                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                        | Order example                            | VR 2 ES.0                         |                                                                                                                                                                                                                                                                  |

## VRD x ES.x

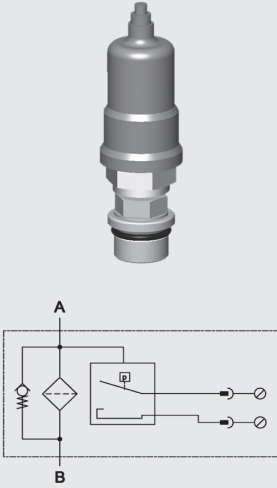
|                                                                                                                                                                         |                                          |                                   |                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indication                       | visual-analogue, scale indication |    |
|                                                                                                                                                                         | Weight                                   | 146 g                             |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Pressure setting or indication range     | 0 bar to +10 bar                  |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Permitt. operating pressure              | 7 bar continuous                  |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Permitt. temperature range               | -20 °C to +60 °C                  |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Thread                                   | G 1/2                             |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Max. torque                              | 33 Nm                             |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Switching type                           | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Max. switching voltage                   | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Electrical connection                    | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Max. switching voltage at resistive load | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | switching capacity                       | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Protection class to DIN 40050            | -                                 |                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                         | Order example                            | VRD 2 ES.0                        |                                                                                                                                                                                                                                                                   |

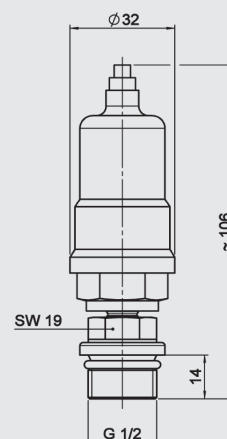
## VMF x F.x

|                                                                                   |                                          |                                                |
|-----------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------|
|  | Type of indication                       | electrical switch                              |
|                                                                                   | Weight                                   | 71 g                                           |
|                                                                                   | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                            |
|                                                                                   | Permitt. operating pressure              | 40 bar                                         |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C                              |
|                                                                                   | Thread                                   | G 1/8                                          |
|                                                                                   | Max. torque                              | 10 Nm                                          |
|                                                                                   | Switching type                           | N/O contact<br>(N/C as an option)              |
|                                                                                   | Max. switching voltage                   | 42 V                                           |
|                                                                                   | Electrical connection                    | threaded connection                            |
|                                                                                   | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                             |
|                                                                                   | switching capacity                       | Ohmic 2.5 A at 24 V =<br>Ohmic 2.5 A at 42 V ~ |
|                                                                                   | Protection class to DIN 40050            | IP 65, terminals IP 00                         |
|                                                                                   | Order example                            | VMF 2 F.0                                      |

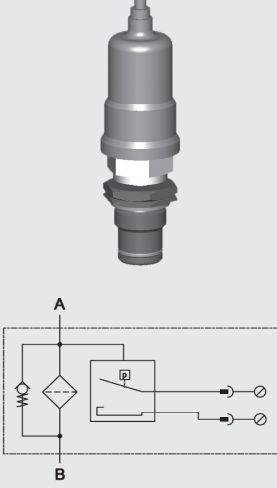


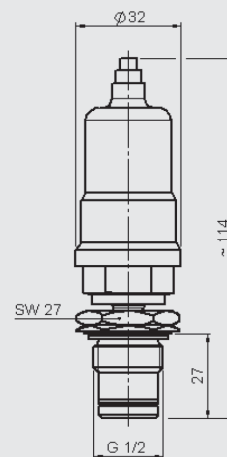
## VR x F.x

|                                                                                    |                                          |                                                |
|------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------|
|  | Type of indication                       | electrical switch                              |
|                                                                                    | Weight                                   | 142 g                                          |
|                                                                                    | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                            |
|                                                                                    | Permitt. operating pressure              | 40 bar                                         |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                              |
|                                                                                    | Thread                                   | G 1/2                                          |
|                                                                                    | Max. torque                              | 33 Nm                                          |
|                                                                                    | Switching type                           | N/O contact<br>(N/C as an option)              |
|                                                                                    | Max. switching voltage                   | 42 V                                           |
|                                                                                    | Electrical connection                    | threaded connection                            |
|                                                                                    | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                             |
|                                                                                    | switching capacity                       | Ohmic 2.5 A at 24 V =<br>Ohmic 2.5 A at 42 V ~ |
|                                                                                    | Protection class to DIN 40050            | IP 65, terminals IP 00                         |
|                                                                                    | Order example                            | VR 2 F.0                                       |




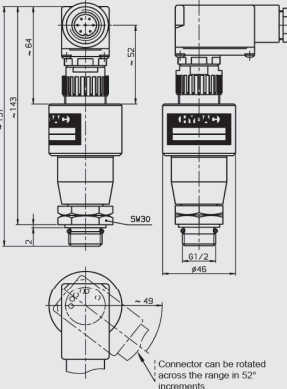

## VRD x F.x

|                                                                                     |                                          |                                                |
|-------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------|
|  | Type of indication                       | electrical switch                              |
|                                                                                     | Weight                                   | 158 g                                          |
|                                                                                     | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                            |
|                                                                                     | Permitt. operating pressure              | 40 bar                                         |
|                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                              |
|                                                                                     | Thread                                   | G 1/2                                          |
|                                                                                     | Max. torque                              | 33 Nm                                          |
|                                                                                     | Switching type                           | N/O contact<br>(N/C as an option)              |
|                                                                                     | Max. switching voltage                   | 42 V                                           |
|                                                                                     | Electrical connection                    | threaded connection                            |
|                                                                                     | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                             |
|                                                                                     | switching capacity                       | Ohmic 2.5 A at 24 V =<br>Ohmic 2.5 A at 42 V ~ |
|                                                                                     | Protection class to DIN 40050            | IP 65, terminals IP 00                         |
|                                                                                     | Order example                            | VRD 2 F.1                                      |


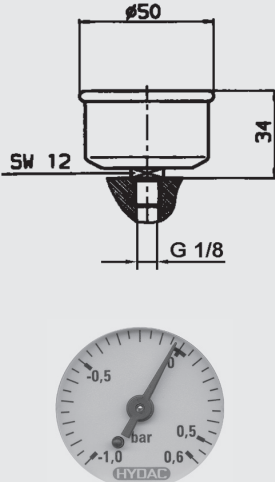



E 7.050.15/11.16

## VR x GC.x


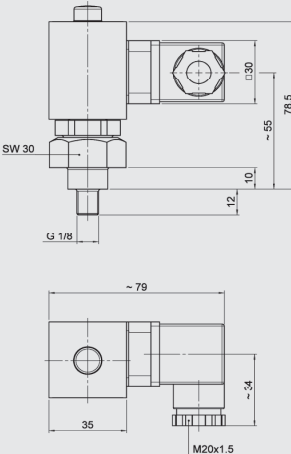
|                                                                                   |                                             |                                                                                                                                                                                                        |                                                                                     |
|-----------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |                                             |                                                                                                                                                                                                        |  |
|  | Type of indication                          | Electronic/analogue<br>(4-20 mA or 1-10 V)<br>1 electrical switching contact at 75%<br>and at 100% of the pressure setting<br>Analogue signal up to 20% of the<br>pressure setting constant 4mA or 1 V |                                                                                     |
|                                                                                   | Weight                                      | 340 g                                                                                                                                                                                                  |                                                                                     |
|                                                                                   | Pressure setting or<br>indication range     | 2 bar -10%                                                                                                                                                                                             |                                                                                     |
|                                                                                   | Permitt. operating pressure                 | 7 bar                                                                                                                                                                                                  |                                                                                     |
|                                                                                   | Permitt. temperature range                  | -10 °C to +80 °C                                                                                                                                                                                       |                                                                                     |
|                                                                                   | Thread                                      | G 1/2                                                                                                                                                                                                  |                                                                                     |
|                                                                                   | Max. torque                                 | 15 Nm                                                                                                                                                                                                  |                                                                                     |
|                                                                                   | Switching type                              | N/C or N/O, electronic<br>PNP positive switching (factory setting)                                                                                                                                     |                                                                                     |
|                                                                                   | Max. switching voltage                      | Operating voltage 20-30 V DC                                                                                                                                                                           |                                                                                     |
|                                                                                   | Electrical connection                       | 7 pole plug to DIN 43651; PG 11                                                                                                                                                                        |                                                                                     |
|                                                                                   | Max. switching voltage<br>at resistive load | 12 W                                                                                                                                                                                                   |                                                                                     |
|                                                                                   | switching capacity                          | Ohmic 0.4 A at 30 V =                                                                                                                                                                                  |                                                                                     |
|                                                                                   | Protection class to<br>DIN 40050            | IP 65 (only if the connector is wired and fitted<br>correctly)                                                                                                                                         |                                                                                     |
|                                                                                   | Order example                               | VR 2 GC.0 /-LED-SQ-123                                                                                                                                                                                 |                                                                                     |

## VMF x K.x

|                                                                                    |                                             |                                      |                                                                                      |
|------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                          | visual-analogue,<br>scale indication |  |
|                                                                                    | Weight                                      | 54 g                                 |                                                                                      |
|                                                                                    | Pressure setting or<br>indication range     | -1 bar to + 0.6 bar                  |                                                                                      |
|                                                                                    | Permitt. operating pressure                 | -0.7 to +0.4 bar continuous          |                                                                                      |
|                                                                                    | Permitt. temperature range                  | -20 °C to +60 °C                     |                                                                                      |
|                                                                                    | Thread                                      | G 1/8                                |                                                                                      |
|                                                                                    | Max. torque                                 | 10 Nm                                |                                                                                      |
|                                                                                    | Switching type                              | -                                    |                                                                                      |
|                                                                                    | Max. switching voltage                      | -                                    |                                                                                      |
|                                                                                    | Electrical connection                       | -                                    |                                                                                      |
|                                                                                    | Max. switching voltage<br>at resistive load | -                                    |                                                                                      |
|                                                                                    | switching capacity                          | -                                    |                                                                                      |
|                                                                                    | Protection class to<br>DIN 40050            | -                                    |                                                                                      |
|                                                                                    | Order example                               | VMF 0.6 K.0                          |                                                                                      |

|                                                                                     |
|-------------------------------------------------------------------------------------|
|  |
|-------------------------------------------------------------------------------------|

## VMF x LE.x

|                                                                                     |                                             |                                                                                                    |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                          | visual, red pin<br>and electrical switch<br>1 switching contact at 100% of the<br>pressure setting |  |
|                                                                                     | Weight                                      | 176 g                                                                                              |                                                                                       |
|                                                                                     | Pressure setting or<br>indication range     | 2 bar -0.2 bar                                                                                     |                                                                                       |
|                                                                                     | Permitt. operating pressure                 | 7 bar                                                                                              |                                                                                       |
|                                                                                     | Permitt. temperature range                  | -10 °C to +100 °C                                                                                  |                                                                                       |
|                                                                                     | Thread                                      | G 1/8                                                                                              |                                                                                       |
|                                                                                     | Max. torque                                 | 10 Nm                                                                                              |                                                                                       |
|                                                                                     | Switching type                              | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                        |                                                                                       |
|                                                                                     | Max. switching voltage                      | 115 V                                                                                              |                                                                                       |
|                                                                                     | Electrical connection                       | Male connection M20<br>Female connector to DIN EN 175301-803                                       |                                                                                       |
|                                                                                     | Max. switching voltage<br>at resistive load | 15 W =<br>max. 15 VA ~                                                                             |                                                                                       |
|                                                                                     | switching capacity                          | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                         |                                                                                       |
|                                                                                     | Protection class to<br>DIN 40050            | IP 65 (only if the connector is wired and fitted<br>correctly)                                     |                                                                                       |
|                                                                                     | Order example                               | VMF 2 LE.1                                                                                         |                                                                                       |

## VR x LE.x

|  |                                          |                                                                                              |  |
|--|------------------------------------------|----------------------------------------------------------------------------------------------|--|
|  | Type of indication                       | visual, red pin and electrical switch<br>1 switching contact at 100% of the pressure setting |  |
|  | Weight                                   | 137 g                                                                                        |  |
|  | Pressure setting or indication range     | 2 bar -0.2 bar                                                                               |  |
|  | Permitt. operating pressure              | 7 bar                                                                                        |  |
|  | Permitt. temperature range               | -10 °C to +100 °C                                                                            |  |
|  | Thread                                   | G 1/2                                                                                        |  |
|  | Max. torque                              | 15 Nm                                                                                        |  |
|  | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                  |  |
|  | Max. switching voltage                   | 115 V                                                                                        |  |
|  | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803                                 |  |
|  | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                       |  |
|  | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                   |  |
|  | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                  |  |
|  | Order example                            | VR 2 LE.1                                                                                    |  |

## VMF x LZ.x



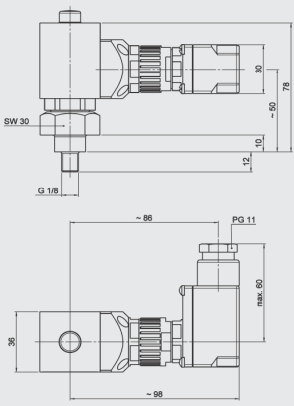
|  |                                          |                                                                                               |  |
|--|------------------------------------------|-----------------------------------------------------------------------------------------------|--|
|  | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|  | Weight                                   | 230 g                                                                                         |  |
|  | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                |  |
|  | Permitt. operating pressure              | 7 bar                                                                                         |  |
|  | Permitt. temperature range               | -10 °C to +100 °C                                                                             |  |
|  | Thread                                   | G 1/8                                                                                         |  |
|  | Max. torque                              | 10 Nm                                                                                         |  |
|  | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                   |  |
|  | Max. switching voltage                   | 115 V                                                                                         |  |
|  | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803                                  |  |
|  | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                        |  |
|  | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                    |  |
|  | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                   |  |
|  | Order example                            | VMF 2 LZ.1                                                                                    |  |

## VR x LZ.x



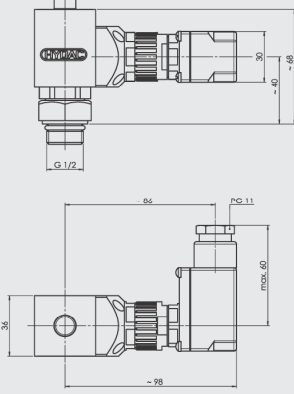
|  |                                          |                                                                                               |  |
|--|------------------------------------------|-----------------------------------------------------------------------------------------------|--|
|  | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|  | Weight                                   | 190 g                                                                                         |  |
|  | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                |  |
|  | Permitt. operating pressure              | 7 bar                                                                                         |  |
|  | Permitt. temperature range               | -10 °C to +100 °C                                                                             |  |
|  | Thread                                   | G 1/2                                                                                         |  |
|  | Max. torque                              | 15 Nm                                                                                         |  |
|  | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                   |  |
|  | Max. switching voltage                   | 115 V                                                                                         |  |
|  | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803                                  |  |
|  | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                        |  |
|  | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                    |  |
|  | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                   |  |
|  | Order example                            | VR 2 LZ.1                                                                                     |  |

E 7.050.15/11.16



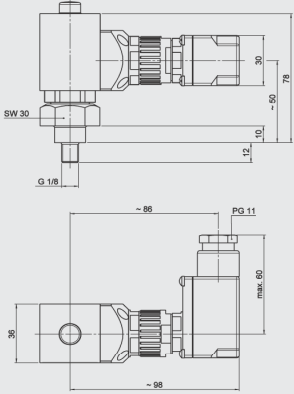
## VMF x LZ.x /-DB

|                                                                                                                                                                        |                                          |                                                                                                                                                                                              |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                                                                                                        | Weight                                   | 170 g                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                                                                                                               |                                                                                     |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                        | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                            |                                                                                     |
|                                                                                                                                                                        | Thread                                   | G 1/8                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                        | Max. torque                              | 10 Nm                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                        | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                  |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage                   | 24 V                                                                                                                                                                                         |                                                                                     |
|                                                                                                                                                                        | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                       |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                       |                                                                                     |
|                                                                                                                                                                        | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                   |                                                                                     |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                  |                                                                                     |
|                                                                                                                                                                        | Order example                            | VMF 2 LZ.1 /-DB                                                                                                                                                                              |                                                                                     |

## VR x LZ.x /-DB



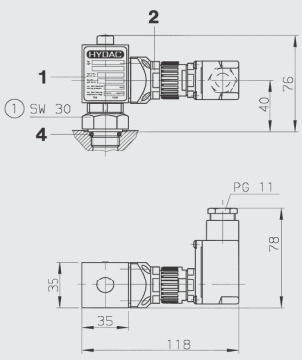
|                                                                                                                                                                           |                                          |                                                                                                                                                                                              |                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <br> | Type of Indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                                                                                                           | Weight                                   | 190 g                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                                                           | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                                                                                                               |                                                                                      |
|                                                                                                                                                                           | Permitt. operating pressure              | 7 bar                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                                                           | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                            |                                                                                      |
|                                                                                                                                                                           | Thread                                   | G 1/2                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                                                           | Max. torque                              | 15 Nm                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                                                           | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                  |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage                   | 24 V                                                                                                                                                                                         |                                                                                      |
|                                                                                                                                                                           | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                       |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                       |                                                                                      |
|                                                                                                                                                                           | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                   |                                                                                      |
|                                                                                                                                                                           | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                  |                                                                                      |
|                                                                                                                                                                           | Order example                            | VR 2 LZ.1 /-DB                                                                                                                                                                               |                                                                                      |

## VMF x LZ.x /-CN




|                                                                                                                                                                            |                                          |                                                                                                                                                                                               |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED goes out at 75%<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                                                                                                            | Weight                                   | 170 g                                                                                                                                                                                         |                                                                                       |
|                                                                                                                                                                            | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                                                                                                                |                                                                                       |
|                                                                                                                                                                            | Permitt. operating pressure              | 7 bar                                                                                                                                                                                         |                                                                                       |
|                                                                                                                                                                            | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                             |                                                                                       |
|                                                                                                                                                                            | Thread                                   | G 1/8                                                                                                                                                                                         |                                                                                       |
|                                                                                                                                                                            | Max. torque                              | 10 Nm                                                                                                                                                                                         |                                                                                       |
|                                                                                                                                                                            | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                   |                                                                                       |
|                                                                                                                                                                            | Max. switching voltage                   | 24 V                                                                                                                                                                                          |                                                                                       |
|                                                                                                                                                                            | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                        |                                                                                       |
|                                                                                                                                                                            | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                        |                                                                                       |
|                                                                                                                                                                            | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                    |                                                                                       |
|                                                                                                                                                                            | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                   |                                                                                       |
|                                                                                                                                                                            | Order example                            | VMF 2 LZ.1 /-CN                                                                                                                                                                               |                                                                                       |

E 7.050.15/11.16




## VR x LZ.x /-CN

|                                                                                                                                                                     |                                          |                                                                                                                                                                                                       |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED goes out at 75%<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% $\Delta p$ |  |
|                                                                                                                                                                     | Weight                                   | 190 g                                                                                                                                                                                                 |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -0.2 bar                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 7 bar                                                                                                                                                                                                 |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                                     |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                                                                                                                                                                 |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 15 Nm                                                                                                                                                                                                 |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                           |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 24 V                                                                                                                                                                                                  |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                                |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                                |                                                                                     |
|                                                                                                                                                                     | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                            |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                           |                                                                                     |
|                                                                                                                                                                     | Order example                            | VR 2 LZ.1 /-CN                                                                                                                                                                                        |                                                                                     |




## VMF x LZ.x /-BO

|                                                                                                                                                                        |                                          |                                                                                               |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                                                                                                        | Weight                                   | 120 g                                                                                         |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar (or 2.5 bar) -10%                                                                       |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar                                                                                         |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -10 °C to +100 °C                                                                             |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/8                                                                                         |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 10 Nm                                                                                         |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/O (75%)<br>N/C (100%)                                                                       |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | 24 V                                                                                          |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | Male connection<br>M12 x 1                                                                    |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                        |                                                                                      |
|                                                                                                                                                                        | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                    |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65                                                                                         |                                                                                      |
|                                                                                                                                                                        | Order example                            | VMF 2 LZ.1 /-BO                                                                               |                                                                                      |




## VR x LZ.x /-BO

|                                                                                                                                                                         |                                          |                                                                                               |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                                                                                                         | Weight                                   | 145 g                                                                                         |                                                                                       |
|                                                                                                                                                                         | Pressure setting or indication range     | 2 bar (or 2.5 bar) -10%                                                                       |                                                                                       |
|                                                                                                                                                                         | Permitt. operating pressure              | 7 bar                                                                                         |                                                                                       |
|                                                                                                                                                                         | Permitt. temperature range               | -10 °C to +100 °C                                                                             |                                                                                       |
|                                                                                                                                                                         | Thread                                   | G 1/2                                                                                         |                                                                                       |
|                                                                                                                                                                         | Max. torque                              | 15 Nm                                                                                         |                                                                                       |
|                                                                                                                                                                         | Switching type                           | N/O (75%)<br>N/C (100%)                                                                       |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage                   | 24 V                                                                                          |                                                                                       |
|                                                                                                                                                                         | Electrical connection                    | Male connection<br>M12 x 1                                                                    |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                        |                                                                                       |
|                                                                                                                                                                         | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                    |                                                                                       |
|                                                                                                                                                                         | Protection class to DIN 40050            | IP 65                                                                                         |                                                                                       |
|                                                                                                                                                                         | Order example                            | VR 2 LZ.1 /-BO                                                                                |                                                                                       |




## VMF x LZ.x /-AV

|                                                                                                                                                                        |                                          |                                                                                               |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                                                                                                        | Weight                                   | 120 g                                                                                         |                                                                                     |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar (or 2.5 bar) -10%                                                                       |                                                                                     |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar                                                                                         |                                                                                     |
|                                                                                                                                                                        | Permitt. temperature range               | -10 °C to +100 °C                                                                             |                                                                                     |
|                                                                                                                                                                        | Thread                                   | G 1/8                                                                                         |                                                                                     |
|                                                                                                                                                                        | Max. torque                              | 10 Nm                                                                                         |                                                                                     |
|                                                                                                                                                                        | Switching type                           | N/C (75% and 100%)                                                                            |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage                   | 24 V                                                                                          |                                                                                     |
|                                                                                                                                                                        | Electrical connection                    | Male connection M12 x 1                                                                       |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 15 W = max. 15 VA ~                                                                           |                                                                                     |
|                                                                                                                                                                        | switching capacity                       | Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~                                                       |                                                                                     |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65                                                                                         |                                                                                     |
|                                                                                                                                                                        | Order example                            | VMF 2 LZ.1 /-AV                                                                               |                                                                                     |





## VR x LZ.x /-AV

|                                                                                                                                                                           |                                          |                                                                                               |                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                                                                                                           | Weight                                   | 145 g                                                                                         |                                                                                      |
|                                                                                                                                                                           | Pressure setting or indication range     | 2 bar (or 2.5 bar) -10%                                                                       |                                                                                      |
|                                                                                                                                                                           | Permitt. operating pressure              | 7 bar                                                                                         |                                                                                      |
|                                                                                                                                                                           | Permitt. temperature range               | -10 °C to +100 °C                                                                             |                                                                                      |
|                                                                                                                                                                           | Thread                                   | G 1/2                                                                                         |                                                                                      |
|                                                                                                                                                                           | Max. torque                              | 15 Nm                                                                                         |                                                                                      |
|                                                                                                                                                                           | Switching type                           | N/C (75% and 100%)                                                                            |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage                   | 24 V                                                                                          |                                                                                      |
|                                                                                                                                                                           | Electrical connection                    | Male connection M12 x 1                                                                       |                                                                                      |
|                                                                                                                                                                           | Max. switching voltage at resistive load | 15 W = max. 15 VA ~                                                                           |                                                                                      |
|                                                                                                                                                                           | switching capacity                       | Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~                                                       |                                                                                      |
|                                                                                                                                                                           | Protection class to DIN 40050            | IP 65                                                                                         |                                                                                      |
|                                                                                                                                                                           | Order example                            | VR 2 LZ.1 /-AV                                                                                |                                                                                      |




## VMF x LZ.x /-D4C

|                                                                                                                                                                            |                                          |                                                                                                                                                                                                                                                                             |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <br> | Type of indication                       | 1 electrical switching contact at 75% and 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C<br>2 green LED's light when below 30 °C<br>1 green LED lights from 30 °C<br>1 yellow LED lights from 75%<br>1 redLED lights from 100% Δp |  |
|                                                                                                                                                                            | Weight                                   | 245 g                                                                                                                                                                                                                                                                       |                                                                                       |
|                                                                                                                                                                            | Pressure setting or indication range     | 2.5 bar -10%                                                                                                                                                                                                                                                                |                                                                                       |
|                                                                                                                                                                            | Permitt. operating pressure              | 7 bar                                                                                                                                                                                                                                                                       |                                                                                       |
|                                                                                                                                                                            | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                                                                                                           |                                                                                       |
|                                                                                                                                                                            | Thread                                   | G 1/8                                                                                                                                                                                                                                                                       |                                                                                       |
|                                                                                                                                                                            | Max. torque                              | 10 Nm                                                                                                                                                                                                                                                                       |                                                                                       |
|                                                                                                                                                                            | Switching type                           | N/O (75%)<br>N/C (100%)                                                                                                                                                                                                                                                     |                                                                                       |
|                                                                                                                                                                            | Max. switching voltage                   | 24 V                                                                                                                                                                                                                                                                        |                                                                                       |
|                                                                                                                                                                            | Electrical connection                    | Male connection M12 x 1                                                                                                                                                                                                                                                     |                                                                                       |
|                                                                                                                                                                            | Max. switching voltage at resistive load | 15 W = max. 15 VA ~                                                                                                                                                                                                                                                         |                                                                                       |
|                                                                                                                                                                            | switching capacity                       | Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~                                                                                                                                                                                                                                     |                                                                                       |
|                                                                                                                                                                            | Protection class to DIN 40050            | IP 65                                                                                                                                                                                                                                                                       |                                                                                       |
|                                                                                                                                                                            | Order example                            | VMF 2 LZ.2 /-D4C                                                                                                                                                                                                                                                            |                                                                                       |




## VR x LZ.x /-D4C

|                                                                                   |                                          |                                                                                                                                                                                                                                                                                 |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | 1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C<br>2 green LED's light when below 30 °C<br>1 green LED lights from 30 °C<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                   | Weight                                   | 205 g                                                                                                                                                                                                                                                                           |                                                                                     |
|  | Pressure setting or indication range     | 2.5 bar -10%                                                                                                                                                                                                                                                                    |  |
|                                                                                   | Permitt. operating pressure              | 7 bar                                                                                                                                                                                                                                                                           |                                                                                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                                                                                                               |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                                                                                                                                                                                                                                                           |                                                                                     |
|                                                                                   | Max. torque                              | 15 Nm                                                                                                                                                                                                                                                                           |                                                                                     |
|                                                                                   | Switching type                           | N/O (75%)<br>N/C (100%)                                                                                                                                                                                                                                                         |                                                                                     |
|                                                                                   | Max. switching voltage                   | 24 V                                                                                                                                                                                                                                                                            |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection<br>M12 x 1                                                                                                                                                                                                                                                      |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                                                                                                          |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                                                                                                      |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 65                                                                                                                                                                                                                                                                           |                                                                                     |
|                                                                                   | Order example                            | VR 2 LZ.2 /-D4C                                                                                                                                                                                                                                                                 |                                                                                     |



## VMF x LZ.x /-BO-LED

|                                                                                     |                                          |                                                                                                                                                                          |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |   |
|                                                                                     | Weight                                   | 245 g                                                                                                                                                                    |                                                                                       |
|  | Pressure setting or indication range     | 2.5 bar -10%                                                                                                                                                             |  |
|                                                                                     | Permitt. operating pressure              | 7 bar                                                                                                                                                                    |                                                                                       |
|                                                                                     | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                        |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                                                                                                                                    |                                                                                       |
|                                                                                     | Max. torque                              | 10 Nm                                                                                                                                                                    |                                                                                       |
|                                                                                     | Switching type                           | N/O (75%), N/C (100%)                                                                                                                                                    |                                                                                       |
|                                                                                     | Max. switching voltage                   | 24 V                                                                                                                                                                     |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection<br>M12 x 1                                                                                                                                               |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                   |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                               |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65                                                                                                                                                                    |                                                                                       |
|                                                                                     | Order example                            | VMF 2 LZ.2 /-BO-LED                                                                                                                                                      |                                                                                       |


## VR x LZ.x /-BO-LED

|                                                                                     |                                          |                                                                                                                                                                          |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                     | Weight                                   | 205 g                                                                                                                                                                    |                                                                                       |
|  | Pressure setting or indication range     | 2.5 bar -10%                                                                                                                                                             |  |
|                                                                                     | Permitt. operating pressure              | 7 bar                                                                                                                                                                    |                                                                                       |
|                                                                                     | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                        |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                                                                                                                                    |                                                                                       |
|                                                                                     | Max. torque                              | 15 Nm                                                                                                                                                                    |                                                                                       |
|                                                                                     | Switching type                           | N/O (75%), N/C (100%)                                                                                                                                                    |                                                                                       |
|                                                                                     | Max. switching voltage                   | 24 V                                                                                                                                                                     |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection<br>M12 x 1                                                                                                                                               |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                   |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                               |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65                                                                                                                                                                    |                                                                                       |
|                                                                                     | Order example                            | VR 2 LZ.2 /-BO-LED                                                                                                                                                       |                                                                                       |



**VR x LZ.x /-GM**





|                                             |                                                                                                                                                                                      |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of indication                          | visual, red pin<br>and 1 electrical switching contact at 75%<br>and at 100% of the pressure setting<br>Indicator function possible in conjunction<br>with the "No element" indicator |
| Weight                                      | 290 g                                                                                                                                                                                |
| Pressure setting or<br>indication range     | 2.5 bar -10%                                                                                                                                                                         |
| Permitt. operating pressure                 | 7 bar                                                                                                                                                                                |
| Permitt. temperature range                  | -10 °C to +100 °C                                                                                                                                                                    |
| Thread                                      | G 1/2                                                                                                                                                                                |
| Max. torque                                 | 15 Nm                                                                                                                                                                                |
| Switching type                              | -                                                                                                                                                                                    |
| Max. switching voltage                      | 24 V                                                                                                                                                                                 |
| Electrical connection                       | Male connection<br>M12 x 1                                                                                                                                                           |
| Max. switching voltage<br>at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                               |
| switching capacity                          | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                           |
| Protection class to<br>DIN 40050            | IP 65                                                                                                                                                                                |
| Order example                               | VR 2 LZ.1 /-GM                                                                                                                                                                       |




VMF x R.x



|                                          |                                   |
|------------------------------------------|-----------------------------------|
| Type of indication                       | visual-analogue, scale indication |
| Weight                                   | 54 g                              |
| Pressure setting or indication range     | 0 to 10 bar                       |
| Permitt. operating pressure              | 7 bar continuous                  |
| Permitt. temperature range               | -20 °C to +60 °C                  |
| Thread                                   | G 1/8                             |
| Max. torque                              | 10 Nm                             |
| Switching type                           | -                                 |
| Max. switching voltage                   | -                                 |
| Electrical connection                    | -                                 |
| Max. switching voltage at resistive load | -                                 |
| switching capacity                       | -                                 |
| Protection class to DIN 40050            | -                                 |
| Order example                            | VMF 2 R.0                         |

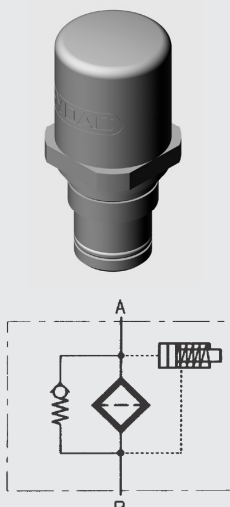


$$VR \times R_x$$


|                                             |                                      |
|---------------------------------------------|--------------------------------------|
| Type of indication                          | visual-analogue,<br>scale indication |
| Weight                                      | 125 g                                |
| Pressure setting or<br>indication range     | 0 to 10 bar                          |
| Permitt. operating pressure                 | 7 bar continuous                     |
| Permitt. temperature range                  | -20 °C to +60 °C                     |
| Thread                                      | G 1/2                                |
| Max. torque                                 | 33 Nm                                |
| Switching type                              | -                                    |
| Max. switching voltage                      | -                                    |
| Electrical connection                       | -                                    |
| Max. switching voltage<br>at resistive load | -                                    |
| switching capacity                          | -                                    |
| Protection class to<br>DIN 40050            | -                                    |
| Order example                               | VR 2 R.0                             |

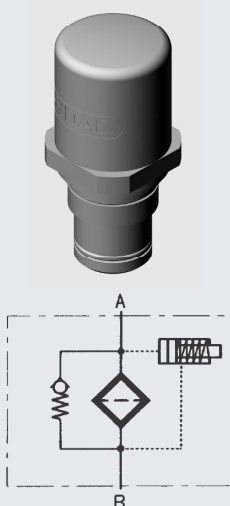
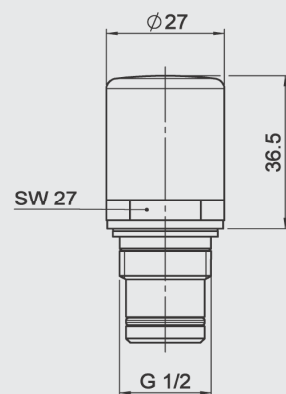


## 3.3 DIFFERENTIAL PRESSURE INDICATORS

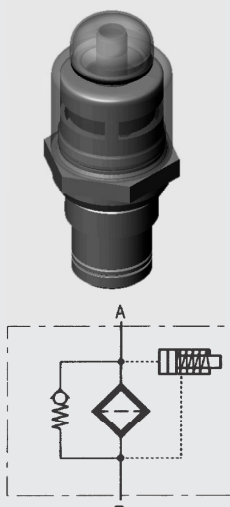

### VM x B.x

|                                                                                   |                                          |                                           |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Automatic reset |  |
|                                                                                   | Weight                                   | 55 g                                      |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%    |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 210 bar                                   |                                                                                     |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C                         |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                     |                                                                                     |
|                                                                                   | Max. torque                              | 33 Nm                                     |                                                                                     |
|                                                                                   | Switching type                           | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage                   | -                                         |                                                                                     |
|                                                                                   | Electrical connection                    | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | -                                         |                                                                                     |
|                                                                                   | switching capacity                       | -                                         |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | -                                         |                                                                                     |
|                                                                                   | Order example                            | VM 5 B.1                                  |                                                                                     |

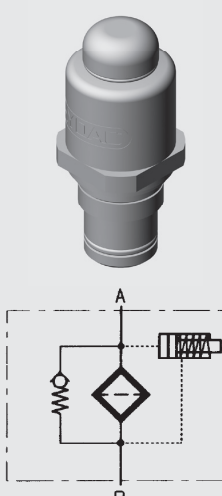
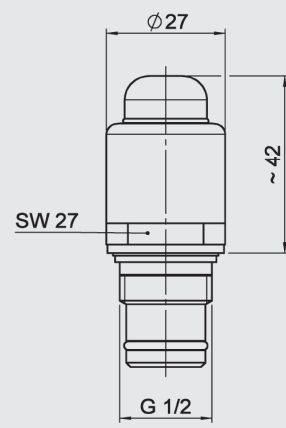
### VD x B.x

|                                                                                    |                                          |                                           |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Automatic reset |  |
|                                                                                    | Weight                                   | 110 g                                     |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%    |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 420 bar                                   |                                                                                      |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                         |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                     |                                                                                      |
|                                                                                    | Max. torque                              | 100 Nm                                    |                                                                                      |
|                                                                                    | Switching type                           | -                                         |                                                                                      |
|                                                                                    | Max. switching voltage                   | -                                         |                                                                                      |
|                                                                                    | Electrical connection                    | -                                         |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | -                                         |                                                                                      |
|                                                                                    | switching capacity                       | -                                         |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | -                                         |                                                                                      |
|                                                                                    | Order example                            | VD 5 B.1                                  |                                                                                      |

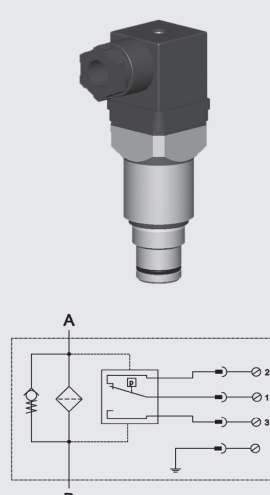
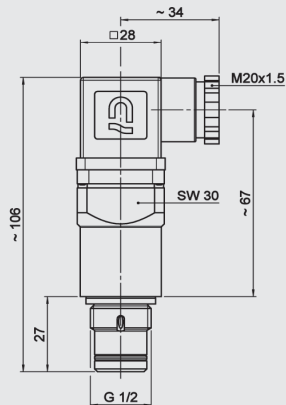
### VM x BM.x

|                                                                                     |                                          |                                        |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Manual reset |  |
|                                                                                     | Weight                                   | 55 g                                   |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10% |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 210 bar                                |                                                                                       |
|                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                      |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                  |                                                                                       |
|                                                                                     | Max. torque                              | 33 Nm                                  |                                                                                       |
|                                                                                     | Switching type                           | -                                      |                                                                                       |
|                                                                                     | Max. switching voltage                   | -                                      |                                                                                       |
|                                                                                     | Electrical connection                    | -                                      |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | -                                      |                                                                                       |
|                                                                                     | switching capacity                       | -                                      |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | -                                      |                                                                                       |
|                                                                                     | Order example                            | VM 5 BM.1                              |                                                                                       |

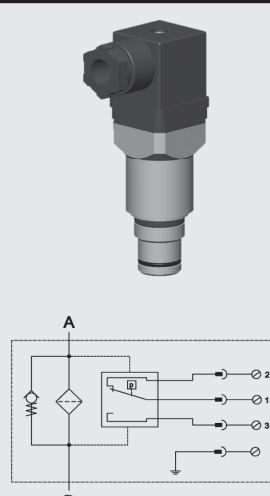
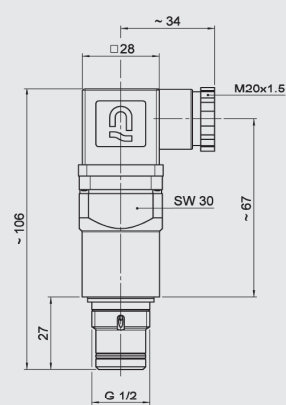
## VD x BM.x

|                                                                                   |                                          |                                           |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Manual reset    |  |
|                                                                                   | Weight                                   | 110 g                                     |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -10 %<br>5 bar -10 %<br>8 bar ±10 % |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 420 bar                                   |                                                                                     |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C                         |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                     |                                                                                     |
|                                                                                   | Max. torque                              | 100 Nm                                    |                                                                                     |
|                                                                                   | Switching type                           | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage                   | -                                         |                                                                                     |
|                                                                                   | Electrical connection                    | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | -                                         |                                                                                     |
|                                                                                   | switching capacity                       | -                                         |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | -                                         |                                                                                     |
|                                                                                   | Order example                            | VD 5 BM.1                                 |                                                                                     |

## VM x C.x

|                                                                                    |                                          |                                                              |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                            |  |
|                                                                                    | Weight                                   | 120 g                                                        |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar -10 %<br>5 bar -10 %<br>8 bar ±10 %                    |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 210 bar                                                      |                                                                                      |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                                        |                                                                                      |
|                                                                                    | Max. torque                              | 33 Nm                                                        |                                                                                      |
|                                                                                    | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                      |
|                                                                                    | Max. switching voltage                   | 230 V                                                        |                                                                                      |
|                                                                                    | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |                                                                                      |
|                                                                                    | Switching capacity <sup>1)</sup>         | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~     |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                      |
|                                                                                    | Order example                            | VM 5 C.0                                                     |                                                                                      |


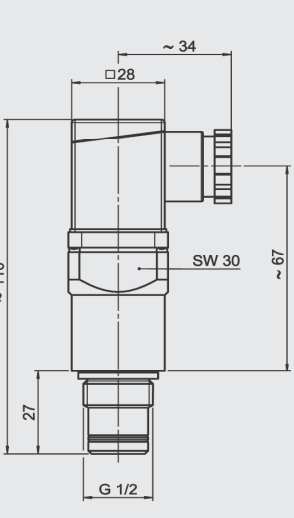
## VD x C.x

|                                                                                     |                                          |                                                              |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                            |  |
|                                                                                     | Weight                                   | 220 g                                                        |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 5 bar -10 %<br>8 bar ±10 %                                   |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 420 bar                                                      |                                                                                       |
|                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                        |                                                                                       |
|                                                                                     | Max. torque                              | 100 Nm                                                       |                                                                                       |
|                                                                                     | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                       |
|                                                                                     | Max. switching voltage                   | 230 V                                                        |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |                                                                                       |
|                                                                                     | Switching capacity <sup>1)</sup>         | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~     |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                       |
|                                                                                     | Order example                            | VD 5 C.0                                                     |                                                                                       |


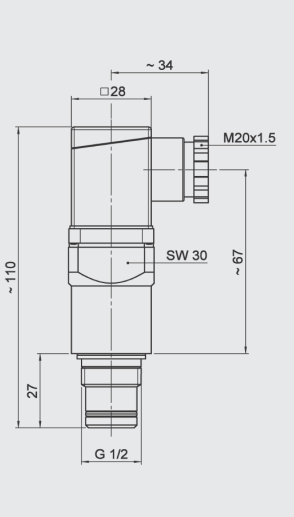
E 7.050.15/11.16

<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).


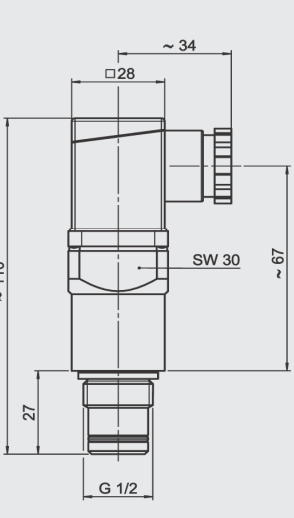
## VM x D.x /-L...

|                                                                                                                                                                     |                                          |                                                               |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                        |  |
|                                                                                                                                                                     | Weight                                   | 150 g                                                         |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                        |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 210 bar                                                       |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                             |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                         |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 33 Nm                                                         |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/C or N/O<br>(change-over contacts)                          |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 24, 48, 115, 230 V<br>(depending on the type of light insert) |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803  |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                            |                                                                                     |
|                                                                                                                                                                     | Switching capacity <sup>1)</sup>         | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~      |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)   |                                                                                     |
|                                                                                                                                                                     | Order example                            | VM 5 D.0 /-L24                                                |                                                                                     |

## VD x D.x /-L...


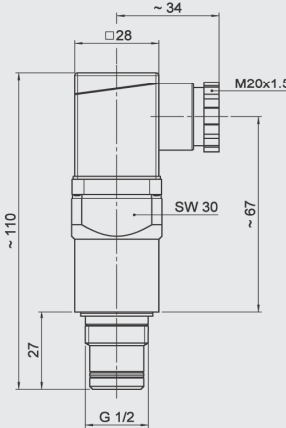
|                                                                                                                                                                        |                                          |                                                               |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                        |  |
|                                                                                                                                                                        | Weight                                   | 250 g                                                         |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                        |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 420 bar                                                       |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +100 °C                                             |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                         |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 100 Nm                                                        |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/C or N/O<br>(change-over contacts)                          |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | 24, 48, 115, 230 V<br>(depending on the type of light insert) |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803  |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                            |                                                                                      |
|                                                                                                                                                                        | Switching capacity <sup>1)</sup>         | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~      |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)   |                                                                                      |
|                                                                                                                                                                        | Order example                            | VD 5 D.0 /-L24                                                |                                                                                      |

## VM x D.x /-LED


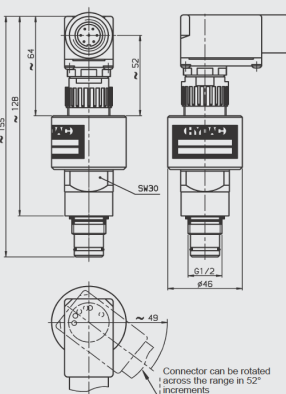
|                                                                                                                                                                         |                                          |                                                              |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                                                                                                         | Weight                                   | 150 g                                                        |                                                                                       |
|                                                                                                                                                                         | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |                                                                                       |
|                                                                                                                                                                         | Permitt. operating pressure              | 210 bar                                                      |                                                                                       |
|                                                                                                                                                                         | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                       |
|                                                                                                                                                                         | Thread                                   | G 1/2                                                        |                                                                                       |
|                                                                                                                                                                         | Max. torque                              | 33 Nm                                                        |                                                                                       |
|                                                                                                                                                                         | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage                   | 24 V                                                         |                                                                                       |
|                                                                                                                                                                         | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |                                                                                       |
|                                                                                                                                                                         | Switching capacity <sup>1)</sup>         | ohmic 3 A at 24 V =                                          |                                                                                       |
|                                                                                                                                                                         | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                       |
|                                                                                                                                                                         | Order example                            | VM 5 D.0 /-LED                                               |                                                                                       |

<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).


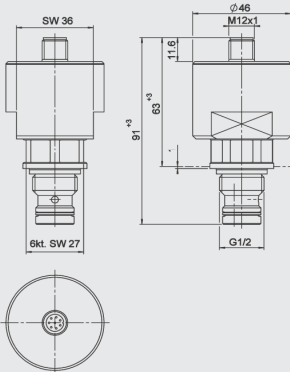
## VD x D.x /-LED

|                                                                                                                                                                     |                                          |                                                              |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | visual indicator and electrical switch                       |  |
|                                                                                                                                                                     | Weight                                   | 250 g                                                        |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 420 bar                                                      |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                        |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 100 Nm                                                       |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | 24 V                                                         |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |                                                                                     |
|                                                                                                                                                                     | Switching capacity <sup>1)</sup>         | ohmic 3 A at 24 V =                                          |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                     |
|                                                                                                                                                                     | Order example                            | VD 5 D.0 /-LED                                               |                                                                                     |

## VD x GC.x

|                                                                                                                                                                        |                                          |                                                                                                                                                                                                  |                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Type of indicator                        | Electronic/analogue<br>(4-20 mA or 1-10 V)<br>1 electrical switching contact at 75% and at 100% of the pressure setting<br>Analogue signal up to 20% of the pressure setting constant 4mA or 1 V |  <p>Connector can be rotated across the range in 52° increments</p> |
|                                                                                                                                                                        | Weight                                   | 400 g                                                                                                                                                                                            |                                                                                                                                                         |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                                                                                                                           |                                                                                                                                                         |
|                                                                                                                                                                        | Permitt. operating pressure              | 420 bar                                                                                                                                                                                          |                                                                                                                                                         |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +80 °C                                                                                                                                                                                 |                                                                                                                                                         |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                                                                                                                                                            |                                                                                                                                                         |
|                                                                                                                                                                        | Max. torque                              | 100 Nm                                                                                                                                                                                           |                                                                                                                                                         |
|                                                                                                                                                                        | Switching type                           | N/C or N/O, electronic<br>PNP positive switching (factory setting)                                                                                                                               |                                                                                                                                                         |
|                                                                                                                                                                        | Max. switching voltage                   | Operating voltage<br>20 to 30 V DC                                                                                                                                                               |                                                                                                                                                         |
|                                                                                                                                                                        | Electrical connection                    | 7 pole plug to DIN 43651; PG 11                                                                                                                                                                  |                                                                                                                                                         |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 12 W                                                                                                                                                                                             |                                                                                                                                                         |
|                                                                                                                                                                        | switching capacity                       | ohmic 0.4 A at 30 V =                                                                                                                                                                            |                                                                                                                                                         |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                      |                                                                                                                                                         |
|                                                                                                                                                                        | Order example                            | VD 5 GC.0 /-LED-SQ-123                                                                                                                                                                           |                                                                                                                                                         |

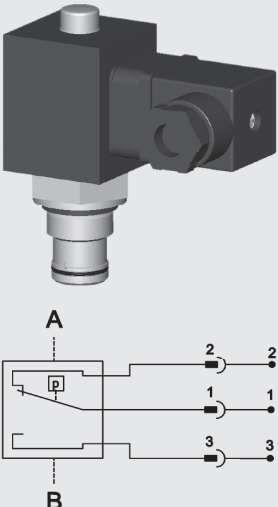
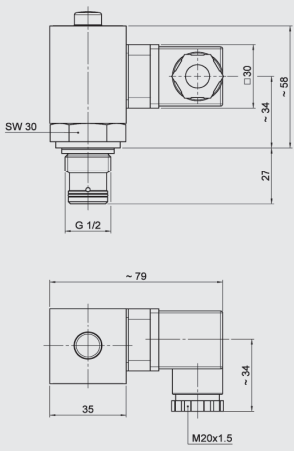
## VL x GW.x

|                                                                                                                                                                            |                                              |                                                                                                                                                        |            |            |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------------------------------------------------------------------------------|
| <br> | Type of indication                           | Electronic/analogue (4-20 mA) for condition monitoring filters incl. bypass monitoring. 1 switching contact at 75% and at 100% of the pressure setting |            |            |  |
|                                                                                                                                                                            | Weight                                       | 157 g                                                                                                                                                  |            |            |                                                                                       |
|                                                                                                                                                                            | Pressure setting p (switching contact 100%)  | 2 bar ±5%                                                                                                                                              | 3 bar ±5%  | 5 bar ±5%  |                                                                                       |
|                                                                                                                                                                            | Indication range Δp                          | 0 to 5 bar                                                                                                                                             | 0 to 5 bar | 0 to 8 bar |                                                                                       |
|                                                                                                                                                                            | Indication range "pressure before filter"    | 25 bar                                                                                                                                                 |            |            |                                                                                       |
|                                                                                                                                                                            | Type of switching                            | electronic switch, PNP positive switching                                                                                                              |            |            |                                                                                       |
|                                                                                                                                                                            | switching outputs Δp                         | N/O or N/C contacts (factory setting)                                                                                                                  |            |            |                                                                                       |
|                                                                                                                                                                            | Output Load                                  | 400 mA                                                                                                                                                 |            |            |                                                                                       |
|                                                                                                                                                                            | Max. switching voltage / operating voltage   | 20 to 30 V DC                                                                                                                                          |            |            |                                                                                       |
|                                                                                                                                                                            | Analogue outputs "press. before filter" & Δp | 4 to 20 mA (max. resistance 600Ω)                                                                                                                      |            |            |                                                                                       |
|                                                                                                                                                                            | Electrical connection                        | M12 x 1 / 8 pole                                                                                                                                       |            |            |                                                                                       |
|                                                                                                                                                                            | Protection class to DIN 40050                | IP 65                                                                                                                                                  |            |            |                                                                                       |
|                                                                                                                                                                            | Permitt. operating pressure                  | 25 bar                                                                                                                                                 |            |            |                                                                                       |
|                                                                                                                                                                            | Permitt. temperature range                   | -40 °C to +85 °C                                                                                                                                       |            |            |                                                                                       |
|                                                                                                                                                                            | Thread                                       | G 1/2                                                                                                                                                  |            |            |                                                                                       |
|                                                                                                                                                                            | Max. torque                                  | 33 Nm                                                                                                                                                  |            |            |                                                                                       |
|                                                                                                                                                                            | Order example                                | VL 5 GW.0 /-V-123                                                                                                                                      |            |            |                                                                                       |


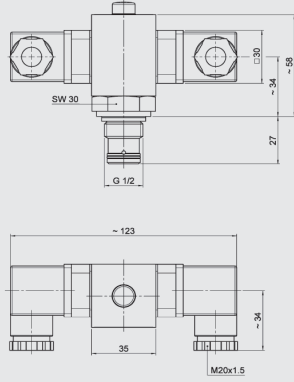
E 7.050.15/11.16

<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details)

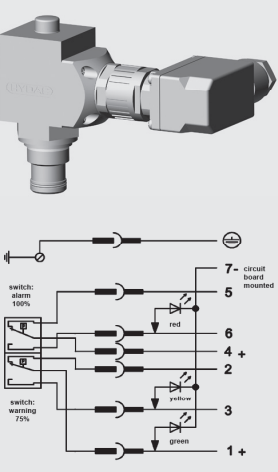
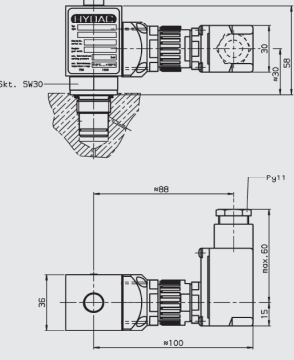
## VD x LE.x

|                                                                                   |                                          |                                                                                              |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and electrical switch<br>1 switching contact at 100% of the pressure setting |  |
|                                                                                   | Weight                                   | 198 g                                                                                        |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                       |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 420 bar                                                                                      |                                                                                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +100 °C                                                                            |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                                                                        |                                                                                     |
|                                                                                   | Max. torque                              | 50 Nm                                                                                        |                                                                                     |
|                                                                                   | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                  |                                                                                     |
|                                                                                   | Max. switching voltage                   | 115 V                                                                                        |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803                                 |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                       |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                   |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                  |                                                                                     |
|                                                                                   | Order example                            | VD 5 LE.1                                                                                    |                                                                                     |

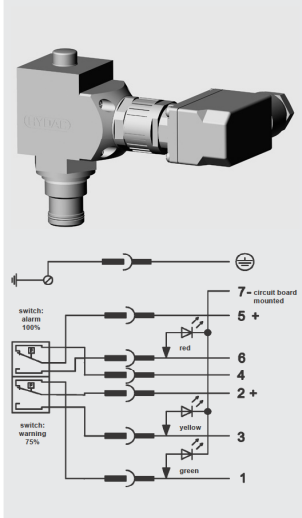
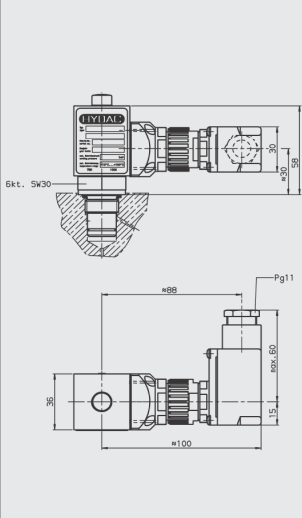
## VD x LZ.x

|                                                                                    |                                          |                                                                                               |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                    | Weight                                   | 240 g                                                                                         |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                        |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 420 bar                                                                                       |                                                                                      |
|                                                                                    | Permitt. temperature range               | -10 °C to +100 °C                                                                             |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                                                                         |                                                                                      |
|                                                                                    | Max. torque                              | 50 Nm                                                                                         |                                                                                      |
|                                                                                    | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                   |                                                                                      |
|                                                                                    | Max. switching voltage                   | 115 V                                                                                         |                                                                                      |
|                                                                                    | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803                                  |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                        |                                                                                      |
|                                                                                    | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                    |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                   |                                                                                      |
|                                                                                    | Order example                            | VD 5 LZ.1                                                                                     |                                                                                      |

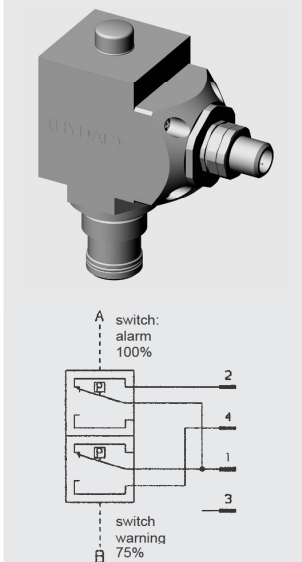
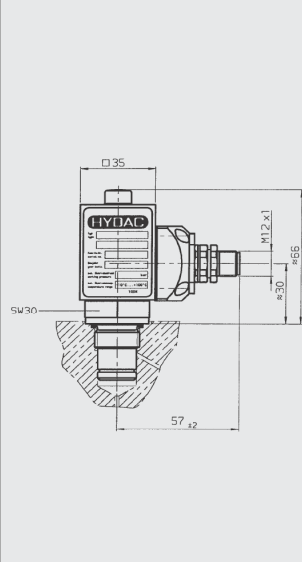
## VD x LZ.x /-DB

|                                                                                     |                                          |                                                                                                                                                                                              |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                     | Weight                                   | 245 g                                                                                                                                                                                        |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                                                                                                                       |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 420 bar                                                                                                                                                                                      |                                                                                       |
|                                                                                     | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                            |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                                                                                                                                                        |                                                                                       |
|                                                                                     | Max. torque                              | 50 Nm                                                                                                                                                                                        |                                                                                       |
|                                                                                     | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                  |                                                                                       |
|                                                                                     | Max. switching voltage                   | 24 V                                                                                                                                                                                         |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                       |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                       |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                   |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                  |                                                                                       |
|                                                                                     | Order example                            | VD 5 LZ.1 /-DB                                                                                                                                                                               |                                                                                       |

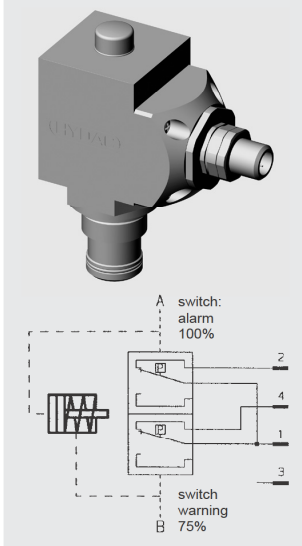
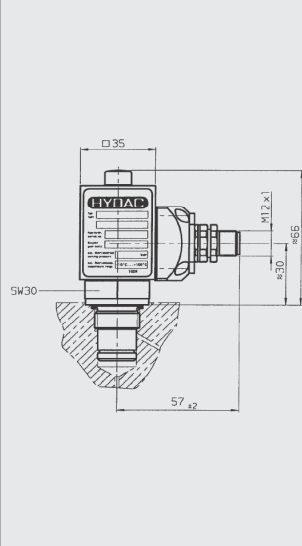
## VD x LZ.x /-CN

|                                                                                   |                                          |                                                                                                                                                                                               |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED goes out at 75%<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |  |
|                                                                                   | Weight                                   | 245 g                                                                                                                                                                                         |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                                                                                                                        |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 420 bar                                                                                                                                                                                       |                                                                                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                             |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                                                                                                                                                                         |                                                                                     |
|                                                                                   | Max. torque                              | 50 Nm                                                                                                                                                                                         |                                                                                     |
|                                                                                   | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                                                                                                                   |                                                                                     |
|                                                                                   | Max. switching voltage                   | 24 V                                                                                                                                                                                          |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection PG 11<br>Female connector to DIN 43651                                                                                                                                        |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                        |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                    |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)                                                                                                                                   |                                                                                     |
|                                                                                   | Order example                            | VD 5 LZ.1 /-CN                                                                                                                                                                                |                                                                                     |



## VD x LZ.x /-BO

|                                                                                    |                                          |                                                                                                 |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                    | Weight                                   | 197 g                                                                                           |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                          |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 420 bar                                                                                         |                                                                                      |
|                                                                                    | Permitt. temperature range               | -10 °C to +100 °C                                                                               |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                                                                           |                                                                                      |
|                                                                                    | Max. torque                              | 50 Nm                                                                                           |                                                                                      |
|                                                                                    | Switching type                           | N/O (75%)<br>N/C (100%)                                                                         |                                                                                      |
|                                                                                    | Max. switching voltage                   | 24 V                                                                                            |                                                                                      |
|                                                                                    | Electrical connection                    | Male connection<br>M12 x 1                                                                      |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                          |                                                                                      |
|                                                                                    | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                      |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | IP 65                                                                                           |                                                                                      |
|                                                                                    | Order example                            | VD 5 LZ.1 /-BO                                                                                  |                                                                                      |

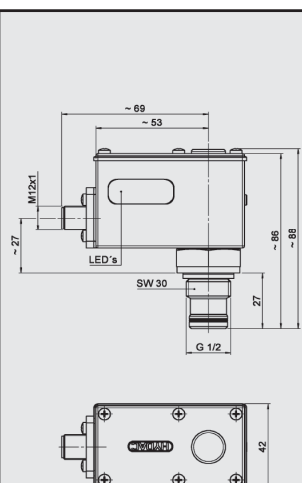
## VD x LZ.x /-AV

|                                                                                     |                                          |                                                                                                 |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting |  |
|                                                                                     | Weight                                   | 197 g                                                                                           |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                          |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 420 bar                                                                                         |                                                                                       |
|                                                                                     | Permitt. temperature range               | -10 °C to +100 °C                                                                               |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                                                           |                                                                                       |
|                                                                                     | Max. torque                              | 50 Nm                                                                                           |                                                                                       |
|                                                                                     | Switching type                           | N/C (75% and 100%)                                                                              |                                                                                       |
|                                                                                     | Max. switching voltage                   | 24 V                                                                                            |                                                                                       |
|                                                                                     | Electrical connection                    | Male connection<br>M12 x 1                                                                      |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                          |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                      |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 65                                                                                           |                                                                                       |
|                                                                                     | Order example                            | VD 5 LZ.1 /-AV                                                                                  |                                                                                       |



## VD x LZ.x /-D4C



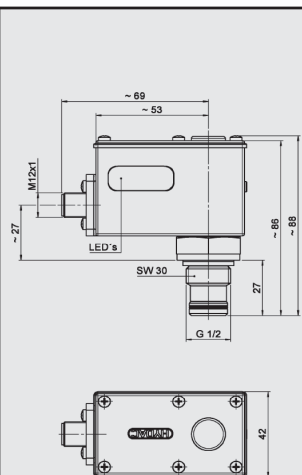
|                                          |                                                                                                                                                                                                                                                                                                      |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of indicator                        | 1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal when operating temperature is below 30 °C<br>2 green LEDs light when below 30 °C<br>1 green LED lights from 30 °C<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% Δp |
| Weight                                   | 256 g                                                                                                                                                                                                                                                                                                |
| Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                                                                                                                                                                                                                               |
| Permitt. operating pressure              | 420 bar                                                                                                                                                                                                                                                                                              |
| Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                                                                                                                                    |
| Thread                                   | G 1/2                                                                                                                                                                                                                                                                                                |
| Max. torque                              | 50 Nm                                                                                                                                                                                                                                                                                                |
| Switching type                           | N/O (75%)<br>N/C (100%)                                                                                                                                                                                                                                                                              |
| Max. switching voltage                   | 24 V                                                                                                                                                                                                                                                                                                 |
| Electrical connection                    | Male connection<br>M12 x 1                                                                                                                                                                                                                                                                           |
| Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                                                                                                                                               |
| switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                                                                                                                                           |
| Protection class to DIN 40050            | IP 65                                                                                                                                                                                                                                                                                                |
| Order example                            | VD 5 LZ.2 /-D4C                                                                                                                                                                                                                                                                                      |





## VD x LZ.x /-BO-LED



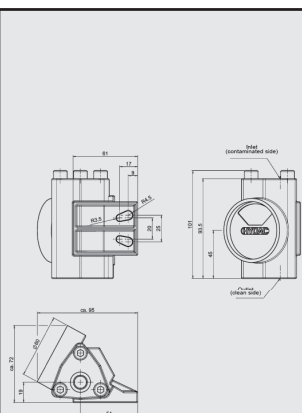
|                                          |                                                                                                                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of indication                       | 1 electrical switching contact at 75% and at 100% of the pressure setting<br>1 green LED constantly lit<br>1 yellow LED lights from 75%<br>1 red LED lights from 100% $\Delta p$ |
| Weight                                   | 250 g                                                                                                                                                                            |
| Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                                                                                                           |
| Permitt. operating pressure              | 420 bar                                                                                                                                                                          |
| Permitt. temperature range               | -10 °C to +100 °C                                                                                                                                                                |
| Thread                                   | G 1/2                                                                                                                                                                            |
| Max. torque                              | 50 Nm                                                                                                                                                                            |
| Switching type                           | N/O (75%)<br>N/C (100%)                                                                                                                                                          |
| Max. switching voltage                   | 24 V                                                                                                                                                                             |
| Electrical connection                    | Male connection<br>M12 x 1                                                                                                                                                       |
| Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                                                                                                           |
| switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                                                                                                       |
| Protection class to DIN 40050            | IP 65                                                                                                                                                                            |
| Order example                            | VD 5 LZ.2 /-BO-LED                                                                                                                                                               |



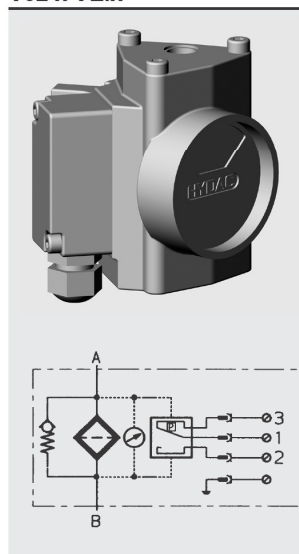
**V02 x V,x**



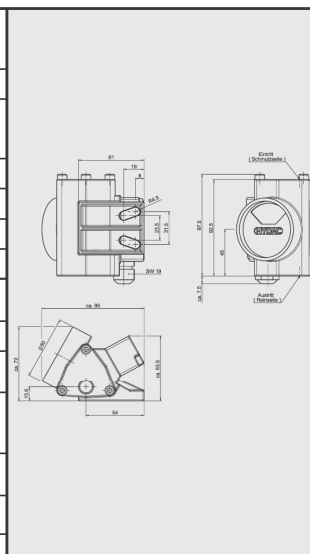
|                                          |                                                                |
|------------------------------------------|----------------------------------------------------------------|
| Type of indication                       | visual-analogue                                                |
| Weight                                   | 580 g                                                          |
| Pressure setting or indication range     | 0.8 bar $\pm 10\%$<br>2.0 bar $\pm 10\%$<br>4.3 bar $\pm 10\%$ |
| Permitt. operating pressure              | 100 bar                                                        |
| Permitt. temperature range               | -30 °C to +100 °C                                              |
| Thread                                   | G 1/4                                                          |
| Max. torque                              | -                                                              |
| Switching type                           | -                                                              |
| Max. switching voltage                   | -                                                              |
| Electrical connection                    | -                                                              |
| Max. switching voltage at resistive load | -                                                              |
| switching capacity                       | -                                                              |
| Protection class to DIN 40050            | -                                                              |
| Order example                            | V02 2 V.0                                                      |



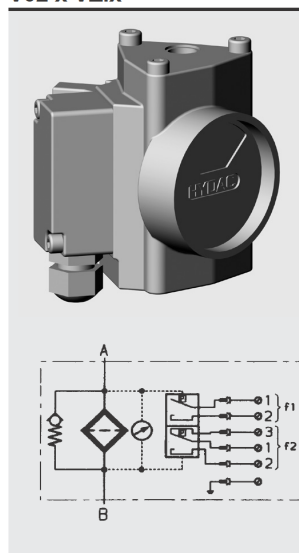
## V02 x VE.x



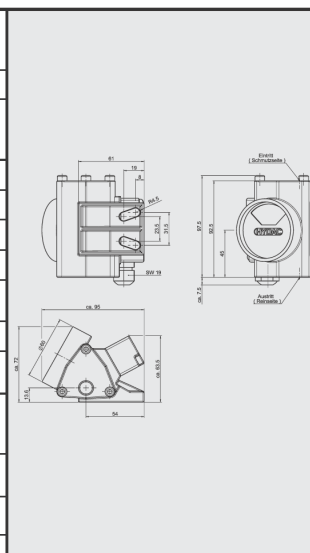
|                                          |                                                                                         |
|------------------------------------------|-----------------------------------------------------------------------------------------|
| Type of indication                       | Visual/analogue indicator and electrical switching contact 100% of the pressure setting |
| Weight                                   | 640 g                                                                                   |
| Pressure setting or indication range     | 0.8 bar $\pm 10\%$<br>2.0 bar $\pm 10\%$<br>4.3 bar $\pm 10\%$                          |
| Permitt. operating pressure              | 100 bar                                                                                 |
| Permitt. temperature range               | -30 °C to +100 °C                                                                       |
| Thread                                   | G 1/4                                                                                   |
| Max. torque                              | -                                                                                       |
| Switching type                           | 100% change-over contact                                                                |
| Max. switching voltage                   | 250 V                                                                                   |
| Electrical connection                    | threaded connection<br>M16 x 1.5                                                        |
| Max. switching voltage at resistive load | 100% contact<br>30 W =<br>60 VA ~                                                       |
| switching capacity                       | Ohmic 2.5 A at 24 V =<br>Ohmic 1 A at 220 V ~                                           |
| Protection class to DIN 40050            | IP 65                                                                                   |
| Order example                            | V02 2 VE.0                                                                              |



## V02 x VZ.x



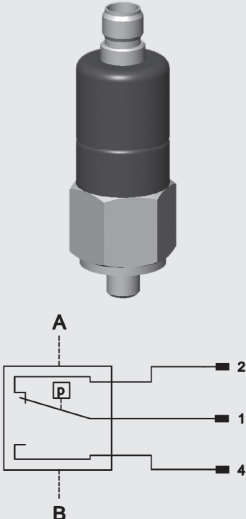

|                                          |                                                                                                      |                                   |
|------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------|
| Type of indication                       | Visual/analogue indicator and 1 electrical switching contact at 75% and 100% of the pressure setting |                                   |
| Weight                                   | 650 g                                                                                                |                                   |
| Pressure setting or indication range     | 0.8 bar ±10%<br>2.0 bar ±10%<br>4.3 bar ±10%                                                         |                                   |
| Permitt. operating pressure              | 100 bar                                                                                              |                                   |
| Permitt. temperature range               | -30 °C to +100 °C                                                                                    |                                   |
| Thread                                   | G 1/4                                                                                                |                                   |
| Max. torque                              | -                                                                                                    |                                   |
| Switching type                           | 75% - N/O contact<br>100% - change-over contact                                                      |                                   |
| Max. switching voltage                   | 250 V                                                                                                |                                   |
| Electrical connection                    | threaded connection<br>M16 x 1.5                                                                     |                                   |
| Max. switching voltage at resistive load | 75% contact<br>120 W =<br>120 VA ~                                                                   | 100% contact<br>30 W =<br>60 VA ~ |
| switching capacity                       | Ohmic 2.5 A at 24 V =<br>Ohmic 1 A at 220 V ~                                                        |                                   |
| Protection class to DIN 40050            | IP 65                                                                                                |                                   |
| Order example                            | V02 2 VZ 0                                                                                           |                                   |



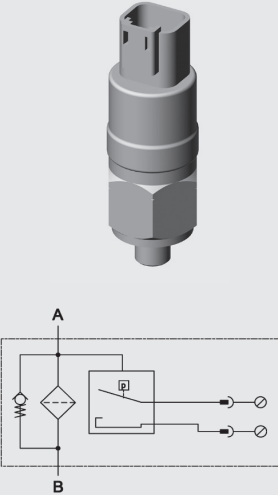
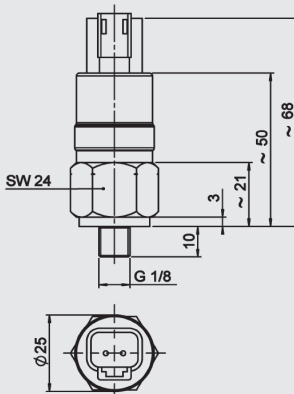
## 3.4 MOBILE INDICATORS

### 3.4.1 RETURN LINE

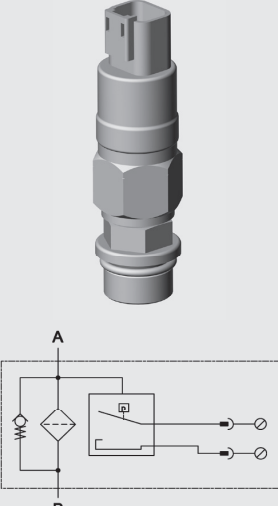
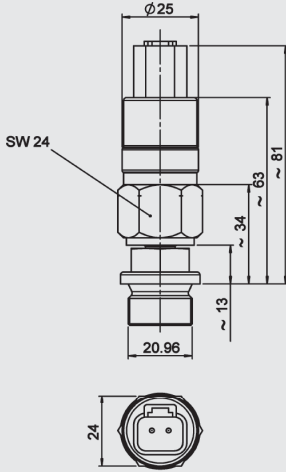
#### VMF x CM.x

|                                                                                   |                                          |                                                             |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                           |  |
|                                                                                   | Weight                                   | 90 g                                                        |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                                         |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 10 bar                                                      |                                                                                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +100 °C                                           |                                                                                     |
|                                                                                   | Thread                                   | G 1/8                                                       |                                                                                     |
|                                                                                   | Max. torque                              | 10 Nm                                                       |                                                                                     |
|                                                                                   | Switching type                           | N/C or N/O (change-over contacts)                           |                                                                                     |
|                                                                                   | Max. switching voltage                   | 24 V                                                        |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection M12 x 1                                     |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 250 W = 300 VA ~                                            |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~       |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 67 (only if the connector is wired and fitted correctly) |                                                                                     |
|                                                                                   | Order example                            | VMF 2 CM.1/-4M0                                             |                                                                                     |

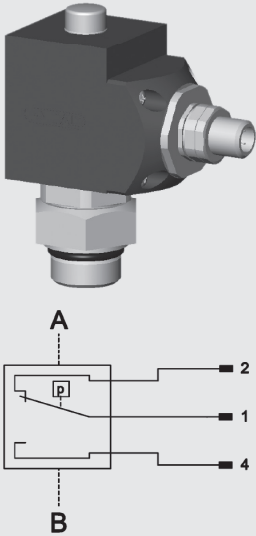

#### VMF x FD.x (plug connection: Deutsch DT 04-2P)

|                                                                                    |                                          |                                                             |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                           |  |
|                                                                                    | Weight                                   | 70 g                                                        |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                                         |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 11 bar continuous                                           |                                                                                      |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                                           |                                                                                      |
|                                                                                    | Thread                                   | G 1/8                                                       |                                                                                      |
|                                                                                    | Max. torque                              | 10 Nm                                                       |                                                                                      |
|                                                                                    | Switching type                           | N/O or N/C                                                  |                                                                                      |
|                                                                                    | Max. switching voltage                   | 42 V                                                        |                                                                                      |
|                                                                                    | Electrical connection                    | Deutsch DT 04-2P                                            |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | 60 W = 100 VA ~                                             |                                                                                      |
|                                                                                    | switching capacity                       | Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~                  |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | IP 67 (only if the connector is wired and fitted correctly) |                                                                                      |
|                                                                                    | Order example                            | VMF 2 FD.0 /-2M0                                            |                                                                                      |

#### VR x FD.x (plug connection: Deutsch DT 04-2P)


|                                                                                     |                                          |                                                             |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                           |  |
|                                                                                     | Weight                                   | 90 g                                                        |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                                         |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 11 bar continuous                                           |                                                                                       |
|                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                           |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                       |                                                                                       |
|                                                                                     | Max. torque                              | 33 Nm                                                       |                                                                                       |
|                                                                                     | Switching type                           | N/O or N/C                                                  |                                                                                       |
|                                                                                     | Max. switching voltage                   | 42 V                                                        |                                                                                       |
|                                                                                     | Electrical connection                    | Deutsch DT 04-2P                                            |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 60 W = 100 VA ~                                             |                                                                                       |
|                                                                                     | switching capacity                       | Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~                  |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 67 (only if the connector is wired and fitted correctly) |                                                                                       |
|                                                                                     | Order example                            | VR 2 FD.0 /-2M0                                             |                                                                                       |


VR x LEM.x

|                                                                                   |                                          |                                                                                              |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red pin and electrical switch<br>1 switching contact at 100% of the pressure setting |  |
|                                                                                   | Weight                                   | 140 g                                                                                        |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 2 bar -0.2 bar                                                                               |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 7 bar                                                                                        |                                                                                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +100 °C                                                                            |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                                                                        |                                                                                     |
|                                                                                   | Max. torque                              | 15 Nm                                                                                        |                                                                                     |
|                                                                                   | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                  |                                                                                     |
|                                                                                   | Max. switching voltage                   | 24V                                                                                          |                                                                                     |
|                                                                                   | Electrical connection                    | Male connection<br>M12 x 1                                                                   |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                       |                                                                                     |
|                                                                                   | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                   |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | IP 65                                                                                        |                                                                                     |
|                                                                                   | Order example                            | VR 2 LEM.1/-4M0                                                                              |                                                                                     |


## 3.4.2 DIFFERENTIAL PRESSURE

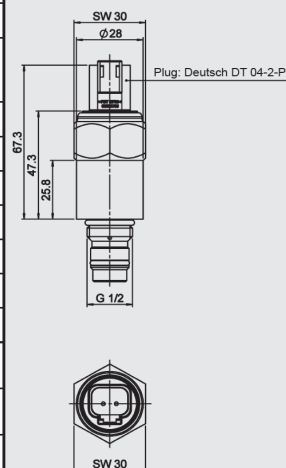
### VL x BF.x

|                                                                                   |                                          |                            |
|-----------------------------------------------------------------------------------|------------------------------------------|----------------------------|
|  | Type of indication                       | visual                     |
|                                                                                   | Weight                                   | 25 g                       |
|                                                                                   | Pressure setting or indication range     | 1 bar -10%<br>2.5 bar -10% |
|                                                                                   | Permitt. operating pressure              | 40 bar                     |
|                                                                                   | Permitt. temperature range               | -10 °C to +80 °C           |
|                                                                                   | Thread                                   | M3; M4                     |
|                                                                                   | Max. torque                              | 0.6 Nm                     |
|                                                                                   | Switching type                           | -                          |
|                                                                                   | Max. switching voltage                   | -                          |
|                                                                                   | Electrical connection                    | -                          |
|                                                                                   | Max. switching voltage at resistive load | -                          |
|                                                                                   | switching capacity                       | -                          |
|                                                                                   | Protection class to DIN 40050            | -                          |
|                                                                                   | Order example                            | VL 2.5 BF.0                |




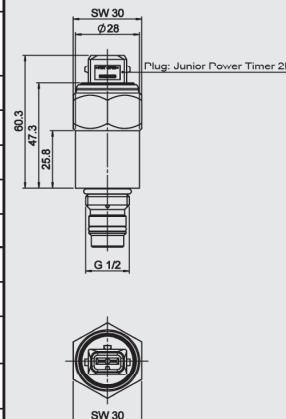
### VM x CD.x (plug type: Deutsch DT 04-2P)

|                                                                                                                                                                           |                                          |                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|
| <br> | Type of indication                       | electrical switch                                           |
|                                                                                                                                                                           | Weight                                   | 100 g                                                       |
|                                                                                                                                                                           | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                      |
|                                                                                                                                                                           | Permitt. operating pressure              | 210 bar                                                     |
|                                                                                                                                                                           | Permitt. temperature range               | -30 °C to +100 °C                                           |
|                                                                                                                                                                           | Thread                                   | G 1/2                                                       |
|                                                                                                                                                                           | Max. torque                              | 33 Nm                                                       |
|                                                                                                                                                                           | Switching type                           | N/O or N/C                                                  |
|                                                                                                                                                                           | Max. switching voltage                   | 48 V                                                        |
|                                                                                                                                                                           | Electrical connection                    | -                                                           |
|                                                                                                                                                                           | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                          |
|                                                                                                                                                                           | switching capacity                       | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~    |
|                                                                                                                                                                           | Protection class to DIN 40050            | IP 67 (only if the connector is wired and fitted correctly) |
|                                                                                                                                                                           | Order example                            | VM 5 CD.0 /-2M0                                             |




### VM x CJ.x (plug type: Junior Power Timer)

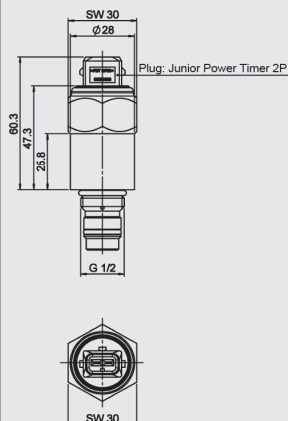
|                                                                                                                                                                            |                                          |                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|
| <br> | Type of indication                       | electrical switch                                           |
|                                                                                                                                                                            | Weight                                   | 100 g                                                       |
|                                                                                                                                                                            | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                      |
|                                                                                                                                                                            | Permitt. operating pressure              | 210 bar                                                     |
|                                                                                                                                                                            | Permitt. temperature range               | -30 °C to +100 °C                                           |
|                                                                                                                                                                            | Thread                                   | G 1/2                                                       |
|                                                                                                                                                                            | Max. torque                              | 33 Nm                                                       |
|                                                                                                                                                                            | Switching type                           | N/O or N/C                                                  |
|                                                                                                                                                                            | Max. switching voltage                   | 48 V                                                        |
|                                                                                                                                                                            | Electrical connection                    | Junior Power Timer                                          |
|                                                                                                                                                                            | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                          |
|                                                                                                                                                                            | switching capacity                       | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~    |
|                                                                                                                                                                            | Protection class to DIN 40050            | IP 54 (only if the connector is wired and fitted correctly) |
|                                                                                                                                                                            | Order example                            | VM 5 CJ.0 /-2M0                                             |




**VD x CJ.x (plug type: Junior Power Timer)**



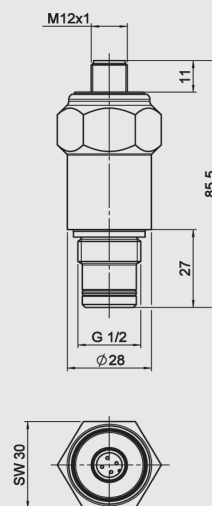
|                                          |                                                             |
|------------------------------------------|-------------------------------------------------------------|
| Type of indication                       | electrical switch                                           |
| Weight                                   | 200 g                                                       |
| Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar $\pm 10\%$                |
| Permitt. operating pressure              | 420 bar                                                     |
| Permitt. temperature range               | -30 °C to +100 °C                                           |
| Thread                                   | G 1/2                                                       |
| Max. torque                              | 100 Nm                                                      |
| Switching type                           | N/O or N/C                                                  |
| Max. switching voltage                   | 48 V                                                        |
| Electrical connection                    | Junior Power Timer                                          |
| Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                          |
| switching capacity                       | Ohmic 3 A at 24 V =<br>Ohmic 0.03 to 5 A at max. 230 V ~    |
| Protection class to DIN 40050            | IP 54 (only if the connector is wired and fitted correctly) |
| Order example                            | VD 5 C.J.0 /-2M0                                            |





**VM x CM.x**




|                                          |                                                             |
|------------------------------------------|-------------------------------------------------------------|
| Type of indication                       | electrical switch                                           |
| Weight                                   | 70 g                                                        |
| Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                      |
| Permitt. operating pressure              | 210 bar                                                     |
| Permitt. temperature range               | -10 °C to +100 °C                                           |
| Thread                                   | G 1/2                                                       |
| Max. torque                              | 33 Nm                                                       |
| Switching type                           | N/C or N/O<br>(change-over contacts)                        |
| Max. switching voltage                   | 48 V                                                        |
| Electrical connection                    | Male connection<br>M12 x 1                                  |
| Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                          |
| switching capacity                       | ohmic 2.5 A at 24 V =<br>ohmic 2.5 A at 42 V ~              |
| Protection class to DIN 40050            | IP 67 (only if the connector is wired and fitted correctly) |
| Order example                            | VM 2 CM.0/-4M0                                              |






VM x M.x



|                                          |                                |
|------------------------------------------|--------------------------------|
| Type of indication                       | single pole (ground switching) |
| Weight                                   | 31 g                           |
| Pressure setting or indication range     | 2 bar $\pm$ 15%                |
| Permitt. operating pressure              | 210 bar                        |
| Permitt. temperature range               | -30 °C to +100 °C              |
| Thread                                   | G 1/2                          |
| Max. torque                              | 33 Nm                          |
| Switching type                           | N/O or N/C                     |
| Max. switching voltage                   | 24V                            |
| Electrical connection                    | -                              |
| Max. switching voltage at resistive load | -                              |
| switching capacity                       | -                              |
| Protection class to DIN 40050            | terminals IP00                 |
| Order example                            | VM 2 M.0                       |




VD x LEM.x

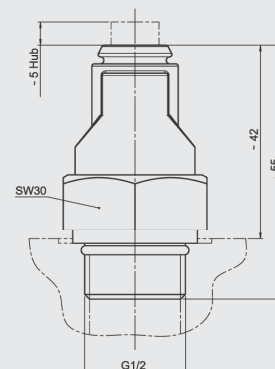
|                                                                                                                                                                        |                                          |                                                                                              |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br> | Type of indication                       | visual, red pin and electrical switch<br>1 switching contact at 100% of the pressure setting |  |
|                                                                                                                                                                        | Weight                                   | 350 g                                                                                        |                                                                                     |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar -10%                                                       |                                                                                     |
|                                                                                                                                                                        | Permitt. operating pressure              | 420 bar                                                                                      |                                                                                     |
|                                                                                                                                                                        | Permitt. temperature range               | -10 °C to +100 °C                                                                            |                                                                                     |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                                                        |                                                                                     |
|                                                                                                                                                                        | Max. torque                              | 50 Nm                                                                                        |                                                                                     |
|                                                                                                                                                                        | Switching type                           | N/C or N/O contacts<br>Reed contacts (change-over contacts)                                  |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage                   | 24V                                                                                          |                                                                                     |
|                                                                                                                                                                        | Electrical connection                    | Male connection<br>M12 x 1                                                                   |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 15 W =<br>max. 15 VA ~                                                                       |                                                                                     |
|                                                                                                                                                                        | switching capacity                       | Ohmic 1 A at 15 V =<br>Ohmic 1 A at 15 V ~                                                   |                                                                                     |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65                                                                                        |                                                                                     |
|                                                                                                                                                                        | Order example                            | VD 5 LEM.1/-4M0                                                                              |                                                                                     |

## 3.5 INDICATORS IN ACCORDANCE WITH ATEX DIRECTIVE


### 3.5.1 RETURN LINE

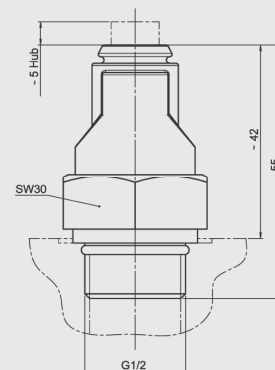
**VR x B.x (ATEX) Can be used on aluminium filters up to Zone 1**

|                                                                                                                                                                     |                                          |                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------|
|   | Type of indication                       | visual, red pin   |
|                                                                                                                                                                     | Weight                                   | 44 g              |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -0.2 bar    |
|                                                                                                                                                                     | Permitt. operating pressure              | 7 bar             |
|                                                                                                                                                                     | Permitt. temperature range               | -10 °C to +100 °C |
|                                                                                                                                                                     | Thread                                   | G 1/2             |
|                                                                                                                                                                     | Max. torque                              | 15 Nm             |
|                                                                                                                                                                     | Switching type                           | -                 |
|                                                                                                                                                                     | Max. switching voltage                   | -                 |
|                                                                                                                                                                     | Electrical connection                    | -                 |
|                                                                                                                                                                     | Max. switching voltage at resistive load | -                 |
|                                                                                                                                                                     | switching capacity                       | -                 |
|                                                                                                                                                                     | Protection class to DIN 40050            | -                 |
|                                                                                                                                                                     | Order example                            | VR 2 B.0 /-2GC    |




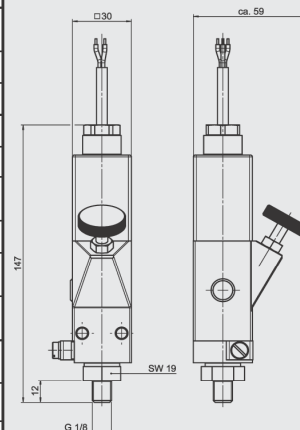
**VR x B.x (ATEX) Can be used on steel/cast iron filters up to Zone 1**

|                                                                                                                                                                        |                                          |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------|
|   | Type of indication                       | visual, red pin      |
|                                                                                                                                                                        | Weight                                   | 44 g                 |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -0.2 bar       |
|                                                                                                                                                                        | Permitt. operating pressure              | 7 bar                |
|                                                                                                                                                                        | Permitt. temperature range               | -10 °C to +100 °C    |
|                                                                                                                                                                        | Thread                                   | G 1/2                |
|                                                                                                                                                                        | Max. torque                              | 15 Nm                |
|                                                                                                                                                                        | Switching type                           | -                    |
|                                                                                                                                                                        | Max. switching voltage                   | -                    |
|                                                                                                                                                                        | Electrical connection                    | -                    |
|                                                                                                                                                                        | Max. switching voltage at resistive load | -                    |
|                                                                                                                                                                        | switching capacity                       | -                    |
|                                                                                                                                                                        | Protection class to DIN 40050            | -                    |
|                                                                                                                                                                        | Order example                            | VR 2 B.0 /-2GC-SO174 |

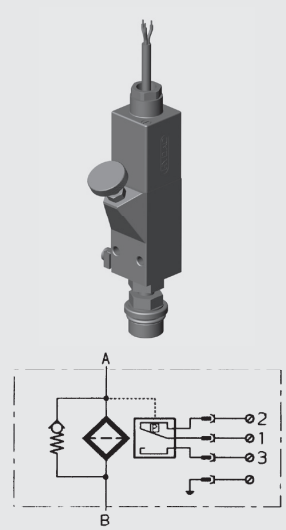


**VMF x C.x /-Ex2G**

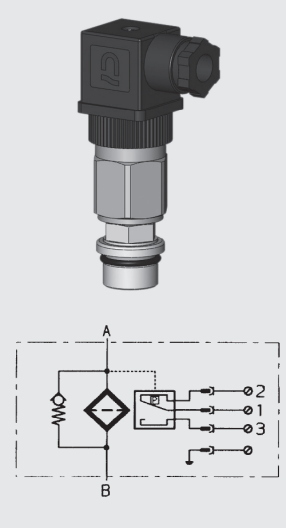
|                                                                                                                                                                         |                                          |                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------|
|   | Type of indication                       | electrical switch                               |
|                                                                                                                                                                         | Weight                                   | 415 g                                           |
|                                                                                                                                                                         | Pressure setting or indication range     | 2 bar ±0.5 bar                                  |
|                                                                                                                                                                         | Permitt. operating pressure              | 200 bar                                         |
|                                                                                                                                                                         | Permitt. temperature range               | -20 °C to +70 °C (T6)/-20 °C to +80 °C (T5)     |
|                                                                                                                                                                         | Thread                                   | G 1/8                                           |
|                                                                                                                                                                         | Max. torque                              | 10 Nm                                           |
|                                                                                                                                                                         | Switching type                           | N/C or N/O (change-over contacts)               |
|                                                                                                                                                                         | Max. switching voltage                   | 250 V                                           |
|                                                                                                                                                                         | Electrical connection                    | Cable connection PG 9<br>Cable length 2 m       |
|                                                                                                                                                                         | Max. switching voltage at resistive load | 62.5 W =<br>250 VA ~                            |
|                                                                                                                                                                         | switching capacity                       | Ohmic 0.25 A at 250 V =<br>Ohmic 1 A at 250 V ~ |
|                                                                                                                                                                         | Protection class to DIN 40050            | IP 65                                           |
|                                                                                                                                                                         | ATEX designation                         | Ex II 2G EEx d IIC T6 / T5                      |



## VR x C.x /-Ex2G

|                                                                                   |                                          |                                              |
|-----------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------|
|  | Type of indication                       | electrical switch                            |
|                                                                                   | Weight                                   | 470 g                                        |
|                                                                                   | Pressure setting or indication range     | 2 bar $\pm$ 0.5 bar                          |
|                                                                                   | Permitt. operating pressure              | 40 bar                                       |
|                                                                                   | Permitt. temperature range               | -20 °C to +70 °C (T6)/-20 °C to +80 °C (T5)  |
|                                                                                   | Thread                                   | G 1/2                                        |
|                                                                                   | Max. torque                              | 33 Nm                                        |
|                                                                                   | Switching type                           | N/C or N/O (change-over contacts)            |
|                                                                                   | Max. switching voltage                   | 250 V                                        |
|                                                                                   | Electrical connection                    | Cable connection PG 9<br>Cable length 2 m    |
|                                                                                   | Max. switching voltage at resistive load | 62.5 W = 250 VA ~                            |
|                                                                                   | switching capacity                       | Ohmic 0.25 A at 250 V = Ohmic 1 A at 250 V ~ |
|                                                                                   | Protection class to DIN 40050            | IP 65                                        |
|                                                                                   | ATEX designation                         | Ex II 2G Ex d IIC T6 / T5                    |
|                                                                                   | Order example                            | VR 2 C.0 /-Ex2G                              |

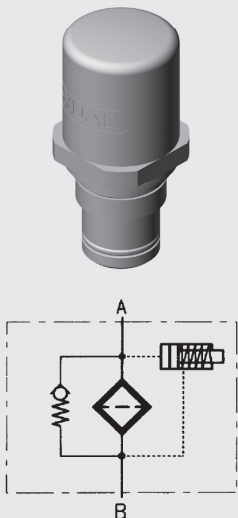

## VR x C.x (ATEX) Can be used on filters up to Zone 1 \*

|                                                                                    |                                          |                                                              |
|------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                            |
|                                                                                    | Weight                                   | 340 g                                                        |
|                                                                                    | Pressure setting or indication range     | 2 bar $\pm$ 0.3 bar                                          |
|                                                                                    | Permitt. operating pressure              | 40 bar                                                       |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                                            |
|                                                                                    | Thread                                   | G 1/2                                                        |
|                                                                                    | Max. torque                              | 33 Nm                                                        |
|                                                                                    | Switching type                           | N/C or N/O (change-over contacts)                            |
|                                                                                    | Max. switching voltage                   | *                                                            |
|                                                                                    | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |
|                                                                                    | Max. switching voltage at resistive load | *                                                            |
|                                                                                    | switching capacity                       | *                                                            |
|                                                                                    | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |
|                                                                                    | Order example                            | VR 2 C.1 /-2GBC                                              |

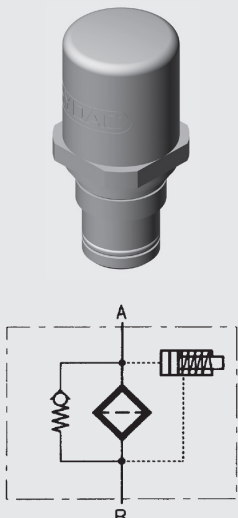

\* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).

## 3.5.2 DIFFERENTIAL PRESSURE

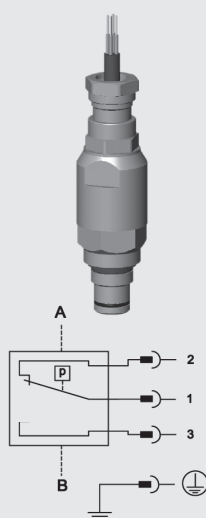
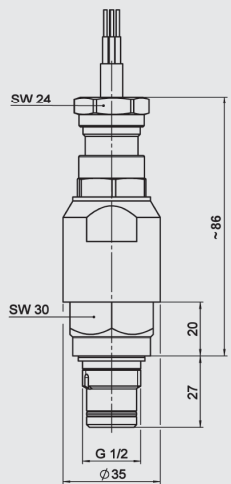
**VM x B.x (ATEX) Can be used on aluminium filters up to Zone 1**

|                                                                                   |                                          |                                           |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Automatic reset |  |
|                                                                                   | Weight                                   | 110 g                                     |                                                                                     |
|                                                                                   | Pressure setting or indication range     | 5 bar -10%<br>8 bar ±10%                  |                                                                                     |
|                                                                                   | Permitt. operating pressure              | 210 bar                                   |                                                                                     |
|                                                                                   | Permitt. temperature range               | -30 °C to +100 °C                         |                                                                                     |
|                                                                                   | Thread                                   | G 1/2                                     |                                                                                     |
|                                                                                   | Max. torque                              | 33 Nm                                     |                                                                                     |
|                                                                                   | Switching type                           | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage                   | -                                         |                                                                                     |
|                                                                                   | Electrical connection                    | -                                         |                                                                                     |
|                                                                                   | Max. switching voltage at resistive load | -                                         |                                                                                     |
|                                                                                   | switching capacity                       | -                                         |                                                                                     |
|                                                                                   | Protection class to DIN 40050            | -                                         |                                                                                     |
|                                                                                   | Order example                            | VM 5 B.1 /-2GC                            |                                                                                     |



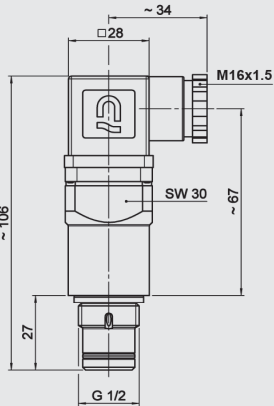
**VD x B.x (ATEX) Can be used on filters up to Zone 1**

|                                                                                    |                                          |                                           |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------|
|  | Type of indication                       | visual, red/green band<br>Automatic reset |  |
|                                                                                    | Weight                                   | 110 g                                     |                                                                                      |
|                                                                                    | Pressure setting or indication range     | 5 bar -10%<br>8 bar ±10%                  |                                                                                      |
|                                                                                    | Permitt. operating pressure              | 420 bar                                   |                                                                                      |
|                                                                                    | Permitt. temperature range               | -30 °C to +100 °C                         |                                                                                      |
|                                                                                    | Thread                                   | G 1/2                                     |                                                                                      |
|                                                                                    | Max. torque                              | 100 Nm                                    |                                                                                      |
|                                                                                    | Switching type                           | -                                         |                                                                                      |
|                                                                                    | Max. switching voltage                   | -                                         |                                                                                      |
|                                                                                    | Electrical connection                    | -                                         |                                                                                      |
|                                                                                    | Max. switching voltage at resistive load | -                                         |                                                                                      |
|                                                                                    | switching capacity                       | -                                         |                                                                                      |
|                                                                                    | Protection class to DIN 40050            | -                                         |                                                                                      |
|                                                                                    | Order example                            | VD 5 B.1 /-2GC                            |                                                                                      |



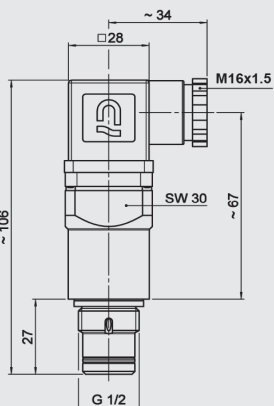
**VD x C.x /-2GEXDIIC**

|                                                                                     |                                          |                                                              |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Type of indication                       | electrical switch                                            |  |
|                                                                                     | Weight                                   | from 600 g                                                   |                                                                                       |
|                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |                                                                                       |
|                                                                                     | Permitt. operating pressure              | 420 bar                                                      |                                                                                       |
|                                                                                     | Permitt. temperature range               | -20 °C to +60 °C (setting)<br>(media temperature max. 75 °C) |                                                                                       |
|                                                                                     | Thread                                   | G 1/2                                                        |                                                                                       |
|                                                                                     | Max. torque                              | 100 Nm                                                       |                                                                                       |
|                                                                                     | Switching type                           | Change-over                                                  |                                                                                       |
|                                                                                     | Max. switching voltage                   | 250 V                                                        |                                                                                       |
|                                                                                     | Electrical connection                    | Cable connection                                             |                                                                                       |
|                                                                                     | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |                                                                                       |
|                                                                                     | switching capacity                       | ohmic 3 A at 24 V =<br>ohmic 0.03 A to 5 A at 250 V ~        |                                                                                       |
|                                                                                     | Protection class to DIN 40050            | IP 66                                                        |                                                                                       |
|                                                                                     | ATEX designation                         | II 2G Ex d IIC T6                                            |                                                                                       |
|                                                                                     | Order example                            | VD 2 C.1 /-2GEXDIIC                                          |                                                                                       |

## VM x C.x (ATEX) Can be used on aluminium filters up to Zone 1 \*

|                                                                                                                                                                     |                                          |                                                              |                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                                            |  |
|                                                                                                                                                                     | Weight                                   | 120 g                                                        |                                                                                     |
|                                                                                                                                                                     | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |                                                                                     |
|                                                                                                                                                                     | Permitt. operating pressure              | 210 bar                                                      |                                                                                     |
|                                                                                                                                                                     | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                     |
|                                                                                                                                                                     | Thread                                   | G 1/2                                                        |                                                                                     |
|                                                                                                                                                                     | Max. torque                              | 33 Nm                                                        |                                                                                     |
|                                                                                                                                                                     | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage                   | *                                                            |                                                                                     |
|                                                                                                                                                                     | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                                                                                                     | Max. switching voltage at resistive load | *                                                            |                                                                                     |
|                                                                                                                                                                     | switching capacity                       | *                                                            |                                                                                     |
|                                                                                                                                                                     | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                     |
|                                                                                                                                                                     | Order example                            | VM 5 C.0 /-2GBC-SO135                                        |                                                                                     |

## VD x C.x (ATEX) Can be used on filters up to Zone 1 \*

|                                                                                                                                                                        |                                          |                                                              |                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   | Type of indication                       | electrical switch                                            |  |
|                                                                                                                                                                        | Weight                                   | 120 g                                                        |                                                                                      |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |                                                                                      |
|                                                                                                                                                                        | Permitt. operating pressure              | 420 bar                                                      |                                                                                      |
|                                                                                                                                                                        | Permitt. temperature range               | -30 °C to +100 °C                                            |                                                                                      |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                        |                                                                                      |
|                                                                                                                                                                        | Max. torque                              | 100 Nm                                                       |                                                                                      |
|                                                                                                                                                                        | Switching type                           | N/C or N/O<br>(change-over contacts)                         |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage                   | *                                                            |                                                                                      |
|                                                                                                                                                                        | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |                                                                                      |
|                                                                                                                                                                        | Max. switching voltage at resistive load | *                                                            |                                                                                      |
|                                                                                                                                                                        | switching capacity                       | *                                                            |                                                                                      |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |                                                                                      |
|                                                                                                                                                                        | Order example                            | VD 5 C.0 /-2GBC-SO135                                        |                                                                                      |

\* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).

## 3.6 INDICATORS WITH UL OR CSA APPROVAL

### 3.6.1 DIFFERENTIAL PRESSURE



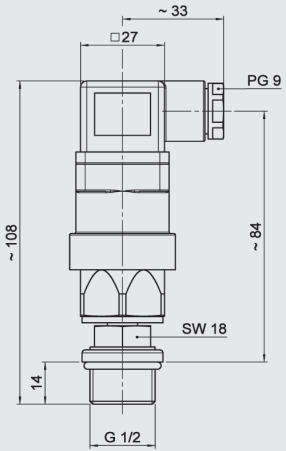
#### VM x C.x (UL, Standard 508)

|  |                                          |                                                              |  |
|--|------------------------------------------|--------------------------------------------------------------|--|
|  | Type of indication                       | electrical switch                                            |  |
|  | Weight                                   | 120 g                                                        |  |
|  | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |  |
|  | Permitt. operating pressure              | 210 bar                                                      |  |
|  | Permitt. temperature range               | -30 °C to +100 °C                                            |  |
|  | Thread                                   | G 1/2                                                        |  |
|  | Max. torque                              | 33 Nm                                                        |  |
|  | Switching type                           | N/C or N/O<br>(change-over contacts)                         |  |
|  | Max. switching voltage                   | 115 V                                                        |  |
|  | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |  |
|  | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |  |
|  | switching capacity                       | ohmic 3 A at 24 V =                                          |  |
|  | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |  |
|  | Order example                            | VM 5 C.0 /-CRUUS                                             |  |

#### VD x C.x (UL, Standard 508)

|  |                                          |                                                              |  |
|--|------------------------------------------|--------------------------------------------------------------|--|
|  | Type of indication                       | electrical switch                                            |  |
|  | Weight                                   | 120 g                                                        |  |
|  | Pressure setting or indication range     | 2 bar -10%<br>5 bar -10%<br>8 bar ±10%                       |  |
|  | Permitt. operating pressure              | 420 bar                                                      |  |
|  | Permitt. temperature range               | -30 °C to +100 °C                                            |  |
|  | Thread                                   | G 1/2                                                        |  |
|  | Max. torque                              | 100 Nm                                                       |  |
|  | Switching type                           | N/C or N/O<br>(change-over contacts)                         |  |
|  | Max. switching voltage                   | 115 V                                                        |  |
|  | Electrical connection                    | Male connection M20<br>Female connector to DIN EN 175301-803 |  |
|  | Max. switching voltage at resistive load | 60 W =<br>100 VA ~                                           |  |
|  | switching capacity                       | ohmic 3 A at 24 V =                                          |  |
|  | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)  |  |
|  | Order example                            | VD 5 C.0 /-CRUUS                                             |  |

3.6.2 RETURN LINE  
VR x C.x (CSA)

|                                                                                                                                                                        |                                          |                                                               |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br> | Type of indication                       | electrical switch                                             |  |
|                                                                                                                                                                        | Weight                                   | 340 g                                                         |                                                                                     |
|                                                                                                                                                                        | Pressure setting or indication range     | 2 bar -0.3 bar                                                |                                                                                     |
|                                                                                                                                                                        | Permitt. operating pressure              | 40 bar                                                        |                                                                                     |
|                                                                                                                                                                        | Permitt. temperature range               | -5 °C to +120 °C                                              |                                                                                     |
|                                                                                                                                                                        | Thread                                   | G 1/2                                                         |                                                                                     |
|                                                                                                                                                                        | Max. torque                              | 30 Nm                                                         |                                                                                     |
|                                                                                                                                                                        | Switching type                           | N/C or N/O (change-over contacts)                             |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage                   | 230 V                                                         |                                                                                     |
|                                                                                                                                                                        | Electrical connection                    | Male connection PG 9<br>Female connector to DIN EN 175301-803 |                                                                                     |
|                                                                                                                                                                        | Max. switching voltage at resistive load | 250 W =<br>300 VA ~                                           |                                                                                     |
|                                                                                                                                                                        | switching capacity                       | ohmic 4 A at 24 V<br>ohmic 0.3 to 4 A at max. 230 V ~         |                                                                                     |
|                                                                                                                                                                        | Protection class to DIN 40050            | IP 65 (only if the connector is wired and fitted correctly)   |                                                                                     |
|                                                                                                                                                                        | Order example                            | VR 2 C.0 /-CSA                                                |                                                                                     |

## 4. MODEL CODE

VR 2 D X /-V-L24

### 4.1 STANDARD CLOGGING INDICATORS

#### Type

VMF return line indicator; connection G  $\frac{1}{8}$   
VR return line indicator; connection G  $\frac{1}{2}$   
VRD return line indicator; for differential pressure cavity  
VM differential pressure indicator; up to 210 bar operating pressure  
VD differential pressure indicator; up to 420 bar operating pressure  
VL differential pressure indicator; up to 25 bar operating pressure  
V02 differential pressure indicator; piped separately; up to 100 bar operating pressure

#### Pressure setting

see particular clogging indicator

#### Version

B visual with automatic reset (for vertical installation only!)  
BF visual, mobile  
BM visual with manual reset  
C electrical  
CA electrical with AMP connector (Mark II)  
CD electrical with Deutsch connector (DT 04-2P)  
CJ electrical with AMP Junior Power Timer connector  
CM electrical with M12x1 connector  
CS electrical with AMP Superseal connector  
D visual/electrical  
E pressure gauge, horizontal  
ES pressure gauge, vertical  
F pressure switch  
FD pressure switch with Deutsch connector (DT 04-2P)  
FJ pressure switch with AMP Junior Power Timer connector  
FS pressure switch with AMP Superseal connector  
GC electronic  
GW electronic  
K pressure gauge, horizontal  
LE visual/mechanical with 100% switching contact  
LEM visual/mechanical with 100% switching contact and M12x1 connector  
LZ visual/mechanical with 75% and 100% switching contact  
M electrical, earth-switching  
R pressure gauge, horizontal  
RS pressure gauge, vertical  
UBM visual, negative pressure  
UE negative pressure gauge, horizontal  
UF negative pressure switch  
V visual/analogue  
VE visual/analogue with 100% switching contact  
VZ visual/analogue with 75% and 100% switching contact

#### Modification number

X the latest version is always supplied

#### Supplementary details

30C cold start suppression of switch outputs up to 30 °C  $\pm 5$  °C  
(only for C-, D-, LZ indicators; power supply only with direct current – max. 24 volts;  
C and D indicators only for VD and VM; D and LZ indicators only as N/O contact)  
L... lamp with appropriate voltage (24, 48, 110, 230 volts) ] only for  
LED 2 light-emitting diodes up to 24 volts ] version "D"  
OE N/C function  
SO135 indicator suitable for PLC control via gold crosspoint contacts  
W suitable for oil/water emulsions (HFA, HFC)  
V seal made from Viton (FKM), suitable for phosphate ester fluid (HFD-R) and biodegradable oils  
(must be specified for version "GW")  
Addition: For VMF indicators B, LE, LZ and C/-EX2G a "/-V" must be added for a Viton version.  
For all other VMF versions, the standard is V and is not specified.

#### Supplementary details for "GC" type

|     |                                                                                         |                                                                                                                                           |                                                                  |
|-----|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| 113 | N/O function                                                                            | pressure peak suppression up to 10 sec.<br>cold start suppression of switching outputs<br>(PNP technique, positive switching) up to 25 °C | ] <b>Must be specified!</b><br>Others on request                 |
| 123 | N/C function                                                                            | pressure peak suppression up to 10 sec.<br>cold start suppression of switching outputs<br>(PNP technique positive switching) up to 25 °C  |                                                                  |
| 30C | cold start suppression of switching outputs up to 30 °C (other temperatures on request) |                                                                                                                                           |                                                                  |
| LED | 3 LEDs (green, yellow, red) in terminal box                                             |                                                                                                                                           |                                                                  |
| PF  | floating switching outputs (due to relay in the plug)                                   |                                                                                                                                           |                                                                  |
| SP  | analogue signal: voltage output 1-10 V                                                  |                                                                                                                                           |                                                                  |
| SQ  | analogue signal: voltage output 4 to 20 mA (current source)                             |                                                                                                                                           |                                                                  |
|     |                                                                                         |                                                                                                                                           | ] if SP or SQ are not specified<br>"current sink" model supplied |

#### Supplementary details to "GW" type

|     |              |                                                                                                                                          |                                                  |
|-----|--------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| 113 | N/O function | pressure peak suppression up to 10 sec.<br>cold start suppression of switching outputs<br>(PNP technique positive switching) up to 25 °C | ] <b>Must be specified!</b><br>Others on request |
| 123 | N/C function | pressure peak suppression up to 10 sec.<br>cold start suppression of switching outputs<br>(PNP technique positive switching) up to 25 °C |                                                  |

## Supplementary details for "LZ" type

AV plug and connector to AUDI, VW specification  
 BO plug and connector to BMW, Opel, Ford specification  
 BO-LEDas for BO, but with progressive LED strip  
 CN electrical connection, 1 connector DIN 43651 with 3 LEDs (to CNOMO specification NF E 48-700)  
 DB electrical connection, 1 connector to DIN 43651 with 3 LEDs (to Daimler-Benz and BMW specification)  
 D4C plug and connector to Daimler-Chrysler specification with cold start suppression 30 °C

## Supplementary details to "ATEX" type










2GC for visual indicator type "B" with ATEX certificate  
 2GBC for electrical indicator type "C" with ATEX certificate (the switch used in the indicator is a passive component according to EN 50020 and can therefore be used in intrinsically safe circuits as simple apparatus in accordance with EN 60079-14)  
 2GEXDIIC for electrical indicator suitable for use in Zone 1 (Category 2), gas atmosphere, Category d (Flameproof Enclosure), Explosive subdivision IIC to ATEX directive  
 EX2G Ex-protection type for the return line indicator type "C"




## Supplementary details for "UL" and "CSA" approval

CRUUS for electrical differential indicator type "C" with UL approval  
 CSA for electrical return line indicator type "C" with CSA approval

## 5. ADAPTERS

### 5.1 TYPES

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------|----------|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <table><tr><td>Designation</td><td>ADAPTER VD-D-S.0</td></tr><tr><td>Part no.</td><td>00318736</td></tr><tr><td>Description</td><td>Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22</td></tr></table>                                                                                                                                                      | Designation | ADAPTER VD-D-S.0                    | Part no. | 00318736 | Description | Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22                                                                                                                                   |    |
| Designation                                                                         | ADAPTER VD-D-S.0                                                                                                                                                                                                                                                                                                                                                                               |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Part no.                                                                            | 00318736                                                                                                                                                                                                                                                                                                                                                                                       |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Description                                                                         | Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22                                                                                                                                                                                                                                                                                                            |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
|    | <table><tr><td>Designation</td><td>ADAPTER VD-D+S-S.0</td></tr><tr><td>Part no.</td><td>00318732</td></tr><tr><td>Description</td><td>Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22.<br/><br/>Swivel-type on request!</td></tr></table>                                                                 | Designation | ADAPTER VD-D+S-S.0                  | Part no. | 00318732 | Description | Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22.<br><br>Swivel-type on request!                                                  |    |
| Designation                                                                         | ADAPTER VD-D+S-S.0                                                                                                                                                                                                                                                                                                                                                                             |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Part no.                                                                            | 00318732                                                                                                                                                                                                                                                                                                                                                                                       |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Description                                                                         | Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22.<br><br>Swivel-type on request!                                                                                                                                                                                                                           |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
|   | <table><tr><td>Designation</td><td>ADAPTER VD-1/4+1/4-W+W.0 /-00404337</td></tr><tr><td>Part no.</td><td>00404337</td></tr><tr><td>Description</td><td>Test adapter for different pressure cavity according to HYDAC works standard HN 28-22.<br/>To test the pressure before and after the filter element.<br/><br/>Also available without mininess couplings (on request)!</td></tr></table> | Designation | ADAPTER VD-1/4+1/4-W+W.0 /-00404337 | Part no. | 00404337 | Description | Test adapter for different pressure cavity according to HYDAC works standard HN 28-22.<br>To test the pressure before and after the filter element.<br><br>Also available without mininess couplings (on request)!    |   |
| Designation                                                                         | ADAPTER VD-1/4+1/4-W+W.0 /-00404337                                                                                                                                                                                                                                                                                                                                                            |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Part no.                                                                            | 00404337                                                                                                                                                                                                                                                                                                                                                                                       |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Description                                                                         | Test adapter for different pressure cavity according to HYDAC works standard HN 28-22.<br>To test the pressure before and after the filter element.<br><br>Also available without mininess couplings (on request)!                                                                                                                                                                             |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
|  | <table><tr><td>Designation</td><td>ADAPTER VR-R+R-S+S.0</td></tr><tr><td>Part no.</td><td>00318741</td></tr><tr><td>Description</td><td>Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2)<br/><br/>Swivel-type on request!</td></tr></table>                                                                                                                       | Designation | ADAPTER VR-R+R-S+S.0                | Part no. | 00318741 | Description | Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2)<br><br>Swivel-type on request!                                                                                                          |  |
| Designation                                                                         | ADAPTER VR-R+R-S+S.0                                                                                                                                                                                                                                                                                                                                                                           |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Part no.                                                                            | 00318741                                                                                                                                                                                                                                                                                                                                                                                       |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Description                                                                         | Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2)<br><br>Swivel-type on request!                                                                                                                                                                                                                                                                                   |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
|  | <table><tr><td>Designation</td><td>ADAPTER V 1/4 I-D-S.0</td></tr><tr><td>Part no.</td><td>00318730</td></tr><tr><td>Description</td><td>Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22.<br/><br/>Two connections G 1/4 (one before and one after the filter element)</td></tr></table>             | Designation | ADAPTER V 1/4 I-D-S.0               | Part no. | 00318730 | Description | Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22.<br><br>Two connections G 1/4 (one before and one after the filter element) |  |
| Designation                                                                         | ADAPTER V 1/4 I-D-S.0                                                                                                                                                                                                                                                                                                                                                                          |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Part no.                                                                            | 00318730                                                                                                                                                                                                                                                                                                                                                                                       |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |
| Description                                                                         | Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22.<br><br>Two connections G 1/4 (one before and one after the filter element)                                                                                                                                                                          |             |                                     |          |          |             |                                                                                                                                                                                                                       |                                                                                       |

|                                                                                   |             |                                                                                                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | Designation | ADAPTER VD-D+1/4+1/4-S+W+W.0                                                                                                                                      |  |
|                                                                                   | Part no.    | 00318744                                                                                                                                                          |                                                                                     |
|                                                                                   | Description | Extending adapter for differential pressure cavity according to HYDAC works standard HN 28-22. Also two connections, one before and one after the filter element. |                                                                                     |
|  | Designation | ADAPTER VF-D-S.0 /-RT                                                                                                                                             |  |
|                                                                                   | Part no.    | On request                                                                                                                                                        |                                                                                     |
|                                                                                   | Description | only for the following filters:<br>LFR, LPFR, MDFR, RFLR, RKMR, RMER, RMTR, RPER                                                                                  |                                                                                     |

## 5.2 MODEL CODE (= EXAMPLE)

### ADAPTER VD-D+1/4+1/4-S+W+W.X /-ESB

#### Connection

- VD differential pressure indicator; connection G 1/2
- VR return line indicator; connection G 1/2
- V1/4 differential pressure indicator; connection G 1/4 internal
- VF differential pressure indicator; flange type

#### Ports (several ports are possible!)

- D differential pressure cavity G 1/2
- R return line cavity G 1/2
- MF cavity for pressure gauge and pressure switch
- 1/4 cavity G 1/4 for Minimes test points (M16 x 1.5)
- 1/8 cavity G 1/8 for Minimes test points (plug-in connection)

#### Orientation of the ports

- S vertical
- W horizontal

#### Type code

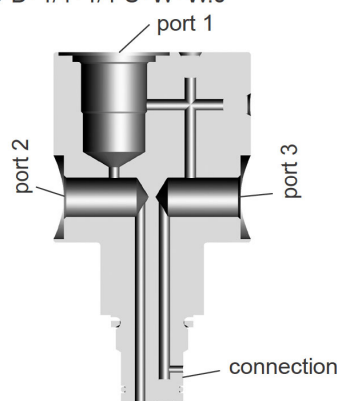
- X the latest version is always supplied

#### Supplementary details

##### ESB swivel type


- V seal in Viton (FPM), suitable for phosphate ester (HFD-R) and biodegradable oils

VD-D+1/4+1/4-S+W+W.0

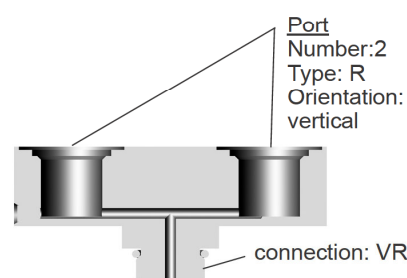


## 5.3 OTHER EXAMPLES

VD-D-S.0



VR-R+R-S+S.0

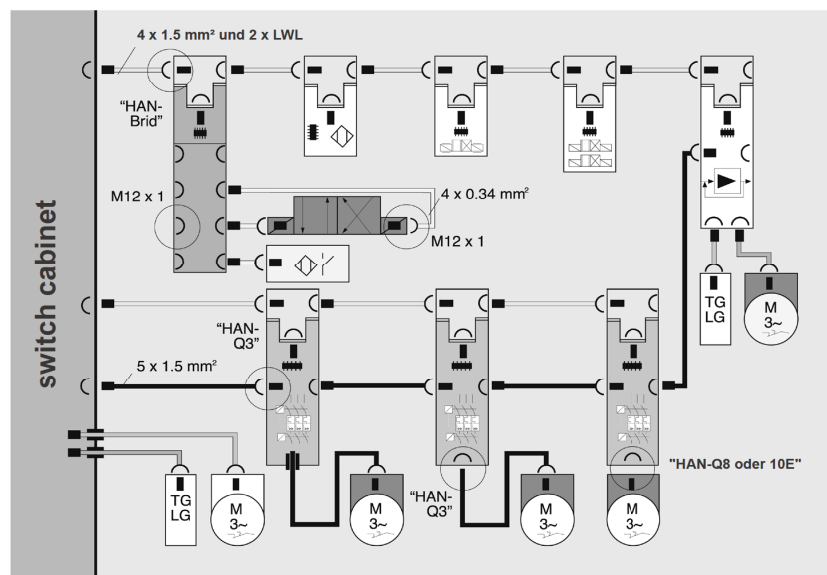


## 6. DESINA SPECIFICATION

DESINA is a fully comprehensive system intended to bring standardization and decentralization to the field of fluid technology and to electrical installation of machinery and systems. The system engineering, automotive and supply industries have worked together to draw up specifications of the necessary components. DESINA makes use of tried-and-tested solutions, such as open bus systems, standard industrial plugs etc.

By standardizing components, interfaces and connection systems, such as a hybrid field bus cable (Cu/LWL), a wide range of different field bus systems can be made compatible on a single physical base.

### 6.1. TOTAL CONCEPT FOR MACHINE TOOL INSTALLATION



### 6.2. CLOGGING INDICATORS

The following clogging indicators are approved to DESINA specification:

VD 5 LZ.x /-D4C  
 VR 2.5 LZ.x /-D4C  
 VD 5 LZ.x /-BO  
 VR 2.5 LZ.x /-BO  
 VD 5 LZ.x /-AV  
 VR 2.5 LZ.x /-AV  
 VR 2.5 LZ.x /-GM

all with M 12 x 1 connector!



**DESINA**

The DESINA logo is shown on the type code label of approved clogging indicators.



E 7.050.15/11.16

NOTE

The information in this brochure relates to the operating conditions and applications described.  
For applications or operating conditions not described, please contact the relevant technical department.  
Subject to technical modifications.

E 7.050.15/11.16