

## HYDAC INTERNATIONAL



### Pressure Transmitter

#### HDA 4300

Marine applications

Relative pressure

Accuracy 0.5 %



**ABS**



Lloyd's  
Register



#### Features

- Accuracy  $\leq \pm 0.5\%$  FS typ.
- Minor temperature error
- Excellent EMC characteristics

#### Approvals:

- American Bureau of Shipping
- Lloyds Register of Ships
- DNV
- Bureau Veritas

Other approvals on request

#### Description

The pressure transmitter series HDA 4300 is designed to measure relative pressures in low-pressure ranges by means of its ceramic thick-film cell.

The electronic evaluation unit converts the measured pressure into a proportional analogue signal of 4 .. 20 mA.

The electronic assembly is completely potted to protect it against humidity, vibrations and shock, and is enclosed in a solid stainless steel housing.

#### Fields of application

HDA 4300 has been specially developed for the use in ship engineering industry.

For use in the ship engineering sector, these pressure transmitters have been approved by the below listed organisations.

## Technical data

| Input data   |  |         |         |    |    |  |    |     |     |
|--|--|---------|---------|----|----|--|----|-----|-----|
| Measurement ranges                                       | bar  | 1       | 2.5     | 4  | 6  | 10                                     | 16 | 25  | 40  |
|  | bar  | -1 .. 5 | -1 .. 9 |    |    |  |    |     |     |
| Overload pressures                                       | bar  | 3       | 8       | 12 | 20 | 32                                     | 50 | 80  | 120 |
|  | bar  | 20      | 32      |    |    |  |    |     |     |
| Burst pressure   | bar  | 5       | 12      | 18 | 30 | 48                                     | 75 | 120 | 180 |
|  | bar  | 30      | 48      |    |    |  |    |     |     |
| Mechanical connection                                    | G1/4 A ISO 1179-2  |         |         |    |    |  |    |     |     |
| Tightening torque, recommended                           | 20 Nm  |         |         |    |    |  |    |     |     |
| Parts in contact with fluid                              | Connector: Stainless steel<br>Sensor cell: Ceramic<br>Seal ring: FKM / EPDM (acc. to model code)         |         |         |    |    |  |    |     |     |
| Output data  |  |         |         |    |    |  |    |     |     |
| Output signal, permitted load resistance                 | 4 .. 20 mA, 2 conductor<br>$R_{Lmax} = (U_B - 10\text{ V}) / 20\text{ mA [k}\Omega\text{]}$              |         |         |    |    |  |    |     |     |
| Accuracy acc. to DIN 16086, Terminal based <sup>1)</sup> | $\leq \pm 0.5\text{ \% FS typ.}$<br>$\leq \pm 1.0\text{ \% FS max.}$                                     |         |         |    |    |  |    |     |     |
| Accuracy at minimum value setting (B.F.S.L.)             | $\leq \pm 0.25\text{ \% FS typ.}$<br>$\leq \pm 0.5\text{ \% FS max.}$                                    |         |         |    |    |  |    |     |     |
| Temperature compensation zero point                      | $\leq \pm 0.02\text{ \% FS / }^\circ\text{C typ.}$<br>$\leq \pm 0.03\text{ \% FS / }^\circ\text{C max.}$ |         |         |    |    |  |    |     |     |
| Temperature compensation span                            | $\leq \pm 0.02\text{ \% FS / }^\circ\text{C typ.}$<br>$\leq \pm 0.03\text{ \% FS / }^\circ\text{C max.}$ |         |         |    |    |  |    |     |     |
| Rise time  | $\leq 2\text{ ms}$   |         |         |    |    |  |    |     |     |
| Long-term drift  | $\leq \pm 0.3\text{ \% FS typ. / year}$  |         |         |    |    |  |    |     |     |
| Environmental conditions / Approvals / Tests             |  |         |         |    |    |  |    |     |     |
| Compensated temperature range                            | -25 .. +85 °C  |         |         |    |    |  |    |     |     |
| Operating temperature range <sup>2)</sup>                | -30 .. +85 °C / -25 .. +85 °C  |         |         |    |    |  |    |     |     |
| Storage temperature range                                | -30 .. +100 °C   |         |         |    |    |  |    |     |     |
| Fluid temperature range <sup>2)</sup>                    | -30 .. +100 °C / -25 .. +100 °C  |         |         |    |    |  |    |     |     |
| EMC  | 2014/30/EU<br>EN 61006-6-1 / 2 / 3 / 4   |         |         |    |    |  |    |     |     |
| Vibration resistance                                     | DIN EN 60068-2-6   |         |         |    |    | $\leq 200\text{ m/s}^2$ (10 .. 500 Hz) |    |     |     |
| Shock resistance   | DIN EN 60068-2-27  |         |         |    |    | $\leq 100\text{ g / 6 ms}$             |    |     |     |
| Protection type <sup>3)</sup>                            | DIN EN ISO 60529   |         |         |    |    | IP 67                                  |    |     |     |
| CE conformity  | Provided   |         |         |    |    |  |    |     |     |
| Other data   |  |         |         |    |    |  |    |     |     |
| Supply voltage   | 10 .. 32 V DC  |         |         |    |    |  |    |     |     |
| Residual ripple of supply voltage                        | $\leq 5\text{ \%}$   |         |         |    |    |  |    |     |     |
| Current consumption                                      | $\leq 25\text{ mA}$  |         |         |    |    |  |    |     |     |
| Life expectancy  | > 10 million load cycles (0 .. 100 % FS)   |         |         |    |    |  |    |     |     |
| Weight   | ~ 150 g  |         |         |    |    |  |    |     |     |

**Note:** Reverse polarity protection of the supply voltage, excess voltage, override and short circuit protection are provided.

**B.F.S.L.** = Best Fit Straight Line


**FS** (Full Scale) = relative to complete measuring range

<sup>1)</sup> Including non-linearity, hysteresis, offset and final value deviation

<sup>2)</sup> In the standard up to -25 °C with FKM seal or EPDM seal, -30 °C on request


<sup>3)</sup> With mounted mating connector in corresponding protection type

Dimensions

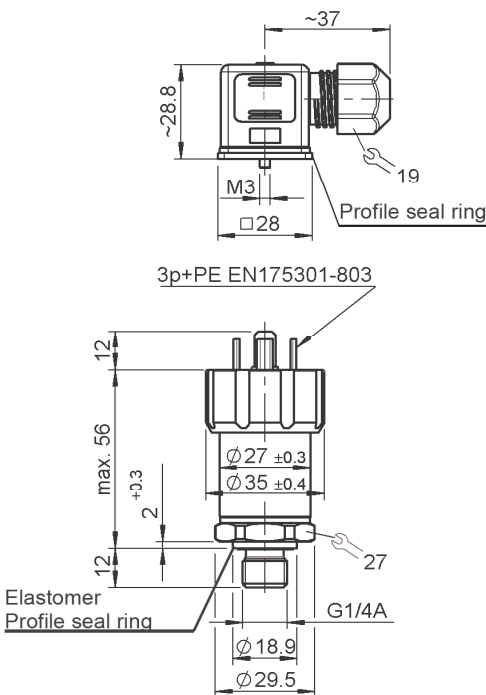

Electrical connection variants

Plug connector M12x1, 4 pole

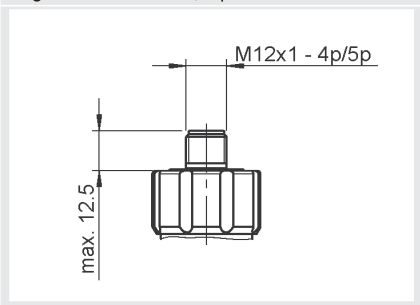

Pin connections

| EN 175301-803, 3 pole + PE | Pin | Output signal: A |
|----------------------------|-----|------------------|
|                            | 1   | Signal +         |
|                            | 2   | Signal -         |
|                            | 3   | n.c.             |
|                            | ⊥   | Housing          |
| M12x1, 4 pole              | Pin | Output signal: A |
|                            | 1   | Signal +         |
|                            | 2   | n.c.             |
|                            | 3   | Signal -         |
|                            | 4   | n.c.             |

## Model code

HDA 4 3 4 X - A - XXXX - S00 - X 1

### Mechanical connection

4 = G1/4 A ISO 1179-2

### Electrical connection

5 = Plug connector EN175301-803, 3 pole + PE (with mating connector IP67)

6 = Plug connector M12x1, 4 pole (without mating connector)

### Output signal

A = 4 .. 20 mA, 2 conductor

### Measuring ranges in bar

01,0; 02,5; 04,0; 06,0; 0010; 0016; 0025; 0040

0005 (-1 .. 5); 0009 (-1 .. 9)

### Modification number

S00 = Ship approval

### Sealing material (in contact with fluid)

E = EPDM seal (e.g. for cooling liquids)

F = FKM seal (e.g. for hydraulic oils)

### Connection material (in contact with fluid)

1 = Stainless steel

### Accessories:

Appropriate accessories, such as mating connectors, can be found in the Accessories brochure.

## Note

The information in this brochure relates to the operating conditions and applications described.

For applications and/or operating conditions not described please contact the relevant technical department.

Subject to technical modifications.