

## HYDAC INTERNATIONAL

3



### Temperature Transmitter ETS 4500

Integrated temperature probe

Accuracy 1 %

#### Description:

The ETS 4500 is a robust electronic temperature transmitter which is particularly suited to measuring temperature in hydraulic applications in industry.

Based on a silicon semiconductor device and corresponding evaluation electronics, the temperature sensor is designed to measure temperatures within a range of -25 °C .. +100 °C.

The sensor has analogue output signals of 4 .. 20 mA and 0 .. 10 V available as standard for integration in modern control systems. The pressure resistance up to 600 bar and excellent EMC characteristics make the ETS 4500 ideal for use in harsh conditions.

#### Technical data:

##### Input data

Measuring range	-25 .. +100 °C					
Probe length	mm	10.7	50	100	250	350
Probe diameter	mm	8	8	8	8	8
Pressure resistance	bar	600	125	125	125	125
Mechanical connection	G1/4 A ISO 1179-2					
Tightening torque, recommended	20 Nm					
Parts in contact with fluid <sup>1)</sup>	Mech. connection: Stainless steel Seal: FKM					

##### Output data

Output signal, permitted load resistance	4 .. 20 mA, 2-conductor $R_{Lmax} = (U_B - 8 \text{ V}) / 20 \text{ mA}$ [kΩ] 0 .. 10 V, 3-conductor $R_{Lmin} = 2 \text{ kΩ}$
Accuracy (at room temperature)	$\leq \pm 1.0 \%$ FS typ. $\leq \pm 2.0 \%$ FS max.
Temperature drift (environment)	$\leq \pm 0.02 \%$ FS / °C
Response time acc. to DIN EN 60751	$t_{50}: \sim 4 \text{ s}$ $t_{90}: \sim 8 \text{ s}$

##### Environmental conditions

Operating temperature range <sup>2)</sup>	-40 .. +85 °C / -25 .. +85 °C
Storage temperature range	-40 .. +100 °C
Fluid temperature range <sup>2)</sup>	-40 .. +125 °C / -25 .. +125 °C
CE mark	EN 61000-6-1 / 2 / 3 / 4
Vibration resistance acc. to DIN EN 60068-2-6 at 10 .. 500 Hz	$\leq 25 \text{ g}$
Shock resistance acc. to DIN EN 60068-2-27	$< 20 \text{ g}$
Protection class acc. to DIN EN 60529 <sup>3)</sup>	IP 67

##### Other data

Supply voltage	8 .. 32 V DC 2-conductor 12 .. 32 V DC 3-conductor
Residual ripple of supply voltage	$\leq 5 \%$
Current consumption 3-conductor	$\sim 25 \text{ mA}$
Weight	$\sim 200 \text{ g}$ (probe length 10.7 mm) $\sim 215 \text{ g}$ (probe length 50 mm) $\sim 235 \text{ g}$ (probe length 100 mm) $\sim 280 \text{ g}$ (probe length 250 mm) $\sim 315 \text{ g}$ (probe length 350 mm)

Note: Reverse polarity protection of the supply voltage, overvoltage, overcurrent and short circuit protection are provided.

FS (Full Scale) = relative to complete measuring range

<sup>1)</sup> Other seal materials on request


<sup>2)</sup> -25 °C with FKM seal, -40 °C on request

<sup>3)</sup> With mounted mating connector in corresponding protection class

EN 18.302.2.1/02.18

3

Dimensions:

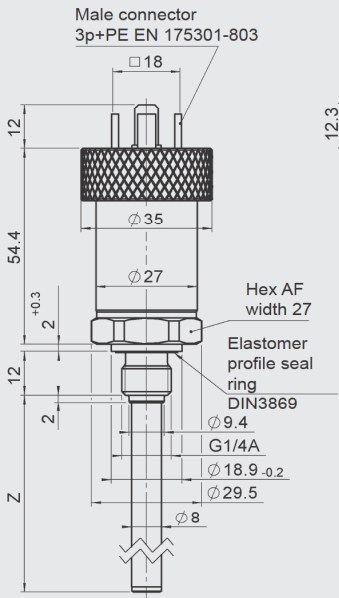

Probe length (Z) [mm]	Probe diameter [mm]
10.7	8
50	8
100	8
250	8
350	8

Model code:

ETS 4 5 4 X - X - XXX - 000

Mechanical connection

4 = G 1/4 A ISO 1179-2

Electrical connection

5 = male, EN 175301-803, 3 pole + PE (mating connector supplied)  
6 = male M12x1, 4 pole (mating connector not supplied)

Output signal

A = 4 .. 20 mA, 2-conductor  
B = 0 .. 10 V, 3-conductor

Probe length

010 = 10.7 mm  
050 = 50 mm  
100 = 100 mm  
250 = 250 mm  
350 = 350 mm

Modification number

000 = standard

Accessories:

Appropriate accessories, such as mating connectors, can be found in the Accessories brochure.

Pin connections:

EN175301-803



Pin	ETS 4545-A	ETS 4545-B
1	Signal +	+U <sub>B</sub>
2	Signal -	0 V
3	n.c.	Signal
L	Housing	Housing

M12x1



Pin	ETS 4546-A	ETS 4546-B
1	Signal +	+U <sub>B</sub>
2	n.c.	n.c.
3	Signal -	0 V
4	n.c.	Signal