

# HYDAC INTERNATIONAL



## **Trimicron filter element** N1TM, N3TM

### **Description**

The filter elements of the Trimicron series have been specially developed for the combined filtration of:

- · Finest solid particle contamination
- Water
- · Oil ageing products

from hydraulic and lubrication oils in the bypass flow.

They are a combination of pleated and spun spray depth filter elements. The filter layers used are produced using melt-blown technology (synthetic fibres).

### **Applications**

- Offline filtration in lubrication systems (e.g. in wind turbines)
- · Offline filtration in hydraulic systems
- Transmission and hydraulic test rigs

### **Special features**

- Excellent filtration performance (ß 5 (c) > 1000)
- · Low initial differential pressure
- High contamination retention
- Fine particle contamination, water and oil ageing products removed by depth filter material
- · Broad range of fluid compatibility
- · Simple element change

### **Technical specifications**

General specifications			
	N1	N3	
Contamination retention capacity ISOMTD at $\Delta P = 2.5$ bar	≈ 410 g	≈ 2500 g	
Water retention capacity	≈ 680 ml	≈ 2.2 l	
Beta value ß 5 (c) @ 2 bar	> 1,000	> 1,000	
Filtration rating	3	3 µm	
Differential pressure at starting point	< 0.	< 0.1 bar	
Permitted fluid temperature range	-10-	-10–80 °C	
Storage temperature range	5–4	5–40 °C	

E 7.635.1/03.16





# Order details N-1-TM-003 /-F Nominal flow rate 1 = nominal flow rate 1 l/min = 3 nominal flow rate 3 l/min Element type TM = Trimicron Filtration rating 003 = 3 μm Seal material N = NBR F = FKM (FPM, Viton⊛)

### Not

The information in this brochure relates to the operating conditions and applications described.

For applications and operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

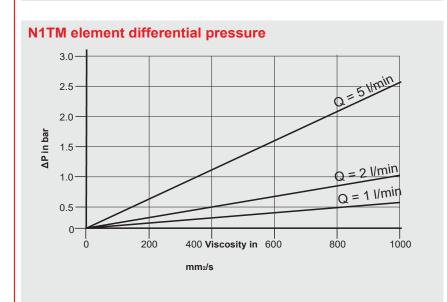

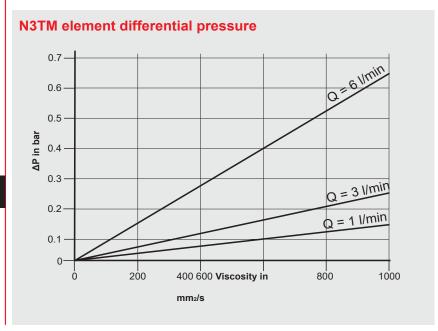

HYDAC FILTER SYSTEMS GMBH Industriegebiet

E 7.635.1/03.16

244 | **HYDAC**