

PAM-Series, Air Hydraulic Pumps

▼ Shown: PAM1041



PAM Series

Reservoir Capacity:
4,0 - 8,0 litres

Flow at Rated Pressure:
0,15 l/min

Air Consumption:
510 l/min

Maximum Operating Pressure:
700 bar



Locking Valves

Pumps with 4/3 manual valves are available with 4/3 manual locking valves **VM4L** instead. Add suffix "L" to pump model number. Example: **PAM1042L**.


Page: **122**



Remote Air Valve


For remote operation of PAM-Series air pumps. Permits either hand or foot operation.

Model Number **VA2**

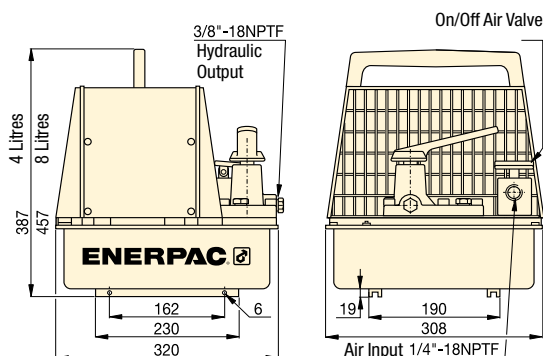

OIL FLOW VERSUS PRESSURE

at 6,9 bar air pressure

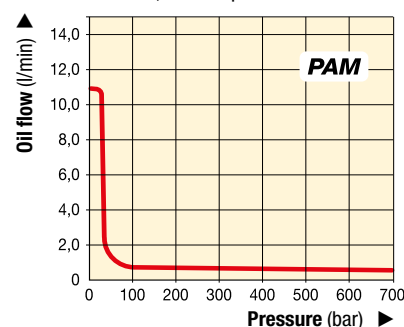

Used with Cylinder	Usable Oil Cap. (litres)	Model Number with Shroud	Pressure Rating (bar)	Output Flow Rate (l/min)		Valve Function	Valve Type	Valve Model Number	Air Pressure Range * (bar)	Air Consumption (l/min)	Sound Level (dBA)	Weight (kg)
				1 st stage	2 nd stage							
Single-Acting	2,6	PAM1021	700	10,65	0,15	Advance/Hold/Retract	3/2	VM2	4,1 - 8,3	510	87	22,7
	7,6	PAM1022	700	10,65	0,15	Advance/Hold/Retract	3/2	VM2	4,1 - 8,3	510	87	27,2
Double-Acting	2,6	PAM1041	700	10,65	0,15	Advance/Hold /Retract	4/3	VM4	4,1 - 8,3	510	87	22,7
	7,6	PAM1042	700	10,65	0,15	Advance/Hold/Retract	4/3	VM4	4,1 - 8,3	510	87	27,2

* Recommended Regulator-Filter-Lubricator:
RFL102.

ENERPAC 111