

Electric Drives  
and Controls

Hydraulics

Linear Motion and  
Assembly Technologies

Pneumatics

Service

**Rexroth**  
Bosch Group

1/14

## Servo directional control valve of 4-way design

**RA 29583-VH1-102-B1/05.12**  
Replaces: 05.10

**Type 4WS2EM...VH1...-102**

Nominal size 10  
Unit series 5X  
Maximum working pressure 315 bar  
Maximum flow rate 180 l/min



H5893\*\_d

**For potentially explosive atmospheres**

### Part I Technical Data Sheet



#### Information on explosion protection:

Ranges of application in accordance with Article 505, NEC ®

- IS Class I, Zone 0, AEx ia IIC T4
- NI Class I, Zone 2
- Ambient temperature range  $-20\text{ °C} \leq T_a \leq +60\text{ °C}$

### What you need to know about these Operating Instructions

These Operating Instructions apply to the explosion-proof version of Rexroth valves, and consist of the following three parts:

- |          |                                                   |                              |
|----------|---------------------------------------------------|------------------------------|
| Part I   | Technical Data Sheet RA 29583-VH1-102-B1          | } <b>RA 29583-VH1-102-B0</b> |
| Part II  | Product-specific Instructions RA 29583-VH1-102-B2 |                              |
| Part III | Control drawing RA 29583-VH1-102-B3               |                              |

You can find further information on the correct handling of Rexroth hydraulic products in our publication "General product information for hydraulic products", RE 07008.

## Overview of Contents

| Contents                            | Page    |
|-------------------------------------|---------|
| Features                            | 2       |
| Ordering data and scope of delivery | 3       |
| Symbol                              | 3       |
| Function, sectional diagram         | 4       |
| Technical data                      | 5 and 6 |
| Information on explosion protection | 6       |
| External trigger electronics        | 6       |
| Plug-in connector                   | 7       |
| Electrical connection               | 7       |
| Characteristic curves               | 8 to 11 |
| Unit dimensions                     | 12      |
| Flushing plate                      | 13      |

## Features

- Servo directional control valve for proper use in potentially explosive atmospheres of Zone 0
- Valve for closed-loop position, force and speed control
- 2-Stage servo valve with mechanical feedback
- 1st stage in the form of flapper nozzle amplifier
- For subplate mounting,  
Mounting hole configuration to  
ISO 4401-05-05-0-05 with ports X and Y.  
Subplates, see page 12
- Dry servo motor, no contamination of solenoid gaps by  
pressure fluid
- Non-wearing spool return element
- Actuation:  
External trigger electronics in modular form, additional  
safety barriers (order separately), see Page 6
- Valve is calibrated and tested
- Internal/external control oil supply and return individually  
orderable
- Spool with flow force compensation
- Control sleeve permanently centered, therefore reducing  
sensitivity to temperature and pressure
- Pressure chamber gaps on control sleeve sealed,  
no wear to O-rings
- Filter for 1st stage freely accessible from the outside

## Ordering data and scope of delivery

| 4WS2E                                                                                                                    |  | M | 10-5X/                  | B | 11                   | VH1                                                                               |                                                                                                         |  | K31           |  | V- 102        |  |
|--------------------------------------------------------------------------------------------------------------------------|--|---|-------------------------|---|----------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--|---------------|--|---------------|--|
| Electrically operated<br>2-stage servo valve,<br>4-way version<br><br>for <b>external</b> = 4WS2E<br>trigger electronics |  |   | Mechanical feedback = M |   | Nominal size 10 = 10 |                                                                                   | Unit series 50 to 59<br>(50 to 59: installation and connection<br>dimensions unchanged)                 |  | = 5X          |  |               |  |
| <b>Nominal flow</b> <sup>1)</sup>                                                                                        |  |   | 5 l/min = 5             |   | 10 l/min = 10        |                                                                                   | 20 l/min = 20                                                                                           |  | 30 l/min = 30 |  | 45 l/min = 45 |  |
| 60 l/min = 60                                                                                                            |  |   | 75 l/min = 75           |   | 90 l/min = 90        |                                                                                   | Valves for <b>external</b> trigger electronics:<br>Coil No. 11 (30 mA/85 Ω per coil) <sup>2)</sup> = 11 |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
| <b>Included in scope of delivery:</b>                                                                                    |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
| – Valve operating instructions                                                                                           |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
| – Valve fastening screws                                                                                                 |  |   |                         |   |                      |                                                                                   |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | 102 = Special numbers <sup>6)</sup>                                               |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | V = FKM seals <sup>6)</sup><br>suitable for mineral oil<br>(HL, HLP) to DIN 51524 |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | <b>Spool overlap</b> <sup>5)</sup>                                                |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | C = 3 ... 5 % positive                                                            |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | D = 0 ... 0,5 % positive                                                          |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | E = 0 ... 0,5 % negative                                                          |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | <b>Electrical connection</b>                                                      |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | K31 = with plug<br>to EN175201-804                                                |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | Plug-in connector – order separately<br>see Page 7                                |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | <b>Supply pressure range to 1st stage</b> <sup>4)</sup>                           |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | 210 = 10 ... 210 bar                                                              |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | 315 = 10 ... 315 bar                                                              |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | <b>Control oil supply and discharge</b> <sup>3)</sup>                             |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | – = External supply, external return                                              |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | E = Internal supply, external return                                              |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | T = External supply, internal return                                              |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | ET = Internals supply, internal return<br>(ET = Standard version)                 |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | VH1 = Valve in explosion-proof design                                             |                                                                                                         |  |               |  |               |  |
|                                                                                                                          |  |   |                         |   |                      | For details, see information on explosion protection,<br>Page 6                   |                                                                                                         |  |               |  |               |  |

### <sup>1)</sup> Nominal flow rate

The nominal flow is based on a 100 % setpoint signal at a valve pressure drop of 70 bar (35 bar per metering edge). The flow can be affected by other values. A possible nominal flow tolerance of ± 10 % (see flow signal function on page 8) must be taken into consideration.

### <sup>2)</sup> Electrical triggering data

The control signal must be generated by a current-regulated output stage with superimposed dither signal. For trigger electronics (servo amplifiers), see page 6.

### <sup>3)</sup> Control oil

The pilot pressure should be kept as constant as possible. Therefore, external pilot control via port X can be advantageous. The valve may be operated with higher pressure at X than at P, to increase the dynamics.

### Note:

Ports X and Y are also subject to pressure when the supply and return of control oil are "internal".

### <sup>4)</sup> Supply pressure range

The system pressure should be kept as constant as possible.

Pilot pressure range: 10 ... 210 bar or 10 ... 315 bar.

With regard to the dynamics, the dependence on the frequency response must be taken into account within the permitted pressure range.


### <sup>5)</sup> Spool overlap

The spool overlap is stated in % of the control spool stroke.

### <sup>6)</sup> Non-standard version number "102"

When not actuated (power off), channel P → A and B → T are open 10 % of the nominal flow.

## Symbol



## Function, sectional diagram

### 4WS2EM...VH1...-102

Valves of this type are electrically operated, 2-stage servo directional control valves with a mounting hole configuration to ISO 4401-05-05-0-05. They are predominantly employed for closed-loop position, force and speed control.

These valves consist of an electro-mechanical converter (torque motor) (1), a hydraulic amplifier (flapper nozzle principle) (2) and a control spool (3) in a sleeve (2nd stage), which is connected to the torque motor via a mechanical feedback.

An electrical input signal at the coils (4) of the torque motor causes a permanent magnet to generate a force that acts on the armature (5) and, acting by means of a torque tube (6), this force generates a torque. This torque then moves the flapper plate (7) - which is connected to the torque tube (6) by a rod - out of its central position between the two control orifices (8), resulting in a pressure drop at the end faces of the control spool. This pressure drop causes the position of the spool to change, so that the pressure port is connected to one consumer port and, at the same time, the other consumer port is connected to the return port. In this special version "102" the valve is trimmed about 10% from  $P \rightarrow A$  and  $B \rightarrow T$ .


The control spool is connected to the flapper plate or the torque motor by a feedback spring (mechanical feedback) (9). The position of the spool continues to change until the return torque through the feedback spring and the electro-magnetic torque of the torque motor reach a state of equilibrium, and the pressure drop at the flapper nozzle system becomes zero.

In this way, the stroke of the control spool and thus the flow of the servo valve are closed-loop-controlled proportionately to the electrical input signal. At the same time, it should be noted that the flow is dependent on the valve pressure drop.

#### External trigger electronics (order separately)

The valve is actuated by external trigger electronics (a servo amplifier), which amplifies an analog input signal (setpoint) so that the controlled-current output signal is capable of driving the servo valve.

### Type 4WS2EM...VH1...-102

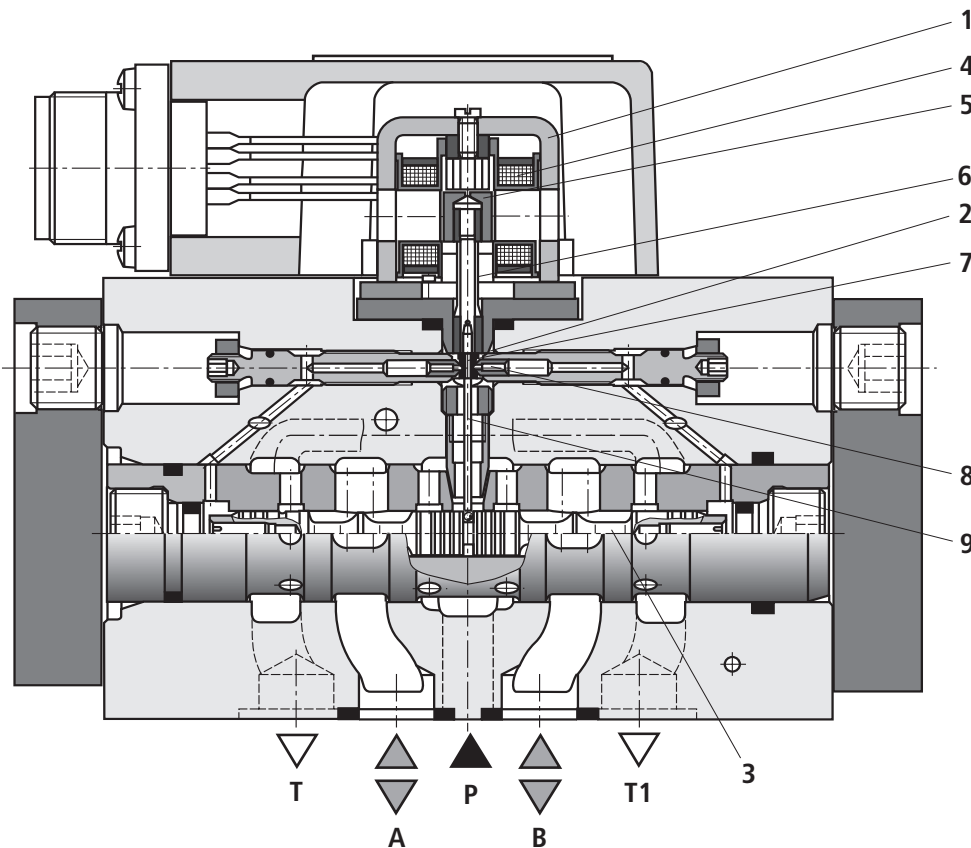

## Technical data

| General                                                                                                           |                                    |                                                                                                                       |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|----|------|----|
| Mounting hole configuration                                                                                       |                                    | ISO 4401-05-05-0-05                                                                                                   |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Installation position                                                                                             |                                    | Optional (ensure that pilot control is certain to receive sufficient pressure (≥10 bar) when starting up the system!) |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Surface protection                                                                                                | Valve body, cover and filter screw | Nitrocarburized                                                                                                       |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|                                                                                                                   | Cap                                | Anodized                                                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Storage temperature range                                                                                         |                                    | °C                                                                                                                    | −20 ... +70                                                                  |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Ambient temperature range                                                                                         |                                    | °C                                                                                                                    | −20 ... +60                                                                  |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Weight                                                                                                            |                                    | kg                                                                                                                    | 3.56                                                                         |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Hydraulic                                                                                                         |                                    |                                                                                                                       |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Working pressure:                                                                                                 | Control oil supply pilot stage     | bar                                                                                                                   | 10 ... 210 or 10 ... 315                                                     |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|                                                                                                                   | Main valve, ports P, A, B          | bar                                                                                                                   | up to 315                                                                    |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Return pressure:                                                                                                  | Port T                             |                                                                                                                       |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|                                                                                                                   | Internal control oil return        | bar                                                                                                                   | Pressure peaks < 100 permitted                                               |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|                                                                                                                   | External control oil return        | bar                                                                                                                   | up to 315                                                                    |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
|                                                                                                                   | Port Y                             | bar                                                                                                                   | Pressure peaks < 100 permitted, static < 10                                  |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Pressure fluid                                                                                                    |                                    | Mineral oil (HL, HLP) to DIN 51524, other pressure fluids available on request, ignition temperature > 150 °C         |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Pressure fluid temperature range                                                                                  |                                    | °C                                                                                                                    | −15 ... +60, preferably +40 ... +50                                          |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Viscosity range                                                                                                   |                                    | mm²/s                                                                                                                 | 15 ... 380, preferably 30 ... 45                                             |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Maximum permissible degree of contamination of pressure fluid Purity class to ISO 4406 (c)                        |                                    | Class 18/16/13 <sup>1)</sup>                                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Zero flow $q_{v,L}^{2)}$ with spool overlap E measured without dither signal                                      |                                    | l/min                                                                                                                 | $\sqrt{\frac{p_p^{4)}}{70\text{bar}}} \cdot 0.7 \frac{\text{L}}{\text{min}}$ | $\sqrt{\frac{p_p^{4)}}{70\text{bar}}} \cdot 0.9 \frac{\text{L}}{\text{min}}$ | $\sqrt{\frac{p_p^{4)}}{70\text{bar}}} \cdot 1.2 \frac{\text{L}}{\text{min}}$ | $\sqrt{\frac{p_p^{4)}}{70\text{bar}}} \cdot 1.5 \frac{\text{L}}{\text{min}}$ | $\sqrt{\frac{p_p^{4)}}{70\text{bar}}} \cdot 1.7 \frac{\text{L}}{\text{min}}$ |    |      |    |
| Nominal flow $q_{v\text{ nom}}^{3)}$ , Tolerance ±10% at valve pressure drop Δp = 70 bar (35 bar per edge)        |                                    | l/min                                                                                                                 | 5                                                                            | 10                                                                           | 20                                                                           | 30                                                                           | 45                                                                           | 60 | 75   | 90 |
| Max. possible control spool stroke based on mechanical end position (in case of fault) referred to nominal stroke |                                    | %                                                                                                                     | 120 ... 170                                                                  |                                                                              |                                                                              |                                                                              | 120 ... 150                                                                  |    |      |    |
| Return system                                                                                                     |                                    | mechanically                                                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Hysteresis (dither optimized)                                                                                     |                                    | %                                                                                                                     | ≤ 1.5                                                                        |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Range of inversion (dither optimized)                                                                             |                                    | %                                                                                                                     | ≤ 0.3                                                                        |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Response sensitivity (dither optimized)                                                                           |                                    | %                                                                                                                     | ≤ 0.2                                                                        |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Pressure gain with 1 % spool stroke variation (starting from hydr. zero)                                          |                                    | % of $p_p$                                                                                                            | ≥ 30                                                                         |                                                                              |                                                                              |                                                                              | ≥ 60                                                                         |    | ≥ 80 |    |
| Zero adjustment flow over entire working pressure range                                                           |                                    | %                                                                                                                     | ≤ 3, long-term ≤ 5                                                           |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Zero offset on variation of:                                                                                      |                                    |                                                                                                                       |                                                                              |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Pressure fluid temperature                                                                                        |                                    | % / 20 K                                                                                                              | ≤ 1                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Ambient temperature                                                                                               |                                    | % / 20 K                                                                                                              | ≤ 1                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Working pressure 80 ... 120 % of $p_p$                                                                            |                                    | % / 100 bar                                                                                                           | ≤ 2                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |
| Return pressure 0 ... 10 % of $p_p^{4)}$                                                                          |                                    | % / bar                                                                                                               | ≤ 1                                                                          |                                                                              |                                                                              |                                                                              |                                                                              |    |      |    |

<sup>1)</sup> The purity classes stated for the components must be complied with in hydraulic systems. Effective filtration prevents problems and also extends the service life of components. For a selection of filters, see [www.boschrexroth.com/filter](http://www.boschrexroth.com/filter).

<sup>2)</sup>  $q_{V,L}$  = zero flow in l/min

<sup>3)</sup>  $q_{V,nom}$  = nominal flow in l/min

<sup>4)</sup>  $p_p$  = working pressure in bar

## Technical data

### Electrical

|                                                                                              |                                                            |    |      |
|----------------------------------------------------------------------------------------------|------------------------------------------------------------|----|------|
| Degree of protection of valve to EN 60529                                                    | IP 65 with correctly mounted and secured plug-in connector |    |      |
| Type of signal                                                                               | analog                                                     |    |      |
| Nominal current per coil                                                                     | mA                                                         | 30 |      |
| Resistance per coil                                                                          | $\Omega$                                                   | 85 |      |
| Inductance at 60 Hz and 100 % nominal current:                                               | Connection in parallel                                     | H  | 0.25 |
| In case of actuation using non-Rexroth amplifiers, we recommend a superimposed dither signal |                                                            |    |      |

### Information on explosion protection

|                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                   |             |     |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----|
| Type test certification                                                                                         | FM Approved                                                                                                                                                                                                                                                                                                                                                                                                       |             |     |
| Range of application to according                                                                               | IS Class I, Zone 0, AEx ia IIC T4                                                                                                                                                                                                                                                                                                                                                                                 |             |     |
| Article 505, NEC ®                                                                                              | NI Class I, Zone 2                                                                                                                                                                                                                                                                                                                                                                                                |             |     |
| Ambient temperature range                                                                                       | °C                                                                                                                                                                                                                                                                                                                                                                                                                | -20 ... +60 |     |
| Pressure fluid temperature range                                                                                | °C                                                                                                                                                                                                                                                                                                                                                                                                                | -15 ... +60 |     |
| Valve is only supplied with power from certified, intrinsically safe circuits with the following maximum values | $U_{max}$                                                                                                                                                                                                                                                                                                                                                                                                         | V           | 9.3 |
|                                                                                                                 | $I_{max}$                                                                                                                                                                                                                                                                                                                                                                                                         | mA          | 390 |
|                                                                                                                 | $P_{max}$                                                                                                                                                                                                                                                                                                                                                                                                         | mW          | 907 |
| Conditions for use in Zone 0                                                                                    | <p>The valve cap consists of cast aluminium.</p> <p>When the valve is to be used as a Category 1 device in Zone 0, the valve cap must be protected in such a manner that no ignitable sparks from friction, impact or grinding can be produced, even in the event of rarely occurring malfunctions.</p> <p><b>Note:</b></p> <p>The hydraulic fluid used must have an ignition temperature of at least 150 °C.</p> |             |     |
| Required free space for burst protection                                                                        | The specified free space for burst protection (see Page 12) must remain free, in order that excess pressure occurring in the event of a fault can be dissipated through the plug in the valve cap.                                                                                                                                                                                                                |             |     |
| Additional requirements for use in zone 0                                                                       | Safety barrier required                                                                                                                                                                                                                                                                                                                                                                                           |             |     |
| Additional requirements for use in zone 2                                                                       | May be used without safety barrier                                                                                                                                                                                                                                                                                                                                                                                |             |     |

### External trigger electronics

|                                                 |                |                                                   |
|-------------------------------------------------|----------------|---------------------------------------------------|
| Servo amplifier <sup>1)</sup> in modular design | Analog         | Typ VT 11021 as per Technical Data Sheet RE 29743 |
| Recommended safety barrier <sup>1)</sup>        | Single-channel | Messrs. Stahl, Type 9001/02-093-390-101           |

#### Note:

The servo amplifier and safety barrier must be operated **outside** the potentially explosive atmosphere!


<sup>1)</sup> Order separately

## Plug-in connector

Plug-in connector to EN 175201-804

Metal version

Order separately under Material No. **R900223890**

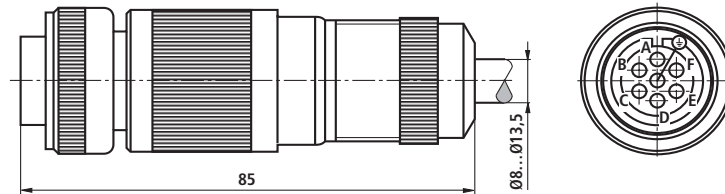


## Electrical connection

The electrical connection may only be connected **in parallel**.

The electrical actuation with positive (+) to A and B and negative (-) to C and D produces a volumetric flow direction of P → A and B → T. Inverse electrical actuation produces a volumetric flow direction of P → B and A → T.

Pins E, F and PE on the plug are not connected.

### Zone 0

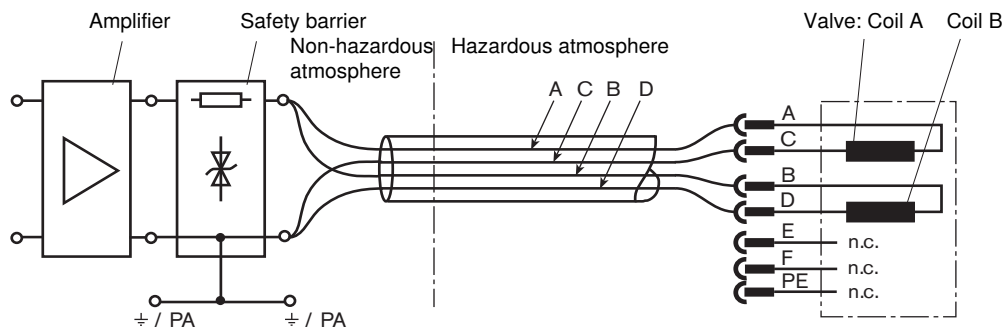

Safety barrier required

#### Note

Only approved cables and leads may be used for intrinsically safe circuits.

The Entity Concept allows interconnection of intrinsically safe apparatus with associated apparatus not specifically examined in combination as system when:


$$V_{\max} > V_{oc} \text{ or } V_i; I_{\max} > I_{sc} \text{ or } I_i; C_a > C_i + C_{cable};$$

$$L_a > L_i + L_{cable}$$

Control equipment connected to barrier must not use or generate more than 250 Vrms or Vdc.

The configuration of associated apparatus must be FM Approved.

### Zone 2

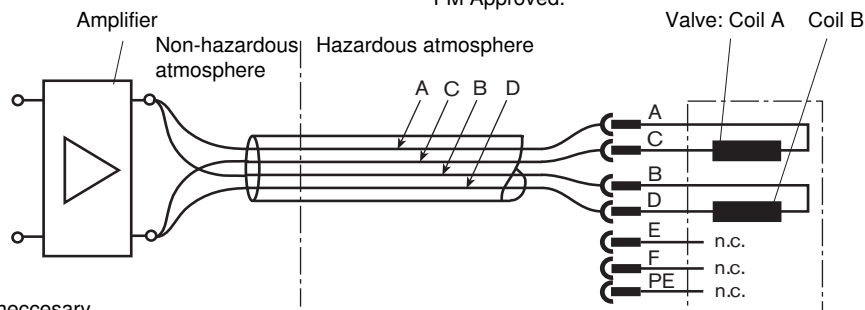


Safety barrier not necessary

## Characteristic curves (measured with HLP 32, $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )

**Flow - load function** (tolerance  $\pm 10\%$ ) with 100 % setpoint signal

Note:

Observe flow values in the max. setpoint range (see tolerance zone of flow signal function)

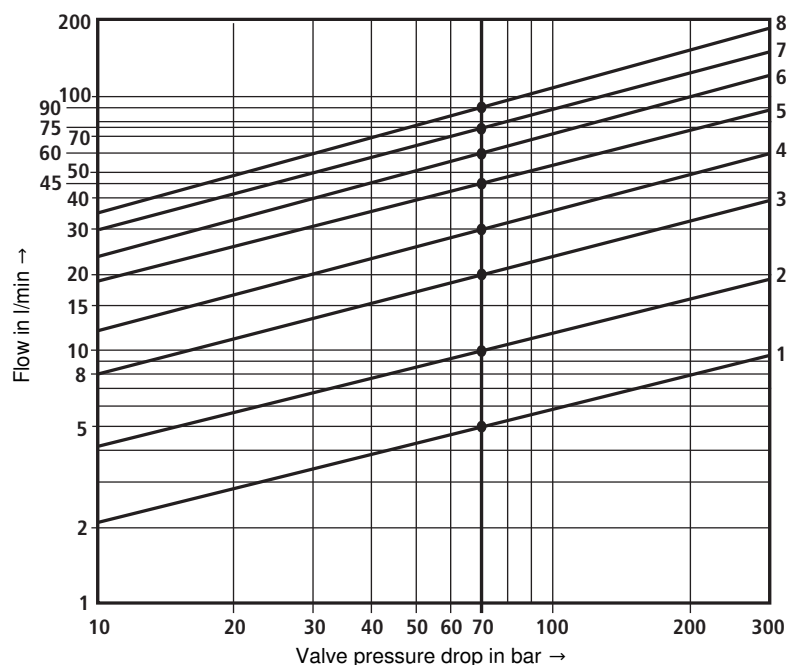


| Order code | Nominal flow | Curve |
|------------|--------------|-------|
| 5          | 5 l/min      | 1     |
| 10         | 10 l/min     | 2     |
| 20         | 20 l/min     | 3     |
| 30         | 30 l/min     | 4     |
| 45         | 45 l/min     | 5     |
| 60         | 60 l/min     | 6     |
| 75         | 75 l/min     | 7     |
| 90         | 90 l/min     | 8     |

$\Delta p$  = valve pressure drop  
(supply pressure  $p_p$  minus  
load pressure  $p_L$  and  
minus return pressure  $p_T$ )

## Tolerance zone of flow signal function


at a constant metering edge pressure drop

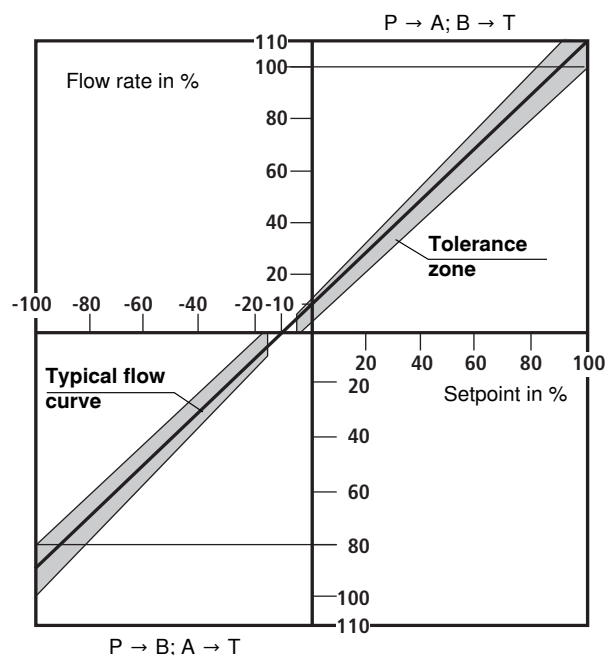




## Characteristic curves (measured with HLP 32, $\vartheta_{oil} = 40 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$ )


Unit step response with pressure stage 315 bar, without flow (measured with safety barrier <sup>1)</sup>)

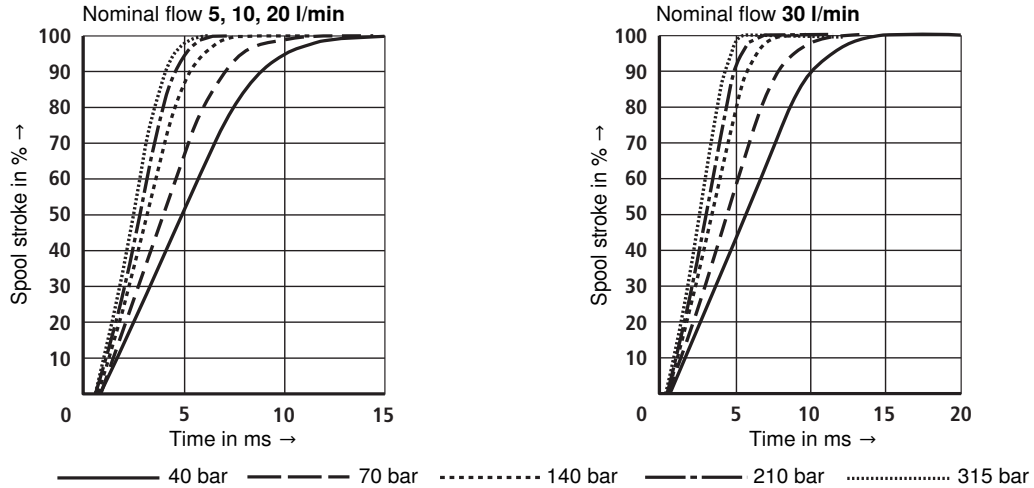

Frequency response with pressure stage 315 bar, stroke frequency response without flow (measured with safety barrier <sup>1)</sup>)

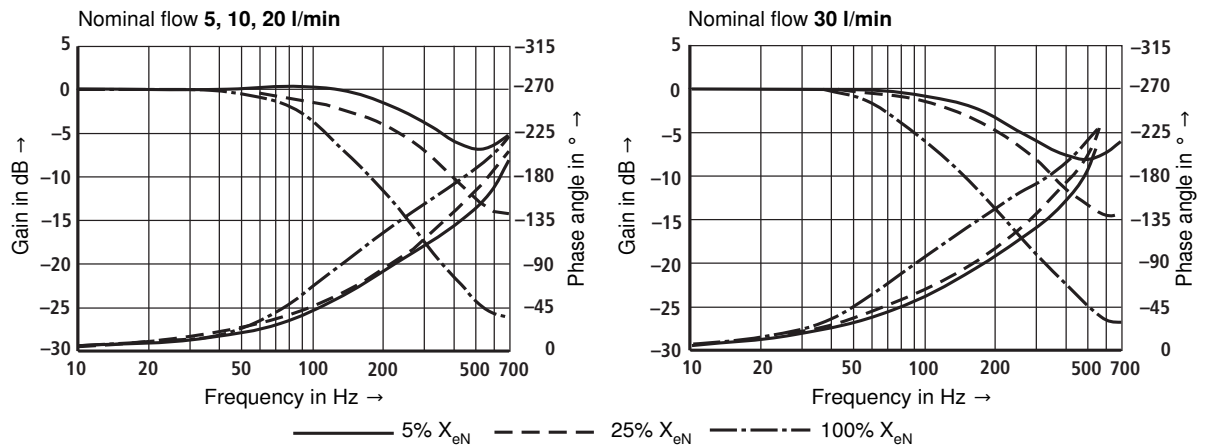


Dependence of frequency  $f$  at  $-90^{\circ}$  on working pressure  $p$  and input amplitude (measured with safety barrier <sup>1)</sup>)

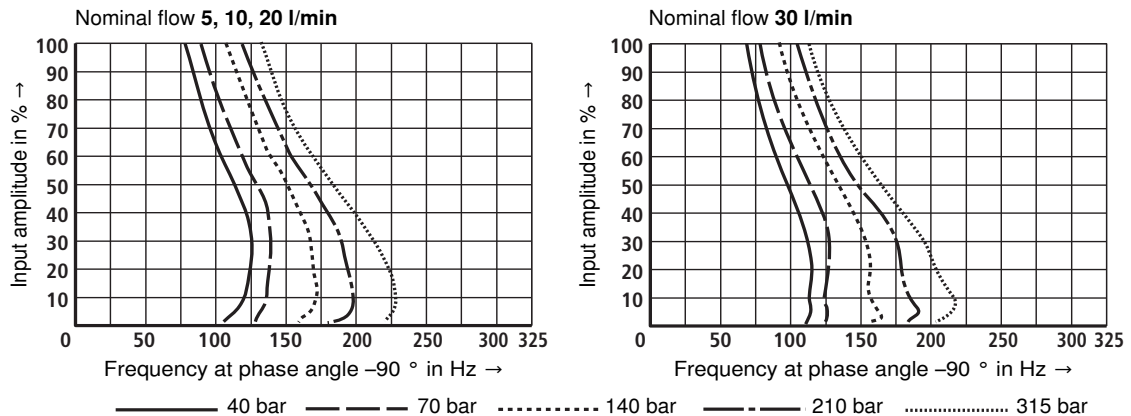


<sup>1)</sup> see pages 6 and 7 for information on the safety barrier

## Characteristic curves (measured with HLP 32, $\vartheta_{oil} = 40 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$ )


Unit step response with pressure stage 315 bar, without flow (measured with safety barrier <sup>1)</sup>)

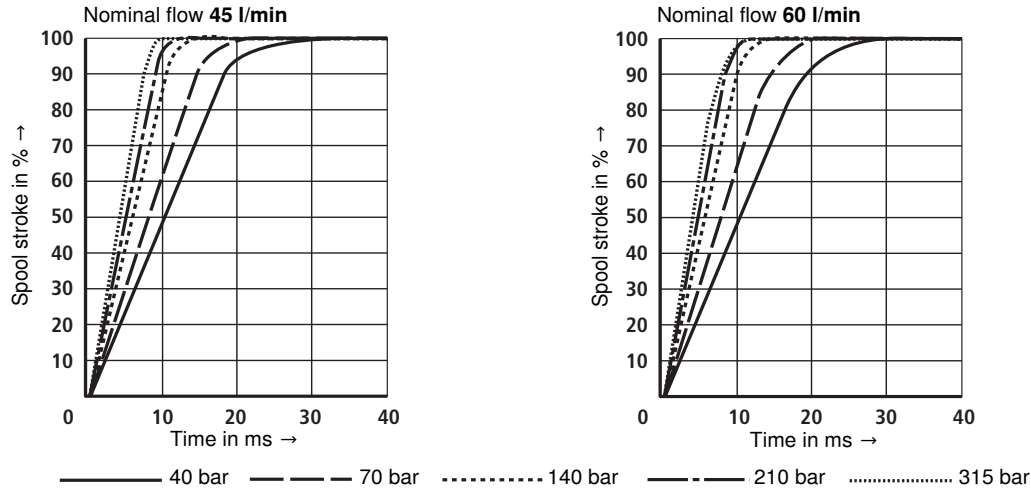

Frequency response with pressure stage 315 bar, stroke frequency response without flow (measured with safety barrier <sup>1)</sup>)

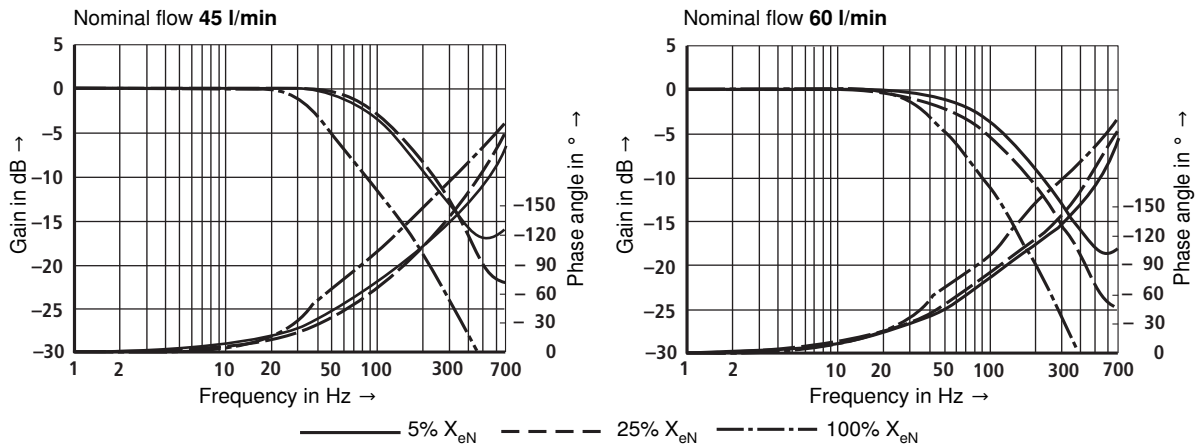


Dependence of frequency  $f$  at  $-90^{\circ}$  on working pressure  $p$  and input amplitude (measured with safety barrier <sup>1)</sup>)

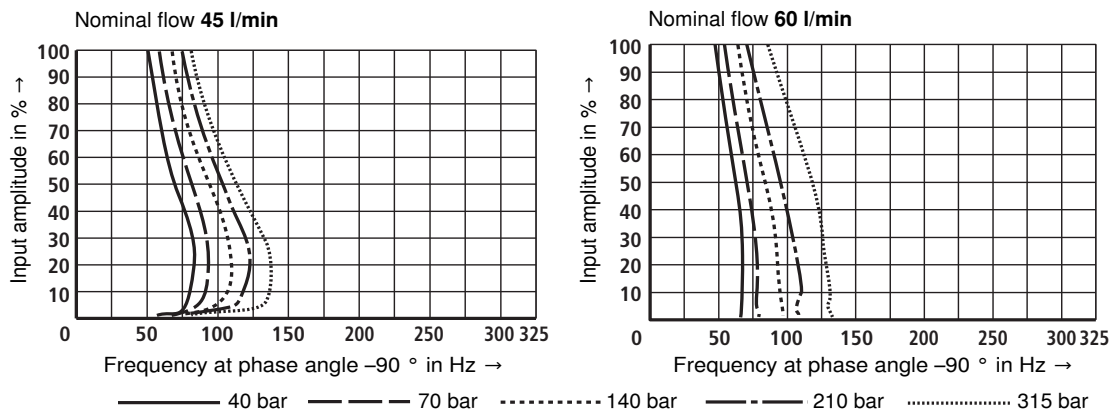


<sup>1)</sup> see pages 6 and 7 for information on the safety barrier

## Characteristic curves (measured with HLP 32, $\vartheta_{oil} = 40 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$ )


Unit step response with pressure stage 315 bar, without flow (measured with safety barrier <sup>1)</sup>)

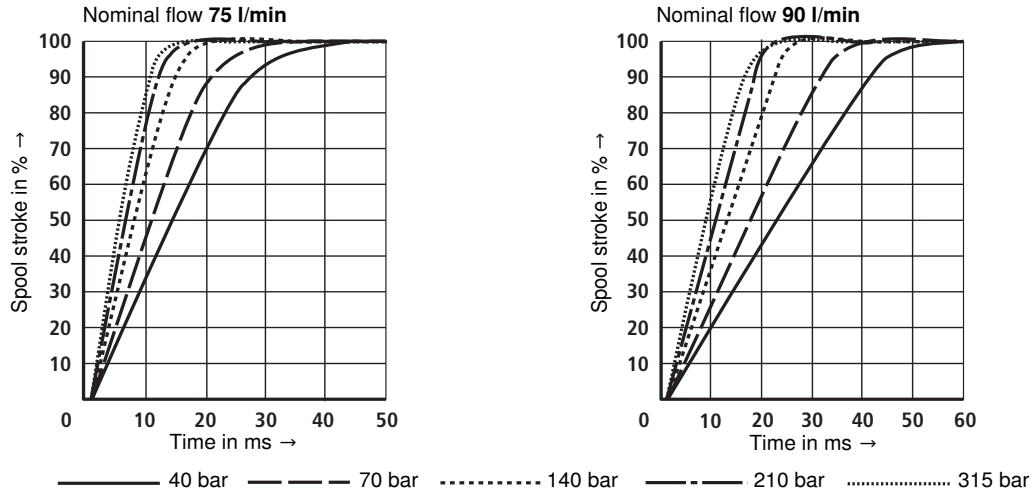

Frequency response with pressure stage 315 bar, stroke frequency response without flow (measured with safety barrier <sup>1)</sup>)

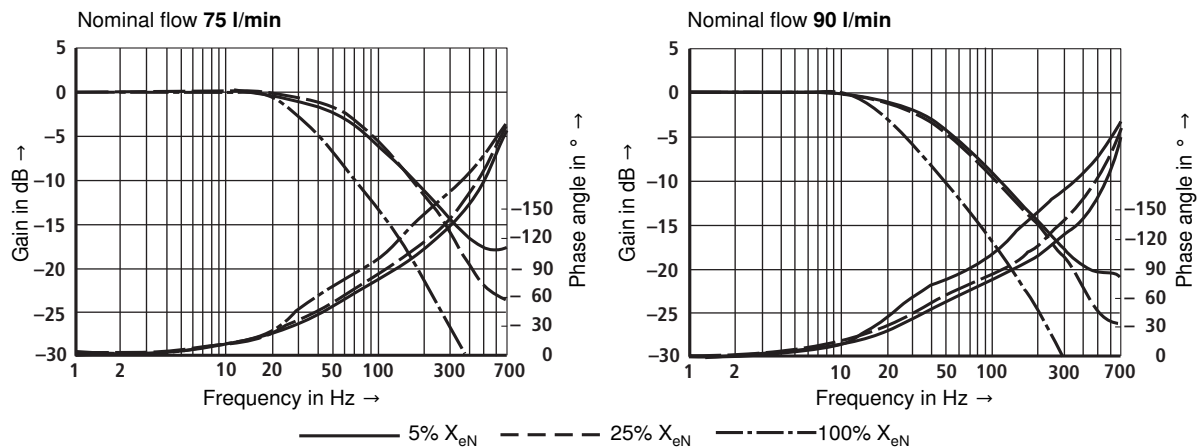


Dependence of frequency  $f$  at  $-90^{\circ}$  on working pressure  $p$  and input amplitude (measured with safety barrier <sup>1)</sup>)

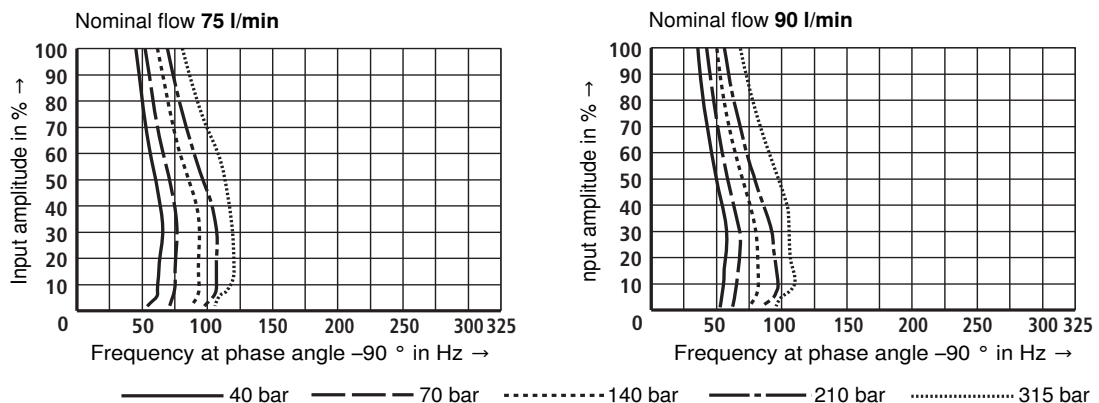

<sup>1)</sup> see pages 6 and 7 for information on the safety barrier

## Unit dimensions (Dimensions in mm)

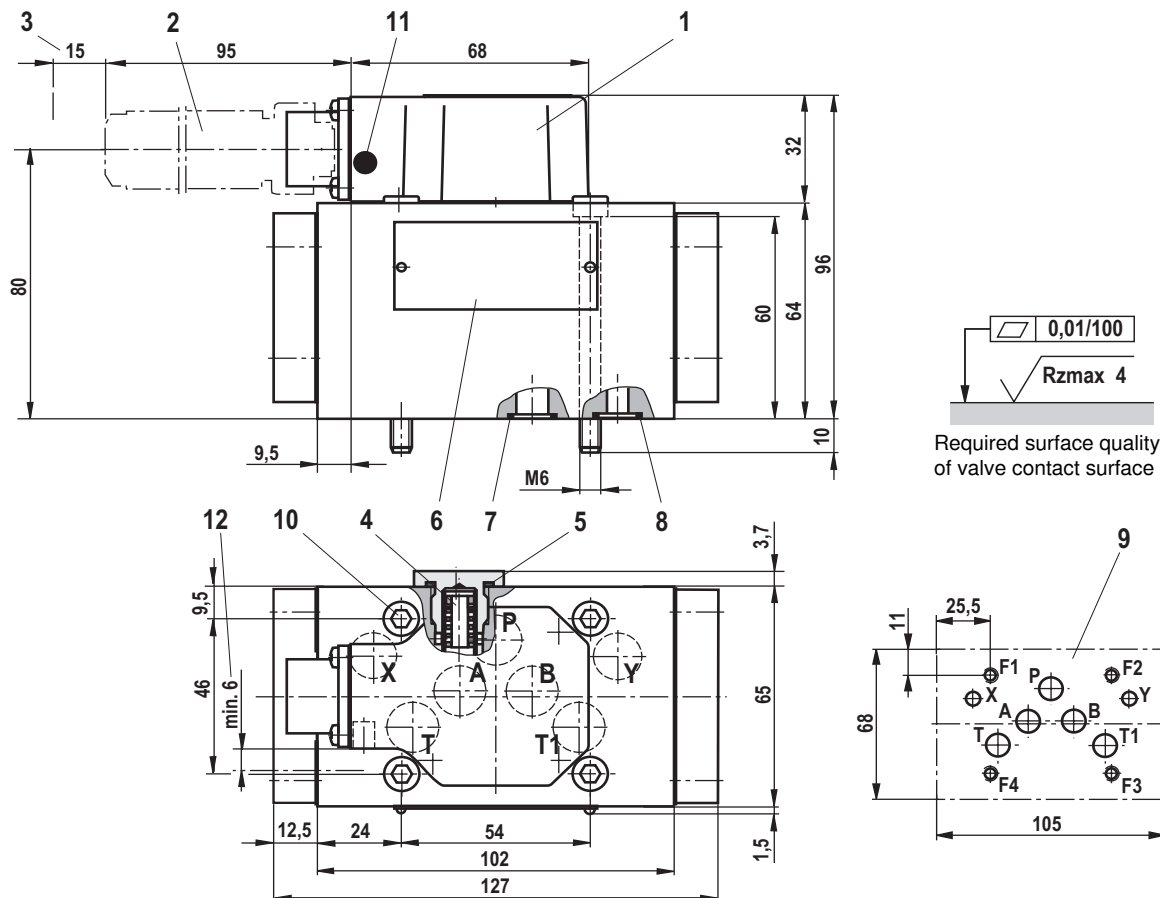

- 1 Cap
- 2 Plug-in connector  
(order separately, see page 7)
- 3 Required space for removing plug-in connector,  
note additional bending radius of connecting cable
- 4 Exchangeable filter element with seals  
Material no.: **R961001950**
- 5 Profile seal for filter screw M16 x 1.5, part of item 4
- 6 Nameplate
- 7 Same seals for ports P, A, B, T and T1
- 8 Same seals for ports X and Y  
Ports X and Y are also subjected to pressure when  
control oil is "internal".
- 9 Machined valve contact surface  
Position of connections in accordance with  
ISO 4401-05-05-0-05, T1 connection also be used

- 10 Valve fastening screws  
For strength reasons only the following  
valve fastening screws may be used:  
**4 cheese-head bolts**  
**ISO 4762-M6 x 70-10.9-flZn-240h-L**  
**(Friction coefficient 0.09 - 0.14)**  
(Included in scope of delivery )
- 11 Burst protection
- 12 Free space for burst protection

### Subplates


G 66/01 FE/Zn (G3/8)  
G 67/01 FE/Zn (G1/2)  
with ports X and Y:  
G 535/01 FE/Zn (G3/4)  
G 535/02 FE/Zn (M27 x 2)  
G 536/01 FE/Zn (G1)  
G 536/02 FE/Zn (M33 x 2)  
with dimensions like in data sheet RE 45054 (must be ordered separately)

## Flushing plate with mounting hole configuration to ISO 4401-05-05-0-05 (Dimensions in mm)

### Symbol



- Material No. **R900912450**
- weight: 2 kg
- Same seals for ports P, A, B, T and T1
- Same seals for X, Y
- Fastening screws  
 For strength reasons only the following  
 valve fastening screws may be used:  
**4 cheese-head bolts**  
**ISO 4762-M6 x 50-10.9-fZn-240h-L**  
**(Friction coefficient 0.09 - 0.14)**  
 (Included in scope of delivery )

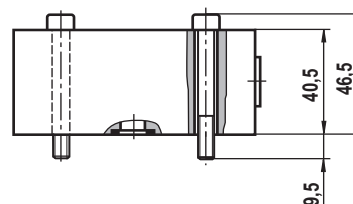

### Note

In order to ensure that the servo valves function perfectly, it is essential to flush the system before commissioning it into service.

For procedure see Product-specific Instructions  
 RA 29583-VH1-102-B2