

RE 30035


Edition: 2023-11

Replaces: 2021-10

rexroth
A Bosch Company

Pressure and flow control system

Type SYHDFEE, SYHDFED, SYHDFEF

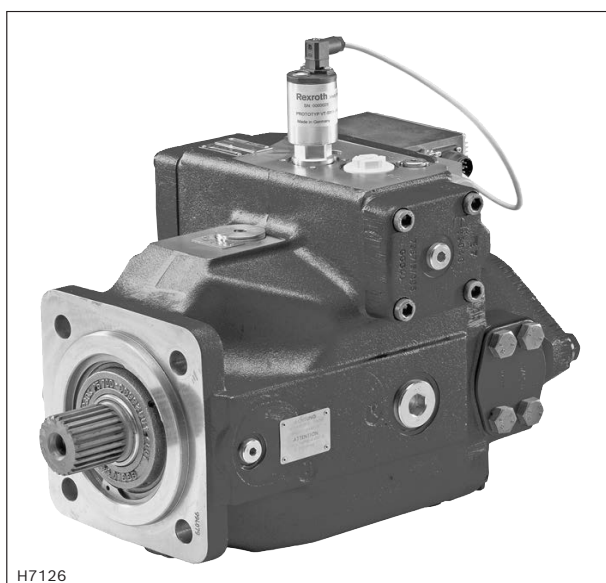

- ▶ Size 40 ... 355
- ▶ Component series 1X
- ▶ Maximum operating pressure 350 bar
- ▶ With axial piston variable displacement pump type A4VSO
- ▶ Function: Swivel angle control, pressure control, torque limitation, speed control function, master-slave
- ▶ Communication: Sercos, PROFINET, EtherNET/IP, POWERLINK, VARAN, CAN over EtherCAT, ServoDrive over EtherCAT, analog

Features

The control system is used for the electro-hydraulic control of the swivel angle, pressure and power (partially optional) of an axial piston variable displacement pump.

It consists of the following components:

- ▶ Axial piston variable displacement pump type A4VSO, optimized for operation in the control system
- ▶ Proportional directional valve type VT-DFP, as a pilot control valve with integrated electronics including inductive position transducer for valve position sensing.
- ▶ Position transducer for sensing the swivel angle
- ▶ Pressure transducer with suitable signal level and dynamics (optional)

Contents

Features	1
Ordering code	2 ... 6
Section	7, 8
Schematic diagram	9, 10
Technical data	11 ... 16
Electrical connection	17 ... 20
LED indicators	21, 22
Control loop quality	23
Characteristic curves	23 ... 25
Dimensions	26 ... 40
Hubs for standard electric motor coupling	40
Accessories for through-drives	41, 42
Accessories (separate order)	43
Project planning information	44
Installation information	44
Further information	44

RE 30035, edition: 2023-11, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2/44 SYHDFE. | Pressure and flow control system

Ordering code: Pump of the control system

01	02	03	04	05	06	07	08	09	10	11	See following pages	
	-	1X	/		-		Z	B	25		-	...

Series

01	Control system with internal analog electronics	SYHDFEE
	Control system with internal digital electronics (Ethernet-based bus systems)	SYHDFED
	Control system with internal digital electronics (Ethernet-based bus systems)	SYHDFEF
	Pump combinations (see order example page 6)	SY2HDFE. SY3HDFE.

02	Component series 10 ... 19 (10 ... 19: unchanged installation and connection dimensions)	1X
----	--	----

Size

		040	071	125	180	250	355	
03	Displacement in cm ³	40	71	125	180	250	355	e.g. 071

Direction of rotation looking at the drive shaft

04	Clockwise	✓	✓	✓	✓	✓	✓	R
	Counterclockwise	✓	✓	✓	✓	✓	✓	L

Hydraulic fluid

05	Mineral oil according to DIN 51524 (HL/HLP)	✓	✓	✓	✓	✓	✓	V
	HFC	-	✓	✓	✓	✓	✓	F

Drive shaft

06	Splined shaft profile DIN 5480	✓	✓	✓	✓	✓	✓	Z
----	--------------------------------	---	---	---	---	---	---	---

Connection flange (Ø centering in mm)

07	4-hole mounting flange according to ISO 3019-2	✓	✓	✓	✓	✓	✓	B
----	--	---	---	---	---	---	---	---

Port for working lines pressure port B and suction port S

08	Port B and S: SAE, laterally displaced by 90°, metric mounting thread, 2nd pressure port B1 vis-à-vis B – upon delivery closed by means of flange plate	✓	✓	✓	✓	✓	✓	25
----	---	---	---	---	---	---	---	----

Through-drive (All through-drives with single pumps come without a hub and are operationally safe, provided with an end cover)

09	Without through-drive	✓	✓	-	-	-	-	N00
	Universal through-drive, closed operationally safe with end cover at the factory; for components for the adaptation of further pump stages, see page 34	-	-	✓	✓	✓	✓	U99
	Through-drive, closed operationally safe with end cover at the factory; components for the adaptation of more pump stages see page 33	✓	✓	-	-	-	-	K99
	Centering	Attachment pump ¹⁾ (examples)						
	SAE Ø82.55 mm	✓	✓	-	-	-	-	KC1

Transmission

10	Standard	✓	✓	✓	✓	✓	✓	-
	High-speed	-	✓	-	-	-	-	S

Base pump

11	Standard (internal pilot oil supply)	✓	✓	✓	✓	✓	✓	0000
	External supply	✓	✓	✓	✓	✓	✓	0576

¹⁾ Observe the conditions for the attachment pumps, see page 41.

Ordering code: Type SYHDFEE – pilot control and preload valve

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17
	-	1X	/		-		Z	B	25						-	*

Control spool

12	Standard	A
	4 grooves	C

Installation orientation of the integrated electronics (see page 5 and "Dimensions")

13	Parallel to the pump axis	0
	Vertical to the pump axis	1

Additional functions: Closed-loop control

14	Switchable pressure controller (high signal)	A
	Power limitation adjustable at the valve with integrated electronics (OBE)	B
	Power limitation adjustable via analog input	C
	Pressure controller that can be switched off (high signal)	D

Electronics assembly

15	Standard electronics with leakage oil compensation	0
	Standard electronics without leakage oil compensation	1

Actual pressure value input (see "Electrical connections")

16	Current input 4 ... 20 mA	Port X1	C
	Voltage input 0 ... 10 V	Port X1	V
	Voltage input 1 ... 10 V	Port X1	E
	Voltage input 0.5 ... 5 V	Port X2	F
17	Further details in the plain text		*

4/44 SYHDFE. | Pressure and flow control system

Ordering code: Type SYHDFED – pilot control and preload valve

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17					
	-	1X	/			-		Z	B	25				-	A			0		-	*

Control spool version

12	Standard	A
----	----------	---

Installation orientation of the integrated electronics (see page 5 and "Dimensions")

13	Parallel to the pump axis	0
	Vertical to the pump axis	1

Additional functions: Closed-loop control

14	Standard	A
	For variable-speed operation	N

Field bus interface

15	Sercos III	S
	EtherCAT (CANopen profile)	T
	EtherCAT (Servodrive profile)	D
	VARAN (servo drive profile)	V
	Ethernet/IP	E
	PROFINET RT	N
	Powerlink	W ²⁾

Actual pressure value input (freely configurable); parameter setting on delivery (see "Electrical connections")

16	Voltage input 0 ... 10 V	Port XH4	V
	Voltage input 0.5 ... 5 V	Port X2M1	F
17	Further details in the plain text		*

²⁾ On request

Ordering code: Type SYHDFEF – pilot control and preload valve

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17				
	-	1X	/			-		Z	B	25				-	A	A			-	*

Control spool version

12	Standard	A
----	----------	---

Installation orientation of the integrated electronics (see page 5 and "Dimensions")

13	Parallel to the pump axis	0
	Vertical to the pump axis	1

Additional functions: Closed-loop control

14	Standard	A
----	----------	---



Field bus interface

15	Sercos III	S
	EtherCAT (CANopen profile)	T
	EtherCAT (Servodrive profile)	D
	VARAN (servo drive profile)	V
	Ethernet/IP	E
	PROFINET RT	N

Actual pressure value input (freely configurable); parameter setting on delivery (see "Electrical connections")

16	Voltage input 0 ... 10 V	Port XH1	V
	Voltage input 0.5 ... 5 V	Port X2N	F
17	Further details in the plain text		*

Installation orientation of the valve electronics

Clockwise direction of rotation	
Installation orientation "0"	Installation orientation "1"
	

6/44 SYHDFE. | Pressure and flow control system


Ordering code: Order examples

Order example for single pump: SYHDFEE-1X/250R-VZB25U99-0576-A0A0V

Order example for pump combinations (material numbers or type designations must be combined with "+")

	Main pump (1st pump)		+ Attachment pump (2nd pump)
	SY2HDFEE-1X/125-125/01240219		+ 01240219
	SY2HDFEE-1X/125-125/ SYHDFEE-1X/125R-VZB25U99-0000-A0B0V	+	SYHDFEE-1X/125R-VZB25U99-0000-A0B0V
Double pump			
Size of the main pump			
Size of the attachment pump or pump abbreviation if the attachment pump is not SYHDFE (e.g. PGF)			
Material number without "R9" for the main pump or type designation if material number not known			
Pump combination, mounted with accessories			
Material number without "R9" for the attachment pump or type designation if material number not known			

Section: Type SYHDFEE, SYHDFED

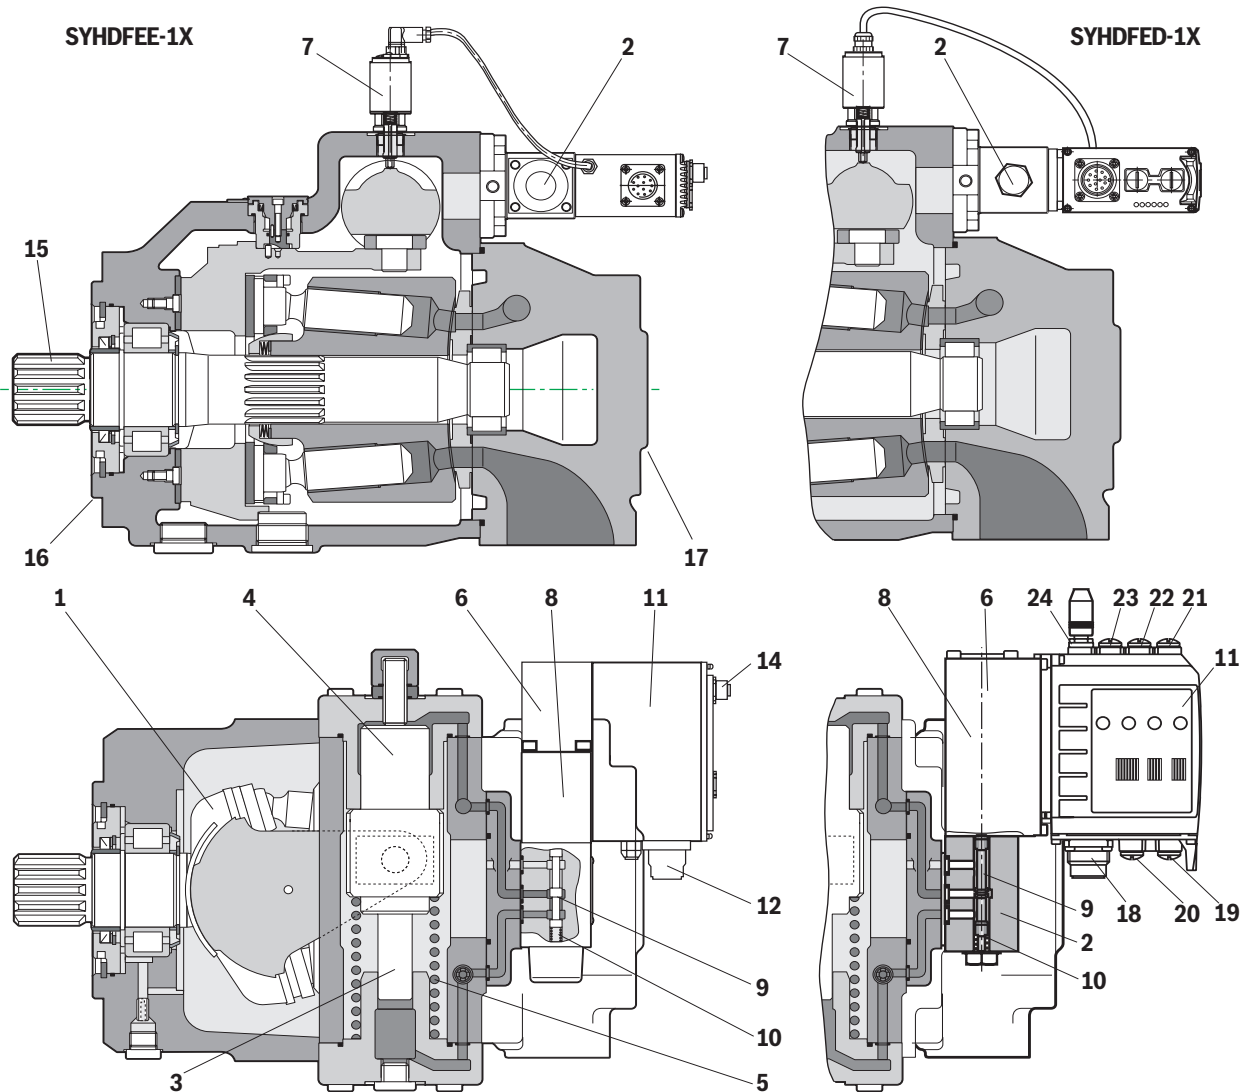

- 1 Swash plate
- 2 Pilot control valve
- 3 Counter piston
- 4 Actuating piston
- 5 Spring
- 6 Inductive position transducer for valve position
- 7 Swivel angle position sensor
- 8 Proportional solenoid
- 9 Valve spool
- 10 Spring
- 11 Integrated electronics
- 12 Connector X1

- 14 Connector X2 for connection of the type HM20 pressure transducer cable version (type SYHDFEE only with actual pressure value input "F")
- 15 Drive shaft
- 16 Connection flange
- 17 Subplate, optionally with through-drive
- 18 Connector XH4
- 19 Multi Ethernet interface X7E1
- 20 Multi Ethernet interface X7E2
- 21 Configurable sensor interface X2M1
- 22 Configurable sensor interface X2M2
- 23 Reserved, X2N
- 24 Actual swivel angle value input X8A


RE 30035, edition: 2023-11, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

8/44 **SYHDFE.** | Pressure and flow control system

Section: Type SYHDFEF

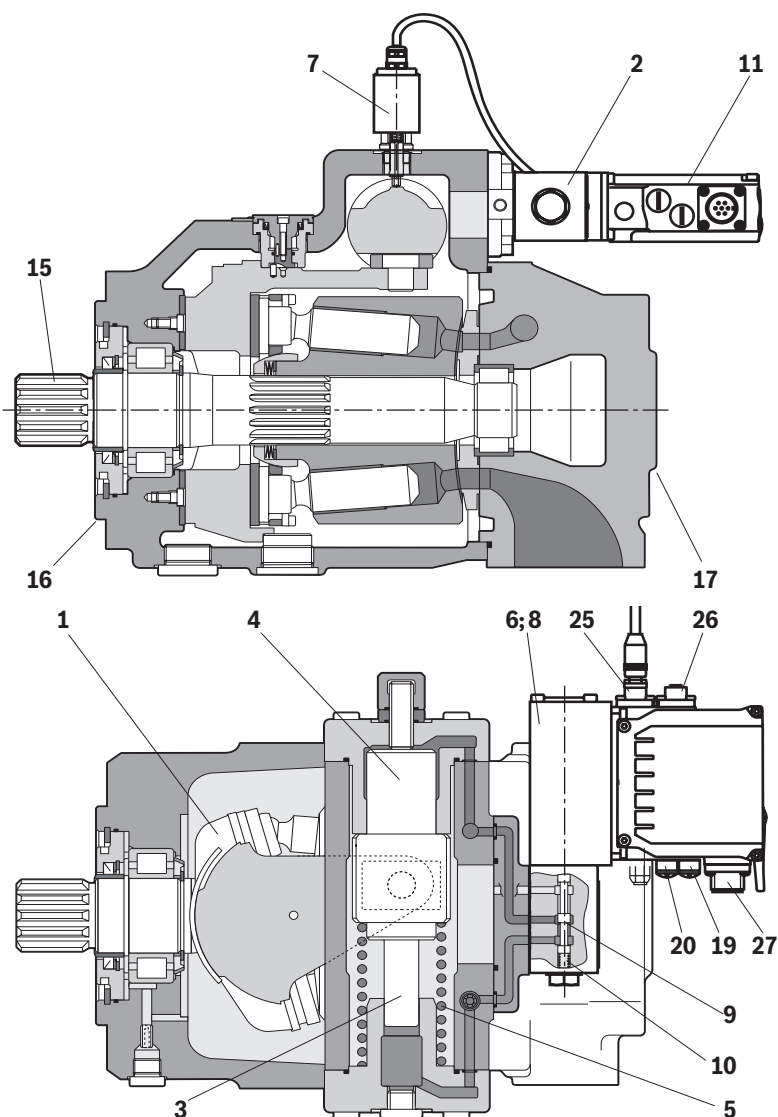


- | | |
|--|--|
| 1 Swash plate | 15 Drive shaft |
| 2 Pilot control valve | 16 Connection flange |
| 3 Counter piston | 17 Subplate, optionally with through-drive |
| 4 Actuating piston | 19 Multi Ethernet interface X7E1 |
| 5 Spring | 20 Multi Ethernet interface X7E2 |
| 6 Inductive position transducer for valve position | 25 Actual swivel angle value input X8A1 |
| 7 Swivel angle position sensor | 26 Configurable sensor interface X2N |
| 8 Proportional solenoid | 27 Connector XH1 |
| 9 Valve spool | |
| 10 Spring | |
| 11 Integrated electronics | |

Bosch Rexroth AG, RE 30035, edition: 2023-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Schematic diagram: Type SYDFE. – actuating system supplied internally

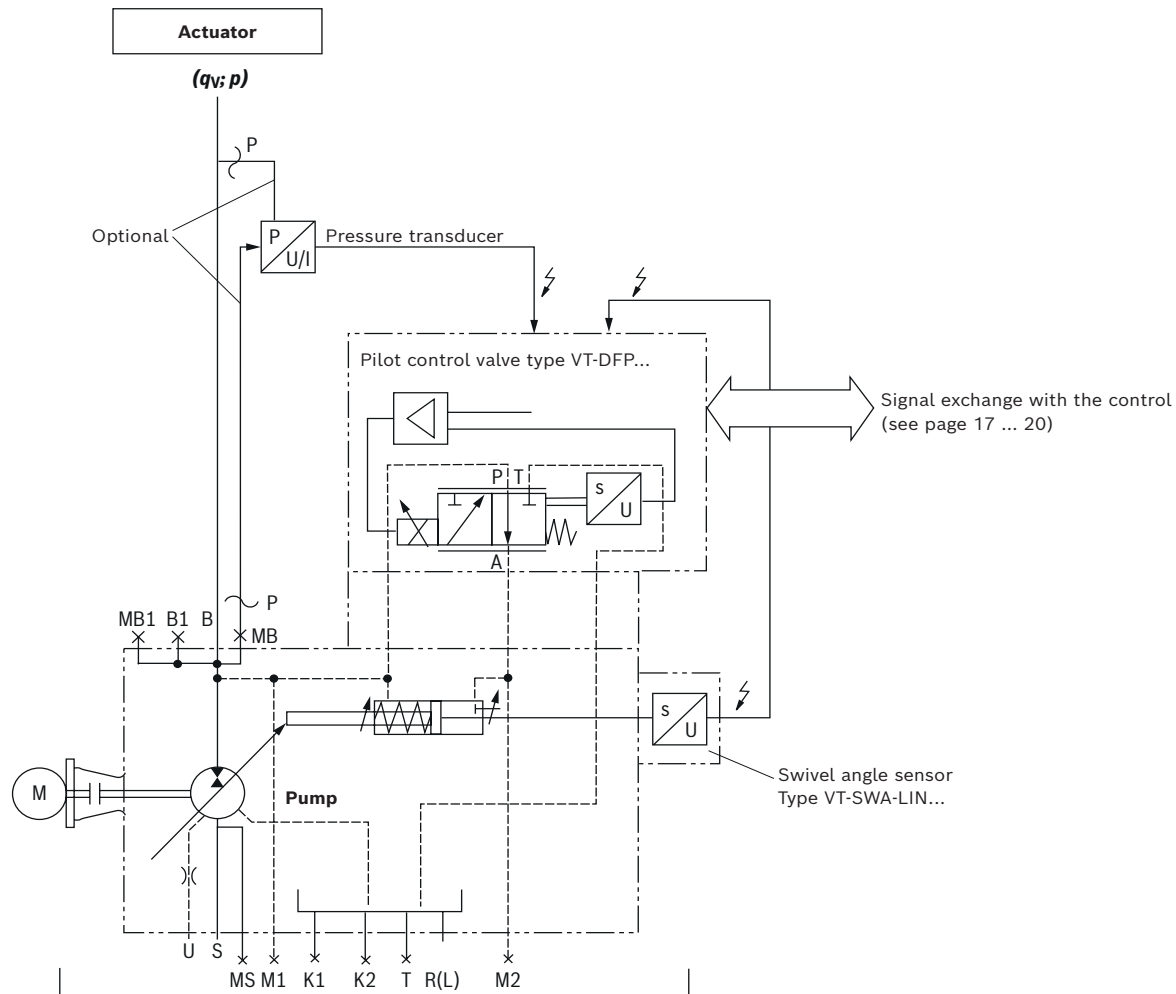

- S** Suction port
- K1, K2** Flushing port
- T** Fluid drain
- MB** Measuring port operating pressure (M14 x 1.5)
- MS** Measuring port suction pressure
- M1, M2** Measuring port control chamber pressure
- R(L)** Fluid filling + bleeding (leakage connection)
- U** Flushing port
- B** Pressure port
- B1** 2nd pressure port/additional port
- MB1** Measuring port operating pressure
Size 250/355: G1/4
NG 40/71/125/180: Blind flange attached to B1
with pressure measuring port G1/4

When using a pressure transducer type HM20-2X/...C13:

- Installation in MB or MB1 (pump) in connection with electronic version for actual pressure value input "F".
- For attachment of a pressure transducer type HM20-2X/315-F-C13-0.5 in MB, an adapter from M14 x 1.5 to G1/4 (material no. R900695665) is required.
- Due to the installation position, the cable version of the type HM20 pressure transducer cannot be used for all sizes without restrictions (check use with M12 extension cable).

When using an external pressure transducer:

Installation in line B (preferably close to the actuator) and electrical connection via central connection X1.


Explanation in the operating instructions (see page 44)



Notice:

The actual pressure value at port B must not be less than 10 bar for more than 10 minutes (lubrication).

Schematic diagram: Type SYHDFE... – actuating system supplied externally

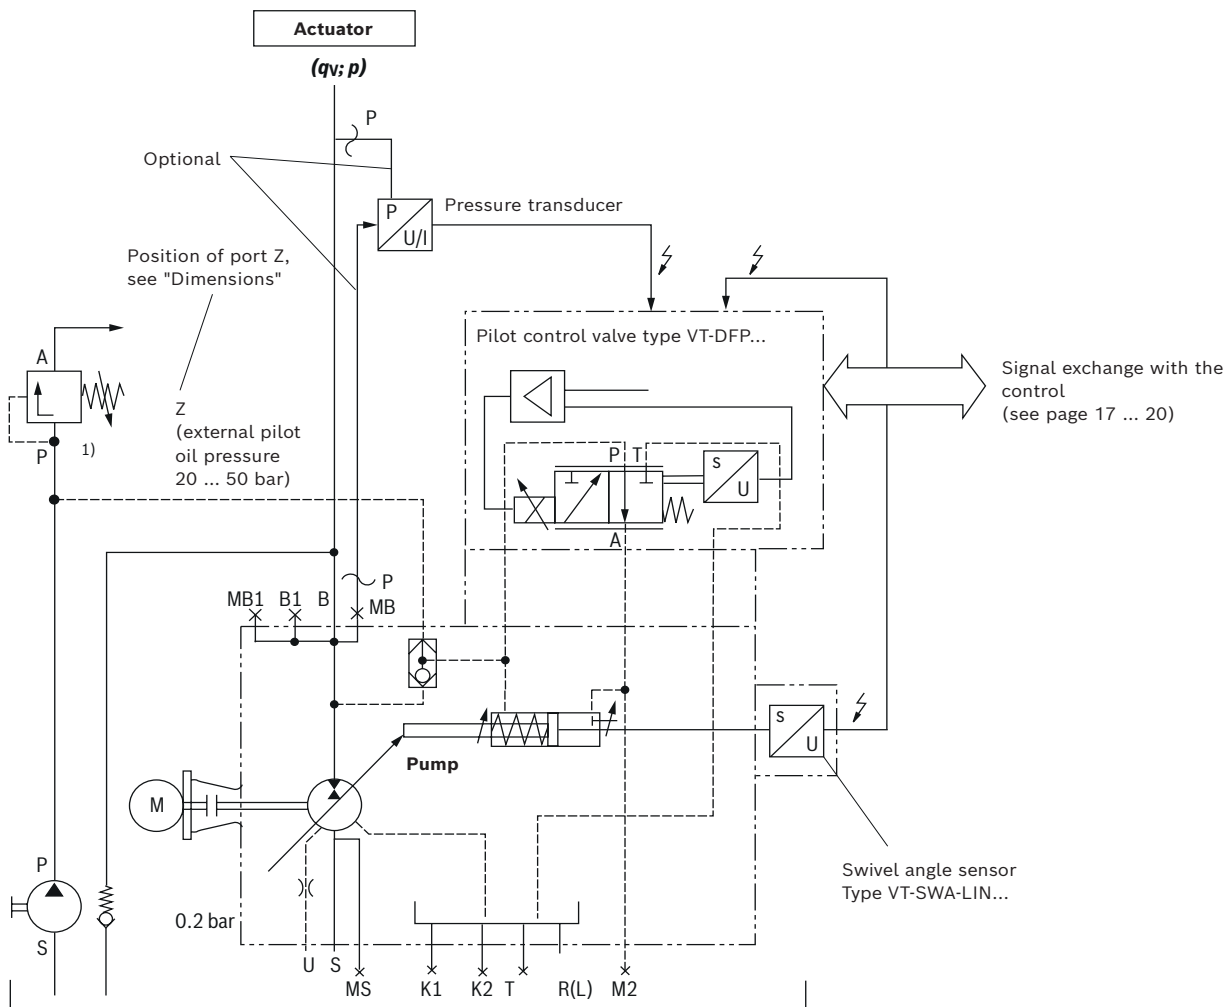

S	Suction port
K1, K2	Flushing port
T	Fluid drain
MB	Measuring port operating pressure (M14 x 1.5)
MS	Measuring port suction pressure
M1, M2	Measuring port control chamber pressure
R(L)	Fluid filling + bleeding (leakage connection)
U	Flushing port
B	Pressure port
B1	2nd pressure port/additional port
MB1	Measuring port operating pressure NG250/355: G1/4 NG 40/71/125/180: Blind flange attached to B1 with pressure measuring port G1/4
Z	External pilot oil pressure (DIN 3852; M14 x 1.5; 12 deep ($p_{max(abs)} = 50 \text{ bar}$))

Notes on external supply:

- ▶ In the case of an actuating system with external supply, the pump adjustment will – in case of voltage failure – not switch to zero stroke but to the negative stop (displacement of 100% flow from the system to the tank).
- ▶ In the case of an active fault message, it is imperative that the machine control reacts (e.g. switching off the drive motor of the pump, interrupting the external supply of the actuating system).
- ▶ The command values for pressure and flow must always be greater than zero ($p_{Command} \geq 3 \text{ bar}$, $a_{Command} \geq 5\%$) as due to drift or tolerances, there is no exact "zero" pressure or "zero" swivel angle. Under unfavorable conditions, smaller command value presettings can lead to cavitation.
- ▶ The actual pressure value must not be less than 10 bar for more than 10 minutes (lubrication).
- ▶ Port Z must be connected to tank level in case of non-use. Closing is not admissible.

1) Maximum pressure limitation must be provided by the customer.

Technical data


(For applications outside these values, please consult us!)

General						
Size		40	71	125	180	355
Weight (without filling quantity)	kg	39	53	88	102	207
Ambient temperature range (pump)	°C	0 ... 60				
Storage temperature range (pump and electronics)	► Type SYHDFEE	°C 0 ... 70				
	► Type SYHDFED	+5 ... +40				
	► Type SYHDFEF	0 ... +40				
Protection class according to EN 60529		IP65 (if suitable and correctly mounted mating connectors are used)				

Mechanical and hydraulic - Standard "-" transmission design						
Size		40	71	125	180	355
Displacement	cm ³	40	71	125	180	355
Maximum speed ¹⁾	► $V_{g \max}$	rpm	2600	2200	1800	1700
	► $V_g \leq V_{g \max}$	rpm	3200	2700	2200	1900
	► $V_{g \max}$ and HFC fluids	rpm	–	2200	1800	1500
Minimum speed ²⁾	rpm	0				
Maximum flow	► n_{nom} and $V_{g \max}$	l/min	104	156	225	604
	► $n_E = 1500$ rpm and $V_{g \max}$	l/min	60	107	186	533
Maximum power ($\Delta p = 350$ bar)	► n_{nom} and $V_{g \max}$	kW	61	91	131	352
	► $n_E = 1500$ rpm and $V_{g \max}$	kW	35	62	109	311
Maximum torque ($\Delta p = 350$ bar)	Nm	223	395	696	1002	1976
Maximum drive torque	► Splined shaft "Z" overall torque ¹⁾	Nm	446	790	1392	3952
	► Maximum through-drive torque	Nm	223	395	696	1976
Drive shaft load (see below)	► Maximum axial force (F_{ax})	N	600	800	1000	2000
	► Maximum radial force (F_q) ³⁾	N	1000	1200	1600	2200
Rotary stiffness of drive shaft	kNm/rad	77	146	263	332	770
Maximum angular acceleration ⁴⁾	rad/s ²	17000	11000	8000	6800	3600
Moment of inertia around drive axis	kgm ²	0.0049	0.0121	0.03	0.055	0.19
Filling quantity of the housing	l	2	2.5	5	4	8
Maximum operating pressure ⁵⁾	bar	350				
Minimum operating pressure	bar	≥20				
Maximum inlet pressure (suction port S)	bar	≤ 30.0				
Minimum inlet pressure (suction port S)	bar	≥0.8 (absolute)				
Hydraulic fluid		Mineral oil (HL, HLP) according to DIN 51524; HFC optional (see ordering code)				
Hydraulic fluid temperature range	°C	–20 ... +70				
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)		Class 18/16/13 (for particle size ≤ 4/6/14 µm)				

- ¹⁾ The values are applicable at an absolute pressure of 1 bar in suction port S. With a reduction of the displacement or an increase in the inlet pressure, the speed can be increased (see characteristic curve "Standard transmission design" page 13).
- ²⁾ Does not apply to HFC fluids, formula for determining the minimum speed on page 13
- ³⁾ In case of higher radial forces, please consult us. Not applicable for use of HFC fluids
- ⁴⁾ The validity range is between the minimum required and maximum admissible speed. It applies to external excitation (e.g. diesel motor 2 ... 8 times the rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.

- ⁵⁾ When using HFC fluids, also see data sheet 92053.




12/44 **SYHDFE.** | Pressure and flow control system

Technical data

(For applications outside these values, please consult us!)

Mechanical and hydraulic - High Speed "S" transmission design			
Size			71
Displacement	cm ³		71
Maximum speed ⁶⁾	► $V_{g \max}$	rpm	3000 ^{7; 8)}
Minimum speed		rpm	0
Maximum flow	► n_{nom} and $V_{g \max}$	l/min	213
Maximum power ($\Delta p = 350$ bar)	► n_{nom} and $V_{g \max}$	kW	124
Maximum torque ($\Delta p = 350$ bar)		Nm	395
Maximum drive torque	► Splined shaft "Z" overall torque ¹⁾	Nm	790
	► Maximum through-drive torque	Nm	395
Drive shaft load (see below)	► Maximum axial force (F_{ax})	N	800
	► Maximum radial force (F_q) ³⁾	N	1200
Rotary stiffness of drive shaft	kNm/rad		146
Maximum angular acceleration ⁴⁾	rad/s ²		11000
Moment of inertia around drive axis	kgm ²		0.0121
Filling quantity of the housing	l		2.5
Maximum operating pressure	bar		350
Minimum operating pressure	bar		≥20
Maximum inlet pressure (suction port S)	bar		≤ 30.0
Minimum inlet pressure (suction port S)	bar		≥0.8 (absolute)
Hydraulic fluid			Mineral oil (HL, HLP) according to DIN 51524 (see ordering code)
Hydraulic fluid temperature range	°C		-20 ... +70
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)			Class 18/16/13 (for particle size ≤ 4/6/14 μm)




- 1) The values are applicable at an absolute pressure of 1 bar in suction port S. With a reduction of the displacement or an increase in the inlet pressure, the speed can be increased (see characteristic curve "Standard transmission design" page 13).
- 3) In case of higher radial forces, please consult us.
- 4) The validity range is between the minimum required and maximum admissible speed. It applies to external excitation (e.g. diesel motor 2 ... 8 times the rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.
- 6) The values are applicable at an absolute pressure of 1 bar in suction port S.
- 7) For suction pressure <1 bar, see characteristic curve "High-Speed transmission design" page 13. No speed increase possible when increasing the inlet pressure.
- 8) For $V_g > 30\%$. For $V_g \leq 30\%$ see "Admissible speed range" page 13)



Technical data

(For applications outside these values, please consult us!)

Maximum speed (speed limit)

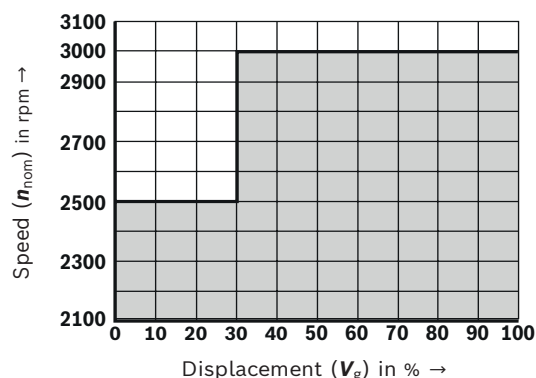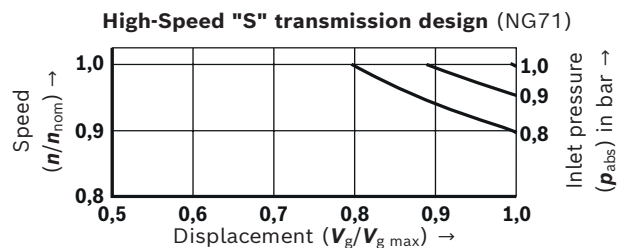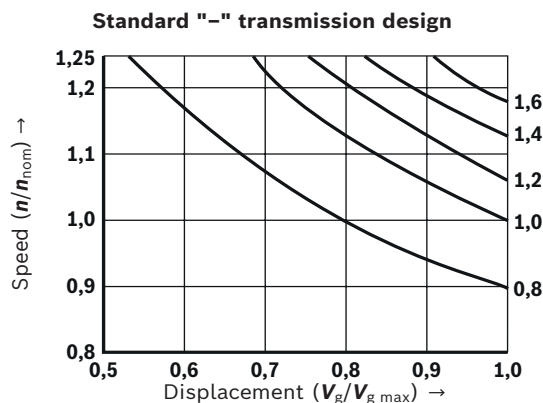

Admissible speed range

Determination of the minimum speed with HFC hydraulic fluid (see ordering code)

Size	71	125	180	250	355	
Speed (n_0)	rpm	750	850	600	550	450
Viscosity (ν_0)	mm ² /s	25				

Admissible load:

$$n = n_0 \cdot \frac{v_0}{v} \cdot \left(\frac{p}{p_{Nenn}} \cdot \frac{V_g}{V_{g \max}} \right)$$

$$x = \left(\frac{p}{p_{Nenn}} \cdot \frac{V_g}{V_{g \max}} \right) = \frac{v}{v_0} \cdot \frac{n}{n_0}$$

When version "SYHDFED...N" ("For variable-speed operation") is used, the minimum speed can be mapped via the derating function.

► Example 1:
The axial piston variable displacement pump type A4VSO125 can be operated with nominal load with $v = 16$ cSt from $n = 1328$ rpm.

► Example 2:
For the axial piston variable displacement pump type A4VSO250, the admissible load with $n = 500$ rpm and $v = 10$ cSt
→ $x = (10/25 \cdot 500/550) = 0.364$ (= 127 bar at $V_{g \max}$)

$V_{g \max}$	Maximum displacement
V_g	Displacement
v	Viscosity
v_0	Reference viscosity
n	Calculated minimum speed
n_0	Reference speed
n_{nom}	Maximum speed
n_E	Speed 1500 rpm
p	Operating pressure
p_{nom}	Nominal pressure

14/44 **SYHDFE.** | Pressure and flow control system

Technical data

(For applications outside these values, please consult us!)

Electric			
Type			SYHDFEE
Supply voltage	► Nominal voltage	VDC	24
	► Minimum	VDC	22.8
	► Maximum	VDC	33.6
Operating range (short-time operation)	► Maximum	V	35
	► Minimum	V	21
Current consumption (in static control operation)	► Rated current	A	0.6
	► Maximum	A	1.25
Inputs	► Actual pressure value input X1; pin 10 and 11		Determined by means of ordering code
	► Analog, current, load ⁹⁾	Ω	100
	► Analog, voltage	kΩ	≥50
	► Digital	Logic 0	V ≤ 0.6
		Logic 1	V ≥21
Outputs	► p_{actual}	V	0 ... 10
		mA	1.5
	► a_{actual}	V	±10
		mA	1.5
	► Digital	Logic 0	V <1 V
		Logic 1	V ≥19; 10 mA (short-circuit-proof)

Electric			
Type			SYHDFED
Supply voltage ¹⁰⁾	► Nominal voltage	VDC	24
	► Minimum	VDC	18
	► Maximum	VDC	36
	► Maximum residual ripple	V _{pp}	2.5
	► Maximum power consumption	VA	40
	► Required fuse protection, external	A	4, time-lag
AD/DA resolution	► Analog inputs	Bit	12
	► Analog outputs ¹¹⁾	Bit	10
Actual pressure value Input ¹²⁾	► Analog voltage	V	0 ... 10
	► Analog current	mA	0 ... 20 ⁹⁾
Analog sensors X2M1, X2M2	► Number (current and voltage input configurable)		1 (per connector)
	► Supply voltage	V	24
	► Maximum supply current	mA	50 (per connector)
	► Voltage inputs		
	– Measurement range	V	0 ... 10
	– Input resistance	kΩ	80 +10%
	► Current inputs (reference to AGND)		
	– Input current range		4 ... 20 (0 ... 20 physically)
	– Input resistance	Ω	200, measuring resistance plus PTC

⁹⁾ Maximum admissible input current 30 mA for configuration on current input.

¹⁰⁾ Supply voltage is used directly for sensor connections X2M1 and X2M2 (no internal voltage limitation).

¹¹⁾ Outputs parameterizable. For the condition as supplied see "Electrical connection."

¹²⁾ – Type VT-DFFD: XH4, pin 10 and 11 (only voltage 0 ... 10 V)
– Type VT-DFFP: XH1: pin D and E

Bosch Rexroth AG, RE 30035, edition: 2023-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Technical data

(For applications outside these values, please consult us!)

Electric			
Type			SYHDFEF
Supply voltage ¹⁰⁾	► Nominal voltage	VDC	24
	► Minimum	VDC	18
	► Maximum	VDC	36
	► Maximum residual ripple	Vpp	2.5
	► Maximum power consumption	VA	40
	► Required fuse protection, external	A	4, time-lag
AD/DA resolution	► Analog inputs	Bit	12
	► Analog outputs ¹¹⁾	Bit	10
Actual pressure value Input ¹²⁾	► Analog voltage	V	0 ... 10
	► Analog current	mA	0 ... 20 ⁹⁾
Analog sensor X2N	► Quantity (voltage inputs)		3
	► Supply voltage	V	24
	► Maximum supply current (total)	mA	50
	► Voltage inputs		
	– Measurement range	V	0 ... 10
	– Input resistance	kΩ	100 +10%

⁹⁾ Maximum admissible input current 30 mA for configuration on current input.

¹⁰⁾ Supply voltage is used directly for sensor connections X2M1 and X2M2 (no internal voltage limitation).

¹¹⁾ Outputs parameterizable. For the condition as supplied see "Electrical connection."

¹²⁾ – Type VT-DFFD: XH4, pin 10 and 11 (only voltage 0 ... 10 V)
– Type VT-DFFP: XH1: pin D and E



Notice:

For information on environment simulation testing for the fields EMC (electro-magnetic compatibility), climate and mechanical load, see data sheet 29016.

Technical data

(For applications outside these values, please consult us!)

Bearing flushing

With the following operating conditions, bearing flushing is necessary for safe continuous operation:

- Applications with special fluids (not mineral fluids) due to limited lubricity and tight operating temperature range
- Operation with boundary conditions of temperature and viscosity with mineral oil operation

With vertical installation (drive shaft upwards), bearing flushing is recommended for lubrication of the front bearing and the shaft seal ring.

The bearing is flushed using port "U" in the area of the front flange of the variable displacement pump.

The flushing fluid flows through the front bearing and exits with the pump leakage at the leakage connection.

Recommended flushing quantities in l/min:

Size	40	71	125	180	250	355
Flushing quantity l/min	3	4	5	7	10	15

The specified flushing quantities result in a pressure differential between port "U" (including fitting) and the leakage chamber of approx. 2 bar (series 1) and approx. 3 bar (series 3).

When using the external bearing flushing, the throttle screw in port U has to be screwed-in to the stop.

Leakage pressure

The admissible leakage pressure (housing pressure) depends on the speed (see diagram).


Maximum leakage pressure (housing pressure)

- 4 bar absolute

These specifications are guidelines; under special operating conditions, a limitation may become necessary.

Direction of flow:

- S → B

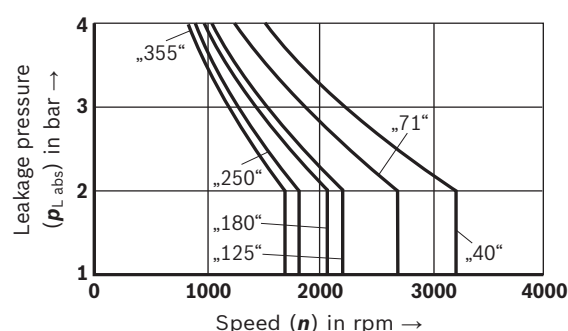

Electrical connection: Type SYHDFEE

Assignment of connector or mating connector and cable set "X1", central connection

Pin	Signal	Description	Signal direction	Type of signal	Assignment in cable set (accessories)
1	+U _B	Supply voltage	IN	24 VDC	1
2	0 V = L0	Reference potential supply voltage	–	–	2
PE	Ground	Grounding connection for the electronics	–	–	green/yellow
3	Fault	Signals faults, e.g., cable break command/actual values, controller monitoring (logic 0 = error)	OUT	logic 24 V	white
4	M0	Reference potential for analog signals	–	–	yellow
5	a _{Command}	Swivel angle command value	IN	analog ±10 V	green
6	a _{Actual}	Actual swivel angle value, normalized	OUT	analog ±10 V	violet
7	p _{Command}	Pressure command value	IN	analog 0 ... 10 V	pink
8	p _{Actual}	Actual pressure value, normalized	OUT	analog 0 ... 10 V ¹⁾	red
9		Function depends on type of electronics and additional function, see below	–	–	brown
10	Actual pressure value H	Actual pressure value input: Signal level depends on pos. 15 in the ordering code. With version "F" (0.5 ... 5 V) reserved	IN	analog	black
11	Actual pressure value L		–	analog	blue
n.c.					gray

¹⁾ When using a pressure transducer with raised zero point (e.g., 4 ... 20 mA), a voltage of –1 ... –2.5 V will be output in case of a cable break.

Functions at pin 9

Pin	Additional function	Function dependent on pos. 7 of the ordering code (order, see ordering code)	Signal direction	Type of signal
9	"A"	Selecting a different oil volume adjustment (switch T _D)	IN	logic 24 V
	"B"	Power limitation active	OUT	logic 24 V
	"C"	Command value of power limitation	IN	analog 0 ... 10 V
	"D"	Switch off pressure controller	IN	logic 24 V


Connection of pressure transducer type HM20 "X2"

Pin	Signal HM20	Pin	
1	OUT, +U _B	2	n.c.
3	Reference L0		
4	IN, analog, 0.5 ... 5 VDC	5	n.c.



Note:

Mating connectors can be ordered separately, see page 43.



18/44 SYHDFE. | Pressure and flow control system

Electrical connection: Type SYHDFED


Assignment of connector or mating connector and cable set "XH4", central connection

Pin	Signal	Description	Signal direction	Type of signal	Assignment in cable set (accessories)
1	+U _B	Supply voltage	IN	24 VDC	1
2	0 V = L0	Reference potential supply voltage	–	–	2
PE	Ground	Grounding connection for the electronics	–	–	green/yellow
3	DO	Switching output 24 V max. 1.5 A Factory setting: Error signal	OUT	logic 24 V	white
4	M0	Reference potential for analog signals	–	–	yellow
5	AI2	Analog input 2 (or digital input, configuration via software)	IN	analog ±10 V (digital 24 V)	green
6	AO2	Analog output 2 Factory setting: Actual swivel angle value, normalized	OUT	analog ±10 V or 0 ... 20 mA ¹⁾	violet
7	AI1	Analog input 1 (or digital input, configuration via software)	IN	analog ±10 V (digital 24 V)	pink
8	AO1	Analog output 1 Factory setting: Actual pressure value, normalized	OUT	analog ±10 V or 0 ... 20 mA ¹⁾	red
9	DI	Digital input (use freely configurable)	IN	logic 24 V	brown
10	Actual pressure value H	Actual pressure value input (analog input 8): Signal level depends on parameter setting. Factory setting dependent on pos. 13 of the ordering code: 0 ... 10 V (V) or deactivated (F)	IN	analog 0 ... 10 V (freely configurable)	black
11	Actual pressure value L		–	analog	blue
n.c.					gray

¹⁾ If the analog inputs AI1 and AI2 are not used, the analog outputs AO1 and AO2 may be parameterized as current outputs (e.g., if the command value presetting is realized via the fieldbus).

Connector pin assignment for Ethernet interface "X7E1" and "X7E2" (coding D), M12, 4-pole, socket


Pin	Assignment
1	TxD +
2	RxD +
3	TxD –
4	RxD –
5	Not assigned



Electrical connection: Type SYHDFED

Analog configurable sensor interfaces, connections "X2M1", "X2M2" (coding A), M12, 5-pole, socket

Pin	Assignment
1	Voltage output (sensor supply) ²⁾
2	Sensor signal input current ³⁾
3	GND
4	Sensor signal input voltage ³⁾
5	Negative differential amplifier input to pin 4 (optional)



²⁾ Maximum load capacity 50 mA, voltage output same as voltage supply connected to input XH4.
³⁾ Only one signal input configurable per interface

Note:

- X2N, reserved (not used)
- Actual swivel angle value input X8A input (coding A), M12, 5-pole, socket M12
- Mating connectors can be ordered separately, see page 43.

20/44 **SYHDFE.** | Pressure and flow control system

Electrical connection: Type SYHDFEF

Assignment of connector or mating connector and cable set "XH1", central connection


Pin	Signal	Description	Signal direction	Type of signal	Assignment in cable set (accessories)
A	+U _B	Voltage supply	IN	24 VDC	brown
B	0 V = L0	Reference potential for the voltage supply	–	–	yellow
PE	Ground	Grounding connection for the electronics	–	–	green/ yellow
C	–	Do not use	–	–	green
D	AI1	Analog input 1 (freely-configurable)	IN	analog ±10 V or 0 ... 20 mA	blue
E	M0	Reference potential for analog signals	–	–	gray
F	AO1	Analog output 1 (freely-configurable)	OUT	analog ±10 V or 0 ... 20 mA	white

Supply line
3 x 1.0 mm²

Supply line
10 x 0.14 mm²
shielded
(one end of the
shield must be
connected to
the control)


Connector pin assignment for Ethernet interface "X7E1" and "X7E2" (coding D), M12, 4-pole, socket

Pin	Assignment
1	TxD +
2	RxD +
3	TxD –
4	RxD –
5	Not assigned



Connector pin assignment for analog configurable sensor interface "X2N" (coding A), M12, 5-pole, socket

Pin	Assignment
1	Voltage output ¹⁾
2	Analog voltage input 2
3	GND
4	Analog voltage input 4
5	Analog voltage input 3



¹⁾ Maximum load capacity 3 x 25 mA, voltage output same as voltage supply connected to input XH1.

Note:

- Actual swivel angle value input X8A1 (coding A), M12, 5-pole, socket M12
- We recommend connecting the shields on both sides via the metal housings of the plug-in connectors. Using connector pins will affect the effectiveness of the shielding effect. Internal screens are not required.
- Mating connectors can be ordered separately, see page 43.


Bosch Rexroth AG, RE 30035, edition: 2023-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

LED indicators: Type SYHDFED

LED	Interface	Sercos	EtherNET/IP	EtherCAT	PROFINET RT	POWERLINK	VARAN
1	X7E1	Activity	Activity	Not used	Activity	Not used	Active
2		Link	Link	Link/activity	Link	Link/data activity	Link
3	Electronics module	S	Network status	Network status	Network status	Status/error	Network status
4		Module status	Module status	Module status	Module status	Module status	Module status
5	X7E2	Activity	Activity	Not used	Activity	Not used	Not used
6		Link	Link	Link/activity	Link	Link/data activity	Not used

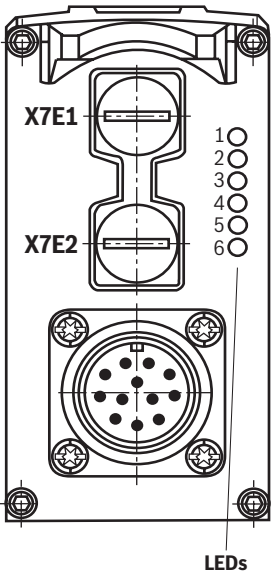

Meaning of the status LEDs

Network status LED (LED 3)	Display status
See firmware and software description 30338-FK	


Module status LED (LED 4)	Display status
Off	No voltage supply
Green-red, flashing	Self-test
Green, flashing	Drive ready for operation
Green	In control
Orange, flashing	Warning
Red, flashing	Error

- Note:**
- For the connection to the M12 sockets, we recommend using self-locking mating connectors
 - LEDs 1, 2, 5 and 6 relate to interfaces "X7E1" and "X7E2"
 - Link: Cable plugged in, connection established (permanently lit)
 - Activity: Data sent/received (flashing)
 - The network status LED 3 (NS) indicates the status of the control communication, see firmware and software description 30338-FK.
 - Module status LED 4 relates to the electronics module
 - For a detailed description of the diagnosis LEDs, please refer to the functional description Rexroth HydraulicDrive HDx.

22/44 **SYHDFE.** | Pressure and flow control system

LED indicators: Type SYHDFEF

LED	Interface	Sercos	EtherNET/IP	EtherCAT	PROFINET RT	VARAN
MS	Electronics module	Module status	Module status	Module status	Module status	Module status
NS		S	Network status and others	Network status and others	Network status and others	Network status and others
L1	X7E1	Link and others	Link and others	Link/activity	Link and others	Link and others
S1		Activity and others	Activity and others	Not used	Activity and others	Active and others
L2	X7E2	Link and others	Link and others	Link/activity	Link and others	Not used
S2		Activity and others	Activity and others	Not used	Activity and others	Not used
PWR	XH1	Power	Power	Power	Power	Power

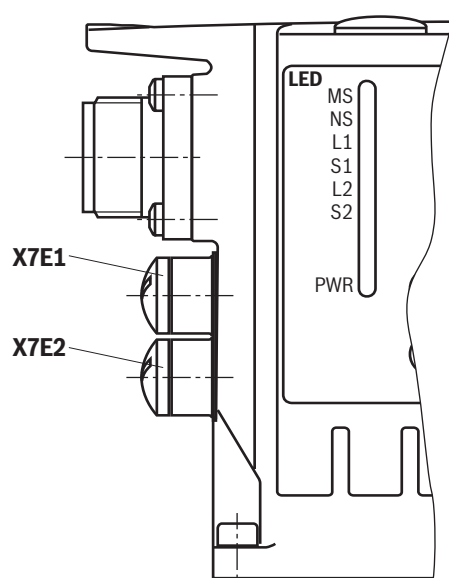

Meaning of the status LEDs

Power LED (LED PWR)	Display status
Off	No voltage supply
Green	Operation

Module status LED (LED MS)	Display status
Off	No voltage supply
Green-red, flashing	Initialization
Green, flashing	Drive ready for operation
Green	Drive active
Orange, flashing	Warning
Red, flashing	Error
Green, rapidly flashing	Firmware must be loaded

Note:

- For the connection to the M12 sockets, we recommend using self-locking mating connectors
- The MS module status LED relates to the electronics module
- The NS network status LED indicates the status of the control communication, see application description 30338-FK
- LEDs L1, S1, L2 and S2 relate to interfaces "X7E1" and "X7E2"
 - Link: Cable plugged in, connection established (permanently lit)
 - Activity: Data sent/received (flashing)
- For a detailed description of the diagnosis LEDs, please refer to the functional description Rexroth HydraulicDrive HDx.

Control loop quality


	Swivel angle control	Pressure control ¹⁾
Linearity tolerance	≤ 1.0%	≤ 1.5% (≤ 1.0% ²⁾)
Temperature error	≤ 0.5% / 10 K	≤ 0.5% / 10 K
Hysteresis	≤ 0.2%	≤ 0.2%
Repetition accuracy	≤ 0.2%	≤ 0.2%

- 1) Without considering the pump pulsation
2) With type SYHDFED and SYHDFEF using the integrated calibration function

Note:
► The specified values are only valid when using the system components specified in this data sheet (see page 43).
► At pressures <20 bar, higher tolerances have to be anticipated due to lower actuating forces.

Characteristic curves
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^\circ\text{C}$)

Transition function for pressure command value step (control spool version "A")

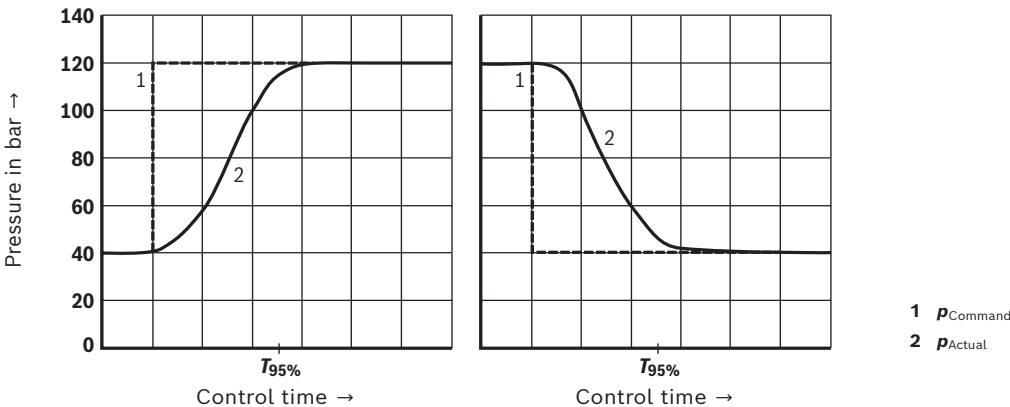

$T_{95\%}$ in ms with connected hydraulic fluid volumes
(lines and actuators)

Hydraulic fluid volume in l	$T_{95\%}$ in ms
<5	150
5 ... 10	200
15 ... 25	250

Note:
► For pressures up to 40 bar, the values of the response times are greater.
► The specified curve shapes and control times refer to a drive speed of 1500 rpm and are only reached with an optimization of the pressure controller.


24/44 **SYHDFE.** | Pressure and flow control system

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Transition function with swivel angle command value step (control spool version "A")


NG40 and 71 ($p = 100 \text{ bar}$)

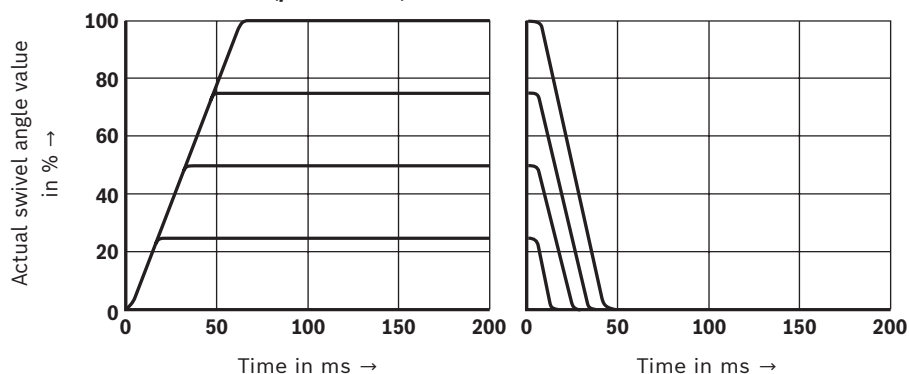

NG125 ($p = 100 \text{ bar}$)

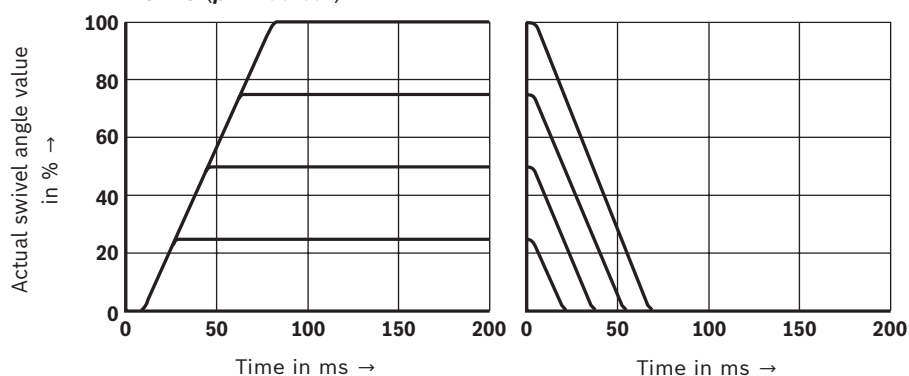

NG180 ($p = 100 \text{ bar}$)

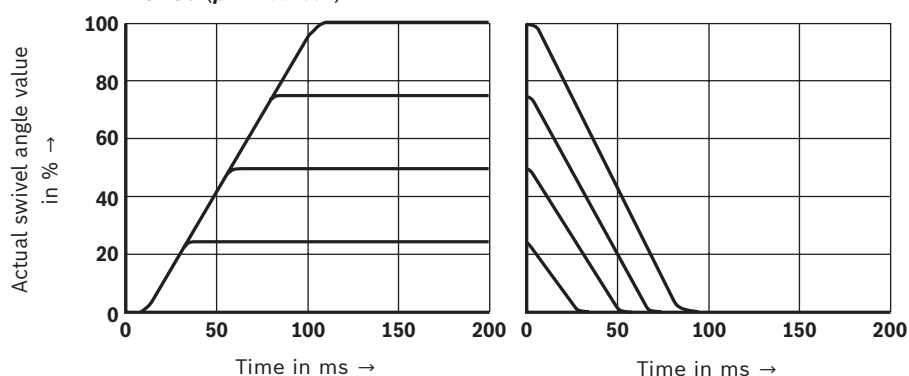

Bosch Rexroth AG, RE 30035, edition: 2023-11



Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Transition function with swivel angle command value step (control spool version "A")

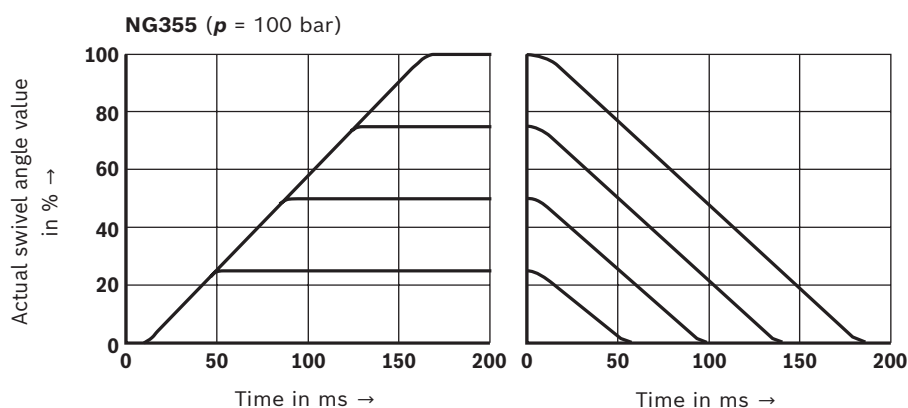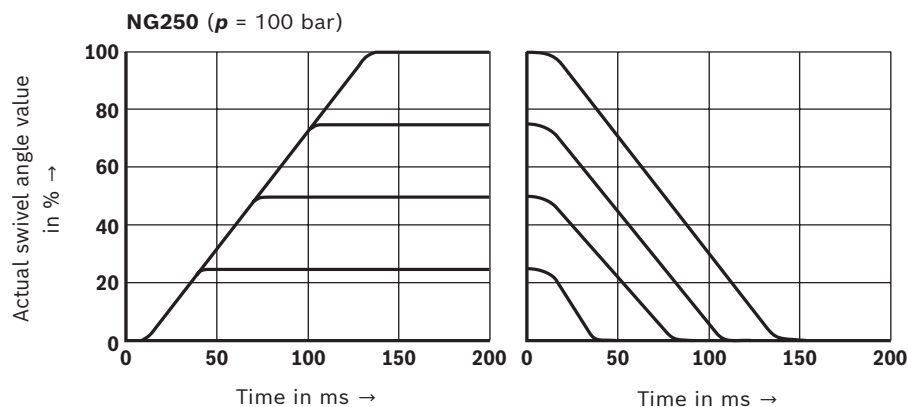

26/44 SYHDFE. | Pressure and flow control system

Dimensions: Type SYHDFEE (installation orientation "0")
(dimensions in mm)

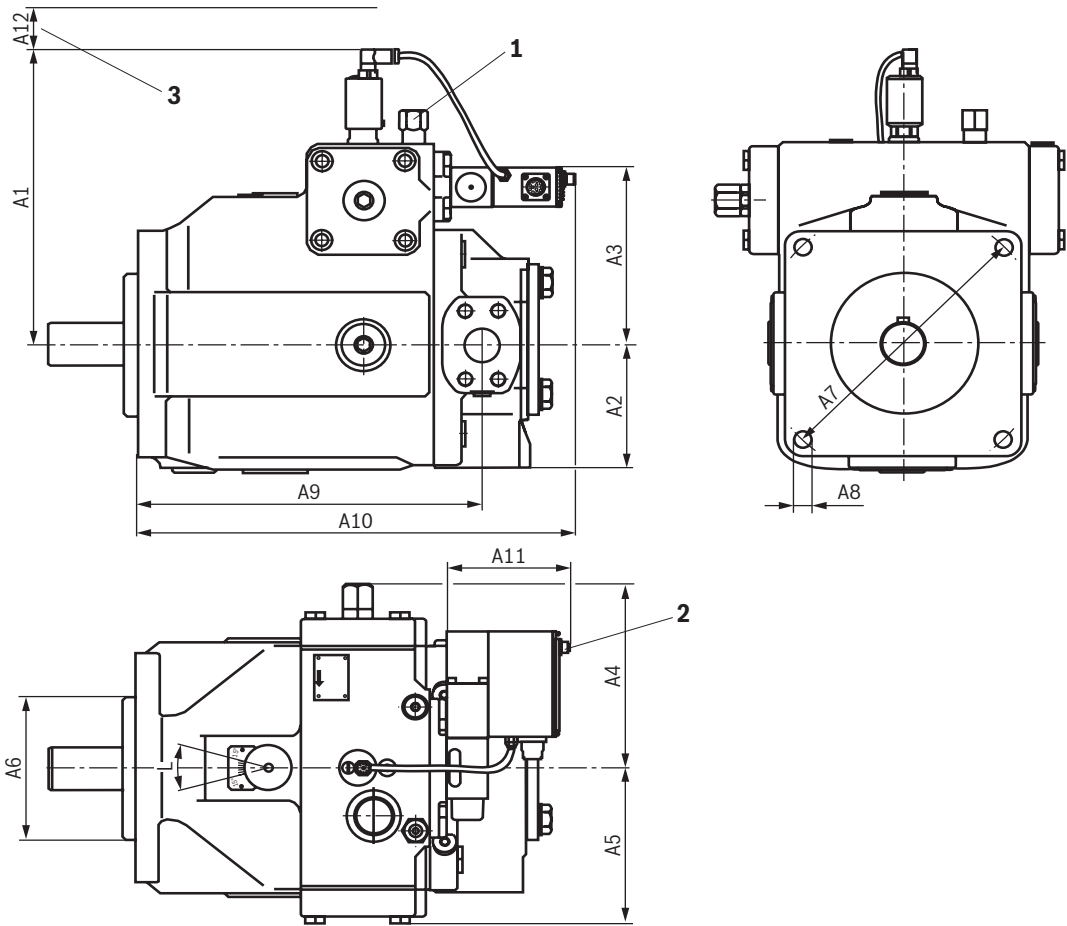


NG	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
40	239	80	127	130	104	125	160	15	227	325	137	25
71	256	92.5	141	149	127	140	180	15	254	352	137	25
125	291	112.5	171	177	147	160	200	20	310	421	137	25
180	291	116	171	177	147	160	200	20	318	421	137	25
250	339	144	207	212	179	224	280	24	380	483	137	25
355	339	144	207	212	179	224	280	24	393	575	137	25

- 1 Port Z (for version "SYHDFE.-1X...0576")
(DIN 3852; M14 x 1.5; 12 deep ($p_{max(abs)} = 50$ bar))
- 2 Port X2 (pressure transducer HM16) with actual pressure
value input "F"
- 3 Space required for removing the mating connector

Notice:
For dimensions of base pump (axial piston variable
displacement pump type A4VSO), see data sheet 92050.

Dimensions: Type SYHDFEE (installation orientation "1") (dimensions in mm)

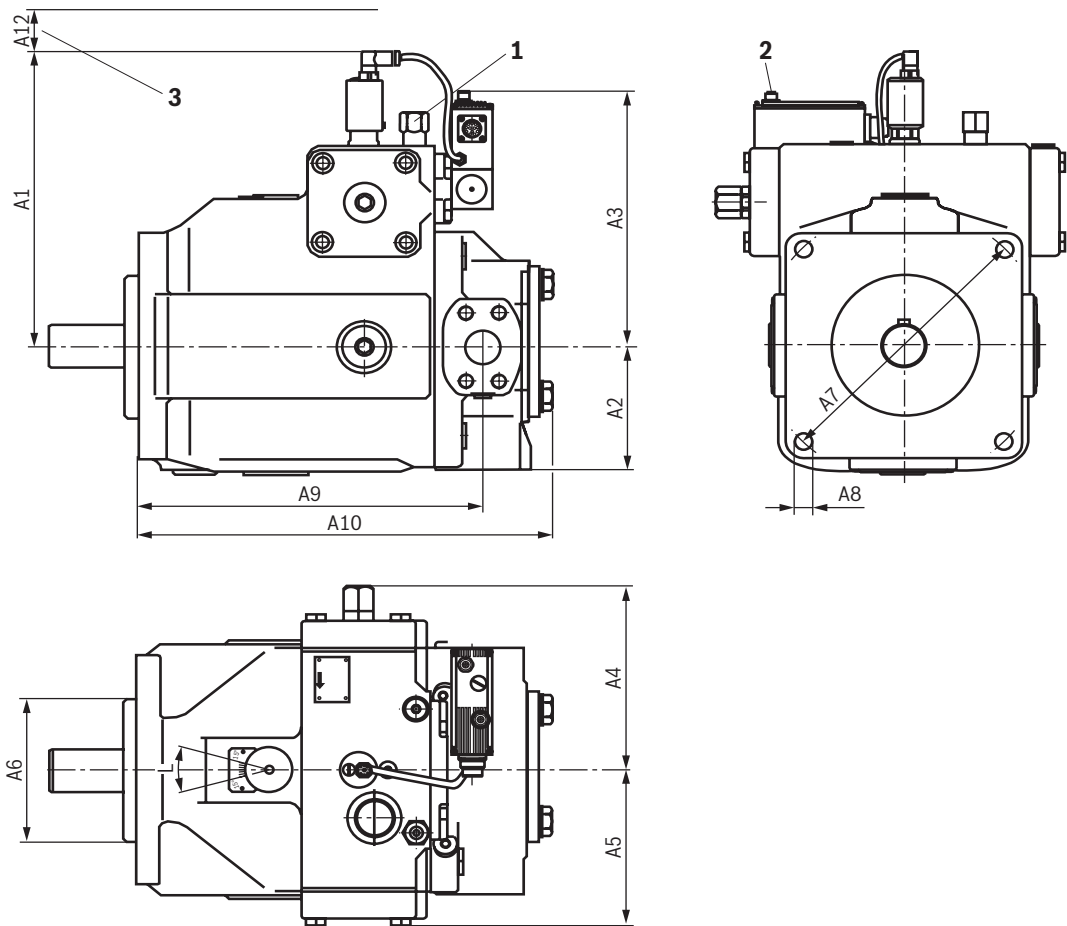


NG	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A12
40	239	80	217	130	104	125	160	15	227	280	25
71	256	92.5	231	149	127	140	180	15	254	310	25
125	291	112.5	261	177	147	160	200	20	310	368	25
180	291	116	261	177	147	160	200	20	318	392	25
250	339	144	297	212	179	224	280	24	380	455	25
355	339	144	297	212	179	224	280	24	393	487	25

- 1 Port Z (for version "SYHDFE.-1X...0576") (DIN 3852; M14 x 1.5; 12 deep ($p_{max(abs)} = 50$ bar))
- 2 Port X2 (pressure transducer HM16) with actual pressure value input "F"
- 3 Space required for removing the mating connector

Notice:
For dimensions of base pump (axial piston variable displacement pump type A4VSO), see data sheet 92050.

28/44 **SYHDFE.** | Pressure and flow control system

Dimensions: Type SYHDFED (installation orientation "0")
(dimensions in mm)

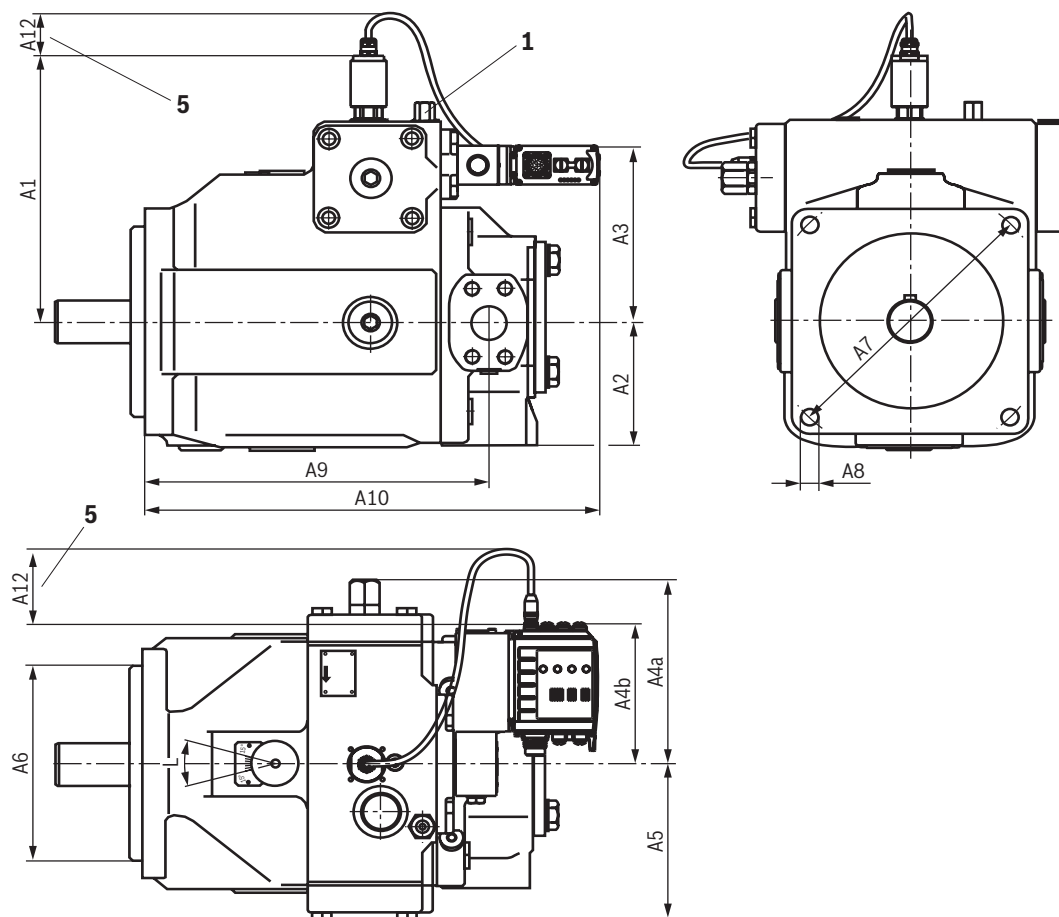



NG	A1	A2	A3	A4a	A4b	A5	A6	A7	A8	A9	A10	A12
40	212	80	127	130	167	104	125	160	15	227	348	100
71	229	92.5	141	149	167	127	140	180	15	254	375	100
125	264	112.5	171	177	167	147	160	200	20	310	444	100
180	264	116	171	177	167	147	160	200	20	318	444	100
250	312	144	207	212	167	179	224	280	24	380	506	100
355	312	144	207	212	167	179	224	280	24	393	598	100

- 1** Port Z (for version "SYHDFE.-1X...0576")
(DIN 3852; M14 x 1.5; 12 deep ($p_{\max(\text{abs})} = 50 \text{ bar}$)
- 5** Space required for the connection line

 Notice:

For dimensions of base pump (axial piston variable displacement pump type A4VSO), see data sheet 92050.

Dimensions: Type SYHDFED (installation orientation "1")
(dimensions in mm)

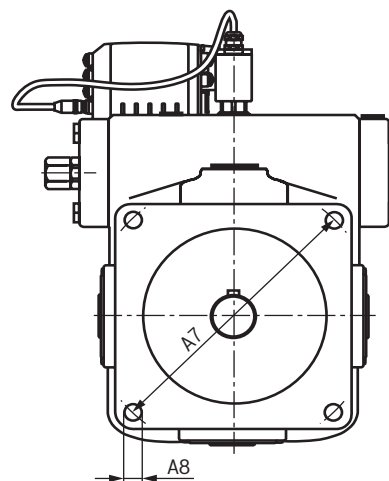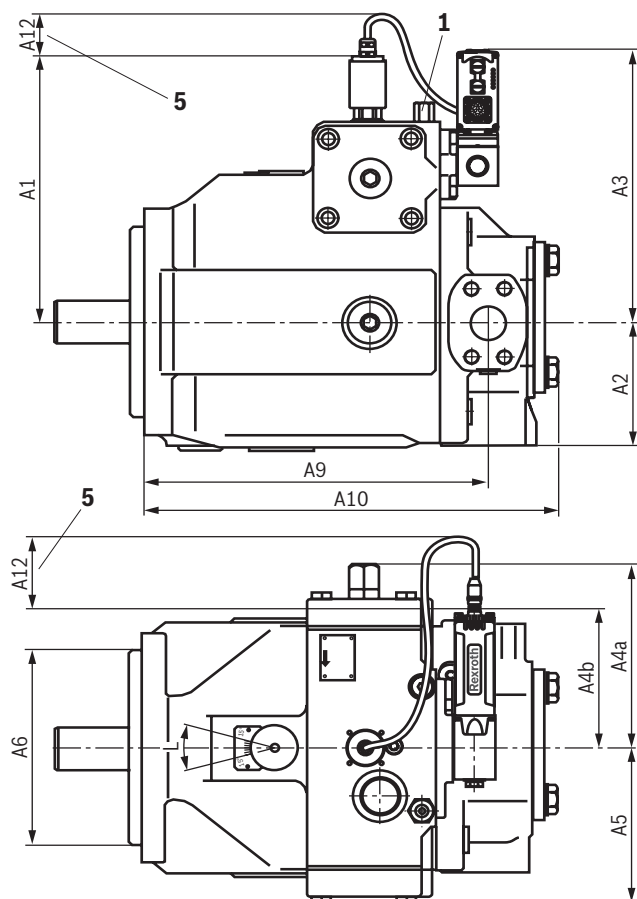

- 1 Port Z (for version "SYHDFE.-1X...0576")
(DIN 3852; M14 x 1.5; 12 deep ($p_{\max(\text{abs})} = 50 \text{ bar}$)
- 5 Space required for the connection line

Notice:

For dimensions of base pump (axial piston variable displacement pump type A4VSO), see data sheet 92050.

NG	A1	A2	A3	A4a	A4b	A5	A6	A7	A8	A9	A10	A12
40	212	80	241	130	167	104	125	160	15	227	280	100
71	250	92.5	255	149	167	127	140	180	15	254	310	100
125	264	112.5	285	177	167	147	160	200	20	310	368	100
180	264	116	285	177	167	147	160	200	20	318	392	100
250	312	144	321	212	167	179	224	280	24	380	455	100
355	312	144	321	212	167	179	224	280	24	393	487	100

Shaft ends


NG	Shaft Ø	= P ¹⁾	= Z ²⁾
40	32	AS 10 x 8 x 56	W 32 x 2 x 14 x 9g
71	40	AS 12 x 8 x 68	W 40 x 2 x 18 x 9g
125	50	AS 14 x 9 x 80	W 50 x 2 x 24 x 9g
180	50	AS 14 x 9 x 80	W 50 x 2 x 24 x 9g
250	60	AS 18 x 11 x 100	W 60 x 2 x 28 x 9g
355	70	AS 20 x 12 x 100	W 70 x 3 x 22 x 9g

¹⁾ Cylindrical with fitting key DIN 6885

²⁾ Splined shaft profile DIN 5480

30/44 SYHDFE. | Pressure and flow control system

Dimensions: Type SYHDFEF (installation orientation "0")
(dimensions in mm)


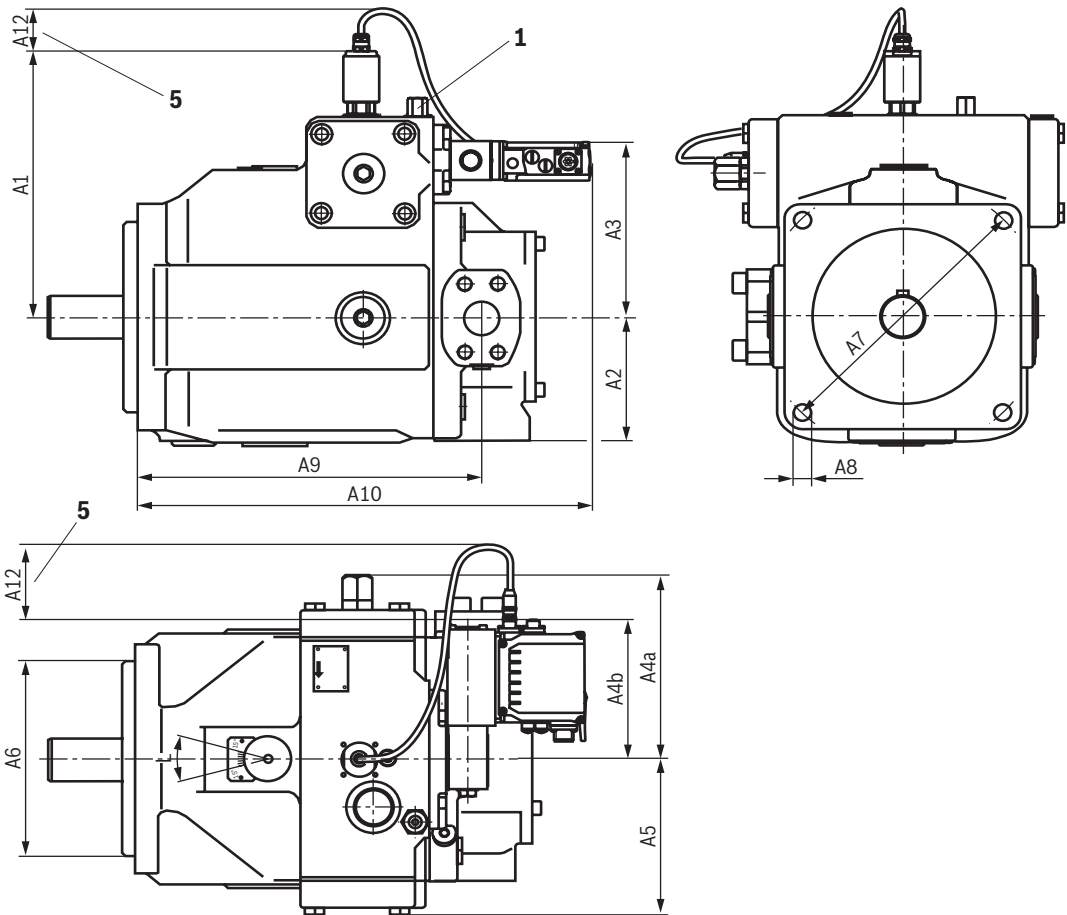


NG	A1	A2	A3	A4a	A4b	A5	A6	A7	A8	A9	A10	A12
40	212	80	127	130	167	104	125	160	15	227	348	100
71	229	92.5	141	149	167	127	140	180	15	254	375	100
125	264	112.5	171	177	167	147	160	200	20	310	444	100
180	264	116	171	177	167	147	160	200	20	318	444	100
250	312	144	207	212	167	179	224	280	24	380	506	100
355	312	144	207	212	167	179	224	280	24	393	598	100

- 1 Port Z (for version "SYHDFE.-1X...0576")
(DIN 3852; M14 x 1.5; 12 deep ($p_{max(abs)} = 50 \text{ bar}$))
- 5 Space required for the connection line

Notice:
For dimensions of base pump (axial piston variable displacement pump type A4VSO), see data sheet 92050.

Dimensions: Type SYHDFEF (installation orientation "1")
(dimensions in mm)

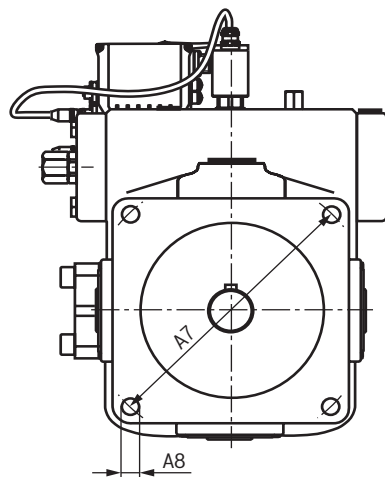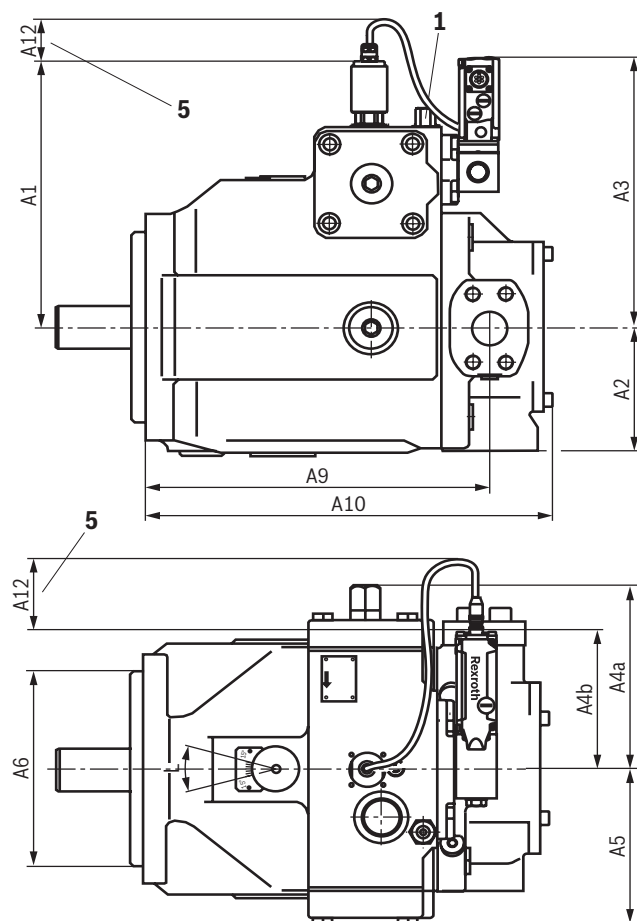

- 1 Port Z (for version "SYHDFE.-1X...0576")
(DIN 3852 M14 x 1.5; 12 deep ($p_{\max(\text{abs})} = 50 \text{ bar}$))
- 5 Space required for the connection line

Notice:

For dimensions of base pump (axial piston variable displacement pump type A4VSO), see data sheet 92050.

NG	A1	A2	A3	A4a	A4b	A5	A6	A7	A8	A9	A10	A12
40	212	80	241	130	167	104	125	160	15	227	280	100
71	250	92.5	255	149	167	127	140	180	15	254	310	100
125	264	112.5	285	177	167	147	160	200	20	310	368	100
180	264	116	285	177	167	147	160	200	20	318	392	100
250	312	144	321	212	167	179	224	280	24	380	455	100
355	312	144	321	212	167	179	224	280	24	393	487	100

Shaft ends

NG	Shaft Ø	= P ¹⁾	= Z ²⁾
40	32	AS 10 x 8 x 56	W 32 x 2 x 14 x 9g
71	40	AS 12 x 8 x 68	W 40 x 2 x 18 x 9g
125	50	AS 14 x 9 x 80	W 50 x 2 x 24 x 9g
180	50	AS 14 x 9 x 80	W 50 x 2 x 24 x 9g
250	60	AS 18 x 11 x 100	W 60 x 2 x 28 x 9g
355	70	AS 20 x 12 x 100	W 70 x 3 x 22 x 9g

¹⁾ Cylindrical with fitting key DIN 6885


²⁾ Splined shaft profile DIN 5480

Through-drives: Drive and through-drive torques

Maximum drive and through-drive torques


Size			40	71	125	180	250	355
Splined shaft								
▶ Total drive torque at the shaft of pump 1 – (Pump 1 + pump 2)								
	$T_{total\ max}$	Nm	446	790	1392	2004	2782	3952
▶ Through-drive torque A								
	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976
	$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976
▶ Through-drive torque B								
	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976
	$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976
Fitting key								
▶ Total drive torque at the shaft of pump 1 – (Pump 1 + pump 2)								
	$T_{total\ max}$	Nm	380	700	1392	1400	2300	3557
▶ Through-drive torque A								
	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976
	$T_{D2\ max}$	Nm	157	305	696	398	909	1581
▶ Through-drive torque B								
	$T_{D1\ max}$	Nm	157	305	696	398	909	1581
	$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976

Distribution of through-drive torques

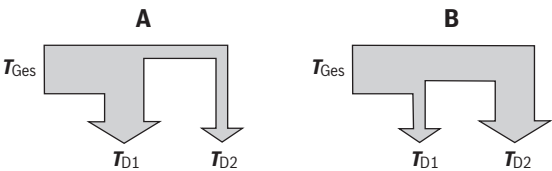

Mass torque (relates to mounting flange of main pump)

Size			40	71	125	180	250	355
Maximum mass torque	$T_{m\ adm.}$	Nm	1800	2000	4200	4200	9300	9300
Maximum mass torque with dynamic mass acceleration of 10 g = 98.1 m/sec ²	$T_{m\ adm.}$	Nm	180	200	420	420	930	930
Weight (SYHDFE or A4VSO...DR)	m	kg	39	53	88	102	184	207
Distance of the center of gravity	l_1	mm	120	140	170	180	210	220

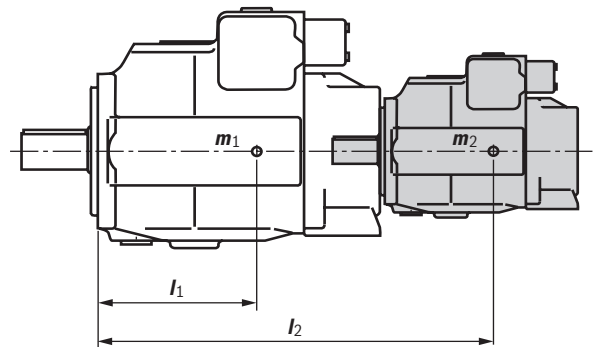

m_1, m_2 Weight of the pump in kg
 l_1, l_2 Distance of the center of gravity in mm


$$T_m = m_1 \cdot l_1 \cdot \frac{1}{102} + m_2 \cdot l_2 \cdot \frac{1}{102} \quad [Nm]$$

Dimensions: Through-drives – sizes 40 and 71 (dimensions in mm)

The control systems of size 40 ... 71 are partly supplied with through-drive "K99". Their advantage is that the through-drive is subsequently convertible. By simply exchanging the intermediate flange and the hub, the through-drive can be adjusted to the on-site requirements. The assemblies as exchange kits can be ordered separately, see "Accessories for through-drives" on page 41 as well as data sheet 95581.

Small centering diameters have been directly integrated into the pump port subplate. Here, a subsequent modification is not possible. In this connection, observe the "Ordering code" as well as "Accessories for through-drives". Hubs for through-drives can be ordered separately.

- "K99" With through-drive shaft, without hub, without intermediate flange, closed operationally safe with end cover.

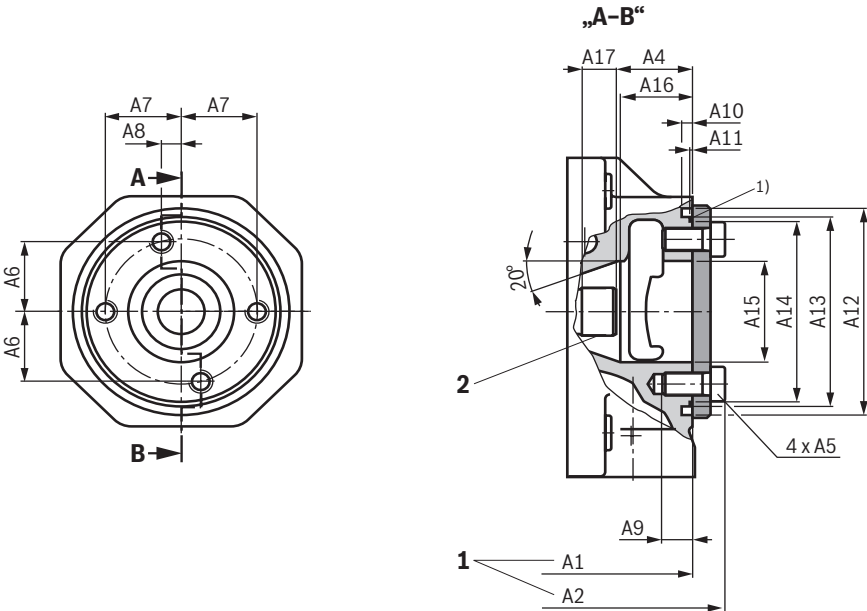

NG Main pump	A1	A2	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13
40	263	280	51.3±1	M12; 25	37+0.2	37+0.2	–	18	9	2.3+0.1	Ø118H7	Ø105g6
71	291	310	48±1	M12; 25	42.3+0.15	45+0.15	15.4±15	18	9	2.7+0.1	Ø130H7	Ø116g6

NG Main pump	A14	A15	A16	A17	Splined shaft profile DIN 5480	1) Seal ring for later attachment (separate order)
40	Ø97.6-0.4	Ø52	44	14	W25 x 1.25 x 18 x 9g	99 x 3
71	Ø106.4-0.4	Ø63	38	16	W30 x 1.25 x 22 x 9g	110.72 x 3.53

- 1 Up to pump mounting face
- 2 For splined shaft profile DIN 5480, see table

Notice: Left view, drawing without cover.


34/44 **SYHDFE.** | Pressure and flow control system

Dimensions: Through-drives – size 125 ... 355 (dimensions in mm)

The control systems of size 125 ... 355 are supplied with universal through-drives "U99".
Their advantage is that the through-drive is subsequently convertible. By simply exchanging the intermediate flange and the hub, the through-drive can be adjusted to the on-site requirements.

The assemblies as exchange kits can be ordered separately, see "Accessories for through-drives" on page 41 as well as data sheet 95581.


- **"U99"** With through-drive shaft, without hub, without intermediate flange, closed operationally safe with end cover.

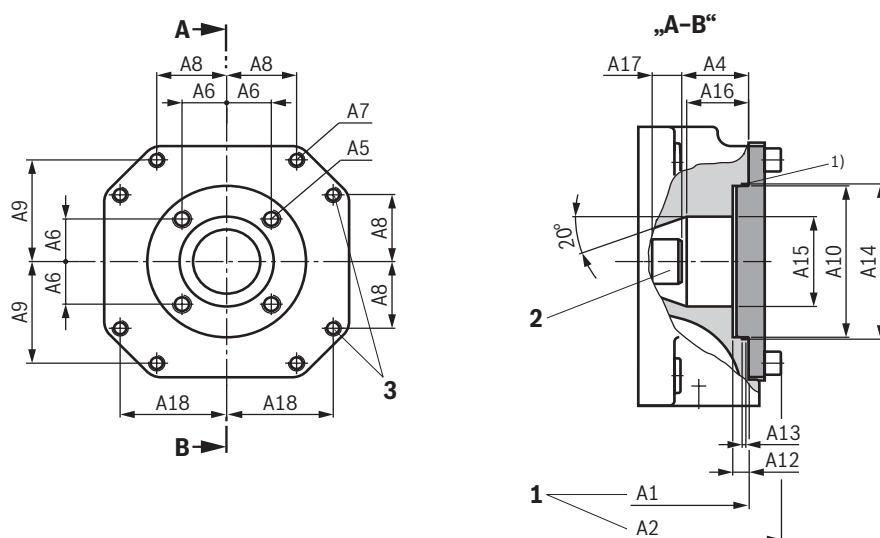

NG Main pump	A1	A2	A4	A5	A6	A7	A8	A9	A10	A12	A13
125	347	368	49.7 ^{±1}	M14; 15	33.2 ^{+0.15}	M12; 18	–	79.2 ^{+0.15}	Ø118 ^{H7}	9	2.8 ^{+0.2}
180	371	392	49.7 ^{±1}	M14; 15	33.2 ^{+0.15}	M12; 18	–	79.2 ^{+0.15}	Ø118 ^{H7}	9	2.8 ^{+0.2}
250	431	455	61.4 ^{±1}	M20; 22	44.5 ^{+0.15}	M10; 15	58.15 ^{+0.15}	86.2 ^{+0.15}	Ø160 ^{H7}	9	2.8 ^{+0.2}
355	460	487	61.4 ^{±1}	M20; 22	44.5 ^{+0.15}	M10; 15	58.15 ^{+0.15}	86.2 ^{+0.15}	Ø160 ^{H7}	9	2.8 ^{+0.2}

NG Main pump	A14	A15	A16	A17	A18	Splined shaft profile DIN 5480	¹⁾ Seal ring for later attachment (separate order)
125	Ø121 ^{+0.1}	Ø70	46	22	–	W35 x 1.25 x 26 x 9g	118 x 2
180	Ø121 ^{+0.1}	Ø70	46	25	–	W35 x 1.25 x 26 x 9g	118 x 2
250	Ø163 ^{+0.1}	Ø87	64	30.5	86.2 ^{+0.15}	W42 x 1.25 x 32 x 9g	160 x 2
355	Ø163 ^{+0.1}	Ø87	64	34	86.2 ^{+0.15}	W42 x 1.25 x 32 x 9g	160 x 2

- 1 Up to pump mounting face
2 For splined shaft profile DIN 5480, see table
3 Only NG250 and 355

 **Notice:**
Left view, drawing without cover.

Bosch Rexroth AG, RE 30035, edition: 2023-11


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: Through-drives (dimensions in mm)

► "UB3" 2-hole mounting flange according to ISO 3019-2 – 100


Hub for splined shaft, 22-4 SAE B, 7/8", 16/32 DP; 13T³⁾ for attachment of an axial piston variable displacement pump type A10VSO 28/31, splined shaft "S" (see data sheet 92711)

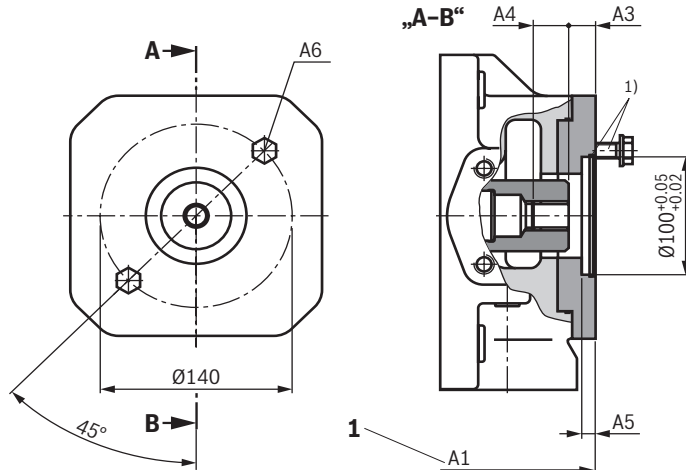

NG	A1	A3	A4	A5	A6 ²⁾
125	369	20.5	24.9	10	M12
180	393	20.5	24.9	10	M12
250	On request				
355	On request				

► "UB4" 2-hole mounting flange according to ISO 3019-2 – 100

Hub for splined shaft, 25-4 SAE B-B, 1", 16/32 DP; 15T³⁾ for attachment of an axial piston variable displacement pump type A10VSO 45/31, splined shaft "S" (see data sheet 92711)

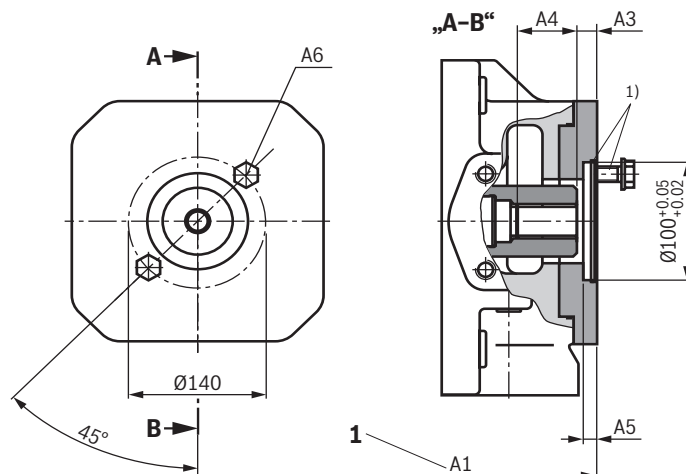

NG	A1	A3	A4	A5	A6 ²⁾
125	369	18.9	29.5	10	M12
180	393	18.9	29.5	10	M12
250	453	20.9	29.5	10	M12
355	482	20.9	29.5	10	M12

- 1) 2 mounting screws and seal ring included in the scope of delivery.
2) Thread according to DIN 13 (for maximum tightening torques, see page 44).
3) According to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

1 Up to pump mounting face


Notice:
Before determining the design, please request a binding installation drawing.

36/44 **SYHDFE.** | Pressure and flow control system

Dimensions: Through-drives (dimensions in mm)

► "UB8" 4-hole mounting flange according to ISO 3019-2 – 160


Hub for splined shaft, 32-4 SAE C, 1 1/4", 12/24 DP; 14T³⁾ for attachment of an axial piston variable displacement pump type A10VSO 71/32, splined shaft "S" (see data sheet 92714)

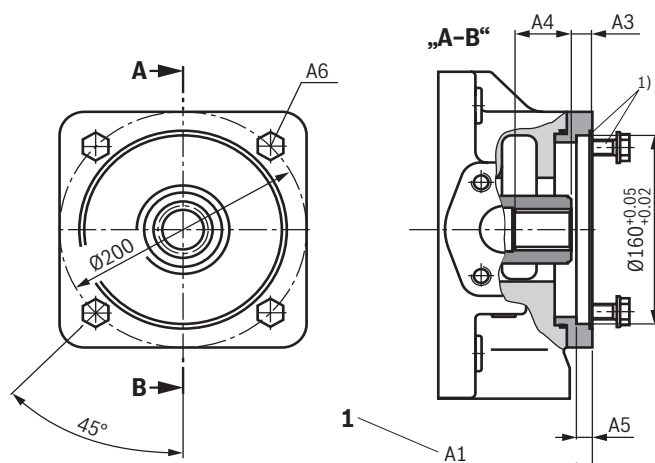

NG	A1	A3	A4	A5	A6 ²⁾
125	On request				
180	On request				
250	453	20.9	38	9	M16
355	On request				

► "UB7" 4-hole mounting flange according to ISO 3019-2 – 180

Hub for splined shaft, 44-4 SAE D, 1 3/4", 8/16 DP; 13T³⁾ for attachment of an axial piston variable displacement pump type A10VSO 140/31(32), splined shaft "S" (see data sheet 92711; 92714)

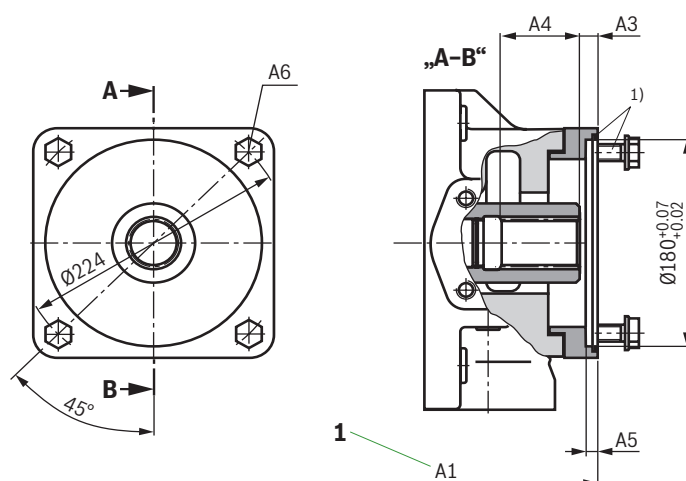

NG	A1	A3	A4	A5	A6 ²⁾
180	406	10.6	62	9	M16
250	453	10.6	64	9	M16
355	482	10.6	64	9	M16

- 1) 2 mounting screws and seal ring included in the scope of delivery.
2) Thread according to DIN 13 (for maximum tightening torques, see page 44).
3) According to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

1 Up to pump mounting face

Notice:

Before determining the design, please request a binding installation drawing.

Bosch Rexroth AG, RE 30035, edition: 2023-11


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: Through-drives (dimensions in mm)

► "U34" 4-hole mounting flange according to ISO 3019-2 – 160


Hub according to DIN 5480 N50 x 2 x 24 x 8H for attachment of an axial piston variable displacement pump type A4VSO/G 125 or 180, splined shaft

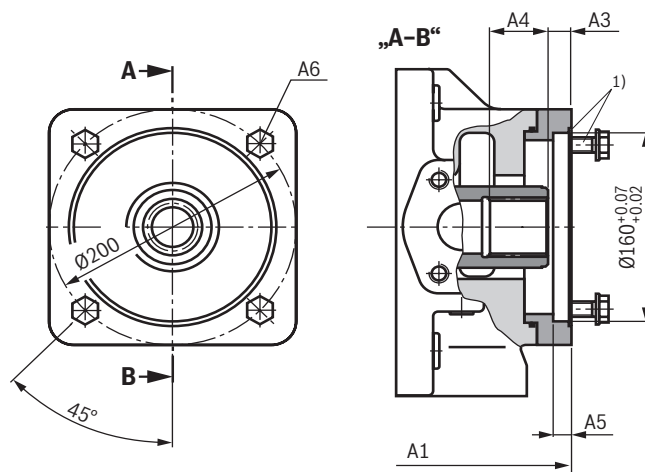

NG	A1	A3	A4	A5	A6 ²⁾
125	369	12.5	51.6	9	M16
180	393	12.5	51.6	9	M16
250	453	12.5	54	9	M16
355	482	12.5	54	9	M16

► "U35" 4-hole mounting flange according to ISO 3019-2 – 224

Hub according to DIN 5480 N60 x 2 x 28 x 8H for attachment of an axial piston variable displacement pump type A4VSO/G or type A4CSG 250, splined shaft

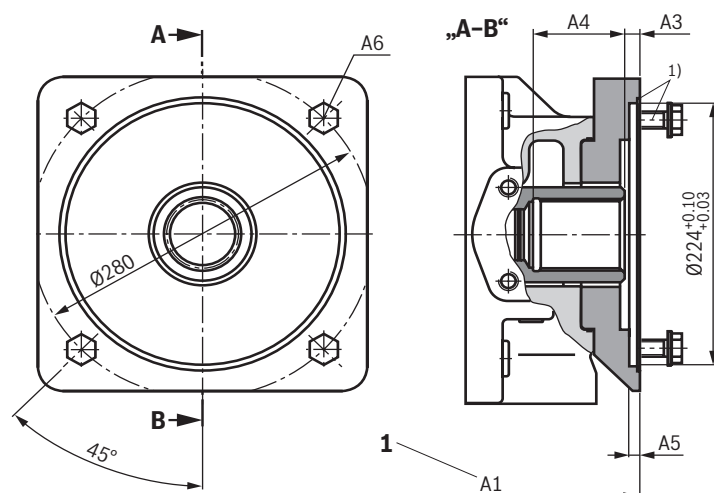


NG	A1	A3	A4	A5	A6 ²⁾
250	469	12.6	75	9	M20
355	498	12.6	75	9	M20

¹⁾ 2 mounting screws and seal ring included in the scope of delivery.

²⁾ Thread according to DIN 13 (for maximum tightening torques, see page 44).

1 Up to pump mounting face


 **Notice:**
Before determining the design, please request a binding installation drawing.

38/44 **SYHDFE.** | Pressure and flow control system

Dimensions: Through-drives (dimensions in mm)

► "U77" 4-hole mounting flange according to ISO 3019-2 – 224


Hub according to DIN 5480 N70 x 3 x 22 x 8H for attachment of an axial piston variable displacement pump type A4VSO/G or type A4CSG 355, splined shaft

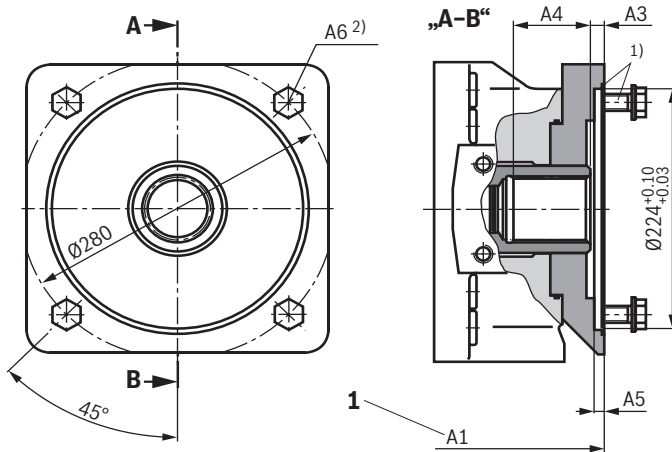

NG	A1	A3	A4	A5	A6 ²⁾
355	498	12.5	75	9	M20

► "U01" 2-hole mounting flange according to ISO 3019-1 – 82-2 (SAE A)

Hub for splined shaft, 16-4 SAE A, 5/8", 16/32 DP; 9T ³⁾ for attachment of external gear pump type AZ-PF-1X-004 ... 022 (see data sheet 10089); recommendation: special design of gear pumps, please check.

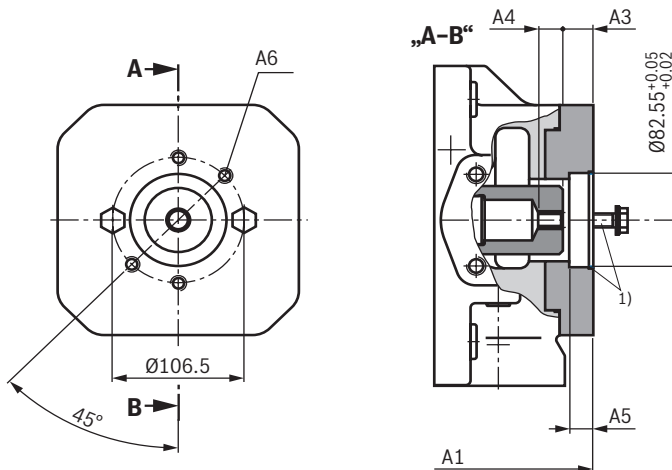

NG	A1	A3	A4	A5	A6 ²⁾
125	369	16	19.4	13	M10
180	393	16	19.4	13	M10
250	453	16	19.4	13	M10
355	482	16	19.4	13	M10

- ¹⁾ 2 mounting screws and seal ring included in the scope of delivery.
²⁾ Thread according to DIN 13 (for maximum tightening torques, see page 44).
³⁾ According to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

1 Up to pump mounting face

Notice:

Before determining the design, please request a binding installation drawing.

Bosch Rexroth AG, RE 30035, edition: 2023-11


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: Through-drives (dimensions in mm)

► "U68" 2-hole mounting flange according to ISO 3019-1 – 101-2 (SAE B)


Hub for splined shaft 22-4 SAE B, 7/8", 16/32 DP; 13T ³⁾ for the attachment of an external gear pump type AZ-PN-1X020 ... 032 (see data sheet 10091) or an axial piston variable displacement pump type A10VO 28/31 and 52(53) splined shaft "S" (see data sheet 92701 and 92703); recommendation: special design of gear pumps, please consult us.

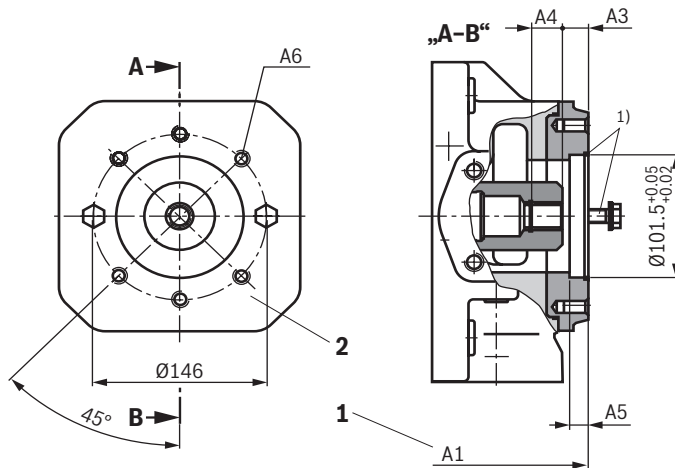

NG	A1	A3	A4	A5	A6 ²⁾
125	369	28	25	13	M12
180	393	28	25	13	M12
250	453	19.5	23.1	13	M12
355	482	19.5	23.1	13	M12

► "U04" 2-hole mounting flange according to ISO 3019-1 – 101-2 (SAE B)


Hub for splined shaft 25-4 SAE B-B, 1", 16/32 DP; 15T ³⁾ for attachment of axial piston variable displacement pump type A10VO 45/31 and 52 (53), splined shaft "S" (see data sheet 92701 and 92703), or internal gear pump type PGH4 (see data sheet 10223)

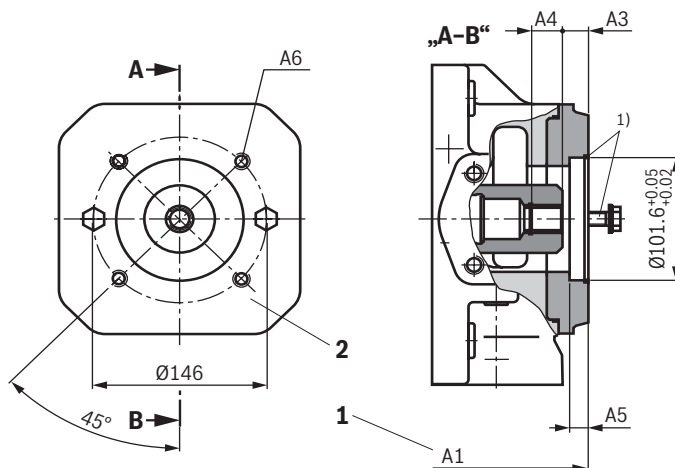

NG	A1	A3	A4	A5	A6 ²⁾
125	369	18.9	29.4	13	M12
180	393	18.9	29.4	13	M12
250	453	18.9	29.4	13	M12
355	482	18.9	29.4	13	M12

- ¹⁾ 2 mounting screws and seal ring included in the scope of delivery.
²⁾ Thread according to DIN 13 (for maximum tightening torques, see page 44).
³⁾ According to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

- 1** Up to pump mounting face
2 Only NG125 and 180


 **Notice:**
Before determining the design, please request a binding installation drawing.

40/44 **SYHDFE.** | Pressure and flow control system

Dimensions: Through-drives (dimensions in mm)

► "U24" 2-hole mounting flange according to ISO 3019-1 – 127-2 (SAE C)

Hub for splined shaft 38-4 SAE C-C, 1 1/2", 12/24 DP; 17T ³⁾ for attachment of an axial piston variable displacement pump type A10VO 100/31, splined shaft, "S" (see data sheet 92701) or type A10VO 85/52(53), splined shaft "S" (see data sheet 92703) or an internal gear pump type PGH5 (see data sheet 10223)

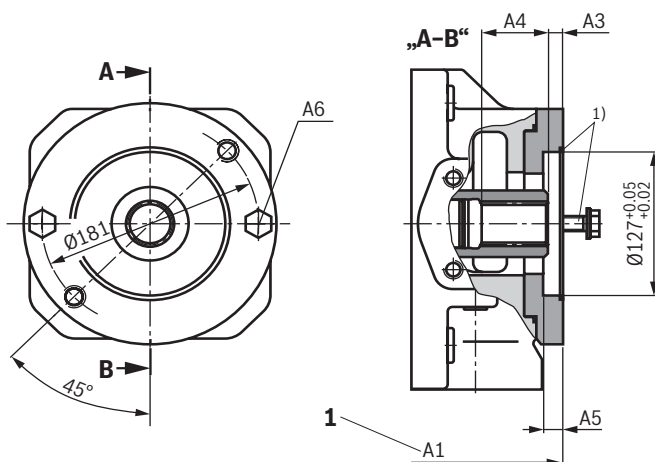

NG	A1	A3	A4	A5	A6 ²⁾
125	369	10.4	50	13	M16
180	393	10.4	50	13	M16
250	453	12.4	55	13	M16
355	482	12.4	55	13	M16

- 1) 2 mounting screws and seal ring included in the scope of delivery.
- 2) Thread according to DIN 13 (for maximum tightening torques, see page 44).
- 3) According to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

1 Up to pump mounting face

Notice:

Before determining the design, please request a binding installation drawing.

Hubs for standard electric motor coupling

Couplings with gear rim for ambient temperature up to 80 °C (e.g. for motor assemblies with motor IM V1)

Motor		SYHDFE.-1X		Shaft Z	
Frame size/ characteristic	Shaft diameter	NG71 Shaft W40 x 2 x 18 x 9g	NG125/180 Shaft W50 x 2 x 24 x 9g	NG250 Shaft W60 x 2 x 28 x 9g	NG355 Shaft W70 x 3 x 22 x 9g
225/0	60	R900026054	R900026055	–	–
250/0	65	R900026058	R900026059	–	–
280/0	75	R900026062	R900026063	R900714636	–
315/0	80	R901037250	R901076760	R900088584 ¹⁾	R900210961 ¹⁾
315/1	80	–	R900026068	R900783295	R900210960

¹⁾ Maximum 40 °C

Accessories for through-drives

The following conditions apply to the attachment pumps listed in the table:

- ▶ Internal gear pump type PGH with shaft "R", mounting flange "U2", see data sheet 10223
- ▶ Internal gear pump type PGF3 with shaft "J", mounting flange "U2", see data sheet 10213
- ▶ External gear pump type AZPF with shaft "R", front cover "R", see data sheet 10089

Flange and through-drive (see ordering code page 2) must be the same. Check in the current data sheet of the gear pump whether the shaft ends have the same specified dimensions.

Mounting kits for axial piston variable displacement pumps and control systems type SYHDFE

Components universal through-drive "U99"	Main pump SYHDFE.-1X		Attachment pump			
	NG125 NG180	NG250 NG355	Size and type		Through-drive centering hub	Flange designation
Mounting kit	R902447035	R902447037	NG18	SYHDFE.-2X	U52 82.55 mm 3/4"	SAE J744 82-1 (A-B)
Flange kit	R902446836	R902446850				
Hub	R902446823	R902446843				
Mounting kit	R902446996	R902446998	NG28	A10VSO / BR31	UB3 100 mm 7/8"	ISO 3019-2 – 100B2HW
Flange kit	R902446808	R902446809				
Hub	R902446824	R902446844				
Mounting kit	R902447001	R902447003	NG45	Shaft "S" or "R"	UB4 100 mm 1"	ISO 3019-2 – 100B2HW
Flange kit	R902446808	R902446809				
Hub	R902446825	R902446845				
Mounting kit	On request	On request	NG45	SYHDFE.-3X	UE1 125 mm 1"	ISO 3019-2 – 125B4HW
Flange kit	On request	R902446813				
Hub	R902446825	R902446845				
Mounting kit	R902447014	R902447016	NG71	A10VSO / BR32	UB8 160 mm 1 1/4"	ISO 3019-2 – 160B4HW
Flange kit	R902446816	R902446817				
Hub	R902446826	R902443227				
Mounting kit	R902447021	R902447022	NG100	Shaft "S" or "R"	UB9 180 mm 1 1/2"	ISO 3019-2 – 180B4HW
Flange kit	R902446818	R902446820				
Hub	R910943555	R910921237				
Mounting kit	R902447025	R902447026	NG140	SYHDFE.-1X	UB7 180 mm 1 3/4"	ISO 3019-2 – 180B4HW
Flange kit	R902446818	R902446820				
Hub	R910904588	R902446849				
Mounting kit	R902447010	R902447011	NG40	A4VSO / BR30	U31 125 mm W 32 x 2 x 14 x 9g	ISO 3019-2 – 125B4HW
Flange kit	R902446812	R902446813				
Hub	R902446828	R902446846				
Mounting kit	R902447012	R902447013	NG71	SYHDFE.-1X	U33 140 mm W 40 x 2 x 18 x 9g	ISO 3019-2 – 140B4HW
Flange kit	R902446814	R902446815				
Hub	R902491155	R902446847				
Mounting kit	R902447019	R902447020	NG125 NG180	Shaft "Z"	U34 160 mm W 50 x 2 x 24 x 9g	ISO 3019-2 – 160B4HW
Flange kit	R902446816	R902446817				
Hub	R902446848	R902446830				
Mounting kit		R902447028	NG250	SYHDFE.-1X	U35 224 mm W 60 x 2 x 28 x 9g	ISO 3019-2 – 224B4HW
Flange kit		R902446822				
Hub		R910902972				
Mounting kit		R902447029	NG355	Shaft "Z"	U77 224 mm W 70 x 3 x 22 x 9g	ISO 3019-2 – 224B4HW
Flange kit		R902446822				
Hub		R910941327				



Notice:

The order numbers for the combination of pumps are contained in the table and in data sheet 95581.

42/44 **SYHDFE.** | Pressure and flow control system

Accessories for through-drives

Mounting kits for axial piston variable displacement pumps and control systems type SYHDFE

Components universal through-drive "K99"	Main pump SYHDFE.-1X		Attachment pump			
	NG40	NG71	Size and type		Through-drive centering hub	Flange designation
Mounting kit	On request	R902546965 ¹⁾	NG18	SYDFE.-2X A10VSO / BR31 Shaft "S" or "R"	K52 82.55 mm 3/4"	ISO 3019-1 – 82-2
Mounting kit	R902488855	R902566875	NG28		WH3 100 mm 7/8"	ISO 3019-2 – 100B2HW
Mounting kit	On request	R902450062	NG45	SYDFE.-2X A10VSO / BR31 Shaft "S" or "R"	WH4 100 mm 1"	ISO 3019-2 – 100B2HW
Mounting kit	–	R902543215	NG45	SYDFE.-3X A10VSO / BR32 Shaft "S" or "R"	KE1 125 mm 1"	ISO 3019-2 – 125B4HW
Mounting kit	–	R902543416	NG71		WH8 160 mm 1 1/4"	ISO 3019-2 – 160B4HW
Mounting kit	R902425118	R910904879	NG40	SYHDFE.-1X A4VSO / BR10 Shaft "Z"	K31 125 mm W 32x2x14x9g	ISO 3019-2 – 125B4HW
Mounting kit	–	R902403972	NG71		K33 140 mm W 40x2x18x9g	ISO 3019-2 – 140B4HW

Components universal through-drive "U99"	Main pump SYHDFE.-1X		Attachment pump		
	NG125 NG180	NG250 NG350	Size and type	Through-drive centering hub	Flange designation
Mounting kit	R902447030	R902447032	PGF2, PGH2, PGH3, AZPF	U01	SAE J744 82-2(A-B)
Flange kit	R902446836	R902446850		82.55	
Hub	R902446831	R902497505		5/8"	
Mounting kit	R902447040	R902447042	PGF 3	U68	SAE J744 101-2(B)
Flange kit	R902446837	R902446851		101.6 mm	
Hub	R902446824	R902446844		7/8"	
Mounting kit	R902447045	R902447047	PGH 4	U04	SAE J744 101-2(B)
Flange kit	R902446837	R902446851		101.6 mm	
Hub	R902446825	R902446845		1"	
Mounting kit	R902447052	R902447053	PGH 5	U24	SAE J744 127-2(B)
Flange kit	R902446838	R902446852		127 mm	
Hub	R910943555	R910921237		1 1/2"	

Through-drive components	Main pump SYHDFE.-1X		Attachment pump		
	NG40	NG71	Size and type	Through-drive centering hub	Flange designation
Hub	On request	On request	PGF2, PGH2, PGH3, AZPF	K01 82.55 mm 5/8"	ISO 3019-1 – 82-2



Notice:

The order numbers for the combination of pumps are contained in the table and in data sheet 95581.

¹⁾ Only with through-drive "K01"

Accessories (separate order)

SYHDFEE	Material number	Data sheet
12-pole mating connector for central connection X1 without cable (assembly kit)	R900884671	08006
12-pole mating connector for central connection X1 with cable set 2 x 5 m	R900032356	–
12-pole mating connector for central connection X1 with cable set 2 x 20 m	R900860399	–
Pressure transducer HM20-2X, measurement range 400 bar (4 ... 20 mA)	R901456334	30272
Pressure transducer HM20-2X, measurement range 400 bar (0.1 ... 10 V)	R901466598	30272
Pressure transducer HM20-2X, measurement range 315 bar (0.5 ... 5 V) with 0.5 m cable	R901342038	30272
Test device VT-PDFE-1-1X/V0/0	R900757051	29689-B
Compact power supply unit VT-NE32-1X	R900080049	29929
SYHDFED	Material number	Data sheet
12-pole mating connector for central connection XH4 without cable (assembly kit)	R900884671	08006
12-pole mating connector for central connection XH4 with cable set 2 x 5 m	R900032356	–
12-pole mating connector for central connection XH4 with cable set 2 x 20 m	R900860399	–
Pressure transducer HM20-2X, measurement range 400 bar (4 ... 20 mA)	R901456334	30272
Pressure transducer HM20-2X, measurement range 400 bar (0.1 ... 10 V)	R901466598	30272
Pressure transducer HM20-2X, measurement range 315 bar (0.5 ... 5 V) with 0.5 m cable	R901342038	30272
Test device VT-PDFE-1-1X/V0/0	R900757051	29689-B
Compact power supply unit VT-NE32-1X	R900080049	29929
Ethernet connection cable M12 to RJ45 (connection X7E1 & X7E2), additional information type designation RKB0044/xxx.x (xxx.x: length in meters)	R911172135	–
Commissioning software IndraWorks DS from version 14V14	–	–
SYHDFEF	Material number	Data sheet
6-pole mating connector for central connection XH1 without cable (assembly kit)	R900021267	08006
6-pole mating connector for central connection XH1 with cable set 3 m	R901420483	08006
6-pole mating connector for central connection XH1 with cable set 5 m	R901420491	08006
6-pole mating connector for central connection XH1 with cable set 10 m	R901420496	08006
Pressure transducer HM20-2X, measurement range 400 bar (4 ... 20 mA)	R901456334	30272
Pressure transducer HM20-2X, measurement range 400 bar (0.1 ... 10 V)	R901466598	30272
Pressure transducer HM20-2X, measurement range 315 bar (0.5 ... 5 V) with 0.5 m cable	R901342038	30272
Ethernet connection cable M12 to RJ45 (connection X7E1 & X7E2), additional information type designation RKB0044/003,0	R911343806	–
Commissioning software IndraWorks DS from version 15	–	–

44/44 **SYHDFE.** | Pressure and flow control system

Project planning information

- ▶ Command values may only be switched via relays with gold-plated contacts (low voltage, low currents).
- ▶ Always shield command and actual value cables.
- ▶ The distance to aerial lines or radios must be at least 1 m.
- ▶ Do not lay signal lines close to power lines.
- ▶ For further information on the control system type SYDFE, see the operating instructions (see "Further information").

Installation information

Tightening torques:

- ▶ The tightening torques specified in this data sheet are maximum values and must not be exceeded (maximum values for screw-in threads).
Manufacturer's specifications regarding the maximum admissible tightening torques of the fittings used are to be observed.
- ▶ For mounting screws according to DIN 13, we recommend checking the tightening torque on a case by case basis according to VDI 2230, version 2003.

Further information

- | | |
|--|--------------------------------|
| ▶ Operating instructions for type SY(H)DFEE | Operating instructions 30012-B |
| ▶ Operating instructions for type SY(H)DFED | Operating instructions 30017-B |
| ▶ Operating instructions for type SY(H)DFEF | Operating instructions 30013-B |
| ▶ Data sheet for universal through-drive for connecting two pumps into one combination | Data sheet 95581 |
| ▶ Data sheet for axial piston variable displacement pump type A4VSO | Data sheet 92050 |
| ▶ Data sheet for axial piston variable displacement pump type A4VSO for HFC | Data sheet 92053 |
| ▶ Data sheet for swivel angle sensor type VT-SWA-LIN-1X | Data sheet 30263 |
| ▶ Technical information: Modification options for variable displacement pump A4VSO for DFE control | Data sheet 30637 |
| ▶ Data sheet for pressure transducer type HM20-2X | Data sheet 30272 |
| ▶ Operating instructions for test device type VT-PDFE | Operating instructions 29689-B |
| ▶ Internet | |
| ▶ Information on available spare parts | |

Bosch Rexroth AG, RE 30035, edition: 2023-11

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK