


RE 17341
 Edition: 2022-07

Hydraulic cylinders Mill type

Series CDM1

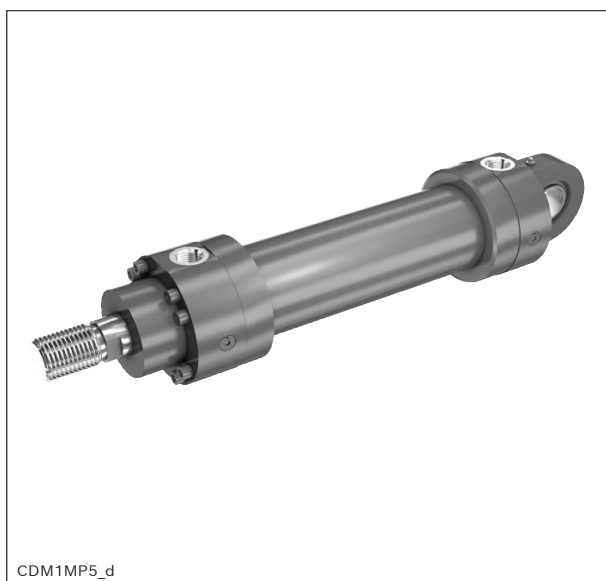

CDM1MP5_d

- ▶ Nominal pressure 160 bar
- ▶ Component series 3X

Features

- ▶ Installation dimensions according to ISO 6020-1
- ▶ 9 types of mounting
- ▶ Piston Ø (ØAL): 25 ... 200 mm
- ▶ Piston rod Ø (ØMM): 14 ... 140 mm
- ▶ Stroke length up to 3000 mm
- ▶ Self-adjusting and adjustable end position damping

Contents

Features	1
Ordering code	2 ... 4
Technical data	5 ... 10
Overview of types of mounting	11
Dimensions	12 ... 29
Piston rod end "E" / enlarged line connection	30
Flange connection	31
Subplates for valve mounting	32 ... 35
Bleeding / measuring coupling	36
Throttle valve	37
Swivel head / fork clevis / clevis bracket	38 ... 45
Trunnion mounting bearing bracket	46, 47
Buckling	48 ... 51
End position damping / damping capacity	52 ... 54
Selection criteria for seals	55
Components / seal kits	56, 57
Tightening torques	58
Priming / painting / corrosivity categories	59
Project planning / maintenance instructions	60

RE 17341, edition: 2022-07, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2/62 Series CDM1 | Mill type

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
CD	M1		/	/	/	A	3X	/							

01	Differential cylinder	CD
02	Series	M1

Types of mounting

03	Without mounting	M00 ¹⁾
	Rectangular flange at head	MF1 ²⁾
	Rectangular flange at base	MF2 ²⁾
	Round flange at head	MF3
	Round flange at base	MF4
	Swivel eye at base	MP3
	Self-aligning clevis at base	MP5
	Trunnion mounting	MT4 ³⁾
	Foot mounting	MS2

04	Piston Ø (ØAL): 25 ... 200 mm, see page 7	
05	Piston rod Ø (ØMM): 14 ... 140 mm, see page 7	
06	Stroke length in mm	

Design principle

07	Head and base flanged	A
08	Component series 30 ... 39 (30 ... 39: unchanged installation and connection dimensions)	3X

Line connection – version

09	According to ISO 1179-1 (pipe thread ISO 228-1)	B
	According to ISO 1179-1 (pipe thread ISO 228-1) with flat pipe flange	C
	According to ISO 6149-1 (metric thread ISO 261)	R
	Enlarged line connection according to ISO 1179-1 (enlarged pipe thread ISO 228-1), page 30	S ^{4; 5)}
	Rectangular flange connection according to ISO 6162, page 31	F ^{5; 6)}
	Square flange connection according to ISO 6164, page 31	H ^{5; 7)}
	Switching and proportional directional valves, page 34, 35	
	Subplate NG6	P ^{5; 8; 9; 10)}
	Subplate NG10	T ^{5; 9; 10; 11)}
	Subplate NG16	U ^{5; 9; 10; 12)}
	Check valves type SV and SL, page 32, 33	
	Subplate NG6	A ^{5; 8; 9; 13)}
	Subplate NG10	E ^{5; 9; 11; 13)}
	Subplate NG20	L ^{5; 9; 12; 13)}

Line connection – position at head

10	View to piston rod ¹⁴⁾	1
		2
		3
		4

Line connection – position at base

11	View to piston rod ¹⁴⁾	1
		2
		3
		4

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
CD	M1		/		/		A	3X	/						

Piston rod design

12	Hard chromium-plated	C
	Hardened and hard chromium-plated	H
	Nickel-plated and hard chromium-plated	N ^{15; 4)}
	Non-corrosive and hard chromium-plated	L

Piston rod end

13	Thread (ISO 6020-1) for swivel head CGKD / fork clevis CCKB	G
	Thread for swivel head CGKD / fork clevis CCKB	H ¹⁶⁾
	Internal thread, see page 30	E ¹⁷⁾
	Piston rod end "H" with mounted swivel head CGKD	F ¹⁶⁾
	Piston rod end "G" with mounted swivel head CGKD	K
	Piston rod end "H" with mounted fork clevis CCKB	P ^{16; 18)}
	Piston rod end "G" with mounted fork clevis CCKB	R ¹⁹⁾

End position damping (see page 52 ... 54)

14	Without	U
	Both sides, self-adjusting	D
	Both sides, adjustable	E
	Base side, self-adjusting	K
	Head side, self-adjusting	S

Seal design (selection criteria for seals, see page 55)

15	For mineral oil HL, HLP and HFA	
	Standard seal system	M
	For mineral oil HL, HLP, HFA and water glycol HFC	
	Servo quality, reduced friction	T ⁷⁾
	Chevron seal kits	A ⁶⁾
	For HDEF phosphate ester and HFDU polyol ester	
	Servo quality, reduced friction	S ⁷⁾
	Standard seal system FKM	V

Additional options (see page 4)

16	Without	W
	With (complete type key on page 4)	Z

Order example:

CDM1MT4/50/28/550A3X/B11CGDMW XV = 175 mm
CDM1MF3/200/140/950A3X/B11CHKAW

- 1) Only available upon request
- 2) Piston Ø 25 ... 125 mm
- 3) Always indicate dimension "XV" in the plain text with orders
- 4) Piston Ø 63 ... 200 mm
- 5) Not for "MF2"; "MF4"
- 6) Piston Ø 50 ... 200 mm
- 7) Piston Ø 40 ... 200 mm
- 8) Piston Ø 40 ... 80 mm, only position "1", "1" (head / base)
- 9) Subplates only with pipe thread (ISO 1179-1)
- 10) Only up to stroke 900 mm
- 11) Piston Ø 63 ... 200 mm, only position "1", "1" (head / base)

- 12) Piston Ø 125 ... 200 mm, only position "1", "1" (head / base)
- 13) Subplates for check valves of type SV and SL
Please note: Seal designs "T" and "S" are not designed for the static holding function.
- 14) All graphical representations in the data sheet show position "1"
- 15) Not possible for piston rod end "E"
- 16) Per piston Ø only possible with large piston rod Ø
- 17) Piston rod Ø 22 ... 140 mm
- 18) Piston Ø 200 mm, on request
- 19) Piston rod Ø 14 ... 90 mm

4/62 **Series CDM1** | Mill type

Ordering code

	01	02	03	04	05	06	07	08
[I Z]								

01	Without	W
	Inductive proximity switches without mating connector - separate order, see page 10	E ^{1; 2)}
02	Standard with guide rings	W ³⁾
03	Without measuring coupling	W
	Measuring coupling, on both sides	A
	Measuring coupling, on both sides, stainless steel version	E ⁴⁾
04	Standard conical grease nipples, DIN 71412 form A	W
	Flat type grease nipples, DIN 3404 form A	B ⁵⁾
05	Without piston rod extension	W
	Specify the piston rod extension dimension "LY" in the plain text in mm	Y
06	Priming class CP3	W
	Painting class CP4	B ⁶⁾
	Painting class CP5	L ⁶⁾
	Painting class CP6	U ⁶⁾
	Painting class CP7	E ⁶⁾
07	Without oil filling	W
	With corrosion protection oil VG68	F
08	Without test certificate	W
	With certificate of compliance 2.1 based on EN 10204	B
	With acceptance test certificate 3.1 based on EN 10204	C

¹⁾ Minimum stroke length 20 mm

²⁾ Piston Ø 40 ... 200 mm

³⁾ For Ø 25 and Ø 32 without guide rings

⁴⁾ On request

⁵⁾ From piston Ø 50 ... 200 mm;
not for piston rod end "P" and "R"

⁶⁾ Specify RAL color in the plain text

Technical data

(For applications outside these values, please consult us!)

General		
Installation position	any	
Ambient temperature range	see page 55	
Priming	see page 59	
Painting	see page 59	
Hydraulic		
Nominal pressure ¹⁾	bar	160
Minimum operating pressure ²⁾ (without load)	bar	10
Static test pressure	bar	240
Hydraulic fluid	see table below	
Hydraulic fluid temperature range	°C	see page 55
Viscosity range	mm²/s	12 ... 380
Viscosity at operating temperature (recommended)	mm²/s	20 ... 100
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)	Class 20/18/15	
Bleeding	secured against screwing out from piston Ø 40 mm by default	
Hydraulic fluid	Classification	Data sheet
Mineral oils	HL, HLP	90220
Phosphate ester	HFDR	90222
Polyol ester	HFDU	90222
Oil-in-water emulsion	HFA	90223
Water glycol	HFC	90223

- ¹⁾ Higher operating pressures up to 200 bar on request
With extreme shock loads, mounting elements and threaded piston rod connections must be designed for durability.
- ²⁾ Depending on the application, a certain minimum pressure is required in order to guarantee good functioning of the hydraulic cylinder. Without load, a minimum pressure of 10 bar is recommended for differential cylinders; for lower pressures, please contact us.

6/62 **Series CDM1** | Mill type

Technical data

(For applications outside these values, please consult us!)

Stroke velocity

Please observe the guideline on maximum stroke velocities (with recommended flow velocity of 5 m/s in the line connection) in the table. Higher stroke velocity on request. If the extension velocity is considerably

higher than the retraction velocity of the piston rod, drag-out losses of the hydraulic fluid may result. If necessary, please consult us.

Piston Ø in mm	Line connection	max. stroke velocity in m/s
25	G1/4	0.29
32	G3/8	0.40
40	G1/2	0.61
50	G1/2	0.39
63	G3/4	0.41
80	G3/4	0.25
100	G1	0.20
125	G1	0.13
160	G1 1/4	0.12
200	G1 1/4	0.08

Information on stroke length and stroke velocity


ØAL in mm		25	32	40	50	63	80	100	125	160	200
Minimum stroke in mm (recommended)	► Without damping	–	–	–	–	–	–	–	–	–	–
	► With damping	30	38	46	44	54	54	64	66	80	92
Maximum velocity in m/s (recommended)	► Seal design "M"; ► 160 bar	0.50				0.40		0.30		0.25	
	► Seal design "M"; ► 100 bar	0.70				0.60		0.40		0.35	
	► Seal design "T", "S"; ► 160 bar	1.00				0.80		0.60		0.50	
Minimum velocity in mm/s (recommended)	► Seal design "M"	30									
	► Seal design "T", "S"	1									

Technical data

(For applications outside these values, please consult us!)

Areas, forces, flow

Piston ØAL in mm	Piston rod ØMM in mm	Area ratio ϕ A1/A3	Areas			Force at 160 bar ¹⁾			Flow at 0.1 m/s ²⁾			max. stroke length in mm
			Piston A ₁ in cm ²	Rod A ₂ in cm ²	Ring A ₃ in cm ²	Pressure F ₁ kN	Diff. F ₂ kN	Pulling F ₃ kN	OFF q _{v1} l/min	Diff. q _{v2} l/min	ON q _{v3} l/min	
25	14	1.46	4.91	1.54	3.37	7.85	2.44	5.37	2.9	0.9	2.0	600
	18	2.08		2.54	2.36		4.07	3.76		1.5	1.4	
32	18	1.46	8.04	2.54	5.50	12.80	4.07	8.76	4.8	1.5	3.3	800
	22	1.90		3.80	4.24		6.08	6.76		2.3	2.5	
40	22	1.43	12.56	3.80	8.76	20.00	6.08	14.03	7.5	2.3	5.2	2000
	28	1.96		6.16	6.41		9.82	10.24		3.7	3.8	
50	28	1.46	19.63	6.16	13.47	31.30	9.82	21.55	11.8	3.7	8.1	2000
	36	2.08		10.18	9.46		16.29	15.10		6.1	5.6	
63	36	1.48	31.17	10.18	20.99	49.80	16.29	33.56	18.7	6.1	12.6	2000
	45	2.04		15.90	15.27		25.40	24.41		9.5	9.2	
80	45	1.46	50.26	15.90	34.36	80.30	25.40	54.96	30.2	9.5	20.7	2000
	56	1.96		24.63	25.63		39.30	40.99		14.8	15.4	
100	56	1.46	78.54	24.63	53.91	125.00	39.30	86.22	47.1	14.8	32.3	3000
	70	1.96		38.48	40.06		61.50	64.04		23.1	24.0	
125	70	1.46	122.72	38.48	84.24	196.00	61.50	134.7	73.6	23.1	50.5	3000
	90	2.08		63.62	59.10		101.00	94.49		38.2	35.4	
160	90	1.46	201.06	63.62	137.44	321.00	101.00	219.8	120.6	38.2	82.4	3000
	110	1.90		95.06	106.00		151.00	169.5		57.0	63.6	
200	110	1.43	314.16	95.06	219.09	502.60	152.00	350.6	188.5	57.0	131.5	3000
	140	1.96		153.96	160.20		246.30	256.3		92.4	96.1	

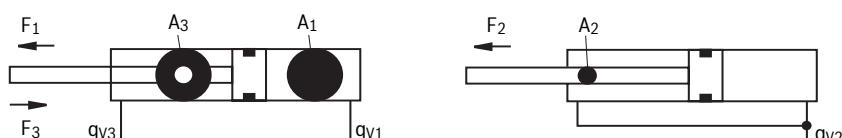

¹⁾ Theoretical static cylinder force (without consideration of the efficiency and admissible load for attachment parts such as swivel heads, plates, or valves, etc.)

²⁾ Stroke velocity

8/62 Series CDM1 | Mill type

Technical data
(For applications outside these values, please consult us!)

Tolerances according to ISO 6020-1

Installation dimensions	WF	W	WC	XC ¹⁾	XO ¹⁾	XS	SS	XV	ZF ¹⁾	ZP ¹⁾	ZJ	XB	Y	PJ	Stroke tolerances in mm
Stroke length in mm	Tolerances in mm														
≤ 1250	±2	±2	±2	±1.5	±1.5	±2	±1.5	±2	±1.5	±1.5	±1.5	max.	±2	±1.5	+2
> 1250 ... ≤ 3000	±4	±4	±4	±3	±3	±4	±3	±4	±3	±3	±3	max.	±4	±3	+5

¹⁾ Not standardized

Technical data

(For applications outside these values, please consult us!)

Hydraulic cylinder mass (in kg)

Piston ØAL in mm	Piston rod ØMM in mm	at 0 mm stroke length						per 100 mm stroke length in kg
		"M00" in kg	"MP3", "MP5" in kg	"MF1", "MF2" in kg	"MF3", "MF4" in kg	"MT4" in kg	"MS2" in kg	
25	14	2.2	2.3	2.6	2.7	2.6	3.2	0.5
	18	2.2	2.3	2.6	2.7	2.6	3.2	0.6
32	18	3.1	3.3	3.8	4.0	3.7	4.7	0.7
	22	3.1	3.3	3.8	4.0	3.7	4.7	0.8
40	22	5.5	5.9	6.4	6.7	6.5	7.6	0.9
	28	5.6	6.0	6.5	6.8	6.6	7.7	1.1
50	28	8.1	8.9	9.7	10.2	9.8	12.0	1.2
	36	8.3	9.1	9.9	10.4	10.0	12.2	1.5
63	36	14.0	15.5	17.0	17.5	17.0	20.0	2.1
	45	14.0	15.5	17.0	17.5	17.0	20.0	2.6
80	45	20.0	22.5	24.0	25.0	24.0	29.0	2.9
	56	20.0	22.5	24.0	25.0	24.0	29.0	3.6
100	56	36.0	41.0	42.5	44.5	43.5	52.0	5.4
	70	37.0	42.0	43.5	45.5	44.5	53.0	6.5
125	70	60.0	66.0	68.0	70.0	73.5	86.0	7.3
	90	61.0	67.0	69.0	71.0	74.5	87.0	9.3
160	90	107.0	122.0	–	121.0	136.0	148.0	11.5
	110	108.0	123.0	–	122.0	137.0	149.0	14.0
200	110	193.0	222.0	–	217.0	245.0	259.0	15.4
	140	196.0	225.0	–	220.0	248.0	262.0	20.1

10/62 **Series CDM1** | Mill type


Technical data: Proximity switch
(For applications outside these values, please consult us!)

Inductive proximity switches are used as reliable end position control for hydraulic cylinders. They are an important element for the safe and exact monitoring of safety equipment, lockings and/or other machine functions in their end position by means of the output of signals. The proximity switch which is high-pressure-resistant up to 500 bar works in a contactless manner.

Consequently, it is wear-free. The proximity switch has been set at the factory. The switching distance must not be adjusted. The lock nut of the proximity switch is marked at the factory using sealing wax. On versions with proximity switch, the hydraulic cylinders are provided with proximity switches on both sides.

General			
Function type	PNP normally open contact		
Admissible pressure	bar	500	
Operating voltage	V DC	10 ... 30	
	► Including residual ripple	%	≤ 15
Voltage drop	V	≤ 1.5	
Rated operating voltage	V DC	24	
Rated operating current	mA	200	
Idle current	mA	≤ 8	
Residual current	µA	≤ 10	
Repetition accuracy	%	≤ 5	
Hysteresis	%	≤ 15	
Ambient temperature range	°C	-25 ... +80	
Temperature drift	%	≤ 10	
Switching frequency	Hz	1000	
Protection class	► Active area	IP	68 according to DIN 40050
	► Proximity switch	IP	67 according to DIN 40050
Housing material	Material no. 1.4104		

Pin assignment

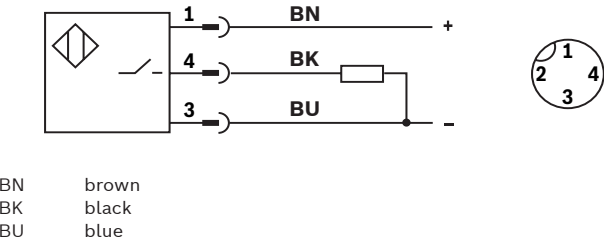

BN brown
BK black
BU blue

Overview of types of mounting

"M00" (see page 12, 13)



"MP3" (see page 14, 15)



"MP5" (see page 14, 15)



"MF1" (see page 16, 17)



"MF2" (see page 18, 19)



"MF3" (see page 20, 21)



"MF4" (see page 22, 23)



"MT4" (see page 24, 25)




"MS2" (see page 26, 27)




12/62 **Series CDM1** | Mill type

Dimensions: "M00"
(dimensions in mm)

"M00"

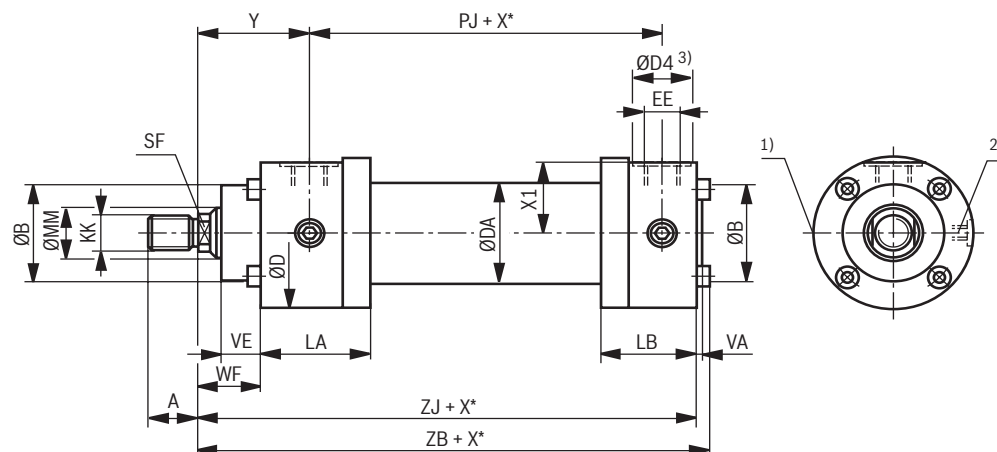

M00...2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

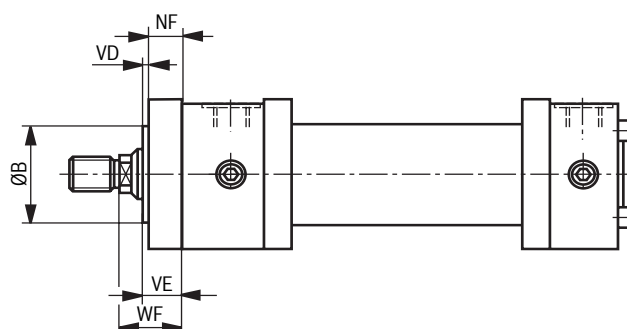

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "M00" (dimensions in mm)

ØAL	ØMM	KK ⁴⁾ ISO 6020-1		A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB f8	ØD	ØDA	ØD4 3; 6)	EE 6)	ØD4 3; 7)	EE 7)
25	14 18	M12 x 1.25 M14 x 1.5	16 18	— —	M12 x 1.25	— 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5
32	18 22	M14 x 1.5 M16 x 1.5	18 22	— —	M14 x 1.5	— 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5
40	22 28	M16 x 1.5 M20 x 1.5	22 28	— —	M16 x 1.5	— 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5
50	28 36	M20 x 1.5 M27 x 2	28 36	— —	M20 x 1.5	— 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5
63	36 45	M27 x 2 M33 x 2	36 45	— —	M27 x 2	— 36	30 36	70	116	78	42	G3/4	34	M27 x 2
80	45 56	M33 x 2 M42 x 2	45 56	— —	M33 x 2	— 45	36 46	85	130	95	42	G3/4	34	M27 x 2
100	56 70	M42 x 2 M48 x 2	56 63	— —	M42 x 2	— 56	46 60	106	158	120	47	G1	43	M33 x 2
125	70 90	M48 x 2 M64 x 3	63 85	— —	M48 x 2	— 63	60 75	132	192	150	47	G1	43	M33 x 2
160	90 110	M64 x 3 M80 x 3	85 95	— —	M64 x 3	— 85	75 95	160	237	190	58	G1 1/4	52	M42 x 2
200	110 140	M80 x 3 M100 x 3	95 112	— —	M80 x 3	— 95	95 120	200	285	230	58	G1 1/4	52	M42 x 2

ØAL	ØMM	Y ⁸⁾	PJ ⁸⁾	X1	VA	VE max.	VD	NF	WF ⁸⁾	ZB	ZJ ⁸⁾	LA	LB
25	14 18	58	77	26	3	15	—	—	28	156	150	58	43
32	18 22	64	89	30.5	3	19	—	—	32	176	170	62	47
40	22 28	71	97	35.5	3	19	—	—	32	196	190	73	56
50	28 36	72	111	44.5	4	24	4	20	38	213	205	74	62
63	36 45	82	117	54.5	4	29	4	25	45	234	224	84	72
80	45 56	91	134	62.5	4	36	4	32	54	260	250	93	81
100	56 70	108	162	75.5	5	37	5	32	57	310	300	117	96
125	70 90	121	174	92.5	5	37	5	32	60	335	325	143	112
160	90 110	143	191	115.5	8	41	5	36	66	380	370	171	130
200	110 140	190	224	138.5	15	45	5	40	75	466	450	230	151

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"

6) Line connection "B"


7) Line connection "R"

8) Tolerances according to ISO 6020-1, see page 8


14/62 Series CDM1 | Mill type

Dimensions: "MP3", "MP5"
(dimensions in mm)


"MP3"

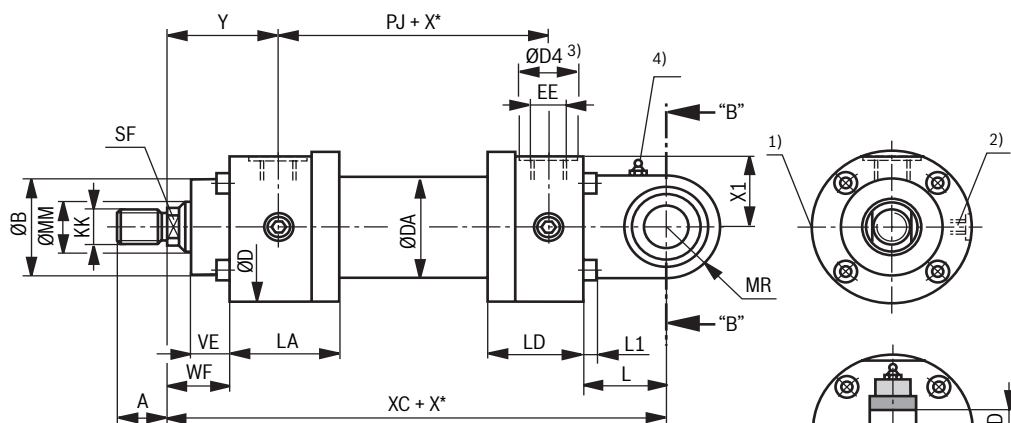

"MP5"

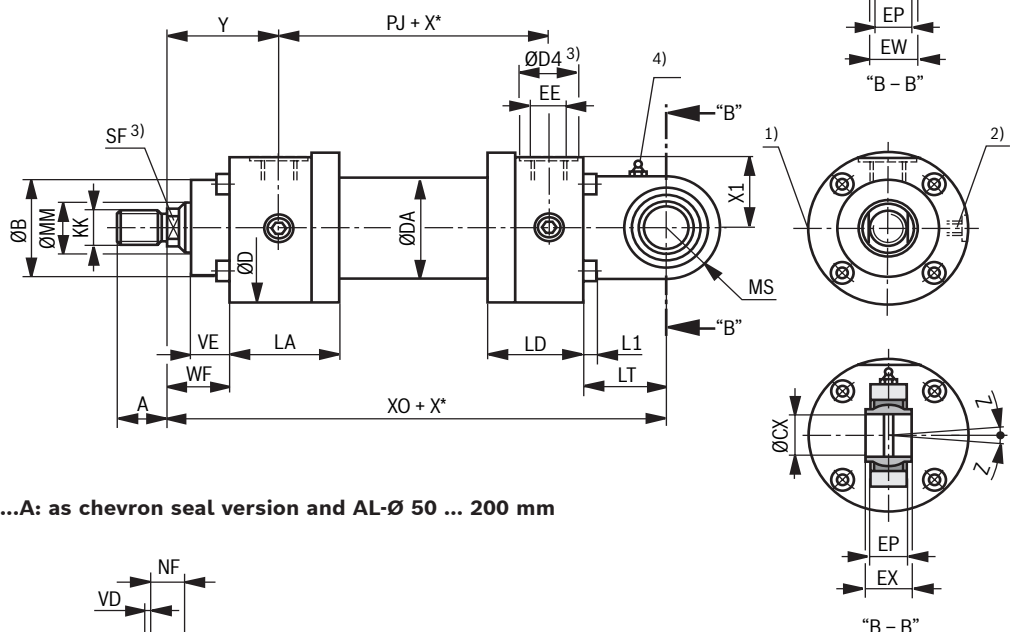

MP3/MP5..2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

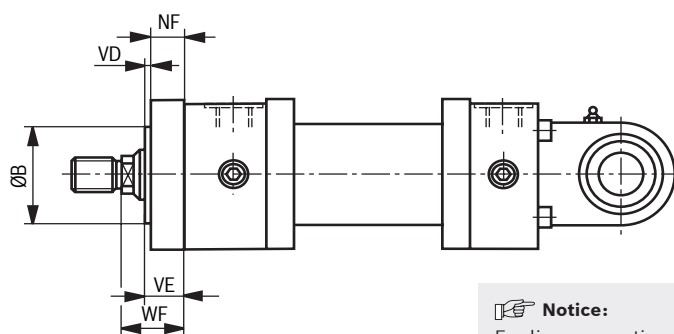

Notice:

For line connections "1" and "2", the position of the grease nipple is at "1"
For line connections "3" and "4", the position of the grease nipple is at "3"

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MP3", "MP5"
(dimensions in mm)

Ø AL	Ø MM	ISO 6020-1		KK ⁵⁾	A ⁵⁾	KK ⁶⁾	A ⁶⁾	SF	ØB f8	ØD	ØDA	ØD4 3; 7)	EE 7)	ØD4 3; 8)	EE 8)	Y ⁹⁾	PJ ⁹⁾
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– –	– –	M12 x 1.25 M14 x 1.5	– –	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– –	– –	M14 x 1.5 M16 x 1.5	– –	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– –	– –	M16 x 1.5 M20 x 1.5	– –	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97
50	28 36	M20 x 1.5 M27 x 2	28 36	– –	– –	M20 x 1.5 M27 x 2	– –	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111
63	36 45	M27 x 2 M33 x 2	36 45	– –	– –	M27 x 2 M33 x 2	– –	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117
80	45 56	M33 x 2 M42 x 2	45 56	– –	– –	M33 x 2 M42 x 2	– –	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134
100	56 70	M42 x 2 M48 x 2	56 63	– –	– –	M42 x 2 M48 x 2	– –	46 60	106	158	120	47	G1	43	M33 x 2	108	162
125	70 90	M48 x 2 M64 x 3	63 85	– –	– –	M48 x 2 M64 x 3	– –	60 75	132	192	150	47	G1	43	M33 x 2	121	174
160	90 110	M64 x 3 M80 x 3	85 95	– –	– –	M64 x 3 M80 x 3	– –	75 95	160	237	190	58	G1 1/4	52	M42 x 2	143	191
200	110 140	M80 x 3 M100 x 3	95 112	– –	– –	M80 x 3 M100 x 3	– –	95 120	200	285	230	58	G1 1/4	52	M42 x 2	190	224

ØAL	MM	X1	VE max.	WF ⁹⁾	NF	VD min.	XC/XO ⁹⁾	CD/CX H9/H7	EP	EW/EX h12	L/LT min.	MR/MS max.	LA	LD	L1	Z
25	14 18	26	15	28	–	–	178	12	11	12	25	16	58	46	6	2°
32	18 22	30.5	19	32	–	–	206	16	13	16	33	20	62	50	6	2°
40	22 28	35.5	19	32	–	–	231	20	17	20	38	25	73	59	6	2°
50	28 36	44.5	24	38	20	4	257	25	22	25	48	32	74	66	8	2°
63	36 45	54.5	29	45	25	4	289	32	27	32	61	40	84	76	10	4°
80	45 56	62.5	36	54	32	4	332	40	32	40	78	50	93	85	10	4°
100	56 70	75.5	37	57	32	5	395	50	40	50	90	63	117	101	10	4°
125	70 90	92.5	37	60	32	5	428	63	52	63	98	71	143	117	12	4°
160	90 110	115.5	41	66	36	5	505	80	66	80	127	90	171	138	12	4°
200	110 140	138.5	45	75	40	5	615	100	84	100	150	112	230	166	16	4°

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Grease nipple, cone head form A according to DIN 71412
(lubrication of bearings at piston Ø 25 mm not possible)

5) Thread for piston rod end "G", "K" and "R"

6) Thread for piston rod end "H", "F" and "P"

7) Line connection "B"


8) Line connection "R"

9) Tolerances according to ISO 6020-1, see page 8

16/62 Series CDM1 | Mill type

Dimensions: "MF1"
 (dimensions in mm)

"MF1"

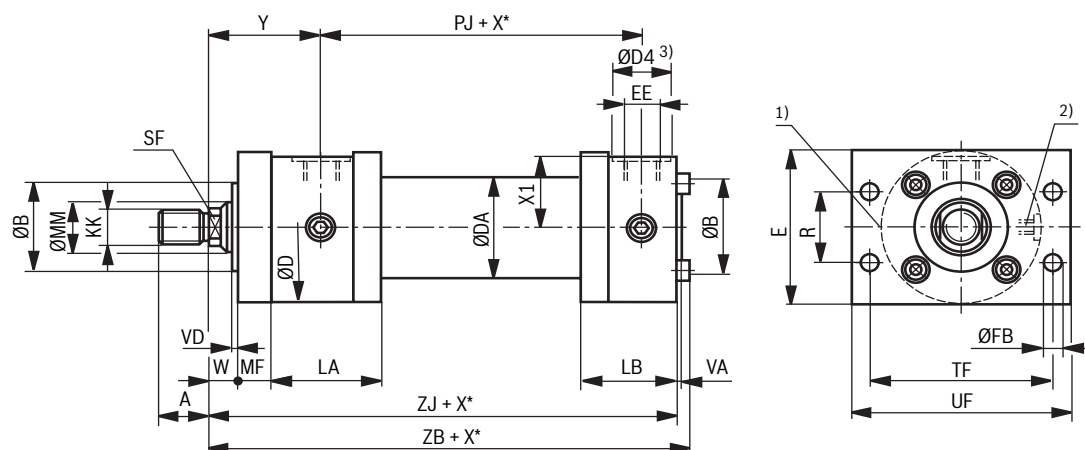

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MF1"
 (dimensions in mm)

ØAL	ØMM	KK ⁴⁾	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB	ØD	ØDA	ØD4	EE	ØD4	EE	Y ⁸⁾	PJ ⁸⁾	X1
		ISO 6020-1					f8			3; 6)	6)	3; 7)	7)			
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77	26
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117	54.5
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134	62.5
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162	75.5
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174	92.5

ØAL	ØMM	MF	VA	VD	W ⁸⁾	ZJ ⁸⁾	ZB	E	R	TF	UF	ØFB	LA	LB
		js13		min.				max.	js13	js13	max.	H13		
25	14 18	12	3	3	16	150	156	60	28.7	69.2	85	6.6	58	43
32	18 22	16	3	3	16	170	176	70	35.2	85	105	9	62	47
40	22 28	16	3	3	16	190	196	80	40.6	98	115	9	73	56
50	28 36	20	4	4	18	205	213	100	48.2	116.4	140	11	74	62
63	36 45	25	4	4	20	224	234	120	55.5	134	160	13.5	84	72
80	45 56	32	4	4	22	250	260	135	63.1	152.5	185	17.5	93	81
100	56 70	32	5	5	25	300	310	160	76.5	184.8	225	22	117	96
125	70 90	32	5	5	28	325	335	195	90.2	217.1	255	22	143	112

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
 (180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
 offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"

6) Line connection "B"


7) Line connection "R"

8) Tolerances according to ISO 6020-1, see page 8


18/62 Series CDM1 | Mill type

Dimensions: "MF2"
(dimensions in mm)

"MF2"

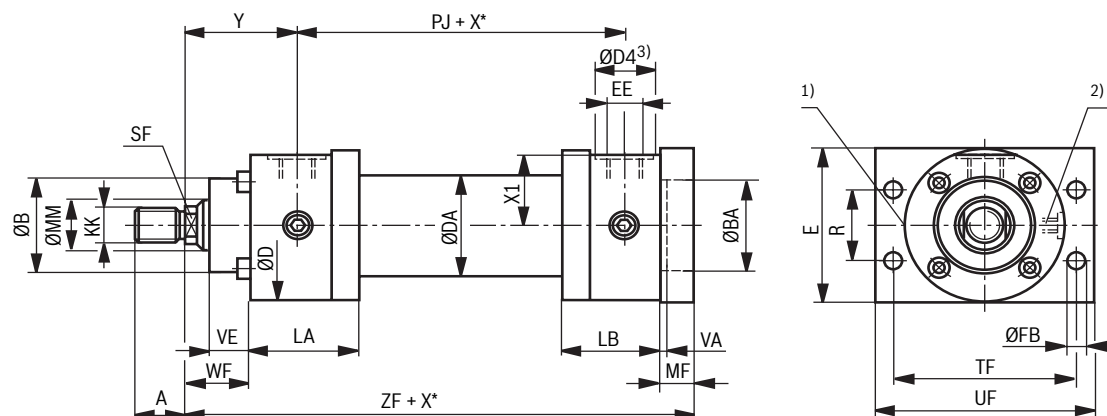

MF2..2X/...A: as chevron seal version and AL- \varnothing 50 ... 200 mm

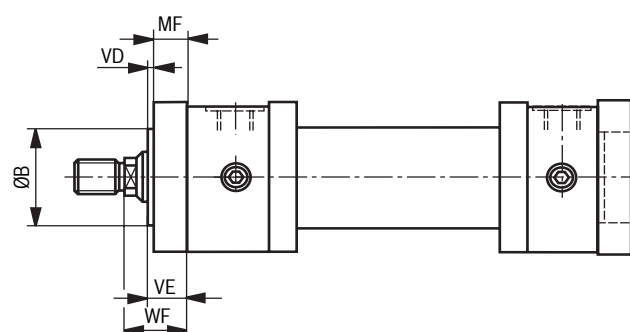

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MF2"
(dimensions in mm)

ØAL	ØMM	KK ⁴⁾ ISO 6020-1	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB f8	ØD	ØDA	ØD4 3; 6)	EE 6)	ØD4 3; 7)	EE 7)	Y ⁸⁾	PJ ⁸⁾
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174

ØAL	ØMM	X1	WF ⁸⁾	MF js13	VA	VE	VD	ØBA H8	ZF ⁸⁾	E max.	R js13	TF js13	UF max.	ØFB H13	LA	LB
25	14 18	26	28	12	3	15	–	32	162	60	28.7	69.2	85	6.6	58	43
32	18 22	30.5	32	16	3	19	–	40	186	70	35.2	85	105	9	62	47
40	22 28	35.5	32	16	3	19	–	50	206	80	40.6	98	115	9	73	56
50	28 36	44.5	38	20	4	24	4	60	225	100	48.2	116.4	140	11	74	62
63	36 45	54.5	45	25	4	29	4	70	249	120	55.5	134	160	13.5	84	72
80	45 56	62.5	54	32	4	36	4	85	282	135	63.1	152.5	185	17.5	93	81
100	56 70	75.5	57	32	5	37	5	106	332	160	76.5	184.8	225	22	117	96
125	70 90	92.5	60	32	5	37	5	132	357	195	90.2	217.1	255	22	143	112

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"

6) Line connection "B"


7) Line connection "R"

8) Tolerances according to ISO 6020-1, see page 8

20/62 Series CDM1 | Mill type

Dimensions: "MF3"
(dimensions in mm)

"MF3"

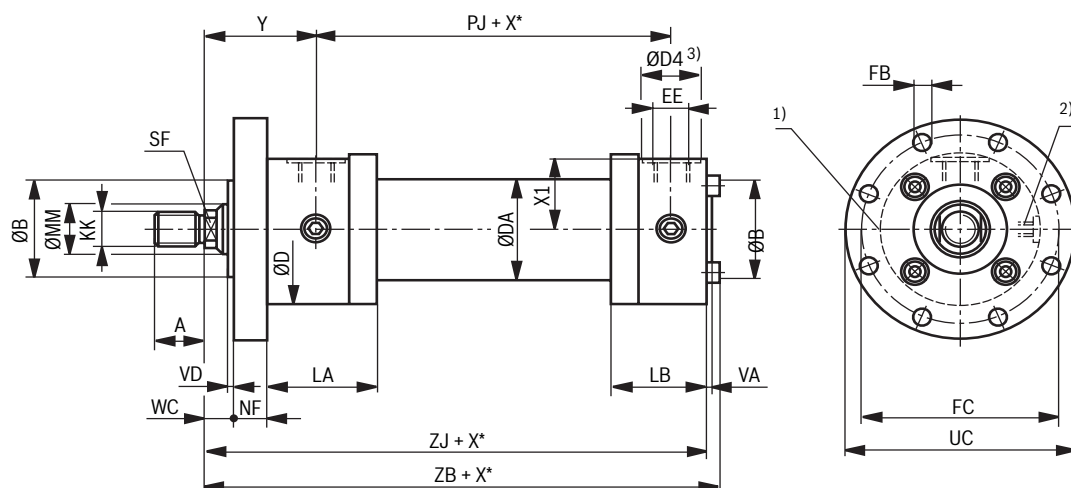

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MF3"
(dimensions in mm)

ØAL	ØMM	KK ⁴⁾ ISO 6020-1	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB f8	ØD	ØDA	ØD4 3; 6)	EE 6)	ØD4 3; 7)	EE 7)	Y ⁸⁾	PJ ⁸⁾
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	160	237	190	58	G1 1/4	52	M42 x 2	143	191
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	200	285	230	58	G1 1/4	52	M42 x 2	190	224

ØAL	ØMM	X1	NF js13	VA	VD	WC ⁸⁾	ZJ ⁸⁾	ZB	ØFC js13	ØUC max.	ØFB H13	LA	LB
25	14 18	26	12	3	3	16	150	156	75	90	6.6	58	43
32	18 22	30.5	16	3	3	16	170	176	92	110	9	62	47
40	22 28	35.5	16	3	3	16	190	196	106	125	9	73	56
50	28 36	44.5	20	4	4	18	205	213	126	150	11	74	62
63	36 45	54.5	25	4	4	20	224	234	145	170	13.5	84	72
80	45 56	62.5	32	4	4	22	250	260	165	195	17.5	93	81
100	56 70	75.5	32	5	5	25	300	310	200	240	22	117	96
125	70 90	92.5	32	5	5	28	325	335	235	275	22	143	112
160	90 110	115.5	36	8	5	30	370	380	280	320	22	171	130
200	110 140	138.5	40	15	5	35	450	466	340	385	26	230	151

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"

6) Line connection "B"


7) Line connection "R"

8) Tolerances according to ISO 6020-1, see page 8


22/62 Series CDM1 | Mill type

Dimensions: "MF4"
(dimensions in mm)

"MF4"

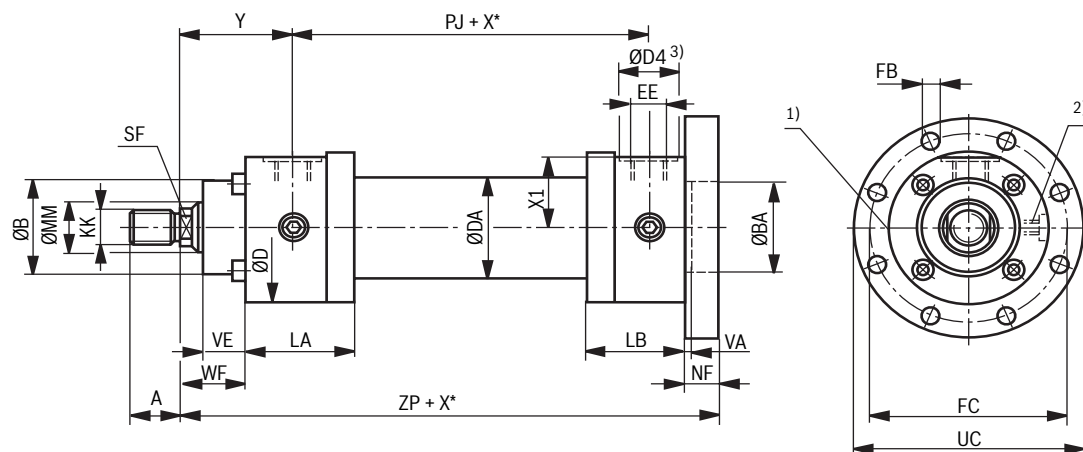

MF4..2X/...A: as chevron seal version and AL- \varnothing 50 ... 200 mm

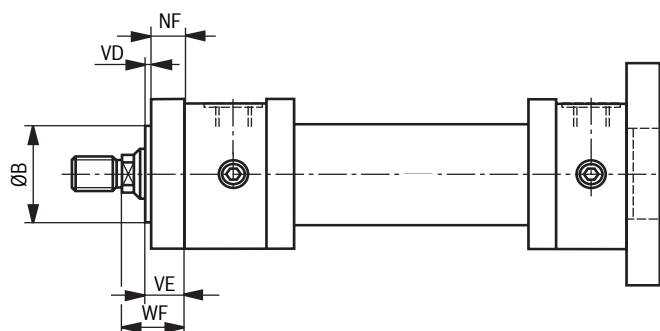

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MF4"
(dimensions in mm)

AL Ø	MM Ø	KK ⁴⁾ ISO 6020-1	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØD	ØDA	ØD4 3; 6)	EE 6)	ØD4 3; 7)	EE 7)	Y ⁸⁾	PJ ⁸⁾
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	56	35	25	G1/4	21	M14 x 1.5	58	77
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	67	42	28	G3/8	26	M18 x 1.5	64	89
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	78	50	34	G1/2	29	M22 x 1.5	71	97
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	95	60	34	G1/2	29	M22 x 1.5	72	111
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	116	78	42	G3/4	34	M27 x 2	82	117
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	130	95	42	G3/4	34	M27 x 2	91	134
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	158	120	47	G1	43	M33 x 2	108	162
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	192	150	47	G1	43	M33 x 2	121	174
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	237	190	58	G1 1/4	52	M42 x 2	143	191
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	285	230	58	G1 1/4	52	M42 x 2	190	224

ØAL	ØMM	X1	WF ⁸⁾ js13	NF	VA	VE	VD	ØB/BA f8/H8	ZP ⁸⁾	ØFC js13	ØUC max.	ØFB H13	LA	LB
25	14 18	26	28	12	3	15	–	32	162	75	90	6.6	58	43
32	18 22	30.5	32	16	3	19	–	40	186	92	110	9	62	47
40	22 28	35.5	32	16	3	19	–	50	206	106	125	9	73	56
50	28 36	44.5	38	20	4	24	4	60	225	126	150	11	74	62
63	36 45	54.5	45	25	4	29	4	70	249	145	170	13.5	84	72
80	45 56	62.5	54	32	4	36	4	85	282	165	195	17.5	93	81
100	56 70	75.5	57	32	5	37	5	106	332	200	240	22	117	96
125	70 90	92.5	60	32	5	37	5	132	357	235	275	22	143	112
160	90 110	115.5	66	36	8	41	5	160	406	280	320	22	171	130
200	110 140	138.5	75	40	15	45	5	200	490	340	385	26	230	151

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"

6) Line connection "B"


7) Line connection "R"

8) Tolerances according to ISO 6020-1, see page 8


24/62 Series CDM1 | Mill type

Dimensions: "MT4"
(dimensions in mm)


"MT4"

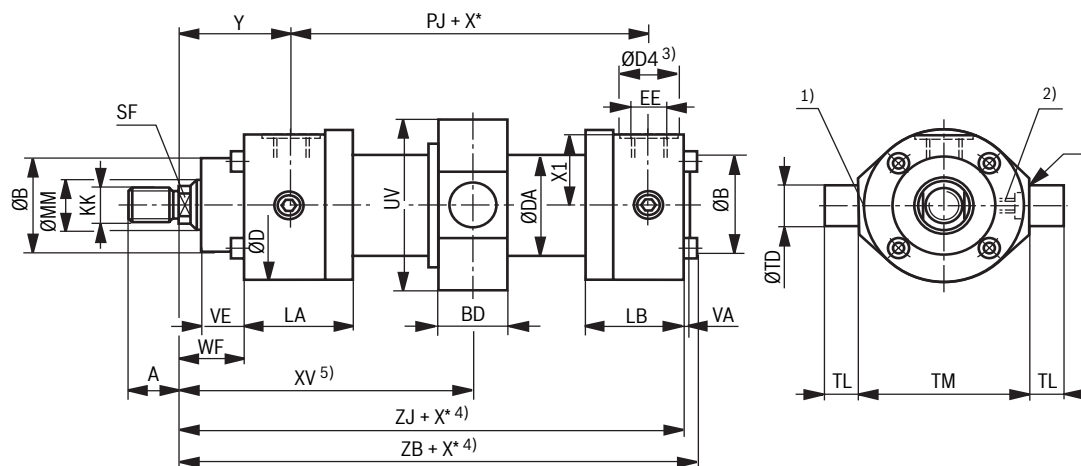

MT4..2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

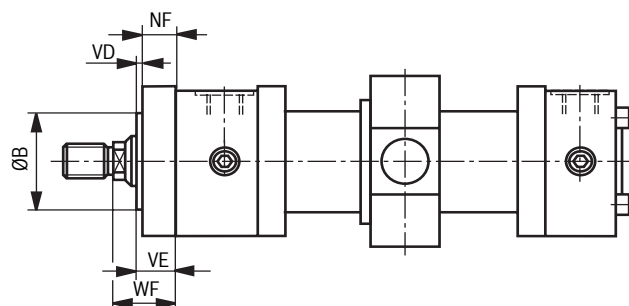

Dimensions for cylinder with piston rod extension "LY"
in retracted condition

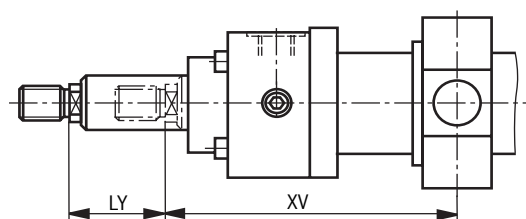

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: "MT4"
(dimensions in mm)

AL Ø	MM Ø	KK ⁶⁾ ISO 6020-1	A ⁶⁾	KK ⁷⁾	A ⁷⁾	SF	ØB f8	ØD	ØDA	ØD4 3); 8)	EE 8)	ØD4 3); 9)	EE 9)	Y ¹¹⁾	PJ ¹¹⁾	X1	VE
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77	26	15
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5	19
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5	19
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5	24
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117	54.5	29
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134	62.5	36
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162	75.5	37
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174	92.5	37
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	160	237	190	58	G1 1/4	52	M42 x 2	143	191	115.5	41
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	200	285	230	58	G1 1/4	52	M42 x 2	190	224	138.5	45

AL Ø	MM Ø	WF ¹¹⁾	NF	VA	VD	ZJ ¹¹⁾	ZB	BD	UV ¹⁰⁾	r	ØTD f8	TL js13	TM h12	XV ^{5); 11)} min.	XV ^{5); 11)} max.	X* ⁴⁾ min.	LA	LB
25	14 18	28	–	3	–	150	156	19	58	0.8	12	10	63	107.5	93.5+X*	22	58	43
32	18 22	32	–	3	–	170	176	24	67	0.8	16	12	75	118	107+X*	19	62	47
40	22 28	32	–	3	–	190	196	28	78	1	20	16	90	131	116+X*	23	73	56
50	28 36	38	20	4	4	205	213	33	95	1	25	20	105	141.5	122.5+X*	28	74	62
63	36 45	45	25	4	4	224	234	38	116	1.5	32	25	120	164	129+X*	47	84	72
80	45 56	54	32	4	4	250	260	53	130	2	40	32	135	189.5	138.5+X*	63	93	81
100	56 70	57	32	5	5	300	310	68	158	2	50	40	160	224	166+X*	70	117	96
125	70 90	60	32	5	5	325	335	78	210	2.5	63	50	195	261	170+X*	106	143	112
160	90 110	66	36	8	5	370	380	118	250	3	80	63	240	320	157+X*	163	171	130
200	110 140	75	40	15	5	450	466	148	300	3	100	80	295	403	201+X*	202	230	151

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Observe the min. stroke length "X*_{min.}"

5) When ordering, always specify the "XV" dimension in the
plain text (observe XV_{min} and XV_{max})

6) Thread for piston rod end "G", "K" and "R"

7) Thread for piston rod end "H", "F" and "P"

8) Line connection "B"

9) Line connection "R"


10) Tolerance according to EN ISO9013: Thermal cutting

11) Tolerances according to ISO 6020-1, see page 8

26/62 Series CDM1 | Mill type

Dimensions: "MS2" (dimensions in mm)

"MS2"

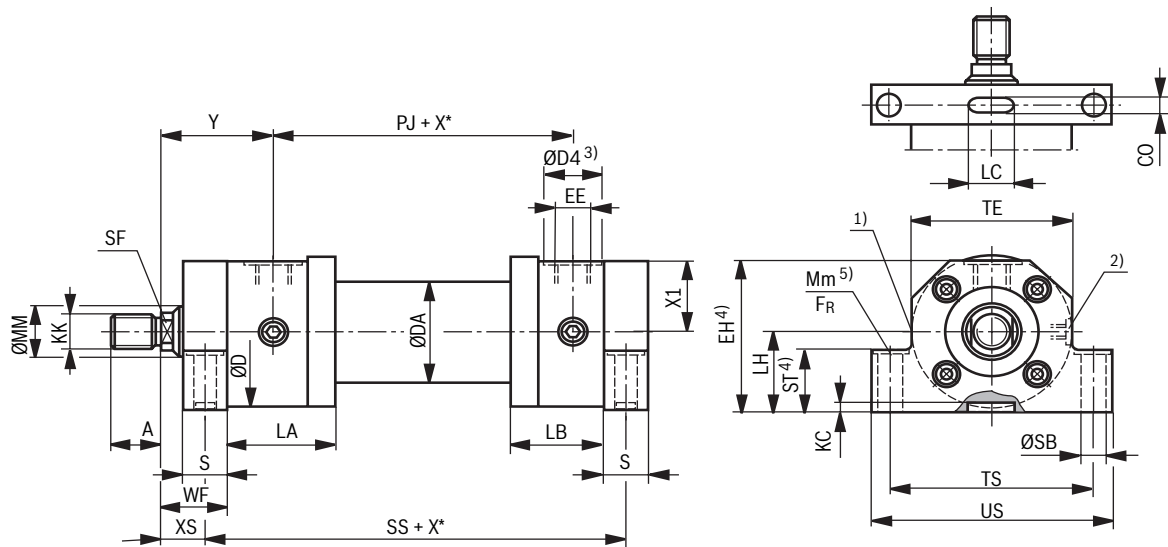

$\emptyset AL$ = piston \emptyset

$\emptyset MM$ = piston rod \emptyset

X^* = stroke length

- 1) Throttle valve only with end position damping "E"
(180° for bleeding)
- 2) Bleeding: With view to the piston rod, the position is offset by 90° in relation to the line connection (clockwise)
- 3) $\emptyset D4$ recess maximum 0.5 mm deep
- 4) Specified dimensions are smaller than the max. dimensions in ISO 6020-1
- 5) Recess maximum 2 mm deep, for hexagon socket head cap screw according to ISO 4762
The mounting screws must not be subjected to shear force.
The mounting screws according to ISO 4762 (property class 10.9) are to be tightened applying the specified tightening torque M_m .
If the calculated frictional force F_R is lower than the maximum cylinder force, a fitting key has to be inserted at the head.
Calculation principle:
 - The specified frictional force F_R refers to a friction factor of 0.2 (steel/steel)
 - Head-side foot as fixed bearing
 - Base-side foot as loose bearing
- 6) Thread for piston rod end "G", "K" and "R"
- 7) Thread for piston rod end "H", "F" and "P"
- 8) Line connection "B"
- 9) Line connection "R"
- 10) Tolerances according to ISO 6020-1, see page 8

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions: "MS2" (dimensions in mm)

AL Ø	MM Ø	KK ⁶⁾ ISO 6020-1	A ⁶⁾	KK ⁷⁾	A ⁷⁾	SF	ØD	ØDA	ØD4 3; 8)	EE 8)	ØD4 3; 9)	EE 9)	Y ¹⁰⁾	PJ ¹⁰⁾	X1	WF ¹⁰⁾
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	56	35	25	G1/4	21	M14 x 1.5	58	77	26	28
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5	32
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5	32
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5	38
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	116	78	42	G3/4	34	M27 x 2	82	117	54.5	45
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	130	95	42	G3/4	34	M27 x 2	91	134	62.5	54
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	158	120	47	G1	43	M33 x 2	108	162	75.5	57
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	192	150	47	G1	43	M33 x 2	121	174	92.5	60
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	237	190	58	G1 1/4	52	M42 x 2	143	191	115.5	66
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	285	230	58	G1 1/4	52	M42 x 2	190	224	138.5	75



AL Ø	MM Ø	XS ¹⁰⁾	SS ¹⁰⁾	CO N9	LC ⁴⁾ +0.5	KC min.	EH ⁴⁾ –1	LH h10	S js13	ØSB H13	ST ⁴⁾	TE js13	TS js13	US max.	LA	LB	FR ⁵⁾ kN	Mm ⁵⁾ Nm
25	14 18	18	142	6	25	3.5	57	32	20	9	24	56	75	92	58	43	4.90	30
32	18 22	19.5	163	8	36	4	67	38	25	11	32	67	90	110	62	47	7.90	60
40	22 28	19.5	183	8	36	4	77.5	43	25	11	32	78	100	120	73	56	7.90	60
50	28 36	22	199	10	40	4.5	95	52	32	14	42	95	120	145	74	62	11.10	100
63	36 45	29	211	10	40	4.5	113	62	32	18	50	116	150	180	84	72	21.15	250
80	45 56	34	236	14	63	5	129	70	40	22	60	130	170	210	93	81	33.35	490
100	56 70	32	293	16	70	6	153	82	50	26	70	158	205	250	117	96	48.30	850
125	70 90	32	321	18	80	6	190	100	56	33	80	192	245	300	143	112	77.80	1710
160	90 110	36	364	22	125	8	232	119	60	33	90	238	295	350	171	130	77.80	1710
200	110 140	39	447	28	160	9	282	145	72	39	110	285	350	415	230	151	113.25	2970

28/62 **Series CDM1** | Mill type

Dimensions: Proximity switch
 (dimensions in mm)

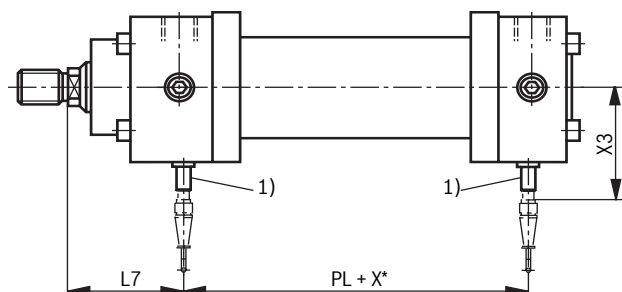

Installation space for mating connector



Mating connector with 5 m cable

Material no. **R913016852**

(Mating connector is **not** included in the scope of delivery, must be ordered separately)




Mating connector, angled with 5 m cable

(position of the cable outlet cannot be defined)

Material no. **R988064311**

(Mating connector is **not** included in the scope of delivery, must be ordered separately)



Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: Proximity switch
 (dimensions in mm)

ØAL	ØMM	PL	L7	X3	X4	X5
25 ²⁾	14	–	–	–	–	–
	18					
32 ²⁾	18	–	–	–	–	–
	22					
40	22	97	71	94	170	125
	28	97	71	94	170	125
50	28	103	76	98	175	130
	36	103	76	98	175	130
63	36	113	84	103	180	135
	45	113	84	103	180	135
80	45	124	96	109	185	140
	56	124	96	109	185	140
100	56	150	114	116	195	150
	70	150	114	116	195	150
125	70	158	129	126	205	160
	90	158	129	126	205	160
160	90	181	148	136	215	170
	110	181	148	136	215	170
200	110	214	195	151	230	185
	140	214	195	151	230	185

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

¹⁾ The proximity switch is always located opposite of the line connection

²⁾ Piston Ø 25 ... 32 mm
 Proximity switch not possible




Notice:

For cylinder dimensions, see page 12 ... 27


30/62 Series CDM1 | Mill type

Piston rod end "E" (dimensions in mm)

ØAL	ØMM	KK ISO 6020-1	A
32	22	M16 x 1.5	22
40	22	M16 x 1.5	22
	28	M20 x 1.5	28
50	28	M20 x 1.5	28
	36	M27 x 2	36
63	36	M27 x 2	36
	45	M33 x 2	45
80	45	M33 x 2	45
	56	M42 x 2	56
100	56	M42 x 2	56
	70	M48 x 2	63
125	70	M48 x 2	63
	90	M64 x 3	85
160	90	M64 x 3	85
	110	M80 x 3	95
200	110	M80 x 3	95
	140	M100 x 3	112



Enlarged line connection (dimensions in mm)

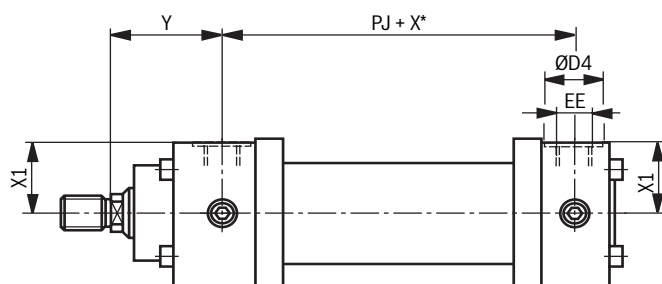

ØAL	Version "S" ISO 1179-1				
	EE	ØD4 ¹⁾	Y	PJ	X1
25	–	–	–	–	–
32	–	–	–	–	–
40	–	–	–	–	–
50	–	–	–	–	–
63	G1	47	80	121	53.5
80	G1	47	91	134	60.5
100	G1 1/4	58	108	162	74
125	G1 1/4	58	121	174	92
160	G1 1/2	65	143	191	114.5
200	G1 1/2	65	190	224	138.5

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

¹⁾ ØD4 recess max. 0.5 mm deep

Notice:


For cylinder dimensions, see page 12 ... 27

Bosch Rexroth AG, RE 17341, edition: 2022-07


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Flange connection (dimensions in mm)

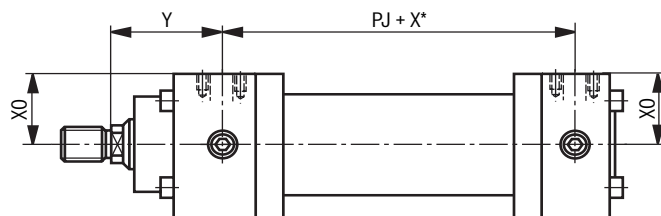

Dimensions for rectangular flange according to ISO 6162-1 (≅SAE 3000 PSI)



Dimensions for square flange according to ISO 6164



ØAL	Version "F" ISO 6162-1 (≅SAE 3000 PSI) ¹⁾									Version "H" ISO 6164						
	Y	PJ	X0	Ød ₃	Ød ₃ ¹⁾	c ±0.25	w ±0.25	d ₁	t ₁ ²⁾	Y	PJ	X0	Ød ₃	w ±0.25	d ₁	t ₁ ²⁾
25	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
40	–	–	–	–	–	–	–	–	–	69	101	34.5	10	24.7	M6	13
50	72	111	41	13	1/2"	38.1	17.5	M8	14	72	111	44	10	24.7	M6	13
63	82	117	52	13	1/2"	38.1	17.5	M8	16	82	117	52	13	29.7	M8	16
80	91	134	60	13	1/2"	38.1	17.5	M8	16	91	134	60	13	29.7	M8	16
100	108	162	72	19	3/4"	47.6	22.3	M10	20	108	162	72	19	35.4	M8	16
125	121	174	91	19	3/4"	47.6	22.3	M10	20	121	174	91	19	35.4	M8	16
160	143	191	114	25	1"	52.4	26.2	M10	20	143	191	114	25	43.8	M10	20
200	190	224	138	25	1"	52.4	26.2	M10	20	190	224	138	25	43.8	M10	20

ØAL = piston Ø

X* = stroke length

¹⁾ Flange connection according to ISO6162-1 corresponds to flange connection according to SAE 3000 PSI

²⁾ Thread depth




Notice:

For cylinder dimensions, see page 12 ... 27

32/62 Series CDM1 | Mill type


Subplates for valve mounting (check valves type SV and SL) (dimensions in mm)

Installation situation with "MT4"

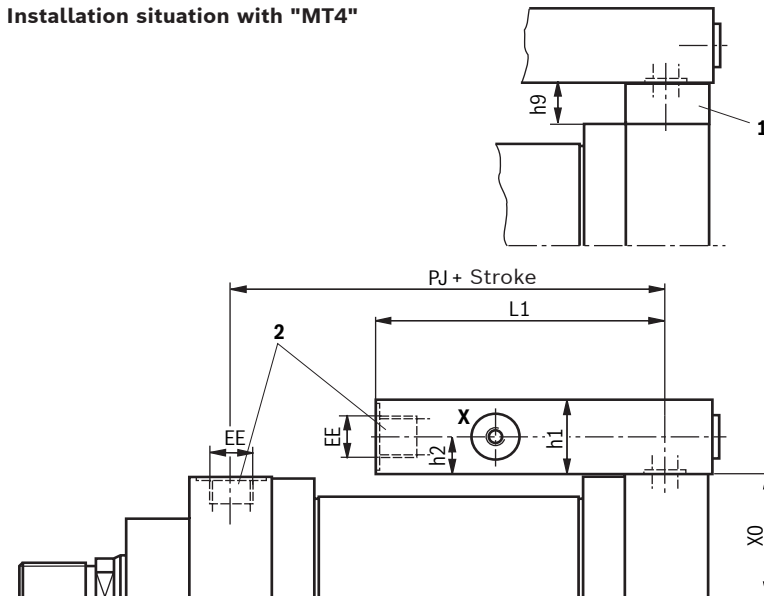


NG6

Porting pattern according to ISO 4401

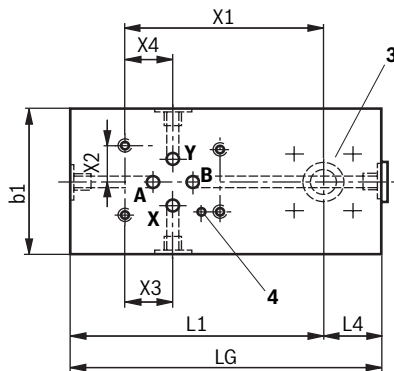

NG10 and 20

Porting pattern according to ISO 5781

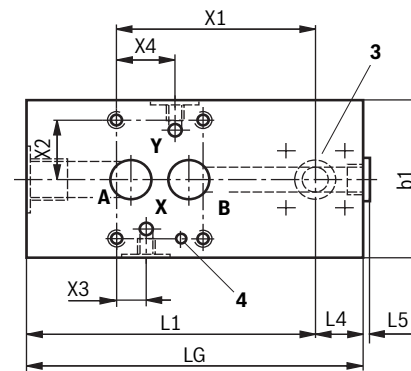

- 1 Adapter plate for type of mounting "MT4"
(included in the scope of delivery for "MT4")
- 2 Line connection "B", dimensions see also page 12...27
- 3 Port "B" to the piston side according to ISO 6164
- 4 Bore for locking pin

Notice:

- Seal designs "T" and "S" are not designed for the static holding function.
- Valves, fittings and piping are not included in the scope of delivery.

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Subplates for valve mounting (check valves type SV and SL) (dimensions in mm)

ØAL	Valve size (NG)	PJ	EE	Minimum stroke ¹⁾		X0	Plate dimensions						
				²⁾	³⁾		L1	L4	L5	LG	b1	h1	h9
40	6	97	G1/2	100	100	34.5	90	20	4	110	55	40	10
50	6	111	G1/2	100	100	44	90	20	4	110	55	40	10
63	6	117	G3/4	100	100	52	100	25	5	125	55	45	10
	10	117	G3/4	100	100	52	105	25	6	130	85	45	10
80	6	134	G3/4	100	100	60	100	25	5	125	55	45	10
	10	134	G3/4	100	100	60	105	25	5	130	85	45	10
100	10	162	G1	100	100	72	102	28	5	130	85	50	10
125	10	174	G1	100	106	91	102	28	5	130	85	50	20
	20	174	G1	100	106	91	137	28	5	165	100	50	20
160	10	191	G1 1/4	100	163	114	115	35	5	150	85	60	20
	20	191	G1 1/4	100	163	114	140	35	5	175	100	60	20
200	10	224	G1 1/4	100	202	138	115	35	5	150	85	60	20
	20	224	G1 1/4	100	202	138	140	35	5	175	100	60	20


ØAL	Valve size (NG)	Port size, porting pattern						Position point Valve	
		h2	A	X	Y	X3	X4	X1	X2
40	6	20	G1/2	G1/4	G1/4	21.5	21.5	65.5	15.5
50	6	20	G1/2	G1/4	G1/4	21.5	21.5	65.5	15.5
63	6	22.5	G3/4	G1/4	G1/4	21.5	21.5	70.5	15.5
	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	73	33.35
80	6	22.5	G3/4	G1/4	G1/4	21.5	21.5	70.5	15.5
	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	73	33.35
100	10	25	G1	G1/4	G1/4	21.5	21.5	70	33.35
125	10	25	G1	G1/4	G1/4	21.5	21.5	70	33.35
	20	25	G1	G1/4	G1/4	20.6	39.5	92	39.7
160	10	30	G1 1/4	G1/4	G1/4	21.5	21.5	80	33.35
	20	30	G1 1/4	G1/4	G1/4	20.6	39.5	95	39.7
200	10	30	G1 1/4	G1/4	G1/4	21.5	21.5	80	33.35
	20	30	G1 1/4	G1/4	G1/4	20.6	39.5	95	39.7

ØAL = piston Ø

¹⁾ The information only applies to the following connection situation,
see representation.

²⁾ Not for "MT4"


³⁾ Only for "MT4"

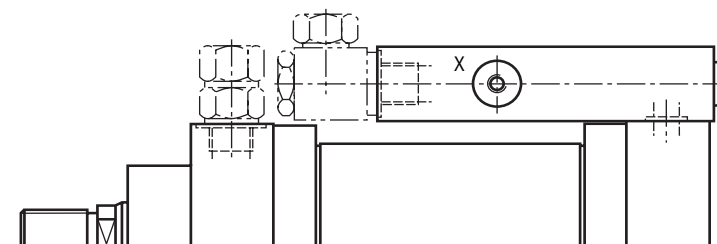


34/62 Series CDM1 | Mill type

Subplates for valve mounting (switching and proportional directional valves) (dimensions in mm)


Installation situation with "MT4"

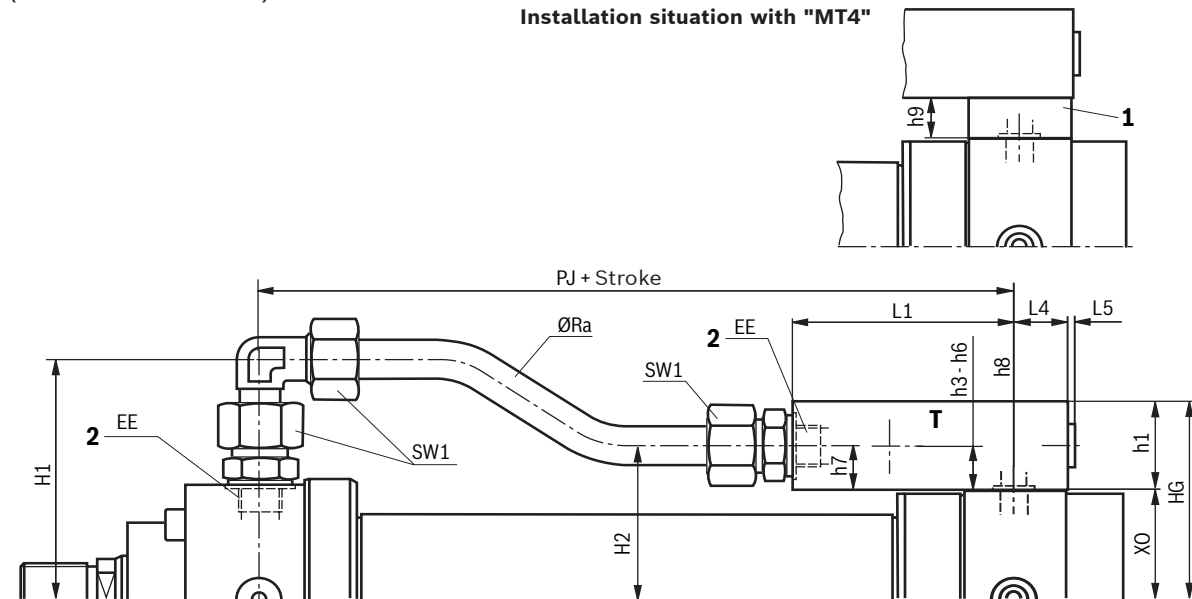


NG6

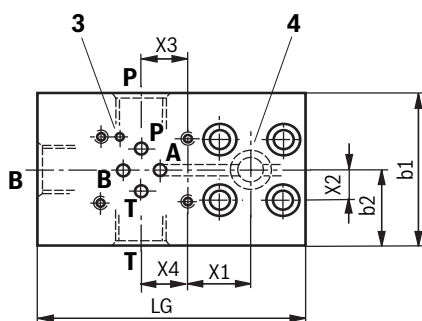

NG10

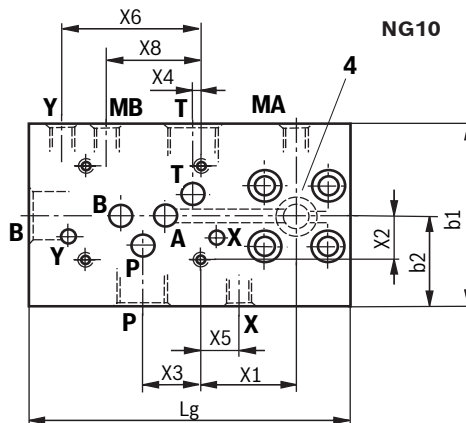

NG16

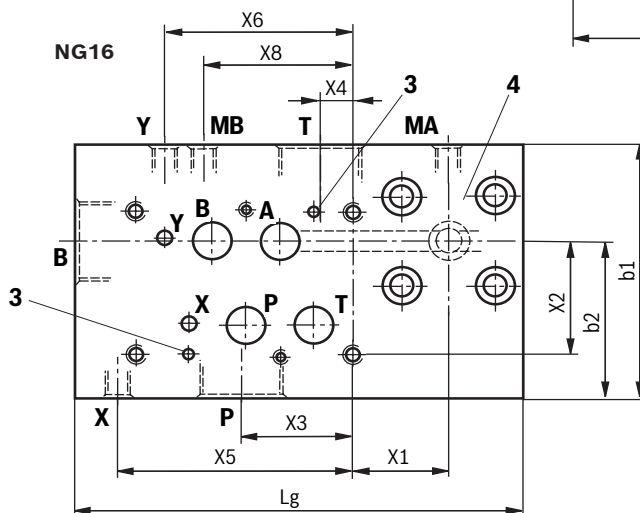

- 1 Adapter plate for type of mounting "MT4"
(included in the scope of delivery for "MT4")
- 2 Line connection "B"
(dimensions see also page 12...27)
- 3 Bore for locking pin
- 4 Port "B" to the piston side according to ISO 6164

Notice:

Porting pattern according to ISO 4401

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Subplates for valve mounting (switching and proportional directional valves) (dimensions in mm)

ØAL	Valve size (NG)	PJ	EE	Minimum stroke	Plate and piping dimensions																
					L1	L4	L5 _{max.}	H1	H2 1)	H2 2)	SW1	ØRa	b1	h1	lg	HG 1)	HG 2)	b2	X0	h7	h9
40	6	101	G1/2	225	90	20	4	90	54.5	64.5	30	16.0 x 2.5	65	40	110	74.5	84.5	32.5	34.5	20	10
50	6	111	G1/2	215	90	20	4	99	64	74	30	16.0 x 2.5	65	40	110	84	94	32.5	44	20	10
63	6	117	G3/4	250	100	25	5	119	74.5	84.5	36	20.0 x 3.0	75	45	125	97	107	37.5	52	22.5	10
	10	117	G3/4	275	125	25	5	119	75	85	36	20.0 x 3.0	90	70	150	122	132	45	52	23	10
80	6	134	G3/4	235	100	25	5	127	82.5	92.5	36	20.0 x 3.0	75	45	125	105	115	37.5	60	22.5	10
	10	134	G3/4	260	125	25	5	127	83	93	36	20.0 x 3.0	90	70	150	130	140	45	60	23	10
100	10	162	G1	280	132	28	5	148	102	112	46	25.0 x 4.0	90	80	160	152	162	45	72	30	10
125	10	174	G1	270	132	28	5	165	121	141	46	25.0 x 4.0	90	80	160	171	191	45	91	30	20
	16	174	G1	300	162	28	5	165	131	151	46	25.0 x 4.0	120	90	190	181	201	77.5	91	40	20
160	10	191	G1 1/4	295	135	35	5	193.5	149	169	50	30.0 x 5.0	105	95	170	209	229	55	114	35	20
	16	191	G1 1/4	335	175	35	5	193.5	159	179	50	30.0 x 5.0	125	100	210	214	234	77.5	114	45	20
200	10	224	G1 1/4	260	135	35	5	216.5	173	193	50	30.0 x 5.0	105	95	170	233	253	55	138	35	20
	16	224	G1 1/4	300	175	35	5	216.5	183	203	50	30.0 x 5.0	125	100	210	238	258	77.5	138	45	20

ØAL	Valve size (NG)	Port size, porting pattern															
		P	X3	h3	T	X4	h4	X	X5	h5	Y	X6	h6	MA	MB	X8	h8
40	6	G1/2	21.5	20	G1/2	21.5	20	-	-	-	-	-	-	-	-	-	-
50	6	G1/2	21.5	20	G1/2	21.5	20	-	-	-	-	-	-	-	-	-	-
63	6	G3/4	21.5	22.5	G3/4	21.5	22.5	-	-	-	-	-	-	-	-	-	-
	10	G3/4	27	33	G3/4	3.5	33	G1/4	18	47	G1/4	65	47	G1/4	G1/4	60	17
80	6	G3/4	21.5	22.5	G3/4	21.5	22.5	-	-	-	-	-	-	-	-	-	-
	10	G3/4	27	33	G3/4	3.5	33	G1/4	18	47	G1/4	65	47	G1/4	G1/4	60	17
100	10	G1	27	30	G1	3.5	40	G1/4	18	57	G1/4	65	57	G1/4	G1/4	58	20
125	10	G1	27	30	G1	3.5	40	G1/4	18	57	G1/4	65	57	G1/4	G1/4	58	20
	16	G1	50	26	G1	17.0	25	G1/4	105	45	G1/4	88	70	G1/4	G1/4	88	35
160	10	G1 1/4	27	35	G1 1/4	3.5	45	G1/4	20	72	G1/4	65	72	G1/4	G1/4	55	25
	16	G1 1/4	52	32	G1 1/4	15.0	32	G1/4	110	55	G1/4	88	80	G1/4	G1/4	88	40
200	10	G1 1/4	27	35	G1 1/4	3.5	45	G1/4	20	72	G1/4	65	72	G1/4	G1/4	55	25
	16	G1 1/4	52	32	G1 1/4	15.0	32	G1/4	110	55	G1/4	88	80	G1/4	G1/4	88	40

ØAL	Valve size (NG)	Position point of valve	
		X1	X2
40	6	25	15.5
50	6	25	15.5
63	6	30	15.5
	10	45	21.4
80	6	30	15.5
	10	45	21.4
100	10	52	21.4
125	10	52	21.4
	16	37	55.6
160	10	55	21.4
	16	45	55.6
200	10	55	21.4
	16	45	55.6



Notice:

The dimensions h3, h4, h5, h6, h8 and X3, X4, X5, X6 determine the position of ports P, T, B, X, Y.

ØAL = piston Ø


1) Not for "MT4"

2) Only for "MT4"

36/62 Series CDM1 | Mill type

Bleeding / measuring coupling
(dimensions in mm)


For piston $\varnothing \geq 40$ mm,
a patented safety vent against unintended screwing out in
head and base is delivered by default.
For piston $\varnothing 25$ and 32 mm, a bleed screw G1/8 is
installed in head and base which is not secured against
screwing out.
The port allows for the installation of a measuring
coupling with check valve for pressure measurement or
contamination-free bleeding. Measuring coupling with
check valve function, i.e. it can also be connected when
the system is pressurized.




1) Bleeding: With view to the piston rod, the position is
offset by 90° in relation to the line connection (clockwise)

Connection possibility for measuring coupling


Piston \varnothing (AL) 25 and 32 mm

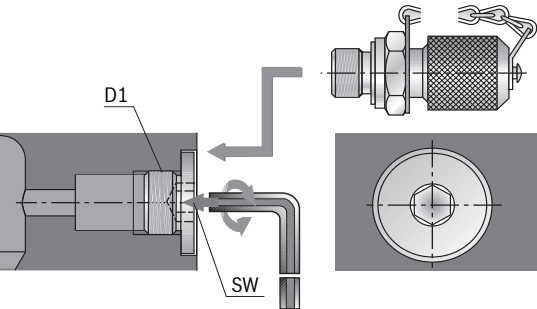

Piston \varnothing (AL) 40 ... 200 mm

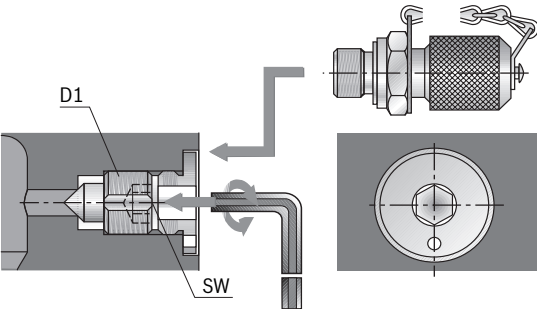

\varnothing AL	D1	Bleed screw		Measuring coupling	
		Fuse	SW	D2	
25 and 32	G1/8	not secured	5	G1/8	
40 and 50	G1/8	secured	5	G1/8	
63 ... 200	G1/4	secured	6	G1/4	

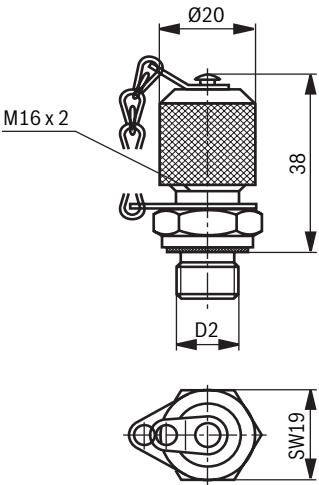


Scope of delivery: Measuring coupling **G1/8**
MEASURING COUPLING AB 20-11/K3 G1/8 with
seal ring made of NBR
Material no. **R900014363**
MEASURING COUPLING AB 20-11/K3V G1/8 with
seal ring made of FKM
Material no. **R900024710**

Scope of delivery: Measuring coupling **G1/4**
MEASURING COUPLING AB 20-11/K1 G1/4 with
seal ring made of NBR
Material no. **R900009090**
MEASURING COUPLING AB 20-11/K1V G1/4 with
seal ring made of FKM
Material no. **R900001264**

Throttle valve
(dimensions in mm)

ØAL	25	32	40	50	63	80	100	125	160	200
Protrusion A ¹⁾	6.5	4	5.5	1.5	0	0	0	0	0	0


ØAL = piston Ø
¹⁾ Throttle valve only with end position damping "E"
(180° for bleeding) Protrusion A in closed condition



38/62 Series CDM1 | Mill type

Swivel head CGKD (clampable) (dimensions in mm)

ISO 8132

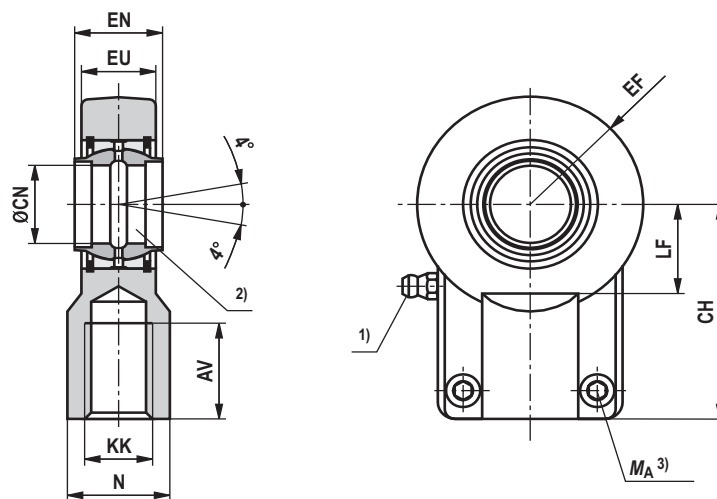

ØAL	ØMM	Type	Material no.	Nominal force kN	AV min.	N max.	CH js13	EF max.	ØCN H7 2)	EN h12	EU max.
25	14	CGKD 12 7)	R900540998	8	17	19	38	16.5	12	12	11
	18	CGKD 12 7)	R900540998	8	17	19	38	16.5	12	12	11
	18	CGKD 16	R900308559	12.5	19	22	44	20.5	16	16	14
32	18	CGKD 16	R900308559	12.5	19	22	44	20.5	16	16	14
	22	CGKD 16	R900308559	12.5	19	22	44	20.5	16	16	14
	22	CGKD 20	R900308576	20	23	28	52	25	20	20	17.5
40	22	CGKD 20	R900308576	20	23	28	52	25	20	20	17.5
	28	CGKD 20	R900308576	20	23	28	52	25	20	20	17.5
	28	CGKD 25	R900323332	32	29	31	65	32	25	25	22
50	28	CGKD 25	R900323332	32	29	31	65	32	25	25	22
	36	CGKD 25	R900323332	32	29	31	65	32	25	25	22
	36	CGKD 32	R900322049	50	37	38	80	40	32	32	28
63	36	CGKD 32	R900322049	50	37	38	80	40	32	32	28
	45	CGKD 32	R900322049	50	37	38	80	40	32	32	28
	45	CGKD 40	R900322029	80	46	47	97	50	40	40	34
80	45	CGKD 40	R900322029	80	46	47	97	50	40	40	34
	56	CGKD 40	R900322029	80	46	47	97	50	40	40	34
	56	CGKD 50	R900322719	125	57	58	120	63	50	50	42
100	56	CGKD 50	R900322719	125	57	58	120	63	50	50	42
	70	CGKD 50	R900322719	125	57	58	120	63	50	50	42
	70	CGKD 63	R900322028	200	64	70	140	72.5	63	63	53.5
125	70	CGKD 63	R900322028	200	64	70	140	72.5	63	63	53.5
	90	CGKD 63	R900322028	200	64	70	140	72.5	63	63	53.5
	90	CGKD 80	R900322700	320	86	91	180	92	80	80	68
160	90	CGKD 80	R900322700	320	86	91	180	92	80	80	68
	110	CGKD 80	R900322700	320	86	91	180	92	80	80	68
	110	CGKD 100	R900322030	500	96	110	210	114	100	100	85.5
200	110	CGKD 100	R900322030	500	96	110	210	114	100	100	85.5
	140	CGKD 100	R900322030	500	96	110	210	114	100	100	85.5
	140	CGKD 125	R900322026	800	113	135	260	160	125	125	105

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Swivel head **CGKD** (clampable) (dimensions in mm)

ØAL	ØMM	Type	KK 6H	LF min.	Clamping screw ISO 4762-10.9	M_A ³⁾ Nm	m ⁴⁾ kg	C_0 ⁵⁾ kN	F_{adm} ⁶⁾ kN
25	14	CGKD 12 ⁷⁾	M12 x 1.25	13	M5 x 16	6	0.1	24.5	9.0
	18	CGKD 12 ⁷⁾	M12 x 1.25	13	M5 x 16	6	0.1	24.5	9.0
	18	CGKD 16 ⁸⁾	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
32	18	CGKD 16 ⁸⁾	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
	22	CGKD 16 ⁸⁾	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
	22	CGKD 20 ⁸⁾	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
40	22	CGKD 20 ⁸⁾	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
	28	CGKD 20 ⁸⁾	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
	28	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
50	28	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
	36	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
	36	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
63	36	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
	45	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
	45	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
80	45	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
	56	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
	56	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
100	56	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
	70	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
	70	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
125	70	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
	90	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
	90	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
160	90	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
	110	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
	110	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
200	110	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
	140	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
	140	CGKD 125	M100 x 3	116	M24 x 70	840	52.5	1430	527.7

ØAL = piston Ø

ØMM = piston rod Ø

¹⁾ Grease nipple, cone head form A according to DIN 71412

²⁾ Related bolt Ø m6

³⁾ M_A = tightening torque

The swivel head must always be screwed against the shoulder of the piston rod. Afterwards, the clamping screws must be tightened with the specified tightening torque.

⁴⁾ m = mass of swivel head in kg

⁵⁾ C_0 = static load rating of the swivel head

⁶⁾ F_{adm} = maximum admissible load on the swivel head during oscillatory or alternating loads

⁷⁾ Bearing cannot be re-lubricated

⁸⁾ Flat type grease nipple not possible



Notice:


Geometry and dimensions may differ depending on the manufacturer.

In case of combination with other mounting elements, the usability must be checked. The clevis brackets are suitable for attachment in case of type of mounting "MP5" and at the swivel head.

40/62 **Series CDM1** | Mill type

Fork clevis **CCKB** (clampable) (dimensions in mm)

ISO 8132

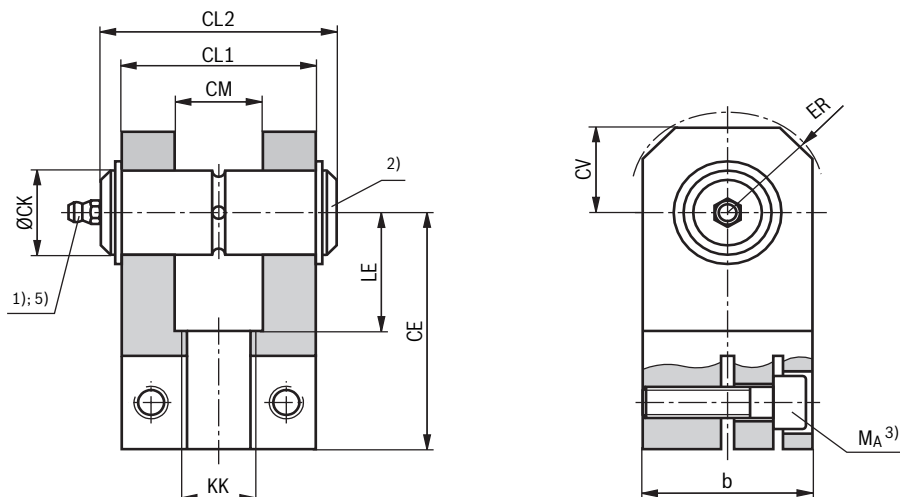

ØAL	ØMM	Type	Material no.	Nominal force kN	b max.	CE js13	ØCK H9 2)	CL1 h16	CL2 max.	CM A13	ER max.
25	14	CCKB 12 5)	R900542842	8	25	38	12	28	49	12	16
	18	CCKB 12 5)	R900542842	8	25	38	12	28	49	12	16
	18	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
32	18	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
	22	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
	22	CCKB 20	R900542844	20	40	52	20	45	72	20	25
40	22	CCKB 20	R900542844	20	40	52	20	45	72	20	25
	28	CCKB 20	R900542844	20	40	52	20	45	72	20	25
	28	CCKB 25	R900542845	32	50	65	25	56	84	25	32
50	28	CCKB 25	R900542845	32	50	65	25	56	84	25	32
	36	CCKB 25	R900542845	32	50	65	25	56	84	25	32
	36	CCKB 32	R900542846	50	65	80	32	70	105	32	40
63	36	CCKB 32	R900542846	50	65	80	32	70	105	32	40
	45	CCKB 32	R900542846	50	65	80	32	70	105	32	40
	45	CCKB 40	R900542847	80	80	97	40	90	133	40	50
80	45	CCKB 40	R900542847	80	80	97	40	90	133	40	50
	56	CCKB 40	R900542847	80	80	97	40	90	133	40	50
	56	CCKB 50	R900542848	125	100	120	50	110	165	50	63
100	56	CCKB 50	R900542848	125	100	120	50	110	165	50	63
	70	CCKB 50	R900542848	125	100	120	50	110	165	50	63
	70	CCKB 63	R900542849	200	140	140	63	140	185	63	71
125	70	CCKB 63	R900542849	200	140	140	63	140	185	63	71
	90	CCKB 63	R900542849	200	140	140	63	140	185	63	71
	90	CCKB 80	R900542850	320	180	180	80	170	225	80	90
160	90	CCKB 80	R900542850	320	180	180	80	170	225	80	90
	110	CCKB 80	R900542850	320	180	180	80	170	225	80	90
	110	CCKB 100	6)	500	220	210	100	210	6)	100	110
200	110	CCKB 100	6)	500	220	210	100	210	6)	100	110
	140	CCKB 100	6)	500	220	210	100	210	6)	100	110

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Fork clevis CCKB (clampable) (dimensions in mm)

ØAL	ØMM	Type	KK 6H	LE min.	CV max.	Clamping screw ISO 4762-10.9	M _A ³⁾ Nm	m ⁴⁾ kg
25	14	CCKB 12 ⁵⁾	M12 x 1.25	18	16	M4 x 16	2.9	0.2
	18	CCKB 12 ⁵⁾	M12 x 1.25	18	16	M4 x 16	2.9	0.2
	18	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
32	18	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
	22	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
	22	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
40	22	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
	28	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
	28	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
50	28	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
	36	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
	36	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
63	36	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
	45	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
	45	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
80	45	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
	56	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
	56	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
100	56	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
	70	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
	70	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
125	70	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
	90	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
	90	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
160	90	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
	110	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
	110	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾
200	110	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾
	140	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾

ØAL = piston Ø

ØMM = piston rod Ø

¹⁾ Grease nipple, cone head form A according to DIN 71412

²⁾ Bolt Ø m6 required (bolt and bolt lock are included in the scope of delivery and are not mounted upon delivery)

³⁾ M_A = tightening torque

The fork clevis must always be screwed against the shoulder of the piston rod. Afterwards, the clamping screws must be tightened with the specified tightening torque.

⁴⁾ m = mass of the fork clevis in kg

⁵⁾ Without lubrication bore

⁶⁾ On request



Notice:

Geometry and dimensions may differ depending on the manufacturer.


All graphical representations are examples.

In case of combination with other mounting elements, the usability must be checked.

42/62 Series CDM1 | Mill type

Clevis bracket CLCA (dimensions in mm)

ISO 8132, form B

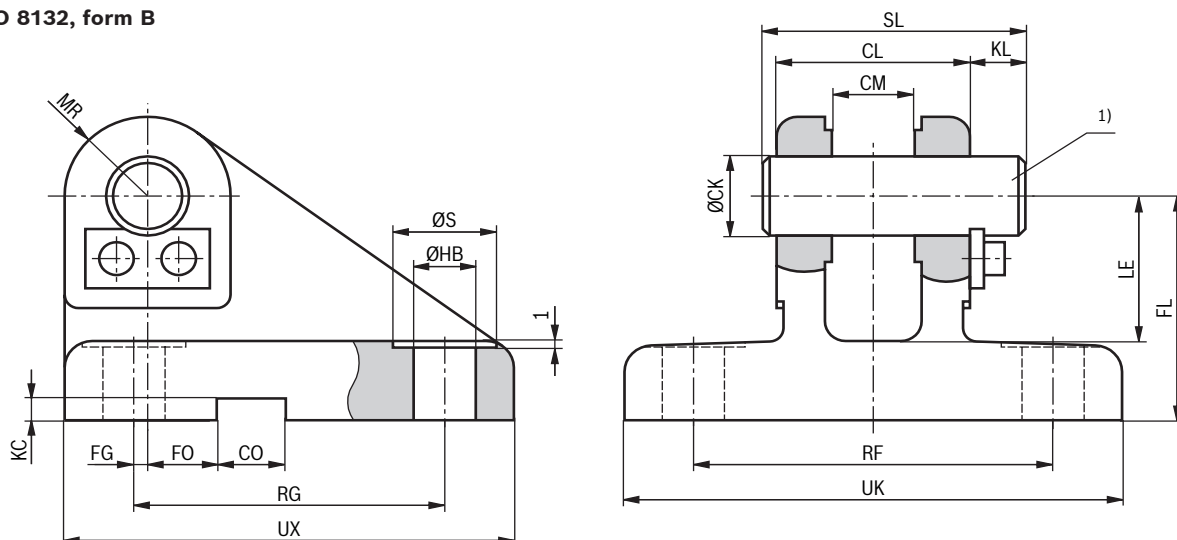

ØAL	ØMM	Type	Material no.	Nominal force kN	ØCK H9 1)	CL h16	CM A13	CO N9	FG JS14	FL js13	FO JS14
25	14	CLCA 12	R900542861	8	12	28	12	10	2	34	10
	18	CLCA 12	R900542861	8	12	28	12	10	2	34	10
	18	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
32	18	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
	22	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
	22	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
40	22	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
	28	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
	28	CLCA 25	R900542864	32	25	56	25	25	10	55	10
50	28	CLCA 25	R900542864	32	25	56	25	25	10	55	10
	36	CLCA 25	R900542864	32	25	56	25	25	10	55	10
	36	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
63	36	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
	45	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
	45	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
80	45	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
	56	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
	56	CLCA 50	R900542867	125	50	110	50	36	25	95	0
100	56	CLCA 50	R900542867	125	50	110	50	36	25	95	0
	70	CLCA 50	R900542867	125	50	110	50	36	25	95	0
	70	CLCA 63	R900542868	200	63	140	63	50	33	112	0
125	70	CLCA 63	R900542868	200	63	140	63	50	33	112	0
	90	CLCA 63	R900542868	200	63	140	63	50	33	112	0
	90	CLCA 80	R900542869	320	80	170	80	50	45	140	0
160	90	CLCA 80	R900542869	320	80	170	80	50	45	140	0
	110	CLCA 80	R900542869	320	80	170	80	50	45	140	0
	110	CLCA 100	3)	500	100	210	100	63	52.5	180	0
200	110	CLCA 100	3)	500	100	210	100	63	52.5	180	0
	140	CLCA 100	3)	500	100	210	100	63	52.5	180	0
	140	CLCA 125	3)	800	125	270	125	80	75	230	0

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Clevis bracket CLCA (dimensions in mm)

ØAL	ØMM	Type	ØHB H13	KC +0.3	KL	LE min.	MR max.	RF js13	RG js13	ØS	SL	UK max.	UX max.	m ²⁾ kg
25	14	CLCA 12	9	3.3	8	22	12	52	45	15	38	72	65	0.45
	18	CLCA 12	9	3.3	8	22	12	52	45	15	38	72	65	0.45
	18	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
32	18	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
	22	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
	22	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
40	22	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
	28	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
	28	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
50	28	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
	36	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
	36	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
63	36	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
	45	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
	45	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
80	45	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
	56	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
	56	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
100	56	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
	70	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
	70	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
125	70	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
	90	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
	90	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
160	90	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
	110	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
	110	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	3)
200	110	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	3)
	140	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	3)
	140	CLCA 125	52	15.4	32	170	125	365	350	76	310	455	450	3)

ØAL = piston Ø

ØMM = piston rod Ø

1) Bolt Ø m6 required
(bolt and bolt lock are included in the scope of delivery and are not mounted upon delivery)

2) **m** = Mass of clevis bracket in kg

3) On request



Notice:

Geometry and dimensions may differ depending on the manufacturer.


All representations are examples.

In case of combination with other mounting elements, the usability must be checked.

44/62 Series CDM1 | Mill type

Clevis bracket CLCD (dimensions in mm)

ISO 8132, form A

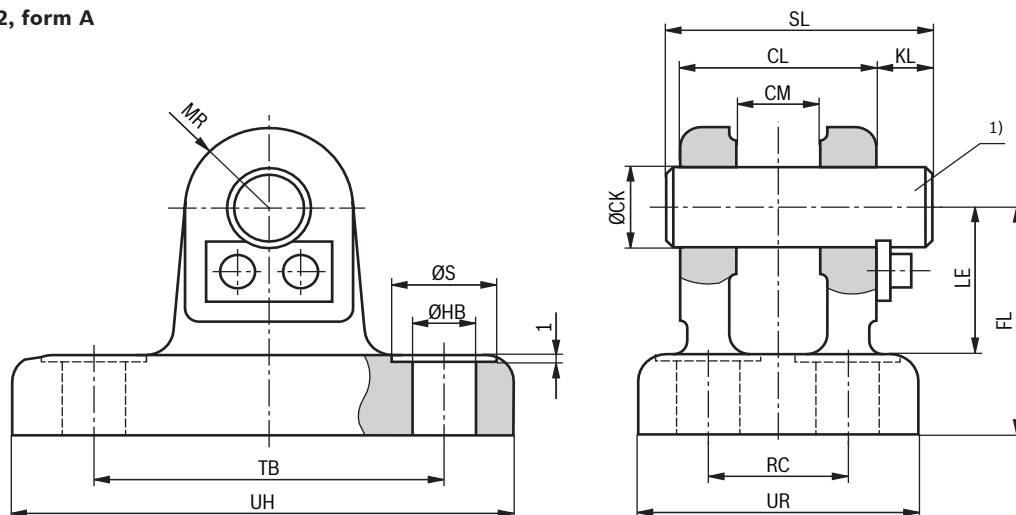

ØAL	ØMM	Type	Material no.	Nominal force kN	ØCK H9 1)	CL h16	CM A13	FL js12	ØHB H13	KL
25	14	CLCD 12	R900542879	8	12	28	12	34	9	8
	18	CLCD 12	R900542879	8	12	28	12	34	9	8
	18	CLCD 16	R900542880	12.5	16	36	16	40	11	8
32	18	CLCD 16	R900542880	12.5	16	36	16	40	11	8
	22	CLCD 16	R900542880	12.5	16	36	16	40	11	8
	22	CLCD 20	R900542881	20	20	45	20	45	11	10
40	22	CLCD 20	R900542881	20	20	45	20	45	11	10
	28	CLCD 20	R900542881	20	20	45	20	45	11	10
	28	CLCD 25	R900542882	32	25	56	25	55	13.5	10
50	28	CLCD 25	R900542882	32	25	56	25	55	13.5	10
	36	CLCD 25	R900542882	32	25	56	25	55	13.5	10
	36	CLCD 32	R900542883	50	32	70	32	65	17.5	13
63	36	CLCD 32	R900542883	50	32	70	32	65	17.5	13
	45	CLCD 32	R900542883	50	32	70	32	65	17.5	13
	45	CLCD 40	R900542884	80	40	90	40	76	22	16
80	45	CLCD 40	R900542884	80	40	90	40	76	22	16
	56	CLCD 40	R900542884	80	40	90	40	76	22	16
	56	CLCD 50	R900542885	125	50	110	50	95	26	19
100	56	CLCD 50	R900542885	125	50	110	50	95	26	19
	70	CLCD 50	R900542885	125	50	110	50	95	26	19
	70	CLCD 63	R900542886	200	63	140	63	112	33	20
125	70	CLCD 63	R900542886	200	63	140	63	112	33	20
	90	CLCD 63	R900542886	200	63	140	63	112	33	20
	90	CLCD 80	R900542887	320	80	170	80	140	39	26
160	90	CLCD 80	R900542887	320	80	170	80	140	39	26
	110	CLCD 80	R900542887	320	80	170	80	140	39	26
	110	CLCD 100	3)	500	100	210	100	180	45	30
200	110	CLCD 100	3)	500	100	210	100	180	45	30
	140	CLCD 100	3)	500	100	210	100	180	45	30
	140	CLCD 125	3)	800	125	270	125	230	52	32

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Clevis bracket CLCD

(dimensions in mm)

ØAL	ØMM	Type	LE min.	MR max.	RC JS14	ØS	SL	TB JS14	UR max.	UH max.	m ²⁾ kg
25	14	CLCD 12	22	12	20	15	38	50	40	70	0.35
	18	CLCD 12	22	12	20	15	38	50	40	70	0.35
	18	CLCD 16	27	16	26	18	46	65	50	90	0.7
32	18	CLCD 16	27	16	26	18	46	65	50	90	0.7
	22	CLCD 16	27	16	26	18	46	65	50	90	0.7
	22	CLCD 20	30	20	32	18	58	75	58	98	0.95
40	22	CLCD 20	30	20	32	18	58	75	58	98	0.95
	28	CLCD 20	30	20	32	18	58	75	58	98	0.95
	28	CLCD 25	37	25	40	20	69	85	70	113	1.9
50	28	CLCD 25	37	25	40	20	69	85	70	113	1.9
	36	CLCD 25	37	25	40	20	69	85	70	113	1.9
	36	CLCD 32	43	32	50	26	87	110	85	143	3
63	36	CLCD 32	43	32	50	26	87	110	85	143	3
	45	CLCD 32	43	32	50	26	87	110	85	143	3
	45	CLCD 40	52	40	65	33	110	130	108	170	5.5
80	45	CLCD 40	52	40	65	33	110	130	108	170	5.5
	56	CLCD 40	52	40	65	33	110	130	108	170	5.5
	56	CLCD 50	65	50	80	40	133	170	130	220	10.6
100	56	CLCD 50	65	50	80	40	133	170	130	220	10.6
	70	CLCD 50	65	50	80	40	133	170	130	220	10.6
	70	CLCD 63	75	63	100	48	164	210	160	270	17
125	70	CLCD 63	75	63	100	48	164	210	160	270	17
	90	CLCD 63	75	63	100	48	164	210	160	270	17
	90	CLCD 80	95	80	125	57	202	250	210	320	32
160	90	CLCD 80	95	80	125	57	202	250	210	320	32
	110	CLCD 80	95	80	125	57	202	250	210	320	32
	110	CLCD 100	120	100	160	66	246	315	260	400	³⁾
200	110	CLCD 100	120	100	160	66	246	315	260	400	³⁾
	140	CLCD 100	120	100	160	66	246	315	260	400	³⁾
	140	CLCD 125	170	125	200	76	310	385	320	470	³⁾

ØAL = piston Ø

ØMM = piston rod Ø

¹⁾ Bolt Ø m6 required
 (bolt and bolt lock are included in the scope of delivery and
 are not mounted upon delivery)

²⁾ **m** = mass of clevis bracket in kg

³⁾ On request



Notice:

Geometry and dimensions may differ depending on the manufacturer.

All graphical representations are examples.

In case of combination with other mounting elements,
 the usability must be checked.


46/62 **Series CDM1** | Mill type

Trunnion mounting bearing bracket CLTB (dimensions in mm)

ISO 8132, form A

CLTB 12 ... 20

CLTB 25 ... 110

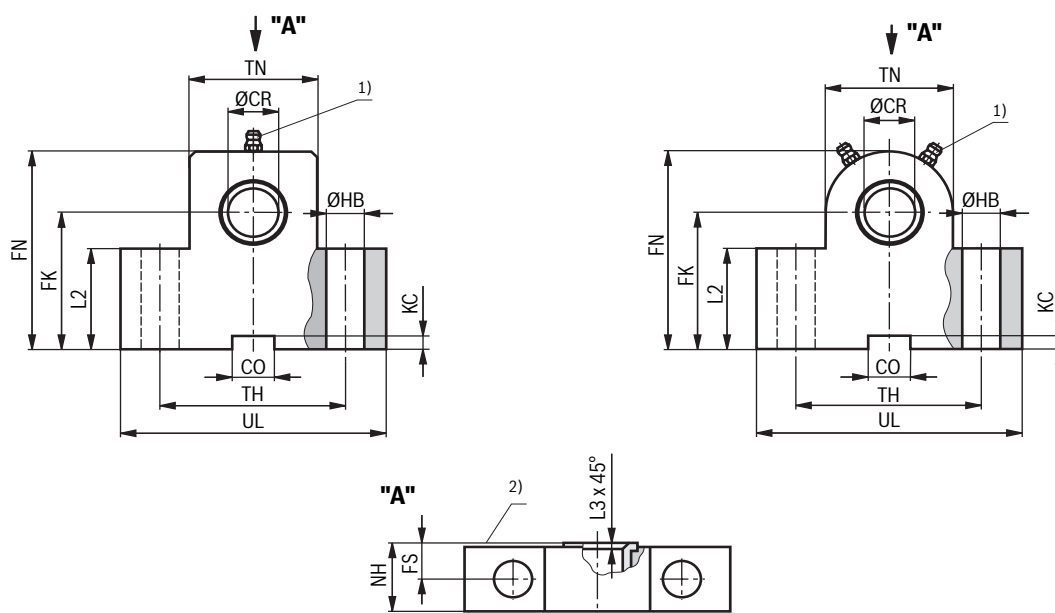

ØAL	Type ³⁾	Material no.	Nominal force kN ⁴⁾	ØCR H7	CO N9	FK JS12	FN max.	FS js13	ØHB H13	KC +0.3
25	CLTB 12	R900772607	8	12	10	34	50	8	9	3.3
32	CLTB 16	R900772608	12.5	16	16	40	60	10	11	4.3
40	CLTB 20	R900772609	20	20	16	45	70	10	11	4.3
50	CLTB 25	R900772610	32	25	25	55	80	12	13.5	5.4
63	CLTB 32	R900772611	50	32	25	65	100	15	17.5	5.4
80	CLTB 40	R900772612	80	40	36	76	120	16	22	8.4
100	CLTB 50	R900772613	125	50	36	95	140	20	26	8.4
125	CLTB 63	R900772614	200	63	50	112	180	25	33	11.4
160	CLTB 80	R900772615	320	80	50	140	220	31	39	11.4
200	CLTB 100	R901205929	500	100	63	180	280	45	52	12.4

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Trunnion mounting bearing bracket CLTB (dimensions in mm)

ØAL	Type ³⁾	TN max.	L2	L3	NH max.	TH js13	UL max.	m ⁵⁾ kg
25	CLTB 12	24	25	1	17	40	63	0.4
32	CLTB 16	31	30	1	21	50	80	0.85
40	CLTB 20	41	38	1.5	21	60	90	1.2
50	CLTB 25	56	45	1.5	26	80	110	2.1
63	CLTB 32	70	52	2	33	110	150	4.55
80	CLTB 40	88	60	2.5	41	125	170	7.3
100	CLTB 50	105	75	2.5	51	160	210	14.5
125	CLTB 63	130	85	3	61	200	265	23.1
160	CLTB 80	170	112	3.5	81	250	325	52.3
200	CLTB 100	215	145	4.5	102	295	385	⁶⁾

ØAL = piston Ø

¹⁾ Grease nipple, cone head form A according to DIN 71412

²⁾ Trunnion mounting contact surface (inside)

³⁾ Bearing blocks are always supplied in pairs

⁴⁾ Nominal force applies to applications in pairs

⁵⁾ **m** = mass of trunnion mounting bearing block in kg
(specified per pair)

⁶⁾ On request



Notice:

Geometry and dimensions may differ depending on the manufacturer. All graphical representations are examples. In case of combination with other mounting elements, the usability must be checked.

The trunnion mounting bearing blocks are suitable for attachment in case of type of mounting "MT4".

48/62 Series CDM1 | Mill type

Buckling

For the admissible stroke length with flexibly guided load and a factor of 3.5 for safety against buckling, please refer to the relevant table. For other installation positions of the cylinder, the admissible stroke length must be interpolated. Admissible stroke length for non-guided load on request. Buckling calculations are carried out according to the following formulas:

1. Calculation according to Euler


$$F = \frac{\pi^2 \cdot E \cdot I}{v \cdot L_K^2} \quad \text{if } \lambda > \lambda_g$$

2. Calculation according to Tetmajer

$$F = \frac{d^2 \cdot \pi (335 - 0,62 \cdot \lambda)}{4 \cdot v} \quad \text{if } \lambda > \lambda_g$$

- E** Module of elasticity in N/mm²
= 2.1 x 10⁵ for steel
- I** Geometrical moment of inertia in mm⁴ for circular cross-section
= $\frac{d^4 \cdot \pi}{64} = 0,0491 \cdot d^4$
- v** 3.5 (safety factor)
- L_K** free buckling length in mm (depending on the type of mounting see sketches A, B, C)
- d** Piston rod Ø in mm
- λ** Slenderness ratio
= $\frac{4 \cdot L_K}{d}$ $\lambda_g = \pi \cdot \sqrt{\frac{E}{0,8 \cdot R_e}}$
- R_e** Yield strength of the piston rod material

Influence of the type of mounting on the buckling length:

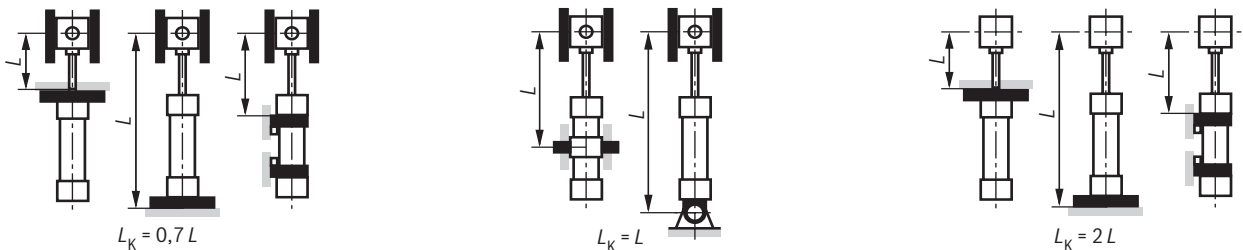


Buckling

(dimensions in mm)

Type of mounting "MF2", "MF4", "MT4" trunnion mounting (with $XV_{max.}$)

ØAL	ØMM	admissible stroke length with								
		70 bar			100 bar			160 bar		
		0°	45°	90°	0°	45°	90°	0°	45°	90°
25	14	260	270	305	215	220	240	160	165	170
	18	435	455	485	385	400	460	310	315	340
32	18	340	355	410	290	295	325	215	220	230
	22	510	535	665	450	465	535	365	370	400
40	22	405	425	495	345	355	395	265	270	285
	28	640	680	875	575	600	710	475	490	535
50	28	540	560	665	465	480	535	365	370	390
	36	845	895	1180	765	805	970	645	665	735
63	36	705	740	900	620	640	725	500	510	540
	45	1030	1100	1480	945	990	1220	805	830	930
80	45	855	900	1120	760	790	905	615	630	680
	56	1230	1310	1700	1130	1190	1490	975	1010	1140
100	56	1030	1090	1390	925	965	1130	760	780	850
	70	1500	1590	2000	1380	1460	1880	1200	1250	1440
125	70	1280	1360	1770	1160	1210	1450	970	995	1090
	90	1900	2030	2300	1770	1880	2300	1570	1640	1950
160	90	1620	1710	2320	1470	1540	1900	1250	1290	1440
	110	2200	2350	2600	2060	2180	2600	1820	1900	2280
200	110	1890	2010	2760	1730	1820	2260	1470	1520	1720
	140	2720	2910	3000	2560	2720	3000	2290	2400	2980

Installation position

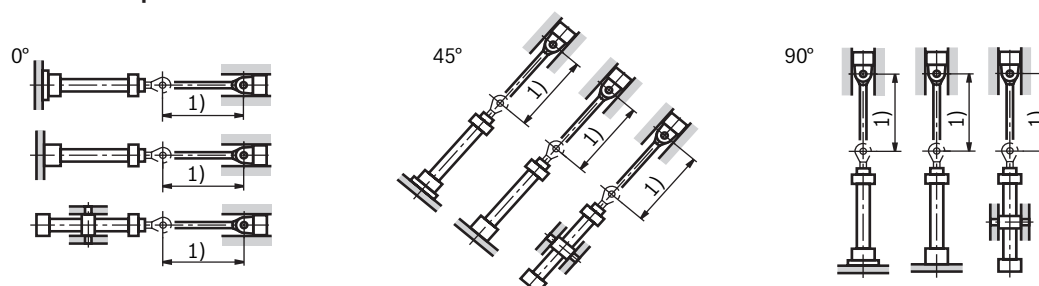

1) Admissible stroke length

50/62 Series CDM1 | Mill type




Buckling

(dimensions in mm)

Type of mounting "MF1", "MF3", "MS2"

ØAL	ØMM	admissible stroke length with								
		70 bar			100 bar			160 bar		
		0°	45°	90°	0°	45°	90°	0°	45°	90°
25	14	350	355	380	300	305	315	235	240	240
	18	530	550	645	470	485	535	390	400	415
32	18	445	455	495	385	390	410	310	315	320
	22	615	640	660	550	570	625	460	465	490
40	22	530	545	590	460	470	490	370	375	380
	28	775	810	980	700	725	815	590	600	635
50	28	670	690	770	590	600	640	475	485	495
	36	975	1020	1300	890	925	1080	765	785	845
63	36	845	880	1000	750	770	830	615	625	645
	45	1170	1230	1400	1070	1120	1330	920	950	1040
80	45	1020	1060	1240	910	935	1020	750	765	795
	56	1390	1470	1700	1280	1340	1620	1110	1150	1270
100	56	1240	1290	1540	1110	1150	1280	930	940	990
	70	1680	1780	2000	1560	1640	2000	1370	1410	1590
125	70	1510	1570	1920	1360	1400	1590	1140	1160	1240
	90	2090	2220	2300	1960	2060	2300	1740	1810	2110
160	90	1880	1980	2500	1720	1780	2070	1460	1500	1610
	110	2430	2580	2600	2280	2400	2600	2600	2110	2460
200	110	2210	2320	2980	2020	2100	2470	1730	1770	1920
	140	2980	3000	3000	2810	2980	3000	2540	2650	3000

Installation position



1) Admissible stroke length

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Buckling (dimensions in mm)

Type of mounting "MP3", "MP5"


ØAL	ØMM	admissible stroke length with								
		70 bar			100 bar			160 bar		
		0°	45°	90°	0°	45°	90°	0°	45°	90°
25	14	155	160	175	120	125	130	75	80	85
	18	300	310	360	250	260	285	190	195	220
32	18	210	220	240	165	170	180	110	115	120
	22	345	360	420	290	300	330	220	225	235
40	22	255	265	295	205	210	225	140	145	150
	28	445	465	560	385	395	445	295	305	320
50	28	350	360	405	285	290	315	205	210	215
	36	600	630	770	525	540	615	415	425	455
63	36	470	490	560	395	405	440	290	292	310
	45	740	780	970	650	680	780	525	535	580
80	45	575	600	700	490	505	555	370	375	390
	56	890	935	1190	790	820	960	640	660	715
100	56	705	735	880	600	620	695	460	470	495
	70	1085	1150	1500	970	1015	1215	800	825	910
125	70	890	935	1135	770	800	905	605	615	655
	90	1400	1490	2030	1270	1340	1660	1070	1110	1250
160	90	1130	1190	1490	990	1030	1190	790	810	870
	110	1620	1720	2370	1470	1550	1930	1240	1290	1450
200	110	1320	1390	1770	1160	1210	1420	930	955	1040
	140	2010	2140	3000	1850	1950	2520	1580	1650	1910

Installation position


0°



45°



90°



1) Admissible stroke length

52/62 Series CDM1 | Mill type

End position damping

End position damping

The objective is to reduce the velocity of a moved mass, the center of gravity of which lies on the cylinder axis, to a level at which neither the hydraulic cylinder nor the machine into which the hydraulic cylinder is installed is damaged. For velocities above 20 mm/s, we recommend the use of an end position damping feature, which absorbs energy without requiring the use of additional equipment. It must, however, always be checked whether end position damping is also required for lower velocities with large masses.

Damping capacity

When decelerating masses via end position damping, the structural-inherent damping capacity must not be exceeded. Hydraulic cylinder with end position damping can achieve their full damping capacity only over the entire stroke length.

With the adjustable end position damping version "E", a throttle valve is additionally provided when compared with version "D". End position damping version "E"

Formulas:

$$D_m = \frac{m}{10K} ; K = kv (0.5 - v)$$

m = moved mass in kg

v = stroke velocity in m/s

k_v = see table page 53

Extension:

$$D_p = p_s - \frac{m \cdot 9.81 \cdot \sin \alpha}{A_1 \cdot 10}$$

Retraction:

$$D_p = p_s + \frac{m \cdot 9.81 \cdot \sin \alpha}{A_3 \cdot 10}$$


p_s = system pressure in bar

A_1 = piston area in cm² (see page 7)

A_3 = annulus area in cm² (see page 7)

α = angle to the horizontal in degree

1 throttle valve







allows cycle times to be optimized. The max. damping capacity can only be achieved when the throttle valve is closed.

The calculation depends on the factors mass, velocity, system pressure and installation position. For this reason, mass and velocity are used to determine the characteristic D_m and system pressure and installation position to determine the characteristic D_p . These two characteristics are used for verifying the admissible damping capacity in the "damping capacity" diagram. The intersection point of the characteristics D_m and D_p must always be below the damping capacity curve of the selected hydraulic cylinder. The values in the diagrams refer to an average oil temperature of +45 ... +65 °C with the throttle valve being closed.

For special applications with very short stroke times, high velocities or large masses, hydraulic cylinder with special end position damping versions can be offered on request.

When fixed or adjustable stops are used, special measures must be taken.



Damping length

ØAL in mm	25	32	40	50	63	80	100	125	160	200
Head side	15	19	23	22	27	27	32	33	40	46
Base side	15	19	23	22	27	27	32	33	40	46

Bosch Rexroth AG, RE 17341, edition: 2022-07


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

End position damping / damping capacity

AL Ø mm	25	32	40	50	63	80	100	125	160	200
kv ①	2.97	2.56	2.82	3.51	3.02	2.53	2.65	2.91	2.76	2.95
kv ②	3.15	2.93	2.95	3.45	2.95	2.53	2.93	2.95	2.95	3.1
kv ③	3.1	2.73	3.1	3.51	2.95	2.51	2.91	2.95	2.91	2.93


Damping capacity: Extension with kv ①

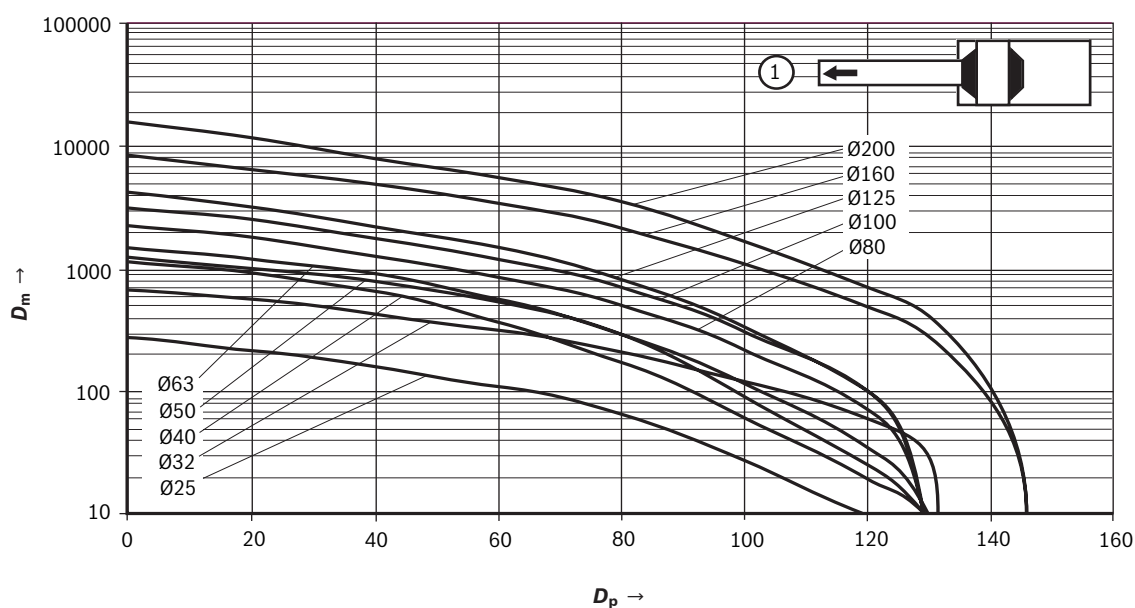


54/62 Series CDM1 | Mill type

End position damping / damping capacity

Damping capacity:
Retraction with k_v ②

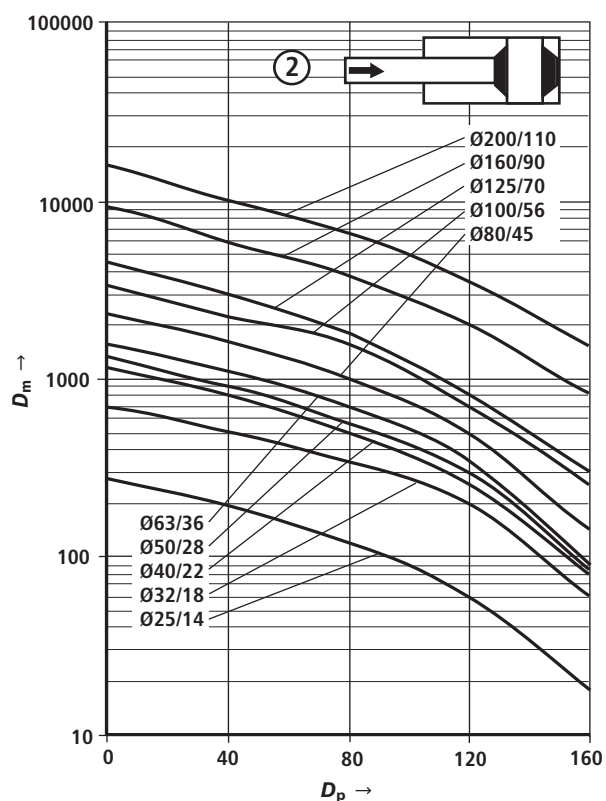

Damping capacity:
Retraction with k_v ③

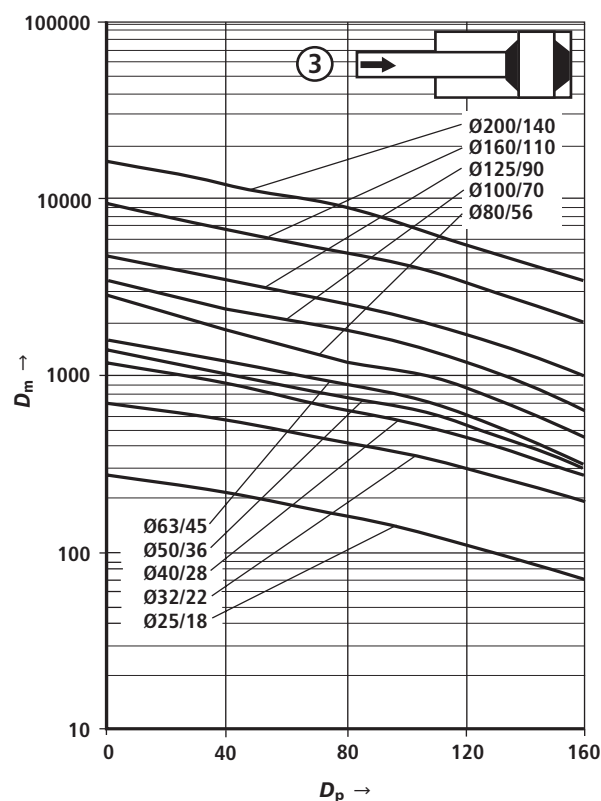

Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Selection criteria for seals

Working conditions

Hydraulic fluid	Hydraulic fluid temperature range	Seal versions				
		"M"	"V"	"A"	"T"	"S"
HL, HLP	−20 °C ... +80 °C	++	++	++	++	++
HFA	+5 °C ... +55 °C	+/-	+/-	+	++	+/-
HFC	−20 °C ... +60 °C	−	−	+/-	++	−
HFDR	−15 °C ... +80 °C	−	++	++	−	++
HFDU	−15 °C ... +80 °C	−	++	−	−	++

Environmental conditions

Ambient and rod temperature in the area of the piston rod		Seal versions				
		"M"	"V"	"A"	"T"	"S"
Standard	−20 °C ... +80 °C ¹⁾	++	+ ²⁾	++	+	++ ²⁾
Extended	+80 °C ... +120 °C ¹⁾	−	++	−	−	++

- ++ = very good
+ = good
+/- = conditional, depending on the application parameters
− = inappropriate


- ¹⁾ Moreover, observe the corresponding hydraulic fluid temperature range
²⁾ Lower temperature limit −15 °C

Notice:


- General technical data in corresponding data sheets will remain valid, see page 5.
- Generally, a hydraulic fluid temperature of approx. 40 °C is recommended. The specified values are to be regarded as guidelines; depending on the case of application, it may be necessary to check the suitability of the seal system.

56/62 **Series CDM1** | Mill type


Components

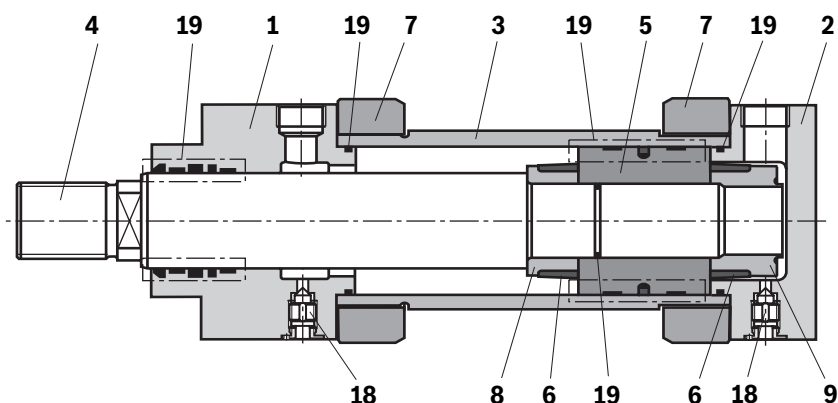








Piston rod

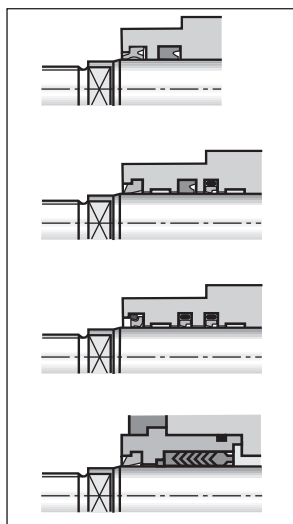

Piston

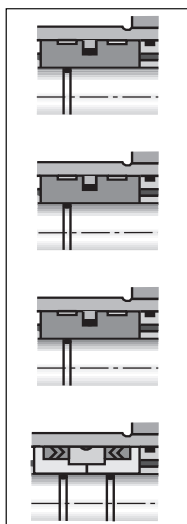

- 1 Head
- 2 Base
- 3 Pipe
- 4 Piston rod
- 5 Piston
- 6 Damping bush
- 7 Flange
- 8 Socket
- 9 Socket
- 10 Base "MP3"
- 11 Base "MP5"
- 12 Round flange "MF3"
- 13 Rectangular flange "MF1"
- 14 Round flange "MF4"
- 15 Rectangular flange "MF2"
- 16 Trunnion mounting "MT4"
- 17 Foot "MS2"
- 18 Bleeding
- 19 Seal kit.
Wiper
Rod seal
Piston seal
Seal ring
Support ring
Guide ring



Bosch Rexroth AG, RE 17341, edition: 2022-07

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Seal kits ¹⁾

ØAL	ØMM	Material no. for seal design				
		"M"	"T"	"V"	"S"	"A"
25	14	R407026468	–	R407026567	–	–
	18	R407026529	–	R407026568	–	–
32	18	R407026530	–	R407026569	–	–
	22	R407026531	R407026548	R407026570	R407026587	–
40	22	R407026532	R407026549	R407026571	R407026588	–
	28	R407026533	R407026550	R407026572	R407026589	–
50	28	R407026534	R407026551	R407026573	R407026590	R407026604
	36	R407026535	R407026552	R407026574	R407026591	R407026605
63	36	R407026536	R407026553	R407026575	R407026592	R407026606
	45	R407026537	R407026554	R407026576	R407026593	R407026607
80	45	R407026538	R407026555	R407026577	R407026594	R407026608
	56	R407026539	R407026556	R407026578	R407026595	R407026609
100	56	R407026540	R407026557	R407026579	R407026596	R407026610
	70	R407026541	R407026558	R407026580	R407026597	R407026611
125	70	R407026542	R407026559	R407026581	R407026598	R407026612
	90	R407026543	R407026560	R407026582	R407026599	R407026613
160	90	R407026544	R407026561	R407026583	R407026600	R407026614
	110	R407026545	R407026562	R407026584	R407026601	R407026615
200	110	R407026546	R407026563	R407026585	R407026602	R407026616
	140	R407026547	R407026564	R407026586	R407026603	R407026617

¹⁾ Seal kits for proximity switches, separate material no., see below.

Proximity switch

ØAL	Material no. for seal design	
	"M", "T", "A"	"V", "S"
25, 32	–	–
40 ... 200	R900885938	R900885939


ØAL = piston Ø

ØMM = piston rod Ø

58/62 Series CDM1 | Mill type

Tightening torques

Screws: Head and base
(item 1 and 2)

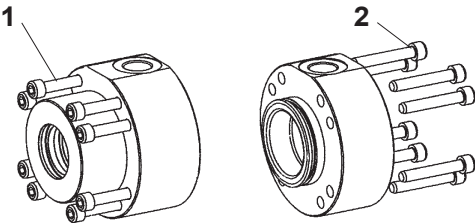

ØAL	Screw	Quantity	Quality class	Tightening torque Nm
25	M6	4	10.9	13
32	M6	4	10.9	13
40	M6	4	10.9	13
50	M8	4	10.9	30
63	M10	4	10.9	60
80	M10	8	10.9	50
100	M10	8	10.9	60
125	M12	12	10.9	100
160	M12	16	10.9	100
200	M16	16	10.9	200

Bosch Rexroth AG, RE 17341, edition: 2022-07

Priming / painting

Priming | By default, hydraulic cylinders are primed with a coating (color gentian blue RAL 5010) of min. 40 µm. Other colors on request.

With hydraulic cylinders and attachment parts, the following surfaces are not primed:

- ▶ All fit diameters to the customer side
- ▶ Sealing surfaces for line connection
- ▶ Sealing surfaces for flange connection
- ▶ Connection surface for valve mounting
- ▶ Inductive proximity switches
- ▶ Measuring coupling
- ▶ Spherical- / plain bearing
- ▶ Grease nipples

Painting | By default, hydraulic cylinders can be ordered in the CP4 to CP7 corrosivity category in the RAL colors. With hydraulic cylinders and attachment parts, the following surfaces are not painted:

- ▶ All fit diameters and connection surfaces to the customer side
- ▶ Sealing surfaces for line connection
- ▶ Sealing surfaces for flange connection
- ▶ Connection surface for valve mounting
- ▶ Inductive proximity switches
- ▶ Measuring coupling
- ▶ Spherical- / plain bearing
- ▶ Grease nipples

Notice:

Surfaces not primed or painted are protected with solvent-free corrosion protection agent. Accessories ordered as a separate order item are not primed or painted by default. Corresponding priming and/or painting on request.

Corrosivity categories

Corrosivity categories

Class	Requirements	Applications	
		Inside	Outside
Priming	CP3	240 h salt spray test SST (DIN EN ISO 9227) 240 h condensation water test KKT (DIN EN ISO 6270-2) Layer thickness: min. 40 µm	Field of application e. g. hall atmosphere, air humidity ≤ 60%, no thermal load. Not suitable for outdoor exposure.
	CP4	480 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 120 µm	Unheated buildings in which there may be condensation (production rooms, storage and sport halls). Urban and industrial atmosphere with little salt or sulfur dioxide load.
Painting	CP5	720 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 140 µm	Silo and debris facilities, chemical plants, boathouses above sea water, laundries, breweries with high humidity and medium contamination. Industrial and coastal areas with medium salt load.
	CP6	1000 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 220 µm	Buildings or areas with almost permanent condensation and serious contamination. Industrial areas with large humidity and aggressive atmosphere.
	CP7	1440 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 320 µm	Buildings or areas with almost permanent condensation and serious contamination. Coastal and offshore areas with high salt load.

The specified resistances of the individual Rexroth classes only refer to the primed and painted cylinder areas, not, for example, to piston rods, trunnion mounting, etc.

In this connection, special measures may be necessary.

60/62 Series CDM1 | Mill type

Project planning / maintenance instructions

Boundary and application conditions:

- ▶ The mechanical alignment of the movement axis and thus the mounting points of hydraulic cylinder and piston rod must be ensured. Lateral forces on the guides of piston rod and piston are to be avoided. It may be necessary to consider the own mass of the hydraulic cylinder ("MP3" / "MP5" or "MT4") or the piston rod.
- ▶ The buckling length / buckling load of the piston rod and / or the hydraulic cylinder must be observed (see page 48).
- ▶ The maximum admissible stroke velocities with regard to the suitability / load of seals must be observed as must their compatibility with the properties of the hydraulic fluid (see page 55).
- ▶ The maximum admissible velocities / kinetic energies when moving into the end positions, also considering external loads, must be observed (excess pressure).
- ▶ The maximum admissible operating pressure must be complied with in any operating state of the hydraulic cylinder.
Possible pressure intensification resulting from the area ratio of annulus area and piston area and possible throttling points are to be observed.
- ▶ Detrimental environmental influences, e.g. aggressive finest particles, vapors, high temperatures, etc. as well as contaminations and deterioration of the hydraulic fluid are to be avoided.

Notice:

This list does not claim to be complete. In case of questions regarding the compatibility with the medium or exceedance of the boundary or application conditions, please contact us.

All graphical representations in the data sheet are examples.
The product supplied may therefore differ from the figure shown.

Standards

The installation dimensions and types of mounting of the hydraulic cylinders comply with ISO 6020-1.

Acceptance

Every hydraulic cylinder is tested according to Rexroth standards and following ISO 10100: 2020 with module L.

Safety instructions

For assembly, commissioning and maintenance of hydraulic cylinders, observe the operating instructions 07100-B. Service and repair work has to be performed by Bosch Rexroth AG or by personnel especially trained for this purpose. No warranty is accepted for damage as a consequence of assembly, maintenance or repair work not performed by Bosch Rexroth AG.

Check lists for hydraulic cylinders

Hydraulic cylinders the characteristics and/or application parameters of which deviate from the values specified in the data sheet can only be offered as a special version upon request. For offers, the deviations of the characteristics and / or application parameters must be described in the check lists for hydraulic cylinders (07200).

Minimum strokes

When using end position damping, the minimum stroke must also be observed, see page 52.