

RE 30030

Edition: 2021-09 Replaces: 2020-01



Pressure and flow control system

Type SYDFE1, SYDFEE, SYDFED, SYDFEF



- With axial piston variable displacement pump A10VSO.../31
- ▶ Size 18 ... 100
- ► Component series 2X
- ► Maximum operating pressure 280 bar
- ► Function: Swivel angle control, pressure control, torque limitation, speed control function, master-slave
- ► Communication: Sercos, PROFINET, EtherNET/IP, POWERLINK, VARAN, CAN over EtherCAT, ServoDrive over EtherCAT, analog

Features

The control system is used for the electro-hydraulic control of swivel angle, pressure and power (partially optional) of an axial piston variable displacement pump. It consists of the following components:

- ► Axial piston variable displacement pump A10VSO.../31
- Proportional directional valve type VT-DFP. with inductive position transducer as pilot control valve.
 With the exception of type SYDFE1, the pilot control valve contains the electronics for controlling the system.
- ► Type SYDFE1: External control electronics VT 5041-3X for realizing all electric functions necessary (separate order)
- ▶ Position transducer for sensing the swivel angle
- Pressure transducer with suitable signal level and dynamics (optional)
- Preload valve with integrated pressure relief function SYDZ (optional)

Contents

Features	1
Ordering code	2 7
Installation orientation of the valve electronics	6
Section	8, 9
Schematic diagram	10 12
Technical data	13 15
Electrical connection	16 18
LED displays	19, 20
Control loop quality	21
Characteristic curves	21, 22
Dimensions	23 36
Torsionally flexible couplings	37
Hubs for through-drives	37
Accessories	38
Project planning information	39
Further information	39



Ordering code: Pump of the control system

C	01 02	2		03	04		05	06	07	08	09		10		Se	e followin	g pages
	- 2)	< /	/			-	Р			12		T -		-		•••	
erie	es																
01	Control syster	n for	exter	rnal a	nalog	electr	onics	(sepa	rate o	rder)							SYDFE1
	Control syster	n wit	h inte	ernal	analog	elec	tronic	S									SYDFEE
	Control syster	n wit	h inte	ernal	digital	elect	ronics	(Ethe	ernet-l	oased	bus sy	stems)					SYDFED
	Control syster	n wit	h inte	ernal	digital	elect	ronics	(Ethe	ernet-k	pased	bus sy	stems)					SYDFEF
	Pump combin	ation	s (se	e ord	er exa	nple	page (3)									SY2DFE.
																	SY3DFE.
02	Component se	eries	20	. 29 (2	20 2	9: un	chang	ed ins	tallati	on an	d conn	ection	dimensio	ns)			2X
ize												018	028	045	071	100	
03	Displacement	in cn	n ³									18	28	45	71	100	e.g. 071
irec	tion of rotation	n loo	king	at the	e drive	shaf	t										
04	Clockwise											✓	1	1	1	1	R
	Counterclocky	vise										✓	✓	/	1	1	L
lydr	aulic fluid																
05													1	/	Р		
	shaft variant	ul. Ciri		DI	N. COO.												
06	Cylindrical wit		_	-								Ø18	Ø22	Ø25	Ø32	Ø40	P
	Splined shaft					<i>ve)</i>						3/4"	_	_	_	1 1/2"	s
	Splined shaft					hor t	oralie	١				_	7/8"	1"	1 1/4"	-	R
	Splined shart	prom	ie JA	KL 0 7.	44 (1118	ilei t	orque	,					170	'	1 1/4	<u> </u>	- N
onr	ection flange (Ø cei	nterir	ng in	mm)												
07	ISO 2-hole											80	100	100	125	125	Α
	SAE 2-hole											82.55	101.6	101.6	127	127	С
ort	for working lin	es pr	essu	re po	rt B a	nd su	ction	port S									
08	SAE, laterally											1	1	1	1	/	12
	ugh-drive (All t			ives w	ith sir	gle p	umps	come	witho	ut a h	ub and						
09	Without throu					2)	(-11				✓	✓	✓	✓	/	N00
	Centering IS0 Ø100 mm	_			nt pur			pies)			+		,	,	,	, ,	KD3
	ISO Ø 100 mm	_			31 NG:								_	✓	1	1	KD3 KD5
					31 NG			CLIA	DCITO	V 2 D L	-					 	KD5 KC1
	SAE Ø82.55 m	_			31 NG			GHZ,	ruH3	, AZPI	-	✓	√	*	4	1	
	SAE Ø101.6 m	_	PGH		F2G3,	rufi)						✓	✓	1	1	KC3 KC5
	SAE Ø127 mm	'	ruH	ເວ									_		✓	✓	KC5
ase	pump variant												r				
10	Standard (inte	ernal	pilot	oil)								✓	1	✓	1	1	0000
	External supp	ly										_	1	✓	1	1	0479
	External supp	ly + re	egene	erativ	e oper	ation						-	_	_	1	/	0487



Pressure and flow control system | **SYDFE.** 3/40

Ordering code: Type SYDFE1 - pilot control and preload valve

0	1		02		03	04		05	06	07	08	09		10		11	12	13	14		15
		_	2X	/			_	Р			12		-		-		0	XOXX		_	*
Cont	rol sp	oool v	ersion																		
11	Stan	ndard	(NG28	3 10	00)															Α	
	2-no	otch s	nool (N	NG18	100,	only f	or rep	lacem	ent re	quire	ment)									В	
	4-no	otch sp	1) Jooc	NG18)																С	
Insta	llatio	n orie	entatio	n, sol	lenoid																
12	Mati	ing co	nnecto	or is o	rientat	ed rad	ially to	the	oump	axis										0	
13	Not	used																		XOX	Х
Prelo	ad va	alve w	vith int	egrat	ed pre	ssure	limita	tion													
14	Pres	ssure	limitat	ion 20	00 bar	(tolera	nce ±8	B bar)	4)											1	
	Pres	ssure	limitat	ion 25	0 bar	(tolera	nce ±	10 bar) 4)											2	
	Pres	ssure	limitat	ion 30	00 bar	(tolera	nce ±	12 bar) 3; 4)											3	
	With	hout p	oreload	l valve	9															Х	
15	Furt	her d	etaile i	n the	plain t	evt												<u> </u>		*	

 $^{^{\}rm 1)}\,$ ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

 $^{^{2)}\,}$ Observe the conditions for the attachment pumps, see page 37.

³⁾ Observe nominal pressure of pump system.

⁴⁾ The pressure limiting function is not suitable for continuous operation.



Ordering code: Type SYDFEE - pilot control and preload valve

	0.1		0.0				0.4		0.5	0.0	0.7	0.0	0.0		10			4.0	4.0						
	01		02)3	04		05 P	06	07	08	09		10		11	12	13	14	15 T	16 T	17 T		18
			2X	_ /					P			12										Ь			*
Con	itrol si	nool v	ersion	1																					
11		•	(NG28		00)													-						Α	
	4-no	tch sp	ool (N	IG18	3)																			С	
nst	allatio	n ori	entatio	on o	f th	e int	egra	ted e	lectro	nics (see n	age 6	and "	Dime	nsions	:")									
12	_		the p				-g. u			11105 (эсс р	uge o	unu	Dime	11310113	, ,								0	
			o in the				f the	e subj	olate													\top		2	
اماما	litiona	l f	diana.	Cla		laas																			
13	_		e pres						ignal)													\neg		Α	
10	-		itation						-	,												-		В	
	_		itation																			\top		c	
	_		ontrol								signa	al)										\top		D	
-100	ctronic		براطسه															-							
14	_				wit	th lo	akan	م منا ہ	compo	neati	on											\neg		0	
14	Standard electronics with leakage oil compensation Standard electronics without leakage oil compensation													+		1									
	ual pre						"Ele	ctrica	l conn	ectio	ns")														
15	_		put 4 . out 0 .			4														ort X		_		C V	
	_		out 1 .																	ort X		+		E	
	-		out 0.5															+		ort X		+		F	
					-															0.070				-	
	ssure			0.1.0						0.4.5		'0 F	5) ()					0.5							
16			′315-F 1 to X2															0.5 n	n for c	airect				L	
			ressur					,,		,		.,					,							Х	
		-1	.!al. ! ·					12	:4-4:-	_															
17	load v		imitati																			$\neg \vdash$		1	
17	_		imitati)											+		2	
			imitati																			+		3	
	_		reload				-0.0															\dashv		x	
						_																-			
18	Furth	ner de	tails ii	n the	e pla	ain te	ext																	*	

³⁾ Observe nominal pressure of pump system.

⁴⁾ The pressure limiting function is not suitable for continuous operation.

5/40



Pressure and flow control system | **SYDFE.**

Ordering code: Type SYDFED - pilot control and preload valve

	01		02		03	3 0	4	05	06	07	08	09		10		11	12	13	14	15	16	17		18
		-	2X	/			Τ-	Р			12		-		_				0				-	*
Con	trol sp	ool v	ersion	1				'																
11	Stand	dard (NG28	1	00)																		Α	
	4-not	ch sp	ool (N	G18	3)																		С	
Inst	allatio	n orie	entatio	on of	f the	integ	rated	electro	onics	(see p	age 6	and '	'Dime	nsions	s")									
12			the p																				0	
	Folde	ed 90°	in the	e dir	ectio	n of	the su	bplate															2	
Add	itional	l func	tions:	Clo	sed-l	оор	ontro	ι																
13	Stand					•																	Α	
	For v	ariabl	e-spe	ed o	perat	tion																	N	
Field	d bus i	interf	ace																					
14	Serco	os III																					S	
	Ether	rCAT (CANo	pen	profi	le)																	Т	
	Ether	rCAT (Servo	drive	e pro	file)																	D	
	VARA	N (se	rvo dr	ive p	orofil	e)																	٧	
	Ether	rnet/II	Р																				E	
	PROF	FINET	RT																				N	
	Powe	erlink																					W 5)	
Actu	ıal pre	essure	value	inp	ut (f	reely	config	urable	; para	mete	r sett	ing or	ı deli	very (see "E	lectri	cal co	onnect	tions"	')				
15			out 0 .																ort XF				٧	
	Volta	ge inp	out 0.5	5 !	5 V													Poi	rt X2ľ	M1			F	
Pres	sure t	ranso	lucer														,							
16								ent ran "); NG1										m for o	direct				L	
	With	out p	ressur	e tra	ansdu	ıcer																	Х	
Prel	oad va	alve w	rith in	tegr	ated	pres	sure li	mitatio	n															
17	Press	sure li	mitati	on 2	00 b	ar (to	lerano	e ± 8 b	ar) ⁴⁾														1	
	Press	sure li	mitati	on 2	50 b	ar (to	lerano	e ± 10	bar) ⁴	1)											\neg		2	
	Press	sure li	mitati	on 3	00 b	ar (to	lerano	e ± 12	bar) ³	3; 4)													3	
	With	out p	reload	valv	/e																		Х	
18	Furth	ner de	tails ir	n the	e plai	n tex	t																*	

³⁾ Observe nominal pressure of pump system.

⁴⁾ The pressure limiting function is not suitable for continuous operation.

⁵⁾ On request



Ordering code: Type SYDFEF - pilot control and preload valve

	01		02		03	C)4		05	06	07	08	09		10		11	12	13	14	15	16	17		18
		_	2X	/		Т		-	Р			12		T -		_			Α	0				_	*
				-																					
on	trol sp	ool v	ersion	1																					
11	Stand	dard (NG28	10	00)																			Α	
	4-not	ch sp	ool (N	G18)																			С	
nst	allatio	n orie	entatio	on of	the i	inte	grate	ed el	ectro	nics (see p	age 6	and '	'Dime	nsions	;")									
	Radia									`														0	
	Folde	ed 90°	o in the	e dir	ectio	n of	the s	subp	late															2	
Add	itional	func	tions:	Clos	sed-lo	оор	cont	rol																	
13	Stand					·																\top		Α	
-: - 1	d bus																								
14	Serce		ace															-						s	
			CANo	nen	profil	e)																+		T	
			Servo																			\dashv		D	
			rvo dr																			\dashv		v	
	Ether	net/II	P																			\neg		E	
	PROF	INET	RT																			\neg		N	
\ct.	ual pre	eeuro	value	inn	(fr	مماير	cont	figur	able)	nara	moto	r sotti	na o	, dali	ory (- OO "F	loctri	cal co	nnec	tione'	')				
15			out 0			еецу	COIII	iigui	able)	рага	mete	setti	iig oi	i deti	rery (see i	tectri	Cat Co		ort XI	_	$\neg r$		v	
		<u> </u>	out 0.5																	ort X2		\dashv		F	
					-													-							
	ssure t			010	0.5					015	· I	′o	- V				1. 1 .	0.5				$\overline{}$			
16			315-F- nection																					L	
			ressur				, -		,,					,								\top		Х	
Prel	oad va	alve w	/ith in	tegra	ated r	ores	sure	limi	tatio	1															
17	_		mitati																			$\neg \Gamma$		1	
	Press	sure li	mitati	on 2	50 ba	ır (to	olera	nce	± 10	oar) 4)											\neg		2	
	Press	sure li	mitati	on 3	00 ba	ır (to	olera	ince	± 12	oar) 3	4)											\top		3	
	With	out p	reload	valv	е																			Х	
18	Furth	er de	tails ir	n the	plair	ı tex	ct.															\neg		*	

³⁾ Observe nominal pressure of pump system.

Installation orientation of the valve electronics

Clockwise direc	ction of rotation	Counterclockwise c	lirection of rotation
Installation orientation "0"	Installation orientation "2"	Installation orientation "0"	Installation orientation "2"

⁴⁾ The pressure limiting function is not suitable for continuous operation.



Pressure and flow control system | **SYDFE.** 7/40

Ordering code: Order examples

Order example for single pump: SYDFEE-2X/100R-PSA12N00-0479-A0A0VXX

Order example for pump combinations (material numbers or type designations must be combined with "+")

Main pump (1st pump)

+ Attachment pump (2nd pump)

SY2DFEE-2X/100-100/00709780

+ 00709780

SY2DFEE-2X/100-100/SYDFEE-2X/100R-PSA12KD5-0000-A0A0CXX +

SYDFEE-2X/100R-PSA12KD5-0000-A0A0CXX

Double pump

Size of the main pump


Size of the attachment pump or pump abbreviation if the attachment pump is not SYDFE (e.g. PGF)

Material number without "R9" for the main pump or type designation if material number is not known

Pump combination, mounted with accessories

Material number without "R9" for the attachment pump or type designation if material number is not known

Example of name plate (SYDFED control system)

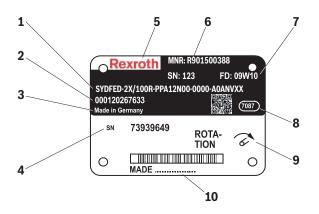


Notice:


For enquiries regarding the control system, material number, production order number, serial number, and date of production are necessary.

- 1 Material short text
- 2 Production order number
- 3 Designation of origin
- 4 Fabrication number
- 5 Word mark
- 6 Material number, serial number underneath
- 7 Date of production
- 8 Plant
- 9 Indication of direction of rotation
- 10 Production location





Section: Type SYDFE1, SYDFEE, SYDFED

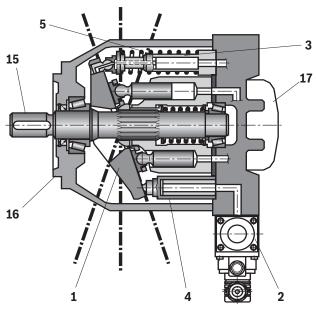

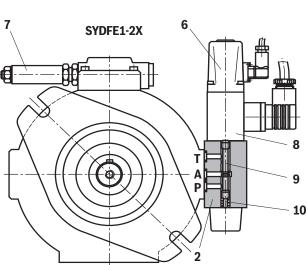

- 1 Swash plate
- 2 Pilot control valve
- 3 Counter piston
- 4 Actuating piston
- 5 Spring
- 6 Inductive position transducer for valve position
- 7 Swivel angle position sensor
- 8 Proportional solenoid
- 9 Valve spool
- 10 Spring
- 11 Integrated electronics
- 12 Connector X1

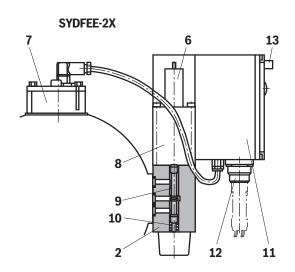

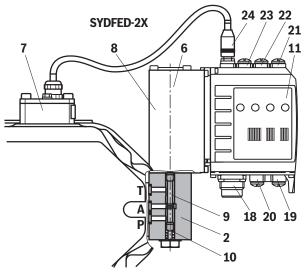


- 13 Connector X2 for connecting the pressure transducer HM 20, cable version (for SYDFEE only with actual pressure value input "F")
- 15 Drive shaft
- 16 Connection flange
- 17 Subplate, optionally with through-drive
- 18 Connector XH4
- 19 Multi Ethernet interface X7E1
- 20 Multi Ethernet interface X7E2
- 21 Configurable sensor interface X2M1
- 22 Configurable sensor interface X2M2
- 23 Reserved, X2N
- 24 Actual swivel angle value input X8A



Pressure and flow control system | **SYDFE.** 9/40

Section: Type SYDFEF

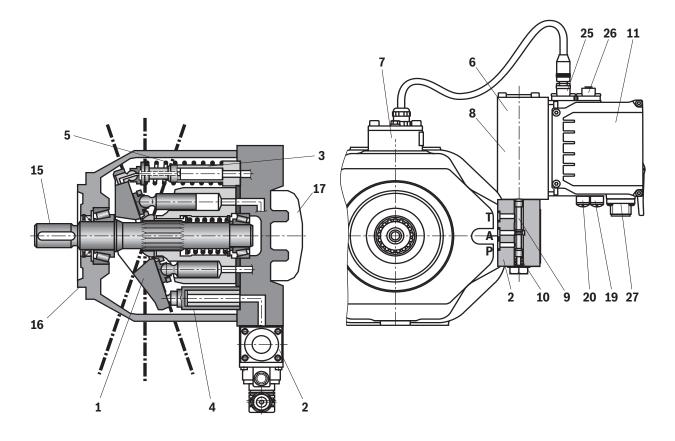


- 1 Swash plate
- 2 Pilot control valve
- 3 Counter piston
- 4 Actuating piston
- 5 Spring
- 6 Inductive position transducer for valve position
- 7 Swivel angle position sensor
- 8 Proportional solenoid
- 9 Valve spool
- 10 Spring
- 11 Integrated electronics
- 15 Drive shaft

- 16 Connection flange
- 17 Subplate, optionally with through-drive
- **19** Multi Ethernet interface X7E1
- 20 Multi Ethernet interface X7E2
- 25 Actual swivel angle value input X8A1
- **26** Configurable sensor interface X2N
- 27 Connector XH1



Schematic diagram: Type SYDFE1 - actuating system supplied internally

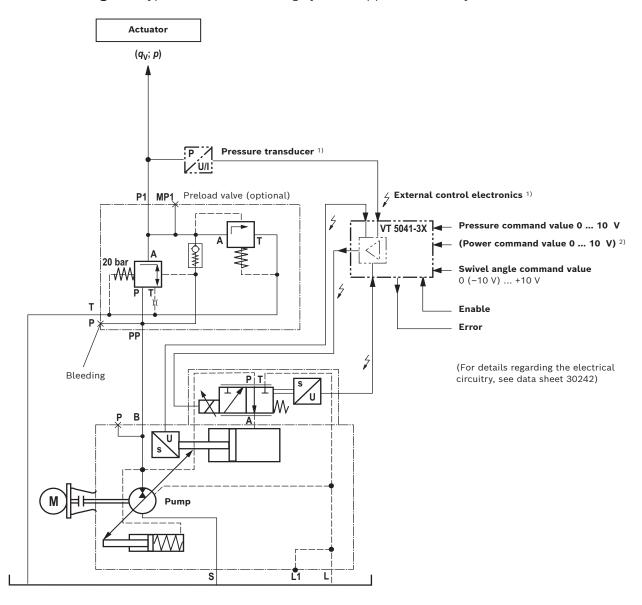

- 1) Separate order
- ²⁾ Optional


Motice:

The actual pressure value at port B must not be less than 10 bar for more than 10 minutes (lubrication).



Pressure and flow control system | **SYDFE.** 11/40

Schematic diagram: Type SYDFEE, SYDFED, SYDFEF - actuating system supplied internally

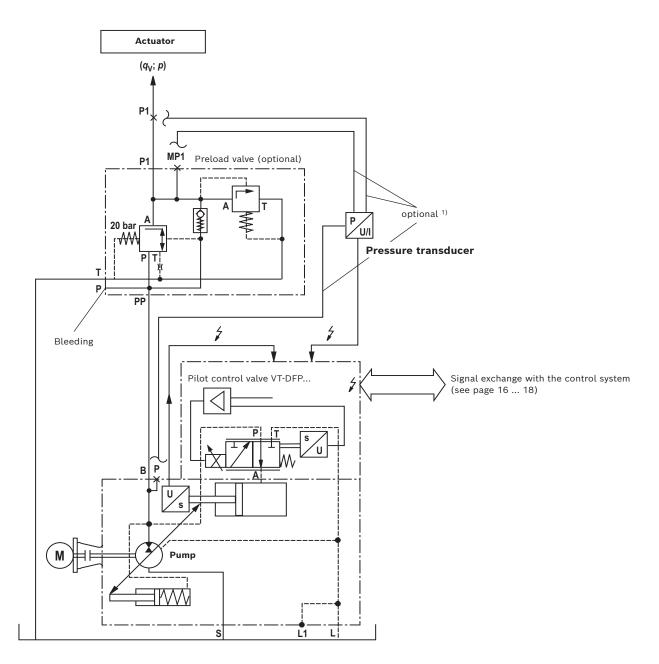


- When using the HM 20 pressure transducer, cable version: Installation in P (pump) or MP1 (preload valve) in connection with actual pressure value input "F".
 - ► Using an external pressure transducer: Installation in line P1 (preferably near the actuator) and electrical connection via the central plug.
 - Using a preload valve: Connection of the pressure transducer to P1 or MP1.

Motice:

The actual pressure value at port B must not be less than 10 bar for more than 10 minutes (lubrication).



Schematic diagram: Type SYDFE... - actuating system supplied externally

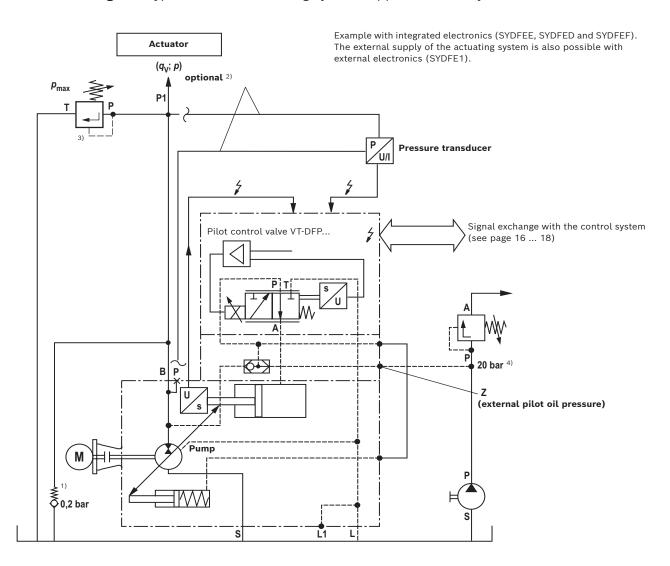

1) The use of an anti-cavitation valve (check valve with 0.2 bar spring) is essential in order to prevent dry-running in the error case.

Pressure transducer	Mounting options	Comment
HM 20-2X/315-F-C13-0.5 (cable version)	Р	Only in connection with actual pressure value input "F"
HM 20-2X/K35 (connector version)	P1	Preferably close to the actuator

- 3) Maximum pressure limitation must be provided by the customer.
- 4) Observe the upper limit for the external pilot oil pressure (see operating instructions), recommendation: 20 bar absolute.

Motes on external supply:

- ▶ In the case of an actuating system with external supply, the pump adjustment will in case of voltage failure not switch to zero stroke but to the negative stop (displacement of 100% flow from the system to the tank).
- ▶ With an active fault message, it is imperative that the machine control reacts (e.g. switching off the drive motor of the pump, interrupting the external supply of the actuating system).
- The command values for pressure and flow must always be greater than zero (p_{Command} ≥ 3 bar, a_{Command} ≥ 5%) as due to drift or tolerances, there is no exact "zero" pressure or "zero" swivel angle. Under unfavorable conditions, smaller command value presettings can lead to cavitation.
- ► The actual pressure value must not be less than 10 bar for more than 10 minutes (lubrication).



Pressure and flow control system | **SYDFE.** 13/40

Technical data

(For applications outside these values, please consult us!)


Mechanical and hydra	nuic		1	1		1	
Size			18	28	45	71	100
Displacement		cm ³	18	28	45	71	100
Speed 1)	► Maximum at V _{g max}	rpm	3300	3000	2600	2200	2000
	► Maximum at V _g < V _{g max}	rpm	3900	3600	3100	2600	2400
Minimum speed		rpm	250				
Maximum flow	$ ightharpoonup$ n_{nom} and $V_{\text{g max}}$	l/min	59.4	84	117	156	200
	▶ $n_{\rm E}$ = 1500 rpm and $V_{\rm g max}$	l/min	27	42	68	107	150
Maximum power	► n _{nom} , V _{g max}	kW	27.7	39	55	73	93
(∆p = 280 bar)	▶ n _E = 1500 rpm and V _{g max}	kW	12.6	20	32	50	70
Maximum torque (Δp	= 280 bar)	Nm	80.1	125	200	316	445
Maximum drive torque	Pritting key	Nm	88	137	200	439	857
	► Splined shaft "S" overall torque	Nm	124	-	-	-	1104
	► Maximum through-drive torque	Nm	108	_	-	-	778
	► Splined shaft "R" overall torque	Nm	_	225	400	644	_
	► Maximum through-drive torque	Nm	_	176	365	548	-
Drive shaft load	► Maximum axial force	N	700	1000	1500	2400	4000
(see below)	► Maximum radial force ²⁾	N	350	1200	1500	1900	2300
Mass	► Pump without through-drive (incl. pilot control valve)	kg	15.5	20.5	26	37.5	52
	► Pump with through-drive (incl. pilot control valve)	kg	16.5	22	27.5	40.5	58
	► Additional preload valve	kg	3.3	3.3	3.3	6.3	6.3
	▶ In addition, in case of external supply	kg	2	2	2	2	2
Moment of inertia aro	und drive axis	kgm ²	0.0009	0.0017	0.0033	0.0083	0.0167
Filling quantity of the	housing	l	0.4	0.7	1.0	1.6	2.2
Maximum operating p	ressure 3)	bar	280				
Minimum operating	▶ With preload valve	bar	≥ 1				
pressure	▶ Without preload valve	bar	≥ 20				
	► External supply (20 bar)	bar	>10 in conti see page 12		ion; for opera	ation below 1	0 bar,
Admissible inlet press	ure	bar	0.8 10.0				
Hydraulic fluid			Mineral oil ((HL, HLP) acc	ording to DIN	N 51524	
Hydraulic fluid temper	rature range	°C	-20 +70				
	degree of contamination of the hydraulic		Class 18/16	/13 (for parti	cle size ≤ 4/6	6/14 μm)	

- 1) The values apply:
 - \blacktriangleright to a perfect viscosity range from 36 ... 16 mm $^2/s$
 - with hydraulic fluids on the basis of mineral oils
 - ▶ with an absolute pressure of 1 bar at the suction opening S. With a reduction of the displacement or an increase in the inlet pressure, the speed can be increased according to the following characteristic curve.

With a reduced inlet pressure, the speed is to be reduced.

- 2) In case of higher radial forces, please consult us
- 3) In case of higher pressures, please consult us



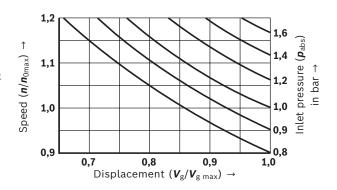



Technical data

(For applications outside these values, please consult us!)

Electric				
Туре				SYDFEE
Operating voltage			VDC	24 ⁺⁴⁰ % ₋₅ %
Operating range	► Upper limit valu	e	V	35
(short-time operation)	► Lower limit valu	е	V	21
Current	► Rated current		А	0.6
consumption (in static control operation)	► Maximum curre	nt	А	1.25
Inputs	Actual pressure X1; pin 10 and	•		Determination by means of ordering code
	► Analog, current,	load ⁴⁾	Ω	100
	► Analog, voltage		kΩ	≥ 50
	► Digital	Logic 0	V	≤ 0.6
		Logic 1	V	≥ 21
Outputs	► p actual		V	0 10
			mA	1.5
	► aactual		V	± 10
			mA	1.5
	► Digital	Logic 0	V	U _a < 1 V
		Logic 1	V	$U_a \ge U_B - 5 \text{ V}$; 10 mA (short-circuit-proof)
Ambient temperatu	re range at the pump		°C	0 60
Storage temperatur	e range (pump + elec	ctronics)	°C	0 70
Electronics design				Integrated at pilot control valve (OBE)
Protection class according to EN 60529	▶ Pump incl. pilot	control valve		IP65 (with correctly installed electrical connection)

 $^{^{}m 4)}$ For current input, maximum admissible input current 30 mA.

M Notice:

Electrical data type SYDFE1 see data sheet 30242.



Pressure and flow control system | **SYDFE.** 15/40

Technical data

(For applications outside these values, please consult us!)

Electric				
Туре			SYDFED	SYDFEF
Supply voltage 6)	► Nominal voltage	VDC	24	
	► Lower limit value	VDC	18	
	► Upper limit value	VDC	36	
	► Maximum residual ripple	Vpp	2.5	
Maximum power cons	sumption	W	40	
Required fuse protec	tion, external	А	4, time-lag	
AD/DA resolution	► Analog inputs	Bit	12	
	► Analog outputs ⁵⁾	Bit	10	
Actual pressure	► Analog voltage	V	0 10	
value Input ⁷⁾	► Analog current	mA	0 20 4)	
Ambient temperature	range at the pump	°C	0 +60	
Storage temperature	range (pump + electronics)	°C	+5 +40	0 +40
Electronics design			Integrated at pilot control valve	(OBE)
Protection class according to EN 6052	► Pump incl. pilot control valve		IP65 (with correctly installed el	lectrical connection)

- 4) Maximum admissible input current 30 mA for configuration on current input.
- 5) Outputs are parameterizable for type SYDFED and SYDFEF. Condition as supplied see "Electrical connection".
- 6) Supply voltage is used directly for the sensor connections X2M1, X2M2 and X8M with type SYDFED and SYDFEF (no internal voltage limitation).
- 7) Type VT-DFPD: XH4, pin 10 and 11 (only voltage 0 ... 10 V)
 - Type VT-DFPF: XH1: pin D and E



- ► For information on environment simulation testing for the fields EMC (electro-magnetic compatibility), climate and mechanical load, see data sheet 29016.
- ▶ With system versions with attached hoses ("0479" and "0487") please observe the information in the operating instructions, chapter "Maintenance".



Electrical connection: Type SYDFEE

► X1, central connection

Assignment of connector or mating connector and cable set

Pin	Signal	Description	Signal direction	Type of signal	Assignment i	n cable set (accessories)
1	+ U _B	Voltage supply	IN	24 VDC	1	0 1 1
2	0 V = L0	Reference potential for the voltage supply	-	-	2	Supply line 3 x 1.0 mm²
PE	Ground	Grounding connection for the electronics	-	-	green/yellow	3 X 1.0 IIIIII
3	Fault	Signals faults, e.g. cable break command / actual values, controller monitoring (logic 0 = error)	OUT	logic 24 V	white	
4	MO	Reference potential for analog signals	-	-	yellow	
5	a Command	Swivel angle command value	IN	analog ± 10 V	green	
6	a Actual	Actual swivel angle value, normalized	OUT	analog ±10 V	violet	
7	p _{Command}	Pressure command value	IN	analog 0 10 V	pink	Supply line
8	P _{Actual}	Actual pressure value, normalized	OUT	analog 0 10 V 1)	red	10 x 0.14 mm² shielded
9		Function depends on electronic type and additional function, see below	-	-	brown	(one end of the shield must be connected to
10	Actual pressure value H	Actual pressure value input: Signal level depends	IN	analog	black	the control)
11	Actual pressure value L	on pos. 15 in the ordering code. With version "F" (0.5 5 V) reserved	_	analog	blue	
n.c.					gray	

Functions at pin 9

Pin	Additional function	Function dependent on pos. 7 of the ordering code (order, see ordering code)	Signal direction	Type of signal
	"A"	Selecting a different oil volume adjustment (switch T_D)	IN	logic 24 V
a	"B"	Power limitation active	OUT	logic 24 V
9	"C"	Command value of power limitation	IN	analog 0 10 V
	"D"	Switch off pressure controller	IN	logic 24 V

¹⁾ When using a pressure transducer with raised zero point (e.g. 4 ... 20 mA), a voltage of -1 ... -2.5 V will be output in case of a cable break.

▶ X2, connection of pressure transducer HM 20

Pin	Signal HM 20	Pin	
1	OUT, +U _B	2	n.c.
3	Reference L0		
4	IN, analog, 0.5 5 VDC	5	n.c.



■ Notes:

- ▶ Mating connectors, separate order, see page 38.
- ► Electrical connection for type SYDFE1 see data sheet 30242.



Pressure and flow control system | **SYDFE.** 17/40

Electrical connection: Type SYDFED


► XH4, central connection

Assignment of connector or mating connector and cable set

Pin	Signal	al Description		Type of signal	Assignment in cable set (accessories)		
1	+ U _B	Voltage supply	IN	24 VDC	1		
2	0 V = L0	Reference potential for the voltage supply		-	2	Supply line 3 x 1.0 mm ²	
PE	Ground	Grounding connection for the electronics	-	-	green/yellow	3 x 1.0 iiiii-	
3	DO	Switching output 24 V max. 1.5 A Factory setting: Error signal	OUT	logic 24 V	white		
4	MO	Reference potential for analog signals	-	-	yellow		
5	AI2	Analog input 2 (or digital input, configuration via software)	IN	analog ±10 V (digital 24 V)	green		
6	AO2	Analog output 2 Factory setting: Actual swivel angle value, normalized	OUT	analog ±10 V or 0 20 mA ¹⁾	violet	Supply line	
7	AI1	Analog input 1 (or digital input, configuration via software)		analog ±10 V (digital 24 V)	pink	10 x 0.14 mm shielded (one end of	
8	AO1	Analog output 1 Factory setting: Actual pressure value, normalized	OUT	analog ±10 V or 0 20 mA ¹⁾	red	the shield must be	
9	DI	Digital input (use freely configurable)	IN	logic 24 V	brown	connected to	
10	Actual pressure value H	Actual pressure value input (analog input 8): Signal level depends on parameter setting.	IN	analog 0 10 V (freely configurable)	black	the control)	
11	Actual pressure value L	Factory setting dependent on pos. 15 of the ordering code: 0 10 V (V) or deactivated (F)	-	analog	blue		
n.c.					gray]	


▶ X7E1 and X7E2, connector pin assignment for Ethernet interface (coding D), M12, 4-pole, socket

Pin	Assignment
1	TxD +
2	RxD +
3	TxD -
4	RxD -
5	Not used



► X2M1 and X2M2, analog configurable sensor interface (coding A), M12, 5-pole, socket

Pin	Assignment				
1	+ 24 V voltage output (sensor supply) ²⁾				
2	Sensor signal input current (4 20 mA) 3)				
3	GND				
4	Sensor signal input voltage (0 10 V) 3)				
5	Negative differential amplifier input to pin 4 (optional)				



- 1) If the analog inputs Al1 and Al2 are not used, the analog outputs AO1 and AO2 may be parameterized as current outputs (e.g. if the command value presetting is realized via the field bus).
- 2) Maximum load capacity 50 mA, voltage output same as voltage supply connected to input XH4.
- 3) Only one signal input per interface configurable

M Notes:

- ► X2N, reserved (not used)
- ➤ X8A, actual swivel angle value input (coding A), M12, 5-pole, socket M12
- ▶ Mating connectors, separate order, see page 38.



Electrical connection: Type SYDFEF


► XH1, central connection

Assignment of connector or mating connector and cable set

Pin	Signal	Description	Signal direction	Type of signal	Assignment in (accessories)	ı cable set
А	+ U _B	Voltage supply	IN	24 VDC	brown	Line
В	0 V = L0 Reference potential for the voltage supply Ground Grounding connection for the electronics		_	_	yellow	7 x 0.75 mm ²
PE			_	-	green/yellow	shielded
С	_	Do not use		_	green	(one end of the shield
D	AI1	Analog input 1 (freely-configurable)	IN	analog ± 10 V or 0 20 mA	blue	must be connected to
E	MO	0 Reference potential for analog signals		-	gray	the control)
F	AO1	Analog output 1 (freely-configurable)	OUT	analog ± 10 V or 0 20 mA	white	


▶ X7E1 and X7E2, connector pin assignment for Ethernet interface (coding D), M12, 4-pole, socket


Pin	Assignment
1	TxD +
2	RxD +
3	TxD -
4	RxD -
5	Not used



▶ X2N, analog configurable sensor interface (coding A), M12, 5-pole, socket

Pin	Assignment				
1	+ 24 V voltage output (sensor supply) 1)				
2	Analog input voltage 2 (0 10 V)				
3	GND				
4	Analog input voltage 4 (0 10 V)				
5	Analog input voltage 3 (0 10 V)				





M Notes:


- ➤ X8A1, actual swivel angle value input (coding A), M12, 5-pole, socket M12
- ▶ Mating connectors, separate order, see page 38.



Pressure and flow control system | **SYDFE.** 19/40

LED displays: Type SYDFED

LED	Interface	Sercos	EtherNET/IP	EtherCAT	PROFINET RT	POWERLINK	VARAN
1	V7F4	Activity	Activity	not used	Activity	not used	Active
2	X7E1	Link	Link	Link/activity	Link	Link/data activity	Link
3	Electronics	S	Network status	Network status	Network status	Status/error	Network status
4	module	Module status	Module status	Module status	Module status	Module status	Module status
5	X7E2	Activity	Activity	not used	Activity	not used	not used
6	A/EZ	Link	Link	Link/activity	Link	Link/data activity	not used

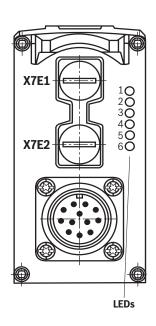

Displays of the status LEDs

Network status LED (LED 3)	Display status		
See firmware and software description 30338-FK			

Module status LED (LED 4)	Display status
Off	No voltage supply
Green-red, flashing	Self-test
Green, flashing	Drive ready for operation
Green	In control
Orange, flashing	Warning
Red, flashing	Error


Notes:

- ► For the connection to the M12 sockets, we recommend using self-locking mating connectors
- ▶ LEDs 1, 2, 5 and 6 relate to interfaces "X7E1" and "X7E2"
 − Link: Cable plugged in, connection established (permanently lit)
 - Activity: Data sent/received (flashing)
- ► The network status LED 3 (NS) indicates the status of the control communication, see firmware and software description 30338-FK.
- ▶ Module status LED 4 relates to the electronics module
- ► For a detailed description of the diagnosis LEDs, please refer to the functional description Rexroth HydraulicDrive HDx.



LED displays: Type SYDFEF

LED	Interface	Sercos	EtherNET/IP	EtherCAT	PROFINET RT	VARAN
MS		Module status	Module status	Module status	Module status	Module status
NS	Electronics module	S	Network status and others			
L1 S1	X7E1	Link and others	Link and others	Link/activity	Link and others	Link and others
S1	A/EI	Activity and others	Activity and others	not used	Activity and others	Active and others
L2 S2	X7E2	Link and others	Link and others	Link/activity	Link and others	not used
S2	A/E2	Activity and others	Activity and others	not used	Activity and others	not used
PWR	XH1	Power	Power	Power	Power	Power

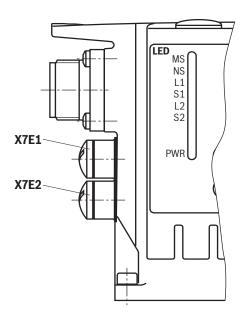

Displays of the status LEDs

Power LED (LED PWR)	Display status
Off	No voltage supply
Green	Operation

Module status LED (LED MS)	Display status
Off	No voltage supply
Green-red, flashing	Initialization
Green, flashing	Drive ready for operation
Green	Drive active
Orange, flashing	Warning
Red, flashing	Error
Green, rapidly flashing	Firmware must be loaded

M Notes:

- ► For the connection to the M12 sockets, we recommend using self-locking mating connectors
- ▶ The MS module status LED relates to the electronics module
- ► The NS network status LED indicates the status of the control communication, see application description 30338-FK
- ▶ LEDs L1, S1, L2 and S2 relate to interfaces "X7E1" and "X7E2"
 - Link: Cable plugged in, connection established (permanently lit)
 - Activity: Data sent/received (flashing)
- ► For a detailed description of the diagnosis LEDs, please refer to the functional description Rexroth HydraulicDrive HDx.



Pressure and flow control system | **SYDFE.** 21/40

Control loop quality

	Swivel angle control	Pressure control 1)
Linearity tolerance	≤ 1.0%	≤ 1.5% (≤ 1.0% ²⁾)
Temperature error	≤ 0.5% / 10 K	≤ 0.5% / 10 K
Hysteresis	≤ 0.2%	≤ 0.2%
Repetition accuracy	≤ 0.2%	≤ 0.2%

- 1) Without considering the pump pulsation
- 2) With SYDFED and SYDFEF using the integrated calibration function


■ Notes:


- ▶ The specified values are only valid when using the system-related components specified in this data sheet (see page 38).
- ► At pressures < 20 bar, higher tolerances have to be anticipated due to lower actuating forces.

Characteristic curves

(measured with HLP46, 9oil = 40 ±5 °C)

Transition function for pressure command value step (control spool version "A")





- 1 p_{Command}
- 2 p_{Actual}

 $T_{95\%}$ in ms with connected hydraulic fluid volumes (lines and actuators)

-	<u> </u>	
	Hydraulic fluid volume	T _{95%}
	in l	in ms
	< 5	150
	5 10	200
	15 25	250

M Notes:


- For pressures up to 40 bar, the values of the response times are greater.
- ➤ The specified curve shapes and control times refer to a drive speed of 1500 rpm and are only reached with an optimization of the pressure controller.





Characteristic curves

(measured with HLP46, ϑ_{oil} = 40 ±5 °C)

Transition function with swivel angle command value step (control spool version "A")

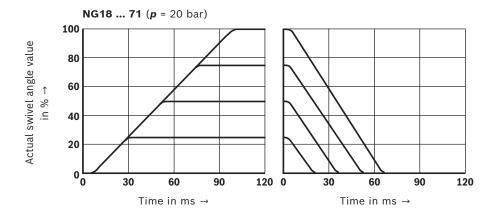

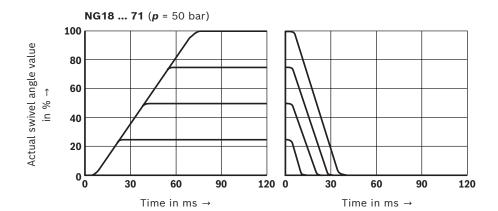

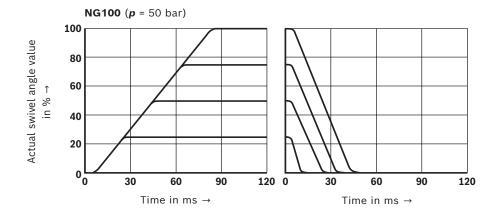




Pressure and flow control system | **SYDFE.** 23/40

Dimensions: Type SYDFE1 (dimensions in mm)

NG18 ... 100 (shaft design "S"; without through-drive "N00"; representation NG71)

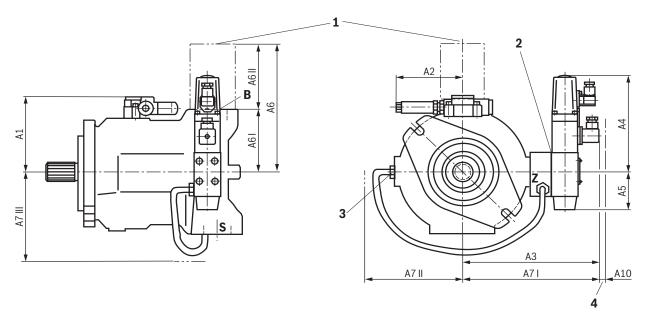

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector

									"047	Version '9" and "0	487"		
NG	A1	A2	А3	A4	A5	A6	A6 I	A6 II	A7 I	A7 II	A7 III	A10	Z
18	98	110	161	158	63	178	63	115	196	125	100	15	G1/4
28	106	110	171	158	63	195	80	115	206	135	115	15	G1/4
45	112	110	181	158	63	205	90	115	216	145	125	15	G1/4
71	124	110	195	158	63	254	104	150	230	159	150	15	G1/4
100	129	110	200	158	63	247	100	147	235	164	150	15	G1/4


Motice:

Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Dimensions: Type SYDFEE (installation orientation "0") (dimensions in mm)

NG18 ... 100 (valve mounting direction "0"; shaft design "S"; without through-drive "N00"; representation NG100)

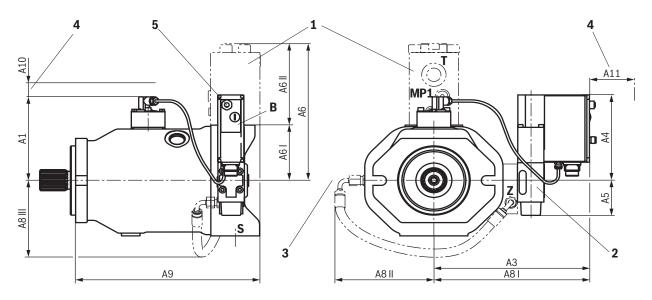

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- **5** Port X2 (pressure transducer HM 20) with actual pressure value input "F".

								"047	Version 9" and "C	487"				
NG	A1	A3 1)	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	A11	Z
18	120	198	158	63	178	63	115	233	125	100	170	8	100	G1/4
28	128	208	158	63	195	80	115	243	135	115	194	8	100	G1/4
45	134	218	158	63	205	90	115	253	145	125	219	8	100	G1/4
71	146	232	158	63	254	104	150	267	159	150	257	8	100	G1/4
100	151	237	158	63	247	100	147	272	164	150	317	8	100	G1/4

¹⁾ Version "0000"

Motice:


Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Pressure and flow control system | **SYDFE.** 25/40

Dimensions: Type SYDFEE (installation orientation "2") (dimensions in mm)

NG18 ... 100 (valve mounting direction "2"; shaft design "S"; without through-drive "N00"; representation NG100)

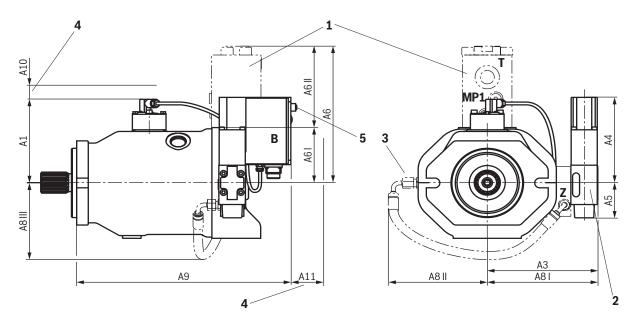

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- 5 Port X2 (pressure transducer HM 20) with actual pressure value input "F".

								Version						
NG	A1	А3	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	A11	Z
18	100	116	158	63	178	63	115	151	125	100	253	8	60	G1/4
28	108	127	158	63	195	80	115	162	135	115	263	8	60	G1/4
45	114	137	158	63	205	90	115	172	145	125	278	8	60	G1/4
71	126	151	158	63	254	104	150	186	159	150	306	8	60	G1/4
100	131	156	158	63	247	100	147	191	164	150	373	8	60	G1/4


Motice:

Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Dimensions: Type SYDFED (installation orientation "0") (dimensions in mm)

NG18 ... 100 (valve mounting direction "0"; shaft design "S"; without through-drive "N00"; representation NG100)

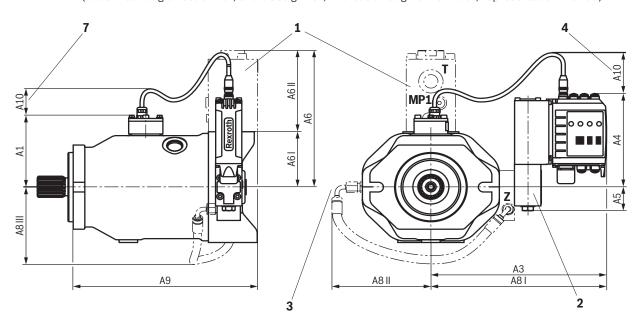

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- 7 Space required for the connection line

								"047	Version '9" and "0	487"			
NG	A1	А3	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	Z
18	100	230	166	43	178	63	115	265	125	100	170	100	G1/4
28	108	241	166	43	195	80	115	276	135	115	194	100	G1/4
45	114	251	166	43	205	90	115	286	145	125	219	100	G1/4
71	126	265	166	43	254	104	150	300	159	150	257	100	G1/4
100	131	270	166	43	247	100	147	305	164	150	317	100	G1/4

M Notice:


Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Pressure and flow control system | **SYDFE.** 27/40

Dimensions: Type SYDFED (installation orientation "2") (dimensions in mm)

NG18 ... 100 (valve mounting direction "2"; shaft design "S"; without through-drive "N00"; representation NG100)

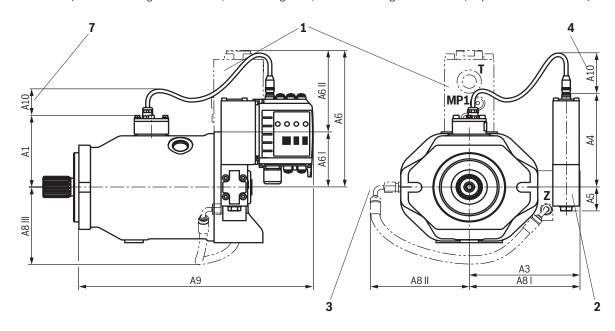

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- 7 Space required for the connection line

								"047	Version '9" and "0	487"			
NG	A1	А3	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	Z
18	100	116	166	43	178	63	115	151	125	100	287	100	G1/4
28	108	127	166	43	195	80	115	162	135	115	297	100	G1/4
45	114	137	166	43	205	90	115	172	145	125	312	100	G1/4
71	126	151	166	43	254	104	150	186	159	150	340	100	G1/4
100	131	156	166	43	247	100	147	191	164	150	407	100	G1/4


Notice:

Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Dimensions: Type SYDFEF (installation orientation "0") (dimensions in mm)

NG18 ... 100 (valve mounting direction "0"; shaft design "S"; without through-drive "N00"; representation NG100)

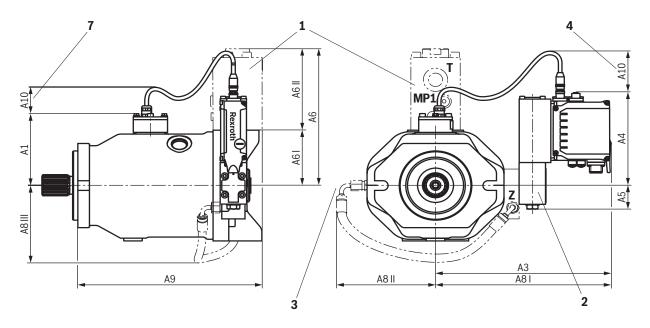

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- 7 Space required for the connection line

								"047	Version '9" and "0	487"			
NG	A1	А3	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	Z
18	100	228	166	43	178	63	115	263	125	100	170	100	G1/4
28	108	239	166	43	195	80	115	274	135	115	194	100	G1/4
45	114	249	166	43	205	90	115	284	145	125	219	100	G1/4
71	126	263	166	43	254	104	150	298	159	150	257	100	G1/4
100	131	268	166	43	247	100	147	303	164	150	317	100	G1/4

Motice:


Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Pressure and flow control system | **SYDFE.** 29/40

Dimensions: Type SYDFEF (installation orientation "2") (dimensions in mm)

NG18 ... 100 (valve mounting direction "2"; shaft design "S"; without through-drive "N00"; representation NG100)

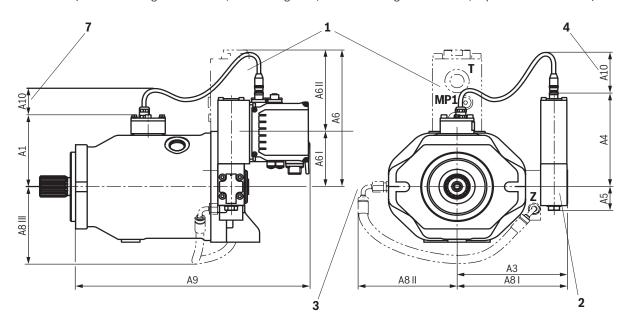

- 1 Preload valve (optional)
- 2 Pilot control valve attachment with clockwise direction of rotation
- **3** Pilot control valve attachment with counterclockwise direction of rotation
- 4 Space required for removing the mating connector
- 7 Space required for the connection line

								"047	Version '9" and "0	487"			
NG	A1	А3	A4	A5	A6	A6 I	A6 II	A8 I	A8 II	A8 III	A9	A10	Z
18	100	116	166	43	178	63	115	151	125	100	285	100	G1/4
28	108	127	166	43	195	80	115	162	135	115	295	100	G1/4
45	114	137	166	43	205	90	115	172	145	125	310	100	G1/4
71	126	151	166	43	254	104	150	186	159	150	338	100	G1/4
100	131	156	166	43	247	100	147	191	164	150	405	100	G1/4


M Notice:

Dimensions base pump (axial piston variable displacement pump A10VSO.../31) see data sheet 92711.



Dimensions: Combination pumps (dimensions in mm)

A10VSO.../31 + **A10VSO.../31** (SYDFE.-2X...) + (SYDFE.-2X...)

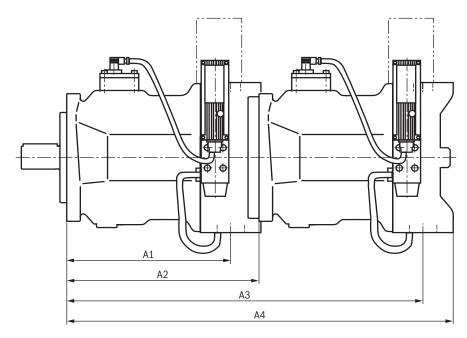

- 1 Main pump
- 2 Attachment pump

										Main	pump									
		A10V	SO 18			A10V	SO 28		A10VSO 45				A10VSO 71				A10VSO 100			
Attachment pump	A1	A2	А3	Α4	A1	A2	А3	Α4	A1	A2	А3	A4	A1	A2	А3	Α4	A1	A2	А3	A4
A10VSO 18	145	182	349	399	164	204	349	399	184	229	374	424	217	267	412	462	275	338	483	533
A10VSO 28					164	204	368.5	410	184	229	393.5	435	217	267	431.5	473	275	338	502.5	544
A10VSO 45									184	229	413	453	217	267	451	491	275	338	522	562
A10VSO 71													217	267	484	524	275	338	555	595
A10VSO 100																	275	338	613	664




Pressure and flow control system | **SYDFE.** 31/40

Dimensions: Connections (dimensions in mm)

Size			18	28	45	71	100
В	▶ Size		3/4"	3/4"	1″	1"	1 1/4"
Working line ► Mounting thread (DIN 13)				M10 x 1,5	5; 17 deep		M14 x 2; 19 deep
(SAE J518 1))	▶ Peak pressure ²⁾	bar	350				
S	▶ Size		1"	1 1/4"	1 1/2"	2"	2 1/2"
Suction line	► Mounting thread (DIN 13)		M10 x 1,5	; 17 deep	M12 x 1.7	5; 20 deep	M12 x 1.75; 17 deep
(SAE J518 ¹⁾)	► Peak pressure ²⁾	bar	10				

Notes regarding size 71:

- ▶ With pressure connection B, two SAE fastening connections rotated by 90° are available. SAE 1 1/4″ standard pressure series, 3000 psi, for pressures up to 250 bar or SAE 1″ standard pressure series, 5000 psi, for pressures up to 350 bar.
- ➤ For operating pressures exceeding 250 bar, the pressure flange SAE 1" must be used.




- Dimensions according to SAE J518 only, metric mounting thread deviating from the standard.
- 2) Application-specific short-time pressure peaks may occur. Please observe when selecting measuring devices and fittings. Specified pressures are in bar absolute.
 - 1 SAE 1 1/4"
 - 2 SAE 1"



Dimensions: Through-drives (dimensions in mm)

- ▶ "KD3" Flange ISO 100, 2-hole for the attachment of
 - ► SYDFE.-2X (NG28 and 45, flange "A")
 - ► A10VSO..31 (NG28 and 45, flange "A", see data sheet 92711)

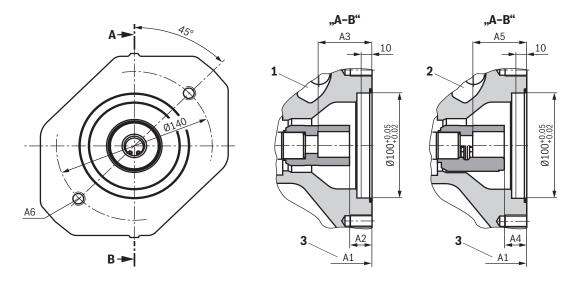

NG	A1	A2	А3	A4	A5	A6
28	204	17.8	41.7	-	-	M12 x 1.75; right through
45	229	17.9	41.7	18.4	46.7	M12 x 1.75; right through
71	267	20.3	44.1	20.8	49.1	M12 x 1.75; 20 deep
100	338	18	41.9	18.2	45.9	M12 x 1.75; 20 deep

M Notice:

Sectional presentation with examples of hubs (order number for hubs see page 37).


- **1** Hub 7/8"
- 2 Hub 1"
- 3 Up to pump mounting face





Pressure and flow control system | **SYDFE.** 33/40

Dimensions: Through-drives (dimensions in mm)

- ▶ "KD5" Flange ISO 125, 2-hole for the attachment of
 - ► SYDFE.-2X (NG71 and 100, flange "A")
 - ► A10VSO..31 (NG71 and 100, flange "A", see data sheet 92711)



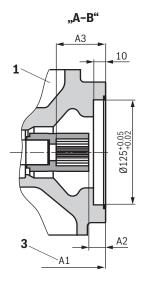

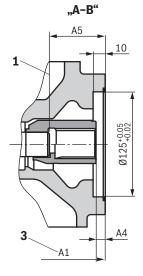

NG	A1	A2	А3	A4	A5	A6
71	267	21.8	58.6	-	-	M16 x 2; right through
100	338	19.5	56.4	10.5	65	M16 x 2; right through

M Notice:

Sectional presentation with examples of hubs (order number for hubs see page 37).

- **1** Hub 1 1/4"
- 2 Hub 1 1/2"
- 3 Up to pump mounting face
- 4 Not NG71





Dimensions: Through-drives (dimensions in mm)


- "KC1" Flange SAE 82-2 (SAE A, 2-hole) for the attachment of
 - ► SYDFE.-2X (NG18, flange "C")
 - ► A10VSO..31 (NG18, flange "C", see data sheet 92711)

 - ► PGF2 (shaft "J", flange "U2", see data sheet 10213)

 ► PGH2 and PGH3 (shaft "R", flange "U2", see data sheet 10223)
 - ► AZPF (shaft "R", front cover "R", see data sheet 10089)

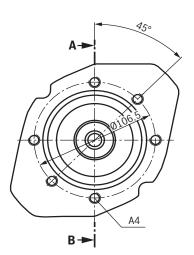

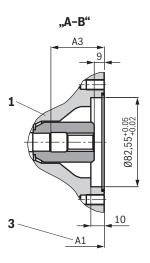

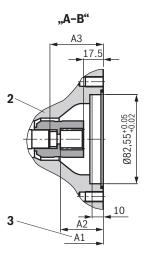

NG	A1	A2	А3	A4
18	182	40	43	M10; 14.5 deep
28	204	39	47	M10; 16 deep
45	229	40.5	53	M10; 16 deep
71	267	40	61	M10; 20 deep
100	338	40	65	M10; 20 deep

Notice:

Sectional presentation with examples of hubs (order number for hubs see page 37).


- **1** Hub 5/8"
- 2 Hub 3/4"
- 3 Up to pump mounting face




Pressure and flow control system | SYDFE. 35/40

Dimensions: Through-drives (dimensions in mm)

- ▶ "KC3" Flange SAE 101-2 (SAE B, 2-hole) for the attachment of
 - ► SYDFE.-2X (NG28 and 45, flange "C")
 - ▶ A10VO..31 (NG28 and 45, flange "C", see data sheet 92701)
 - ► PGF3 (shaft "J", flange "U2", see data sheet 10213)
 ► PGH4 (shaft "R", flange "U2", see data sheet 10223)

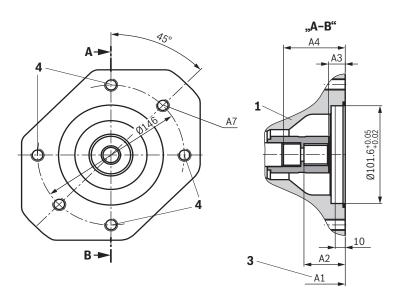

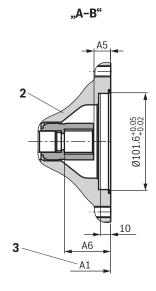

NG	A1	A2	А3	A4	A5	A6	A7
28	204	41.7	17.8	47	-	_	M12; right through
45	229	41.7	17.9	53	18.4	46.7	M12; 18 deep
71	267	44.7	20.3	61	20.8	49.1	M12; 20 deep
100	338	41.9	18	65	18.2	46.6	M12; 20 deep

Motice:


Sectional presentation with examples of hubs (order number for hubs see page 37).

- 1 Hub 7/8"
- 2 Hub 1"
- 3 Up to pump mounting face
- 4 Not NG28



Dimensions: Through-drives (dimensions in mm)

- ▶ "KC5" Flange SAE 127-2 (SAE C, 2-hole) for the attachment of
 - ► SYDFE.-2X (NG71 and 100, flange "C")
 - ► A10VO..31 (NG71 and 100, flange "C", see data sheet 92701)
 - ▶ PGH5 (shaft "R", flange "U2", see data sheet 10223)

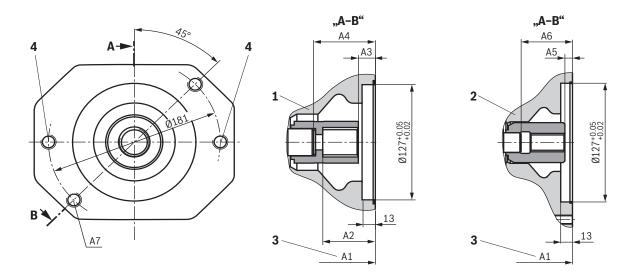

NG	A1	A2	А3	A4	A5	A6	A7
71	267	55.5	17.9	61	-	_	M16; 18 deep
100	338	57	17.9	65	8	65	M16; 25 deep

Notice:

Sectional presentation with examples of hubs (order number for hubs see page 37).

- **1** Hub 1 1/4"
- **2** Hub 1 1/2"
- 3 Up to pump mounting face
- 4 Not NG71



Pressure and flow control system | **SYDFE.** 37/40

Torsionally flexible couplings for attachment to a standard electric motor

N	Motor			Type SYDFE.		
Frame size/ characteristic	Shaft diameter in mm	NG18 Shaft "S", 3/4"	NG28 Shaft "S" or "R", 7/8"	NG45 Shaft "S" or "R", 1"	NG71 Shaft "S" or "R", 1 1/4"	NG100 Shaft "S", 1 1/2"
100/0 112/0	28		R901038012	R901038017		
132/0	38	R900704699	R901012344	R900772898		
160/0	42	R900726977	R900991864	R900994283	R900228413	
180/0	48		R900032918	R900062159	R900240468	R900242567
200/0	55		R901038026	R901038025	R901038021	R901104689
225/0	60		R900750847	R901066409	R900228375	R901050508
250/0	65			R900988348	R900986404	R901046864
280/0	75				R900218487	R901055216
315/0	80					R901046894 1)

¹⁾ Up to 40 °C

Hubs for through-drives

Hubs for the combination of single pumps or the combination of SYDFE with other pumps. Observe that the attachment pump has a splined shaft SAE J744 with the specified diameter.

The following conditions apply to the attachment pumps listed in the table:

- ▶ SYDFE and A10VSO with shaft "S" or "R"
- ▶ Internal gear pump PGH with shaft "R", flange "U2", see data sheet 10223
- Internal gear pump PGF3 with shaft "J", flange "U2", see data sheet 10213
- ► External gear pump AZPF with shaft "R", front cover "R", see data sheet 10089

Observe that the through-drive of the main pump and the flange of the attachment pump (see ordering code page 2) are identical. Check in the current data sheet of the gear pump whether the shaft ends have the specified dimensions.

	Main p	ump SYDFE or A1	ovso		Attachment pump		
NG18	NG28	NG45	NG71	NG100	Ø shaft	Pump type (example)	
R902436099	R902436199	R902436100	R902436200	R902436201	3/4" 19-4 (SAE A-B)	SYDFE-2X, A10VSO31 NG018 shaft "S"	
	R902436098	R902436084	R902436083	R902436101	7/8" 22-4 (SAE B)	SYDFE-2X, A10VSO31 NG028 shaft "R"; PGF3	
		R902436103	R902436104	R902436105	1" 25-4 (SAE B-B)	SYDFE-2X, A10VSO37 NG045 shaft "R"; PGH	
			R902436085	R902436086	1 1/4" 32-4 (SAE C)	SYDFE-2X, A10VSO31 NG071 shaft "R"	
				R910943565	1 1/2" 38-4 (SAE C-C)	SYDFE-2X, A10VSO31 NG100 shaft "S"; PGH	
R910943528	R910986299	R910943529	R910943545	R910943560	5/8" 16-4 (SAE A)	1PF2G2, PGF2, PGH2, PGH3, AZPF	



Accessories (separate order)

SYDFE1	Material number	Data sheet
External control electronics VT 5041-3X/1	R901236404	30242
without power limitation, without swivel angle display	11301230404	50242
External control electronics VT 5041-3X/2	R901263598	30242
without power limitation, with swivel angle display		
External control electronics VT 5041-3X/3	R901196678	30242
with power limitation, with swivel angle display	R901017011	08006
Mating connector for solenoid plug	R901017011	08006
Mating connector for position transducer of valve		00000
Mating connector for position transducer of pump	R900013674	22272
Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA)	R901342029	30272
Pressure transducer HM 20-2X, measurement range 315 bar (0.1 10 V)	R901342030	30272
Card holder VT 3002-1-2X/32D	R900020153	29928
Compact power supply unit VT-NE32-1X	R900080049	29929
SYDFEE	Material number	Data sheet
Mating connector 12-pole for central connection X1 without cable (assembly kit)	R900884671	08006
Mating connector 12-pole for central connection X1 with cable set 2 x 5 m	R900032356	-
Mating connector 12-pole for central connection X1 with cable set 2 x 20 m	R900860399	-
Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA)	R901342029	30272
Pressure transducer HM 20-2X, measurement range 315 bar (0.1 10 V)	R901342030	30272
Pressure transducer HM 20-2X, measurement range 315 bar (0.5 5 V) with 0.5 m cable	R901342038	30272
Test device VT-PDFE-1-1X/V0/0	R900757051	29689-B
Compact power supply unit VT-NE32-1X	R900080049	29929
SYDFED	Material number	Data sheet
Mating connector 12-pole for central connection XH4 without cable (assembly kit)	R900884671	08006
Mating connector 12 pote for central connection XH4 with cable set 2 x 5 m	R900032356	-
Mating connector 12-pole for central connection XH4 with cable set 2 x 20 m	R900860399	
Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA)	R901342029	30272
Pressure transducer HM 20-2X, measurement range 315 bar (4 20 HA)	R901342029	30272
	R901342038	30272
Pressure transducer HM 20-2X, measurement range 315 bar (0.5 5 V) with 0.5 m cable Test device VT-PDFE-1-1X/V0/0		
	R900757051	29689-B
Compact power supply unit VT-NE32-1X	R900080049	29929
Ethernet connection cable M12 to RJ45 (connection X7E1 & X7E2), additional information type designation RKB0044/xxx.x (xxx.x: length in meters)	R911172135	-
Commissioning software IndraWorks DS from version 14V14	_	_
SYDFEF	Material number	Data sheet
	R900021267 R901420483	08006
		08006
Mating connector 6-pole for central connection XH1 with cable set 3 m		00000
Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m	R901420491	08006
Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m Mating connector 6-pole for central connection XH1 with cable set 10 m	R901420491 R901420496	08006
Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m Mating connector 6-pole for central connection XH1 with cable set 10 m Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA)	R901420491 R901420496 R901342029	08006 30272
Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m Mating connector 6-pole for central connection XH1 with cable set 10 m Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA) Pressure transducer HM 20-2X, measurement range 315 bar (0.1 10 V)	R901420491 R901420496 R901342029 R901342030	08006 30272 30272
Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m Mating connector 6-pole for central connection XH1 with cable set 10 m Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA) Pressure transducer HM 20-2X, measurement range 315 bar (0.1 10 V) Pressure transducer HM 20-2X, measurement range 315 bar (0.5 5 V) with 0.5 m cable	R901420491 R901420496 R901342029	08006 30272
Mating connector 6-pole for central connection XH1 without cable (assembly kit) Mating connector 6-pole for central connection XH1 with cable set 3 m Mating connector 6-pole for central connection XH1 with cable set 5 m Mating connector 6-pole for central connection XH1 with cable set 10 m Pressure transducer HM 20-2X, measurement range 315 bar (4 20 mA) Pressure transducer HM 20-2X, measurement range 315 bar (0.1 10 V) Pressure transducer HM 20-2X, measurement range 315 bar (0.5 5 V) with 0.5 m cable Ethernet connection cable M12 to RJ45 (connection X7E1 & X7E2), additional information type designation RKB0044/003,0	R901420491 R901420496 R901342029 R901342030	08006 30272 30272



Pressure and flow control system | **SYDFE.** 39/40

Project planning information

- ▶ Always shield command and actual value cables.
- ▶ The distance to aerial lines or radios must be at least 1 m.
- ▶ Do not lay signal lines close to power lines.
- ▶ For amending notes on the SYDFE control system, see the operating instructions (see "Further information").

Further information

▶ Operating instructions for SY(H)DFE1
 ▶ Operating instructions for SY(H)DFEE
 ▶ Operating instructions for SY(H)DFEC
 ▶ Operating instructions for SY(H)DFED
 ▶ Operating instructions for SY(H)DFED
 ▶ Operating instructions for SY(H)DFEF
 ▶ Operating instructions for SY(H)DFEF
 ▶ Operating instructions for SY(H)DFEN
 ▶ Operating instructions for SY(H)DFEN
 Operating instructions 30014-B

▶ Data sheet for axial piston variable displacement pump A10VSO../31
 ▶ Data sheet for external control electronics VT 5041-3X for SYDFE1
 ▶ Data sheet for pilot control valve VT-DFP.-2X
 ▶ Data sheet for pilot control valve VT-DFP.-2X
 ▶ Data sheet for pilot control valve VT-DFP.-2X

▶ Data sheet for pump preload valve SYDZ 0001-1X
 ▶ Data sheet for swivel angle sensor VT-SWA-1-1X
 ▶ Data sheet for pressure transducer HM 20-2X
 ▶ Data sheet 30272

► Operating instructions for test device VT-PDFE Operating instructions 29689-B

InternetInformation on available spare parts

Internet