

Hydraulic Machine Lifts

▼ SOH10-6



- For lifting heavy equipment with minimum available access
- Remote hydraulic pump enhances safety
- Low height lifting toe
- Precision guided to reduce friction and isolate cylinder from side-loads
- Two extendable support feet provide extra stability
- Includes RC-Series cylinder with CR400 coupler.

SOH Series

Lifting Capacity:

8,5 - 20 ton

Stroke:

136 - 157 mm

Toe Clearance:

20 mm

Maximum Operating Pressure:

700 bar



RSM-Series, Low-Height Cylinders

Low height, single-acting spring-return cylinders are ideal for space restricted applications.


Page: 26



Load Skates


In combination with the Enerpac Machine Lifts we recommend Load Skates for moving heavy loads.

Page: 184

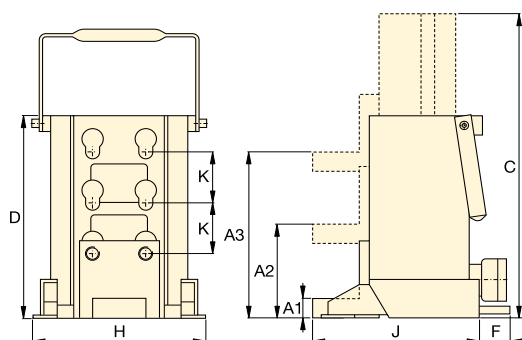

▼ Limited access under this machine makes the Enerpac hydraulic machine lift the perfect solution.



Capacity	Toe Clearance (mm)			Stroke	Model Number	Oil Capacity	Dimensions (mm)						
	Minimum	Central	Maximum				Total Ext. Height	Total Body Height					
ton (kN)	A1	A2	A3	(mm)		(cm³)	C	D	F	H	J	K	(kg)
8,5 (75)	20	95	169	136	SOH10-6	224	430	294	–	190	214	74	26
20 (178)	30	110	190	157	SOH23-6	525	472	320	65	265	250	80	45

ENERPAC 183

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK