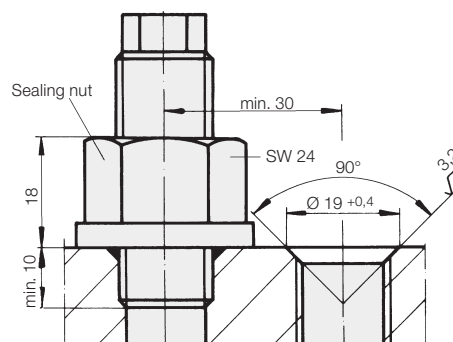
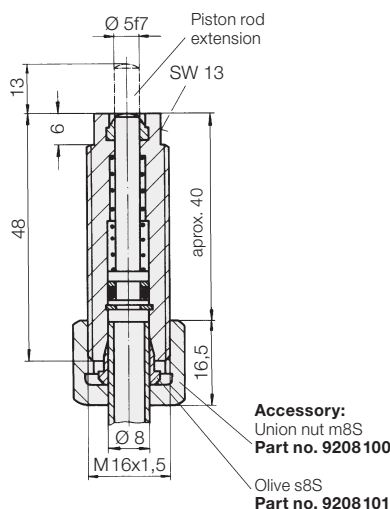
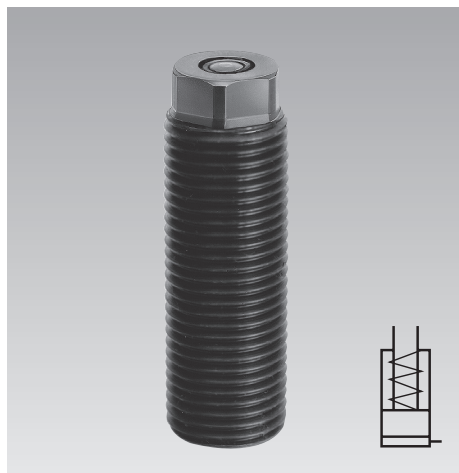


**Threaded-Body Cylinder****single acting with spring return and wiper**
max. operating pressure 160/500 bar**Description**

These threaded-body cylinders allow direct tube or hose connection.

Due to elimination of the pipe union a particularly compact assembly results. Depending on wall strength and fixing method (thread or bore) a certain adjustment is possible.

The cylinders can also be screwed into threaded bores. Sealing is then effected by the sealing nut available as accessory. By adjustment, workpiece tolerances of more than 20 mm can be absorbed.

Material

Piston material: casehardening steel, hardened
Cylinder body: free-cutting steel

Important notes

Threaded-body cylinders must not be subjected to a load in retracted position.

The cylinder is not suitable for pre-mounting of the cutting ring, since there is no stop for the tube. This pre-assembly has to be made by means of a male connector D8S (9208 102).

Cylinders have to be protected against direct influences of aggressive cutting lubricants and coolants.

Operating conditions, tolerances and other data see data sheet A 0.100.

| | | |
|-----------------------------|--------------------|-----|
| Piston Ø | [mm] | 8 |
| Stroke | [mm] | 10 |
| Clamping force | 100 bar [kN] | 0.5 |
| at | 500 bar [kN] | 2.5 |
| Min. operating pressure | [bar] | 5 |
| Oil volume per 10 mm stroke | [cm ³] | 0.5 |
| Piston area | [cm ²] | 0.5 |
| Spring return force, min. | [N] | 15 |
| Weight | [g] | 55 |


Part no. **1459001****Part no.** **1459011**
with piston rod extension**Version with minimum leakage rate for operating pressure up to 160 bar**

e.g. for applications with many operating cycles

Part no. **1459 101****Part no.** **1459 111**
with piston rod extension**Accessories**

| Connecting possibilities | Operating pressure | |
|--|--------------------|----------------|
| | 250* bar | 500 bar |
| Precision steel tube as | 8x1* | 8x2 |
| per DIN 2391 galvanized | 3128112 | 3128212 |
| High-pressure hose ND 4 (s. sheet F 9.361) | 93752X | |
| Seal nut M16x1.5 | 3300407 | |
| Max. seating torque | 90 Nm | |
| Lock nut M16 x 1.5 DIN 936 | 3300409 | |

* Tubes and hoses have to be provided with union nuts m8S and olives s8S.

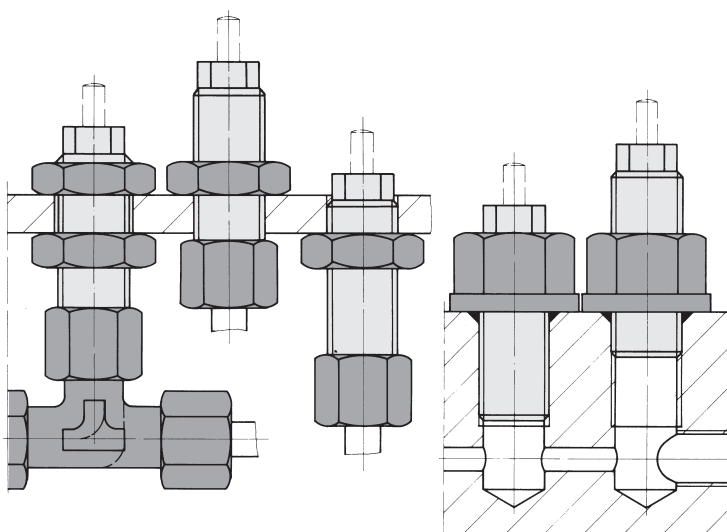Article available on request

Adjustable T-swivel joint QE8S

Part no. **9208035**

Adjustable swivel joint KE8S

Part no. **9208036****Article available on request**