[illegible]

For expanding plug
Part no. 3300-868

see single connection

m Fit depth

0.3


0.5

0.6 +0.03

6.5


Optionally

Connection possibilities

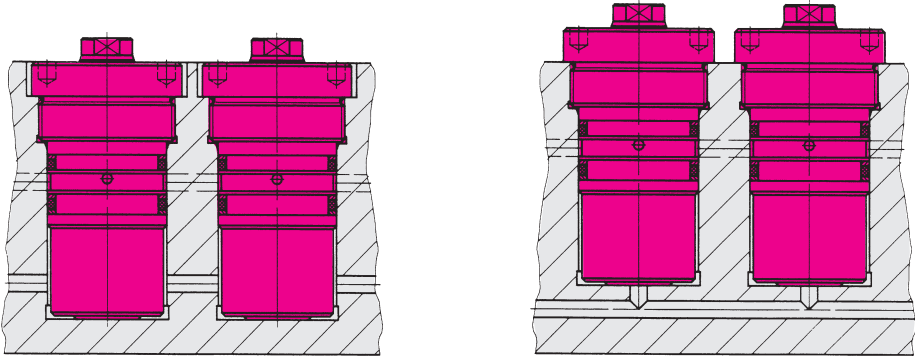

Application example

Double-acting threaded-body cylinders in a multiple clamping bar for a welding fixture (Contact bolt with coupling pin see data sheet G 3.800)

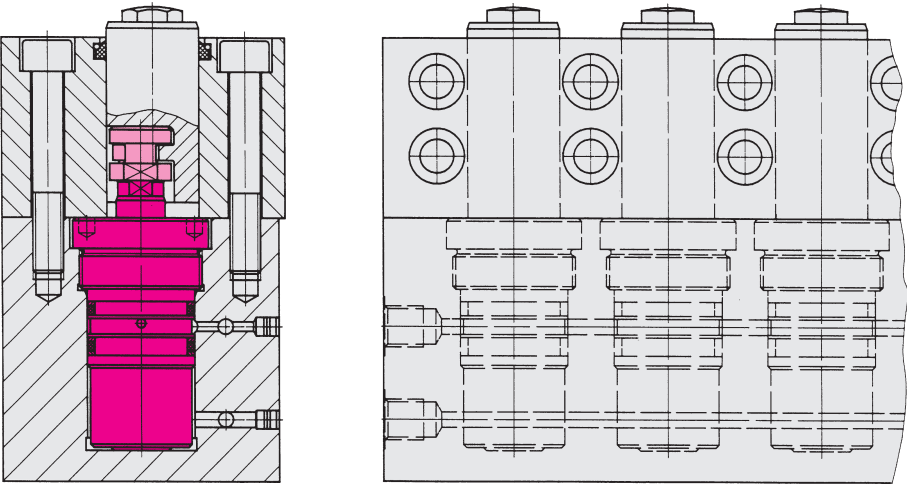

Double-acting threaded-body cylinders as pull-type cylinder for a multiple clamping fixture to mill a wrench flat

