


CAM EDGE CLAMPS


BODY: STEEL, WEAR SURFACES HARDENED, BLACK OXIDE FINISH
BALL HANDLE: BLACK PHENOLIC PLASTIC

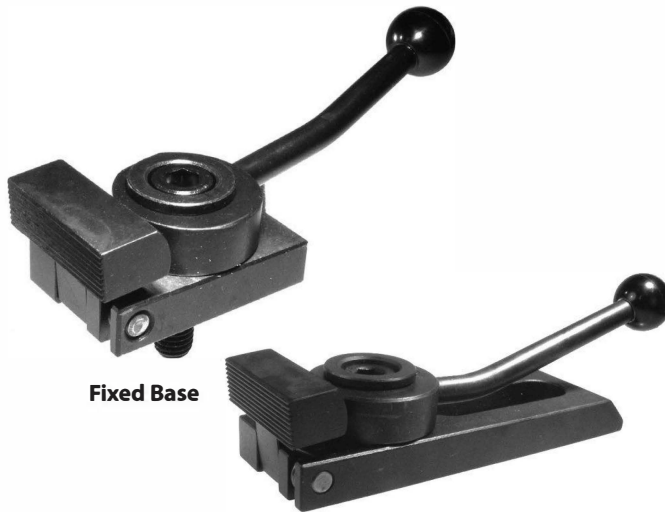

Fixed Base


Slotted Base

Pivoting-nose edge clamp operated by a cam handle for fast action. Smooth spiral cam locks positively anywhere within its 180° throw. Choice of two sizes. Available with either a standard base for fixed-position mounting, or a slotted base for adjustable mounting. Choice of clockwise or counterclockwise handle rotation to clamp.

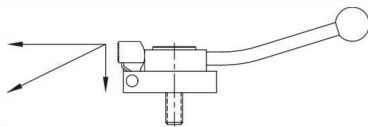


Nose pivots to exert clamping force forward and downward at the same time.

Fixed Base

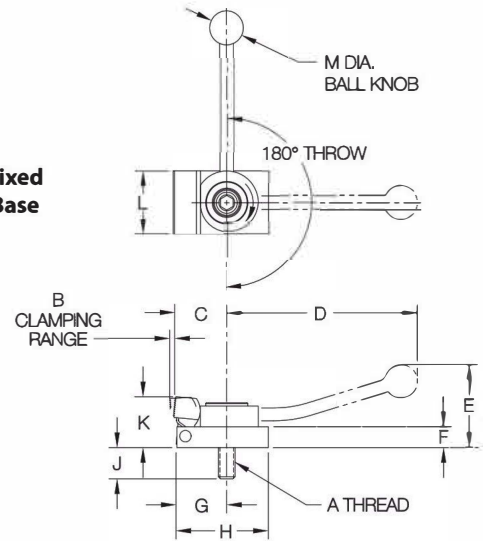

Slotted Base

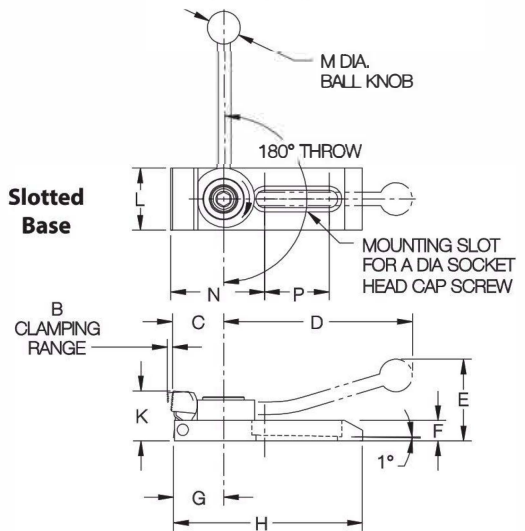

FIXED BASE (INCH)

PART NO.																MAX CLAMPING FORCE (LBS)		
CLOCKWISE CLAMPING	CCW CLAMPING	A	B	C	D	E	F	G	H	J	K		L	M	N	P	HORIZONTAL	VERTICAL
											MIN	MAX						
CL-MF25-5601	CL-MF25-5602	5/16-18	5/32	1-1/8	3-15/16	1-5/8	7/16	15/16	1-3/4	11/16	7/8	1	1-1/4	3/4	—	—	750	50
CL-MF40-5601	CL-MF40-5602	1/2-13	7/32	1-9/16	5-3/4	2-1/2	5/8	1-1/2	2-3/4	15/16	1-5/16	1-1/2	1-7/8	1	—	—	1500	100

FIXED BASE (METRIC)

CL-MF12-5602	—	M12	7/32	1-9/16	5-3/4	2-1/2	5/8	1-1/2	2-3/4	.47	1-5/16	1-1/2	1-7/8	1	—	—	1500	100
--------------	---	-----	------	--------	-------	-------	-----	-------	-------	-----	--------	-------	-------	---	---	---	------	-----

SLOTTED BASE

CL-MF25-5611	—	5/16-18 or M8	5/32	1-1/8	3-15/16	1-5/8	7/16	15/16	3-1/2	—	7/8	1	1-1/4	3/4	2	1	750	50
CL-MF40-5611	—	1/2-13 or M12	7/32	1-9/16	5-3/4	2-1/2	5/8	1-1/2	6	—	1-5/16	1-1/2	1-7/8	1	2-15/16	2	1500	100