


CONSTRUCTION-BALL PADS



RECTANGULAR (STEEL): 1018 STEEL, BLACK OXIDE FINISH. RECTANGULAR (STAINLESS STEEL): 17-4PH STAINLESS STEEL PASSIVATED.

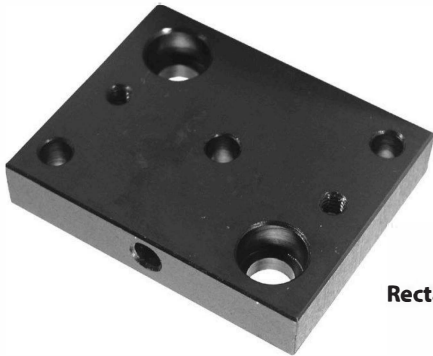

Rectangular

Now also available in stainless steel!

Rectangular Construction-Ball Pads should be fastened with two socket-head cap screws, then can be doweled in place to maintain accurate location. The Construction Ball can be secured by installing a #10-24 set screw (not furnished) in the crosshole.

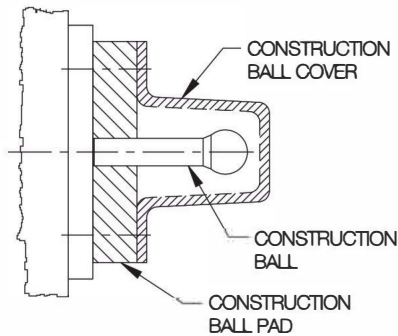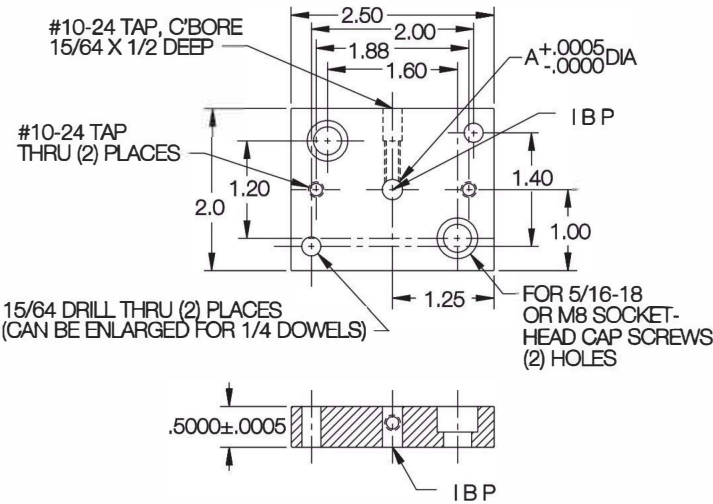

RECTANGULAR – STEEL (INCH)

| PART NO. | A DIA | |
|----------|---------|--------|
| | NOMINAL | ACTUAL |
| CL-1-CBP | 1/4 | .2500 |
| CL-2-CBP | 5/16 | .3125 |
| CL-3-CBP | 3/8 | .3750 |

RECTANGULAR – STAINLESS STEEL (INCH)


| PART NO. | A DIA | |
|------------|---------|--------|
| | NOMINAL | ACTUAL |
| CL-1-CBP-S | 1/4 | .2500 |
| CL-2-CBP-S | 5/16 | .3125 |
| CL-3-CBP-S | 3/8 | .3750 |

CONSTRUCTION-BALL PADS

ROUND (STEEL): 1144 STEEL, BLACK OXIDE FINISH. ROUND (STAINLESS STEEL): 17-4PH STAINLESS STEEL, PASSIVATED.
SHANK TYPE: 8620 STEEL, CASE HARDENED, BLACK OXIDE FINISH



Round

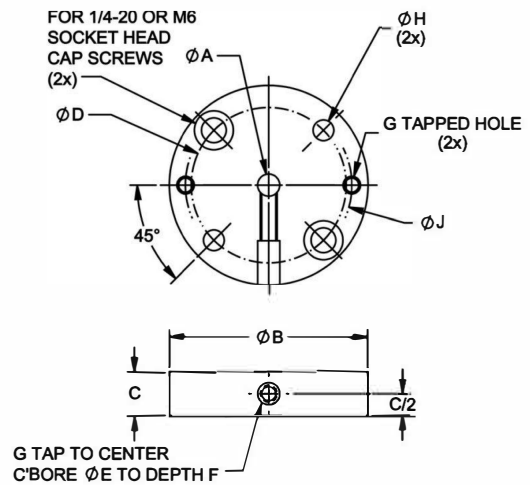

Now also available in stainless steel!

Round Construction-Ball Pads should be fastened with two socket-head cap screws, then can be doweled in place to maintain accurate location. The Construction Ball can be secured by installing a #10-32 set screw (not furnished) in the crosshole.

ROUND - STEEL (METRIC)

| PART NO. | A DIA | |
|-------------|---------|---------------|
| | NOMINAL | ACTUAL |
| CLM-6-CBPR | 6 | 6.012/6.000 |
| CLM-10-CBPR | 10 | 10.015/10.000 |

ROUND - STEEL (INCH)


| PART NO. | A DIA | |
|-----------|---------|--------|
| | NOMINAL | ACTUAL |
| CL-1-CBPR | 1/4 | .2500 |

ROUND - STAINLESS STEEL (INCH)

| | | |
|-------------|-----|-------|
| CL-1-CBPR-S | 1/4 | .2500 |
|-------------|-----|-------|



Shank Type

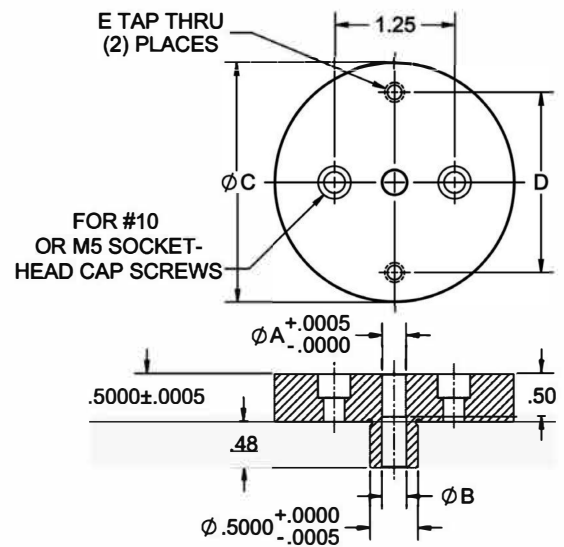


SHANK TYPE - STEEL (INCH)

| PART NO. | A DIA | | B DIA | C DIA | D | E |
|-----------|---------|--------|-------|-------|------|--------|
| | NOMINAL | ACTUAL | | | | |
| CL-1-CBPK | 1/4 | .2500 | .257 | 2.50 | 1.88 | #10-24 |


REVERSIBLE CONSTRUCTION BALL PAD

STEEL: 1144 STEEL, BLACK OXIDE
STAINLESS STEEL: 17-4PH STAINLESS STEEL, PASSIVATED

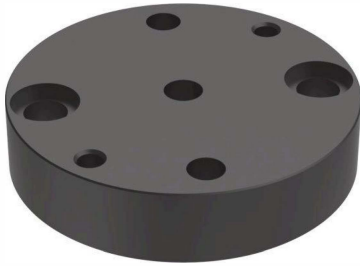

INCH

Reversible round pad for mounting a Construction Ball. This precision reversible round pad can be flipped over in order to mirror a fixture (see application). These round pads should be fastened with two ultra-low-profile socket-head cap screws, then doweled in place to maintain accurate location. The Construction Ball can be secured by installing a #10-32 setscrew (not furnished) in the crosshole. Available in steel and stainless steel. Made in USA.

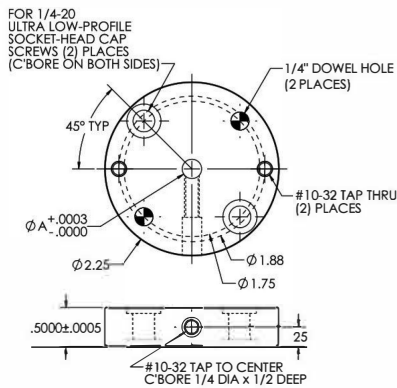


STEEL - INCH

| PART NO. | A DIA NOMINAL | A DIA ACTUAL |
|-------------|---------------|--------------|
| CL-1-R-CBPR | 1/4 | .2500 |
| CL-2-R-CBPR | 5/16 | .3125 |
| CL-3-R-CBPR | 3/8 | .3750 |


STAINLESS STEEL - INCH

| | | |
|---------------|------|-------|
| CL-1-R-CBPR-S | 1/4 | .2500 |
| CL-2-R-CBPR-S | 5/16 | .3125 |
| CL-3-R-CBPR-S | 3/8 | .3750 |

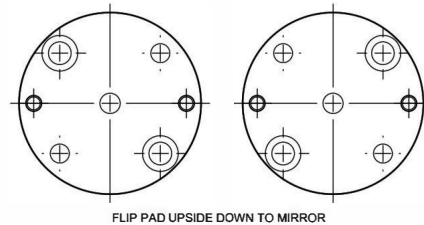

METRIC

Reversible round pad for mounting a Construction Ball. This precision reversible round pad can be flipped over in order to mirror a fixture (see application). These round pads should be fastened with two ultra-low-profile socket-head cap screws, then doweled in place to maintain accurate location. The Construction Ball can be secured by installing a m5 setscrew (not furnished) in the crosshole. Available in steel and stainless steel. Made in USA.

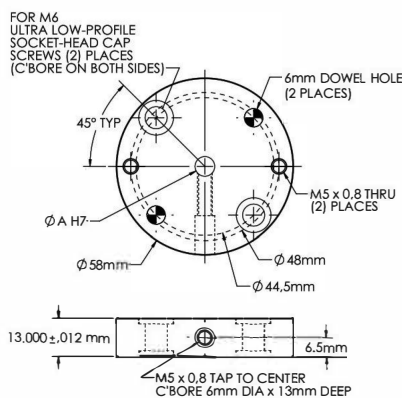

STEEL - METRIC

| PART NO. | A DIA NOMINAL | A DIA ACTUAL |
|---------------|---------------|-----------------|
| CLM-3-R-CBPR | 3mm | 3.010 / 3.000 |
| CLM-6-R-CBPR | 6mm | 6.012 / 6.000 |
| CLM-10-R-CBPR | 10mm | 10.015 / 10.000 |

STAINLESS STEEL - METRIC

| | | |
|-----------------|------|-----------------|
| CLM-3-R-CBPR-S | 3mm | 3.010 / 3.000 |
| CLM-6-R-CBPR-S | 6mm | 6.012 / 6.000 |
| CLM-10-R-CBPR-S | 10mm | 10.015 / 10.000 |