



EYE BOLTS

STEEL: 1144, 115,000 PSI MIN. TENSILE STRENGTH, 100,000 PSI MIN. YIELD STRENGTH, BLACK OXIDE FINISH
STAINLESS STEEL: 300 SERIES, PASSIVATED

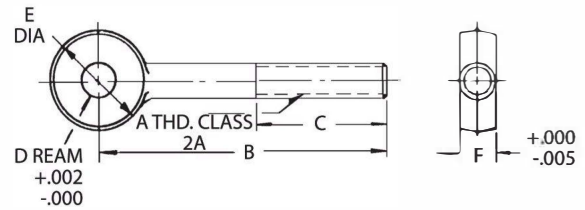


High-strength Eye Bolt with a reamed bearing hole. High-carbon steel, fully machined from solid barstock. Also available in stainless steel. Available in other lengths and materials as a special.

EYE BOLTS - INCH



PART NO. STEEL	PART NO. STAINLESS STEEL	A THREAD	D DIA		B	C	E	F	
			NOMINAL	ACTUAL +.002/-.000				NOMINAL	ACTUAL +.000/-.005
CL-25-EB	CL-25-EB-S	1/4-20	3/16	.188	2	3/4	1/2	1/4	.250
CL-26-EB	CL-26-EB-S				3	1-1/4			
CL-31-EB	CL-31-EB-S	5/16-18	1/4	.250	3	1-1/2	5/8	5/16	.312
CL-32-EB	—				4	2			
CL-38-EB	—		5/16	.312	3	1-1/2			
CL-40-EB	CL-40-EB-S	3/8-16	3/8	.375	3	1-1/2	3/4	3/8	.375
CL-37-EB	—				3-3/4	2			
CL-39-EB	CL-39-EB-S	3/8-16	3/8	.375	5	2-1/2	3/4	3/8	.375
CL-50-EB	CL-50-EB-S	1/2-13	3/8	.375	3-3/4	1-1/2	1	1/2	.500
CL-51-EB	CL-51-EB-S				5	2			
CL-62-EB	CL-62-EB-S	5/8-11	5/8	.625	4-1/2	2	1-1/4	5/8	.625
CL-63-EB	CL-63-EB-S				6	2-1/2			
CL-75-EB	—		5/8	.625	6	2-1/2	1-1/2	3/4	.750
CL-76-EB	—	3/4-10	3/4	.750	6	2-1/2			



EYE BOLTS - METRIC

PART NO.	PART NO. STAINLESS STEEL	A THREAD	THREAD PITCH (mm)	D DIA +.05/-.00 (mm)	B (mm)	C (mm)	E (mm)	F +.00/-.13 (mm)
CLM-25A-EB	CLM-25A-EB-S	M6	1	6	50	20	12	6
CLM-26A-EB	—	M6	1	6	75	30	12	6
CLM-31A-EB	CLM-31A-EB-S	M8	1.25	8	75	40	16	8
CLM-32A-EB	—	M8	1.25	8	100	50	16	8
CLM-40-EB	CLM-40-EB-S	M10	1.5	10	75	40	20	10
CLM-37-EB	CLM-37-EB-S	M10	1.5	10	100	50	20	10
CLM-50A-EB	CLM-50A-EB-S	M12	1.75	12	100	40	24	12
CLM-51A-EB	CLM-51A-EB-S	M12	1.75	12	125	50	24	12
CLM-62-EB	CLM-62-EB-S	M16	2	16	115	50	32	16
CLM-63-EB	CLM-63-EB-S	M16	2	16	150	65	32	16
CLM-76A-EB	—	M20	2.5	20	150	65	40	20