
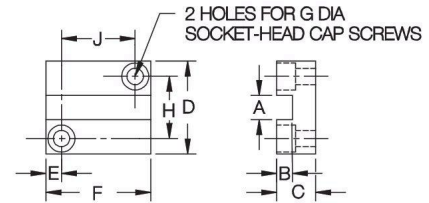


GUIDE BLOCKS

1018 STEEL, CASE HARDENED, BLACK OXIDE FINISH



Rear slide block for Tapped-Heel Clamp Straps.
Guides Clamp Strap straight back for loading.

PART NO.	CLAMP-STRAP STUD SIZE	A	B	C	D	E	F	G MOUNTING SCREWS	H	J
CL-2-GB	1/4-20 or M6	.198	.10	1/4	3/4	13/64	1-3/16	#6-32 or M4	15/32	25/32
CL-20-GB			.05							
CL-4-GB	3/8-16 or M10	.265	.20	1/2	1-1/8	7/32	2	#10-32 or M5	3/4	1-9/16
CL-40-GB			.08							
CL-6-GB	1/2-13 or M12	.390	.25	5/8	1-1/2	1-11/16	1-11/16	1-4-20 or M6	1	1-3/16
CL-60-GB			.12							
CL-8-GB	5/8-11 or M16	.515	.25	5/8	1-1/4	1-5/8	1-5/8	1-4-20 or M6	1	1-1/8
CL-80-GB			.15							
CL-11-GB	3/4-10 or M20	.640	.39	3/4	1-3/4	2-13/32	2-13/32	1-4-20 or M6	1-1/4	1-29/32
CL-110-GB			.18							


CLAMP SPRINGS

STEEL: SPRING STEEL, BLACK OXIDE FINISH

STAINLESS STEEL: 300-SERIES



Sturdy spring that holds up a Clamp Strap for clear loading.

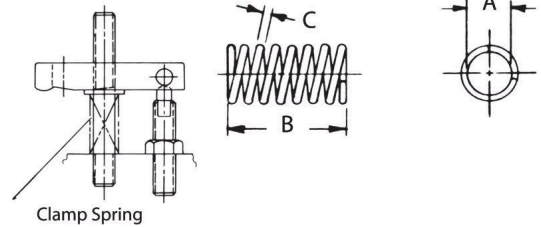

STEEL

PART NO.	FITS STUD SIZE	A DIA	B	C DIA	NO. OF COILS
CL-5-SPG	1/4-20 or M6	19/64	1-1/8	.062	7
CL-6-SPG	5/16-18 or M8	23/64	1-7/32		6
CL-7-SPG	3/8-16 or M10	7/16	1-9/16		8
CL-9-SPG	1/2-13 or M12	9/16	1-11/16		7
CL-11-SPG	5/8-11 or M16	11/16	1-3/4	.091	5
CL-13-SPG	3/4-10 or M20	13/16	2-1/2		6-1/2

STAINLESS STEEL

CL-2430.7	#10-32 or M5	13/64	.7	.042	5-1/2
CL-2440.7	1/4-20 or M6	17/64			
CL-2450.7	5/16-18 or M8	21/64	.7	.049	5
CL-2461.0	3/8-16 or M10	13/32	1.0		7