

The Drive & Control Company

Rexroth
Bosch Group

Radial piston hydraulic motor Häggblunds CAb

RE 15354
Edition: 12.2016
Replace: 01.2015



- ▶ Frame Size: CAb 10, 20, 30, 40
- ▶ Displacement: 503 ... 2 513 cm³/rev
[31 - 153 in³/rev]
- ▶ Specific torque: 8 ... 40 Nm/bar
[407 ... 2 034 lbf·ft/1000 psi]
- ▶ Maximum speed: 310 ... 350 rpm
- ▶ Maximum operating pressure: 250 bar [3 626 psi]

Features

- ▶ High power density
- ▶ Energy efficient
- ▶ Flexibility, many sizes, few mechanical interfaces
- ▶ Insensitive to chock loads
- ▶ No vibrations i.e. no flow pulsation 100% constant displacement, the symmetrical design allows forces to be balanced- radial forces oppose each other and no centrifugal forces due to the rotation
- ▶ Trough hole diameter 45 mm
- ▶ Small footprint (total occupied volume)

Contents

1	Ordering code	2
2	Functional description	4
3	Fluid connections.....	5
4	Technical data	7
5	Type of seal	31
6	Increased robustness.....	31
7	Through hole kit	32
8	Dimensions / Interface.....	33
9	Mounting alternatives.....	38
10	Accessories	40
11	Circuit design	42
12	Related documents	43

RE 15354, Edition: 12 2016, **Bosch Rexroth AB**

2/44 Hägglunds CAb | Radial piston hydraulic motor

1 Ordering code

In order to identify Hägglunds equipment exactly, the following ordering code is used. These ordering codes should be stated in full in all correspondence e.g. when ordering spare parts. Example Hägglunds CAb motor:

CA	B		0010		0010		S		F		00	0		0	
01	02		03		04		05		06		07	08		09	

01	Motor series														
	Compact													CA	
02	Type														
	Basic												•	B	
	Premium												—	P	
03	Frame size														
	0010												0010		
	0020												0020		
	0030												0030		
	0040												0040		
04	Specific torque, Nm/bar ¹⁾														
	Frame size 10										0008	0010	0012		
											•	•	•		
	Frame size 20										0016	0018	0020	0022	0025
											•	•	•	•	
	Frame size 30										0028	0030	0032	0035	0037
											•	•	•	•	
	Frame size 40											0040	0045	0050	
											•	—	—		
05	Mounting alternatives, drive shaft														
	Spline DIN 5480 N													S	
06	Mounting alternatives, motor case										CA 10	CA 20	CA 30	CA 40	
	Front flange										•	•	• ²⁾	—	F
	Center flange										—	—	•	•	C
07	Prepared for brake or tandem kit														
	No												•	0	
	Prepared for brake												—	1	
	Prepared for tandem kit												—	2	
	Mounted brake														
	No												•	0	
	Yes												—	A	
08	Displacement shift														
	Single speed motor												•	0	
	Two speed motor												—	2	
09	Increased robustness														
	No												•	0	
	Yes												—	C	

Bosch Rexroth AB, RE 15354, Edition: 12 2016

0	N	00	0	0	0	3	2002	0	01	00
10	11	12	13	14	15	16	17	18	19	20

10	Through hole		
	No	•	0
	Yes	•	1
11	Type of seal		
	NBR (Nitrile)	•	N
	FPM (Viton)	—	V
12	Speed encoder		
	No	•	00
	Yes	•	01
13	Temperature sensor		
	No	•	0
	Yes	—	1
14	Reinforced bearing		
	No	•	0
	Yes	—	1
15	Explosive environment		
	Non explosive environment	•	0
	Explosive environment	—	1
16	Painting system (Refer to 4.13 Painting system page 31)		
	C3 (normal industrial atmosphere)	•	3
	C5M (marine and other aggressive atmospheres)	•	5
17	Painting colour		
	std RAL 2002	•	2002
	Special RAL 1000 - 9023 **)Specify with RAL colour code	•	**
18	Internal paint		
	Painted	—	0
	Without paint	•	1
19*	Modification (Technical Improvement) ³⁾		00-99
20*	Special design ³⁾		
	Standard		00
	Special index		01-99

• = Available — = Not available

¹⁾ For exact, non-rounded values of specific torque, see 4.2 Motor data page 8

²⁾ Only valid for specific torque up to 30 Nm/bar

³⁾ To be filled in by Bosch Rexroth DC-IA/EHD

2 Functional description

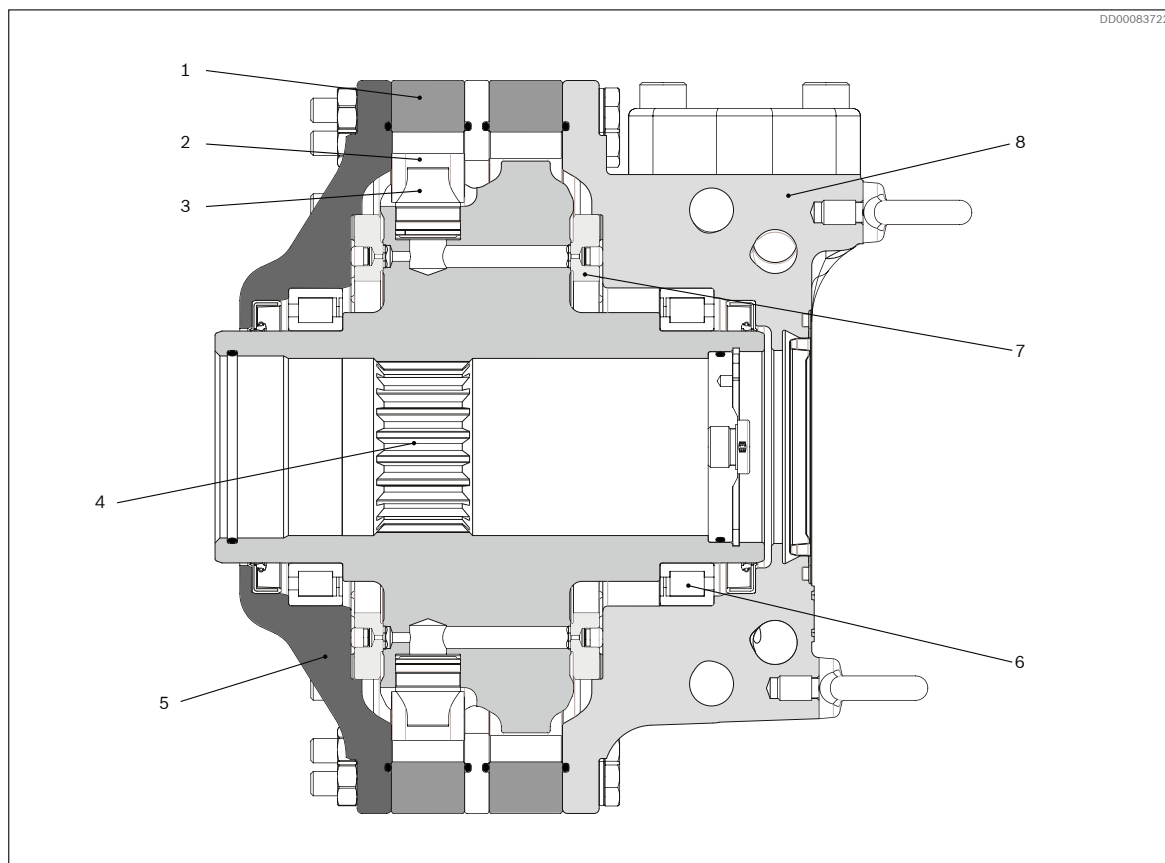


Fig. 1: Section view of radial piston hydraulic motor

- | | |
|---------------------------|-------------------------------|
| 1. Cam ring | 6. Cylindrical roller bearing |
| 2. Cam roller | 7. Distributor |
| 3. Piston | 8. Connection housing |
| 4. Cylinder block, spline | |
| 5. Housing cover | |

Bosch Rexroth's hydraulic industrial motor Hägglunds CAB is of radial-piston type with a rotating cylinder block/hollow shaft and a stationary housing. The cylinder block is mounted in fixed roller bearings in the housing. An even number of pistons are radially located in bores inside the cylinder block, and the distributor directs the incoming and outgoing oil to and from the working pistons. Each piston is working against a cam roller.

When the hydraulic pressure is acting on the pistons, the cam rollers are pushed against the slope on the cam ring that is rigidly connected to the housing, thereby producing a torque. The cam rollers transfer the reaction force to the pistons which are guided in the cylinder block. Rotation

therefore occurs, and the pressure in the system is proportional to the required torque.

Oil main lines are connected to ports A and C in the connection block and drain lines to ports D1, D2 and D3 in the motor housing.

The motor is connected to the shaft of the driven machine shaft through the hollow shaft of the cylinder block. The torque is transmitted by splines.

Quality

To assure our quality we maintain a Quality Assurance System, certified to standard ISO 9001.

3 Fluid connections

3.1 Hydraulic symbol

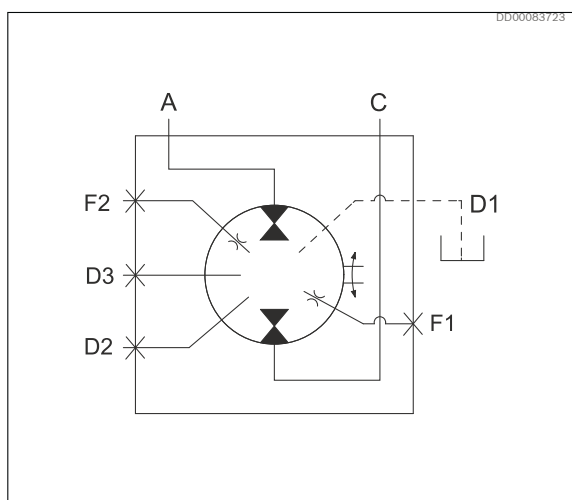


Fig. 2: Hydraulic symbol, radial piston hydraulic motor

Port locations and dimensions, see *Table 1: Port dimensions*

6/44 Hägglunds CAB | Radial piston hydraulic motor

3.2 Port connections

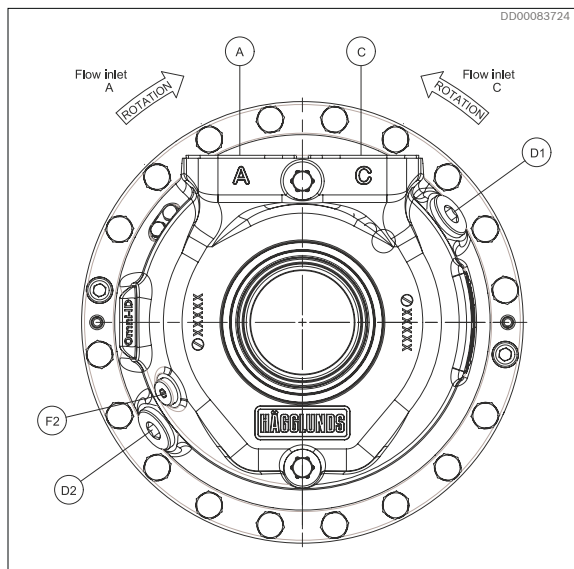


Fig. 3: Connection side of the motor

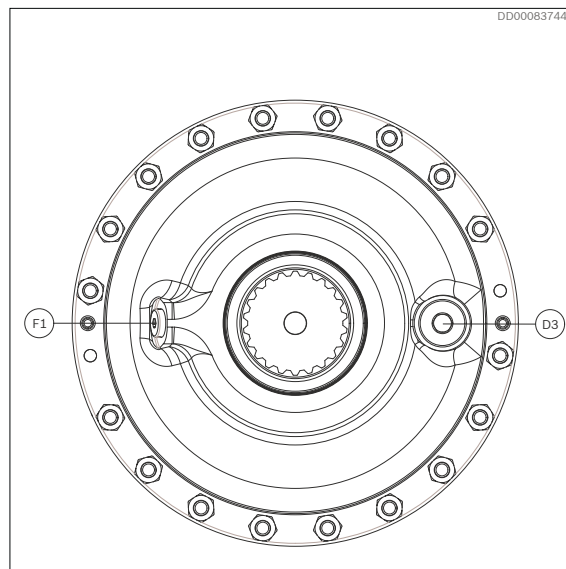


Fig. 4: Shaft side of the motor

Table 1: Port dimensions

Connection	Description	Dimensions		Remarks
		CAb 10 - CAb 20	CAb 30 - CAb 40	
A	Main connection	SAE 1 1/4" *)	SAE 1 1/4" *)	If A is used as the inlet, the motor shaft rotates counter clockwise, viewed from the motor shaft side
C	Main connection	SAE 1 1/4" *)	SAE 1 1/4" *)	If C is used as the inlet, the motor shaft rotates clockwise, viewed from the motor shaft side
D1	Drain outlet	G 3/4"	G 3/4"	Normally plugged at delivery.
D2	Alternative drain outlet / or flushing inlet	G 3/4"	G 3/4"	Normally plugged at delivery.
D3	Alternative drain outlet / or flushing inlet	G 3/4"	G 1/2"	Normally plugged at delivery.
F1	Flushing connection	G 1/4"	G 1/8"	For flushing of radial lip seal. Normally plugged.
F2	Flushing connection	G 1/4"	G 1/4"	For flushing of radial lip seal. Normally plugged.

*) SAE flange J 518 , code 62, 420 bar (6000 psi).

4 Technical data

4.1 Calculation fundamentals

Table 2: Calculation fundamentals.

Metric			US		
Output power	$P = \frac{T \cdot n}{9549}$	(kW) on driven shaft	$P = \frac{T \cdot n}{5252}$	(hp) on driven shaft	
Output torque ($\eta_m=98\%$)	$T = \frac{T_s \cdot (p - \Delta p_i - p_c) \cdot \eta_m}{1000}$	(Nm)	$T = \frac{T_s \cdot (p - \Delta p_i - p_c) \cdot \eta_m}{1000}$	(lbf-ft)	
Pressure required ($\eta_m=98\%$)	$p = \frac{T}{T_s \cdot \eta_m} + \Delta p_i + p_c$	(bar)	$p = \frac{T \cdot 1000}{T_s \cdot \eta_m} + \Delta p_i + p_c$	(psi)	
Flow rate required	$q = \frac{n \cdot V_i}{1000} + q_i$	(l/min)	$q = \frac{n \cdot V_i}{231} + q_i$	(gpm)	
Output speed	$n = \frac{q - q_i}{V_i} \cdot 1000$	(rpm)	$n = \frac{q - q_i}{V_i} \cdot 231$	(rpm)	
Inlet power	$P_{in} = \frac{q \cdot (p - p_c)}{600}$	(kW)	$P_{in} = \frac{q \cdot (p - p_c)}{1714}$	(hp)	

Quantity	Symbol	Metric	US
Power	P	= kW	hp
Output torque	T	= Nm	lbf-ft
Specific torque	T_s	= Nm/bar	lbf-ft/1000 psi
Rotational speed	n	= rpm	rpm
Required pressure	p	= bar	psi
Pressure loss	Δp_i	= bar	psi
Charge pressure	p_c	= bar	psi
Flow rate required	q	= l/min	gpm
Total volumetric loss	q_i	= l/min	gpm
Displacement	V_i	= cm ³ /rev	in ³ /rev
Mechanical efficiency	η_m	= 0,98 ¹⁾	

¹⁾ Not valid for starting efficiency

8/44 Hägglunds CAb | Radial piston hydraulic motor

4.2 Motor data

Table 3: General data (metric)

		Frame size			
		CAb 10	CAb 20	CAb 30	CAb 40
Type of mounting		See 9 Mounting alternatives			
Port connections		See 3.2 Port connections			
External loads		See 4.12 Permissible external loads			
Hydraulic fluids		See 4.4 Hydraulic fluids			
Pressure					
	Maximum operating pressure	bar	250	250	250
	Maximum peak pressure ¹⁾	bar	320	320	320
	Charge pressure	bar	See 4.3 Recommended charge pressure		
	Maximum case pressure	bar	3	3	3
	Maximum case peak pressure ²⁾	bar	8	8	8
Temperature limits of case drain oil					
Seal type: NBR (Nitrile)					
	Minimum	°C	-30	-30	-30
	Maximum	°C	+70	+70	+70
Oil volume in motor case		l	0.7	1.0	1.1
Moment of inertia for rotary group		kg·m ²	0.076	0.146	0.210
Weight		kg	54	70	90

1) Peak pressure 320 bar maximum, allowed to occur up to 10 000 times.

2) Momentary pressure spikes $t < 0.1$ s of up to 8 bar are permitted

Table 4: Specific data (metric)

Frame size	Nominal size	Specific torque	Displacement	Maximum torque ³⁾	Minimum speed	Maximum speed	Maximum operating power ⁴⁾
		Nm/bar	cm ³ /rev	Nm	rpm	rpm	kW
CAb 10	8	8	503	1 945	8	350	66
	10	10	628	2 430	8	350	82
	12.5	12.5	785	3 040	8	350	101
CAb 20	16	16	1 005	3 890	8	350	132
	18	18	1131	4 375	8	350	148
	20	20	1257	4 860	8	350	163
	22.5	22.5	1414	5 470	8	350	182
	25	25	1571	6 075	8	350	200
CAb 30	28	28	1 759	6 805	8	350	218
	30	30	1 885	7 290	8	350	243
	32.5	32.5	2 042	7 900	8	340	251
	35	35	2 199	8 505	8	340	270
	37.5	37.5	2 356	9 115	8	310	264
CAb 40	40	40	2513	9 720	8	330	297

3) Calculated as: Metric = $T_s \cdot (250/2) \cdot 0.98$

4) Flushing of motor case is required. See 4.9 Flushing

Bosch Rexroth AB, RE 15354, Edition: 12 2016

Table 5: General data (US)

			Frame size				
			CAb 10	CAb 20	CAb 30	CAb 40	
Type of mounting			See 9 Mounting alternatives				
Port connections			See 3.2 Port connections				
External loads			See 4.12 Permissible external loads				
Hydraulic fluids			See 4.4 Hydraulic fluids				
Pressure							
	Maximum operating pressure	psi	3 626	3 626	3 626	3 626	
	Maximum peak pressure ¹⁾	psi	4 641	4 641	4 641	4 641	
	Charge pressure	psi	See 4.3 Recommended charge pressure				
	Maximum case pressure	psi	44	44	44	44	
	Maximum case peak pressure ²⁾	psi	116	116	116	116	
Temperature limits of case drain oil							
Seal type: NBR							
	Minimum	°F	-22	-22	-22	-22	
	Maximum	°F	+158	+158	+158	+158	
Oil volume in motor case			US gal	0.19	0.26	0.29	0.32
Moment of inertia for rotary group			lb _m ·ft ²	1.793	2.395	4.978	6.528
Weight			lb	120	155	199	230

¹⁾ Peak pressure 320 bar maximum, allowed to occur up to 10 000 times.

²⁾ Momentary pressure spikes t < 0.1 s of up to 116 psi are permitted

Table 6: Specific data (US)

Frame size	Nominal size	Specific torque	Displacement	Maximum torque ³⁾	Minimum speed	Maximum speed	Maximum operating power ⁴⁾
		lb _r ·ft/1000 psi	in ³ /rev	lb _r ·ft	rpm	rpm	hp
CAb 10	8	407	30.7	1 435	8	350	89
	10	509	38.3	1 792	8	350	110
	12.5	636	47.9	2 242	8	350	135
CAb 20	16	814	61.3	2 869	8	350	177
	18	915	69.0	3 227	8	350	198
	20	1 017	76.7	3 585	8	350	219
	22.5	1 144	86.3	4 034	8	350	244
	25	1 271	95.9	4 481	8	350	268
CAb 30	28	1 424	107.3	5 019	8	350	292
	30	1 526	115.0	5 377	8	350	326
	32.5	1 653	124.6	5 827	8	340	337
	35	1 780	134.2	6 273	8	340	362
	37.5	1 907	143.8	6 723	8	310	354
CAb 40	40	2 034	153.4	7 169	8	330	398

³⁾ Calculated as: US= Ts • (3626-29) • 0,98

⁴⁾ Flushing of motor case is required. See 4.9 Flushing

10/44 Hägglunds CAb | Radial piston hydraulic motor

4.3 Recommended charge pressure

The hydraulic system must be such that the motor will receive sufficient charge pressure at the low pressure port. This applies to all types of installations. The pressure at the low pressure port shall be at least one bar above the case pressure.

Notice!

The diagram is valid for 1 bar (14,5 psi) case pressure. With increasing case pressure the charge pressure must be increased accordingly.

4.3.1 The motor working in driving mode only

For CAb 10 - CAb 40. The required charge pressure at the low pressure port, should be according to diagram. See Fig. 5:

4.3.2 The motor working in braking mode

Required charge pressure at the inlet port is according to diagram. See Fig. 6.

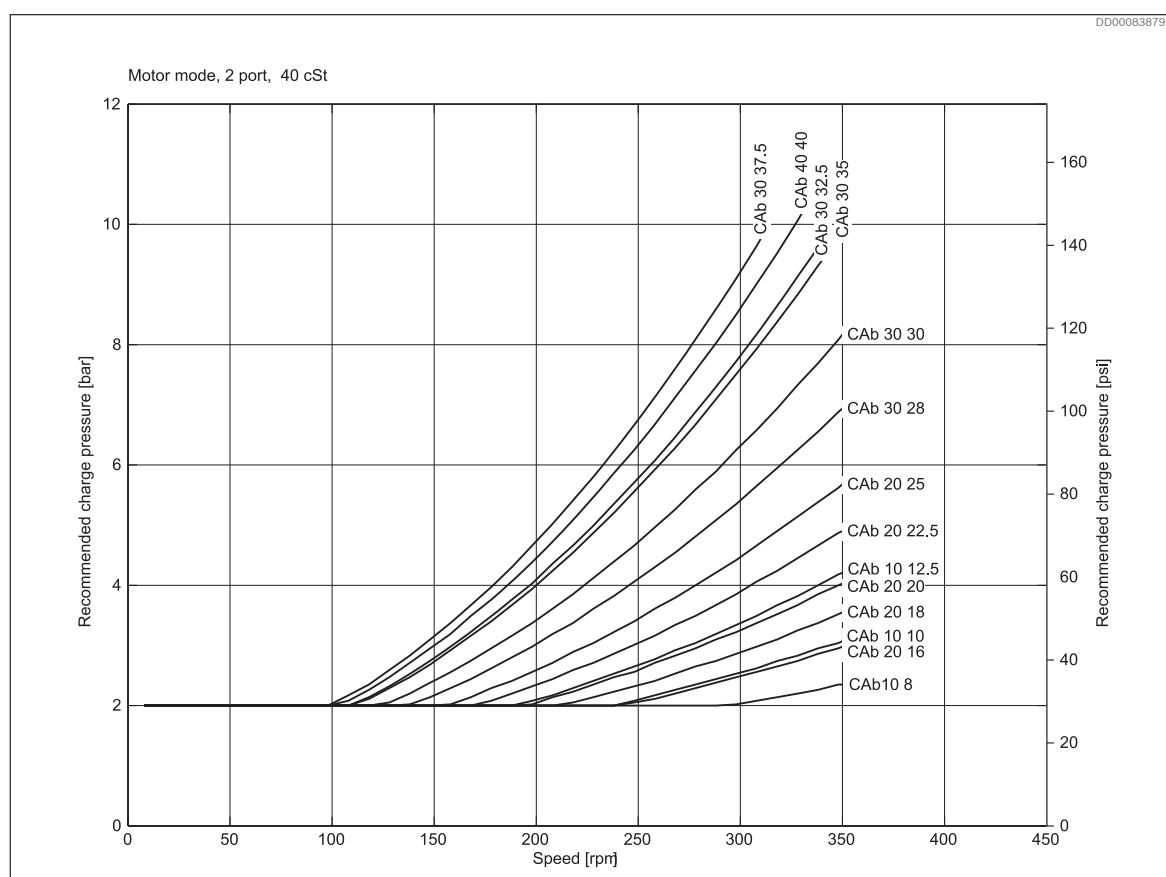


Fig. 5: Recommended charge pressure for motor working in driving mode, Hägglunds CAb 2-port connection. Valid for oil viscosity 40 cSt.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

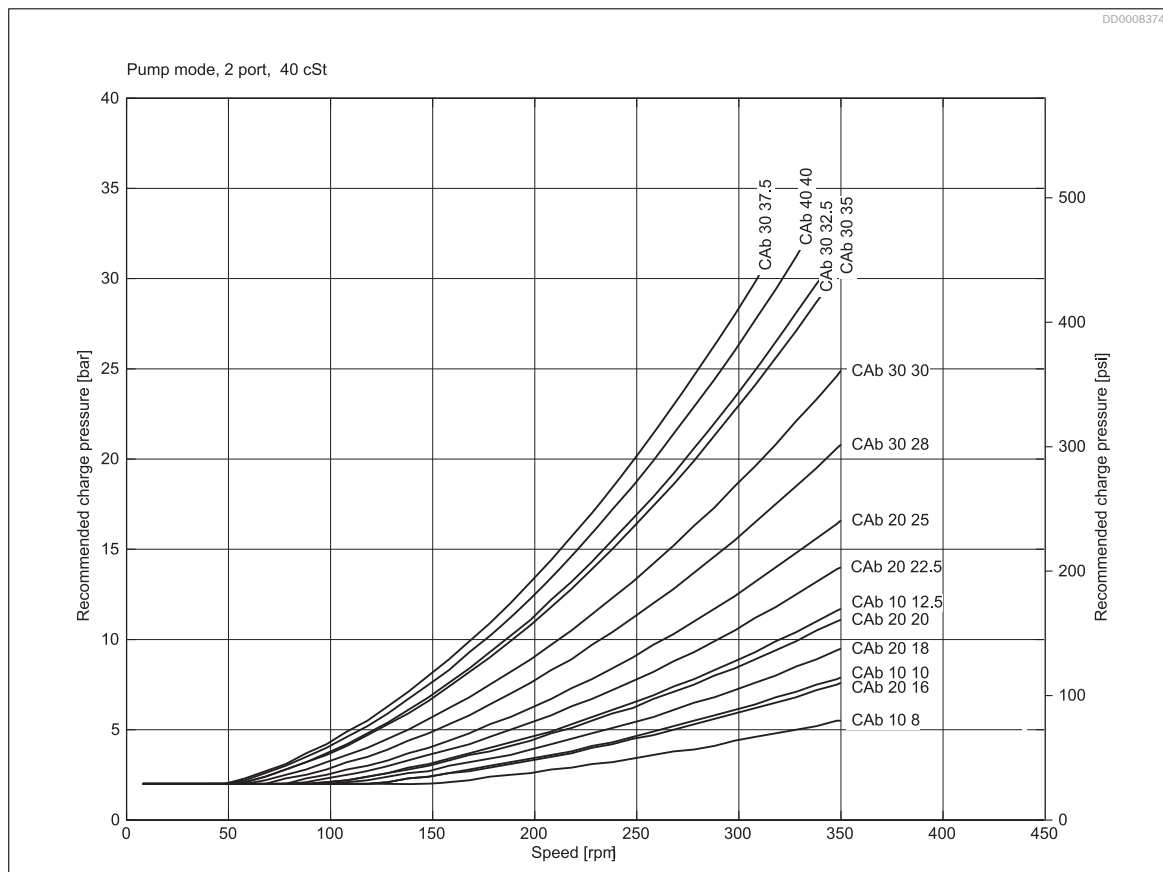


Fig. 6: Recommended charge pressure for motor working in braking mode, Häggblunds CAb 2-port connection.
Valid for oil viscosity 40 cSt.

4.4 Hydraulic fluids

The hydraulic motor Hågglunds CAB is primarily designed for operation with hydraulic fluids according to ISO 11158 HM.

Before the start of project planning, see data sheet RE 15414, Hydraulic fluid quick reference, for detailed information on hydraulic fluids and specific additional demands.

Table 7: Applicable fluids

ISO 11158 (DIN 51524-2)	ISO 11158 (DIN 51524-3)	ISO 15380	ISO 12922
HM (HLP)	HV (HVLP)	HEES	HFB
		HEPG	HFC
		HEPR	

Filtration of the hydraulic fluid

A contamination level of at most 18/16/13 according to ISO 4406 is required. The less contaminated the fluid, the longer the service life of the hydraulic motor.

Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the temperature range, as measured in the motor housing, is within optimum operation range, see Fig. 7. General recommendation is to have a system temperature of 50°C, see dotted line in Fig. 7. An ISO VG 68 fluid will render just above 40 cSt at this point.

- Optimum viscosity range is 40 to 150 cSt.
- Running above 150 cSt or below 40 cSt results in reduced efficiency.
- Running above 400 cSt results in substantial efficiency loss.
- Starting at above 10000 cSt imparts unnecessary strain on parts.
- Running below 30 cSt may impact service life.
- Running below 20 cSt may render instant seizure.

The operating temperature is also limited by the seal type, see Table 3: General data (metric) or Table 5: General data (US).

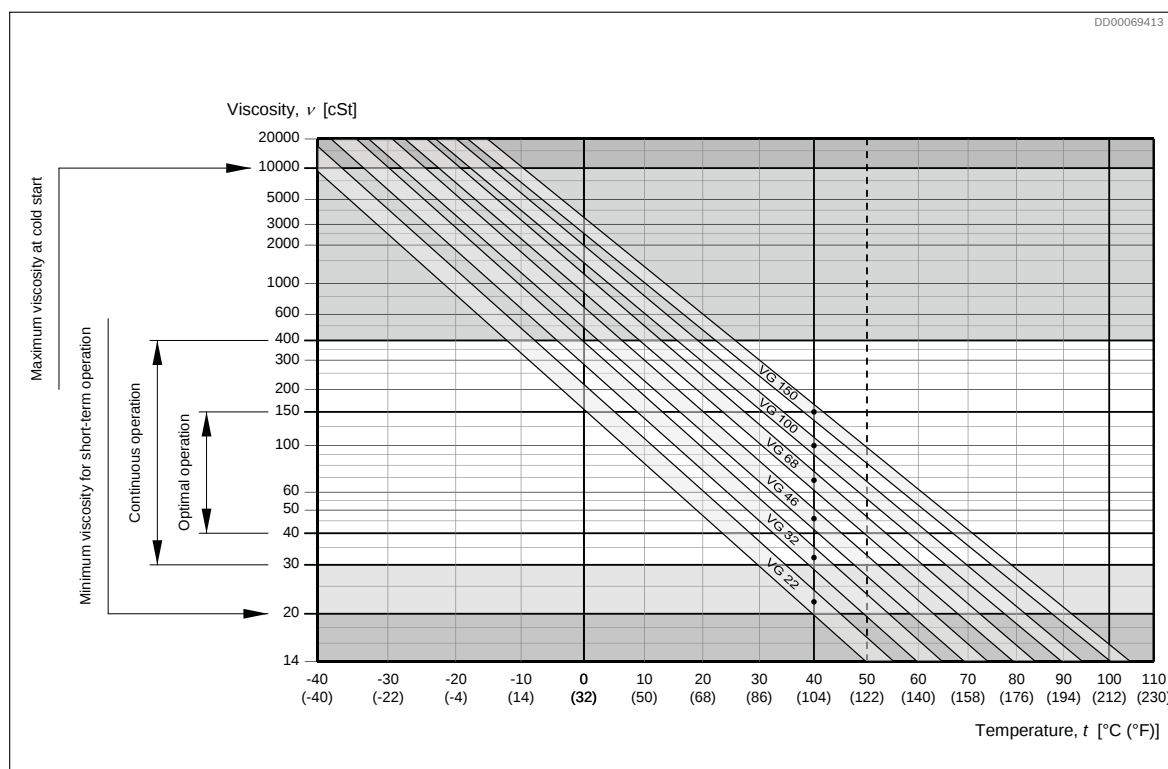


Fig. 7: Selection diagram for viscosity ranges with straight fluids, i.e. viscosity index 100

4.5 Overall efficiency

The diagrams are valid for oil viscosity 40 cSt and low pressure 2 bar (29 psi) at the motor main ports A or C.

Each diagram has the following label definitions:

1. Output power.
2. Constant pressure curves.
3. Overall efficiency.
4. Flushing of motor case is required.

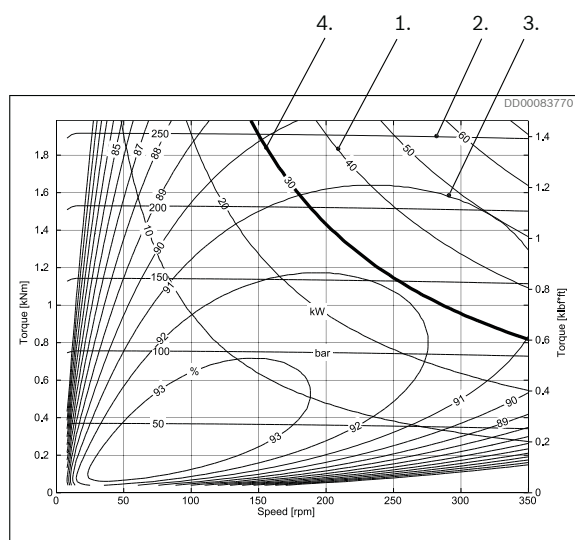


Fig. 8: CAB 10 8, 2 port connection

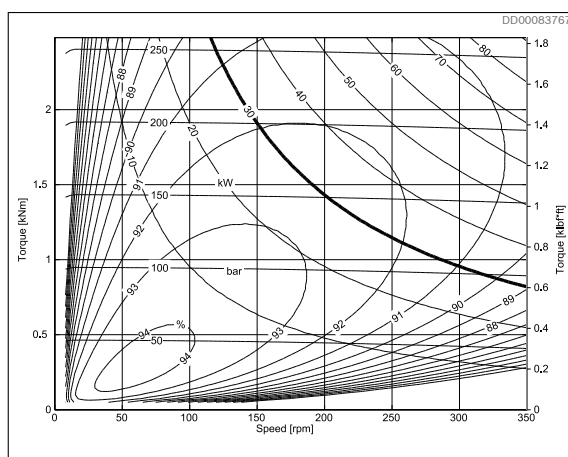


Fig. 9: CAB 10 10, 2 port connection

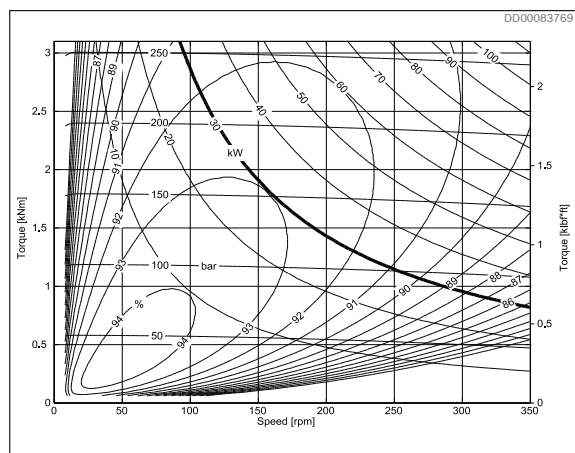


Fig. 10: CAB 10 12.5, 2 port connection

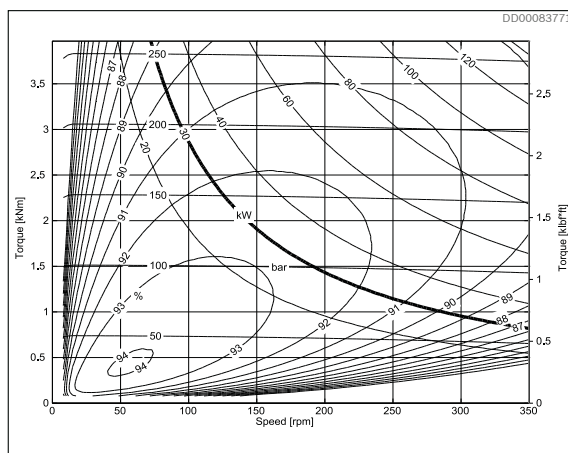


Fig. 11: CAB 20 16, 2 port connection

14/44 Hägglunds CAB | Radial piston hydraulic motor

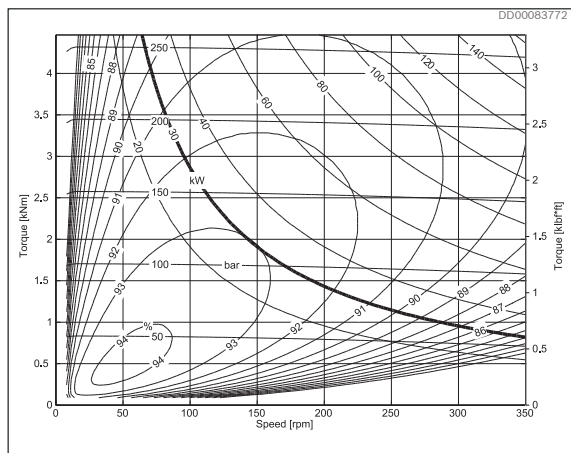


Fig. 12: CAB 20 18, 2 port connection

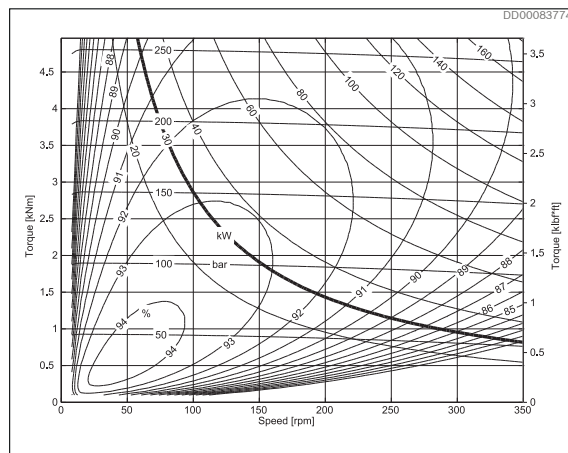


Fig. 13: CAB 20 20, 2 port connection

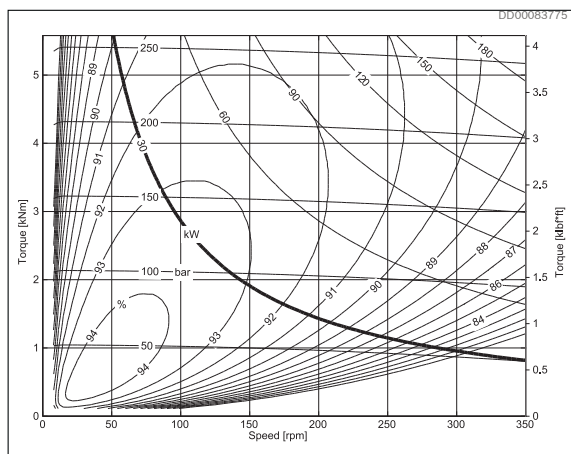


Fig. 14: CAB 20 22.5, 2 port connection

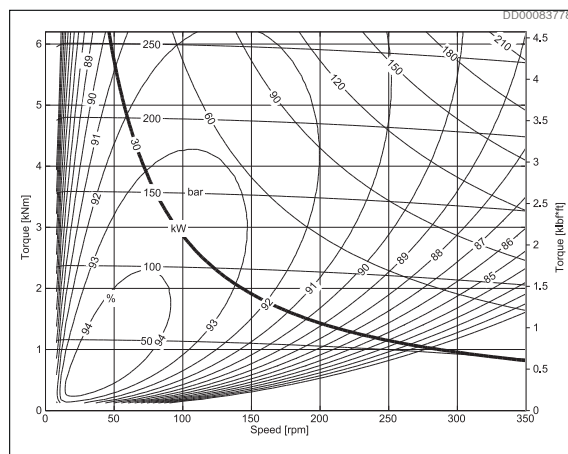


Fig. 15: CAB 20 25, 2 port connection

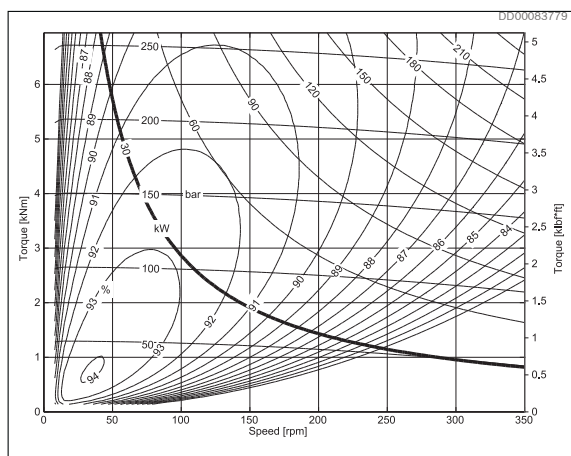


Fig. 16: CAB 30 28, 2 port connection

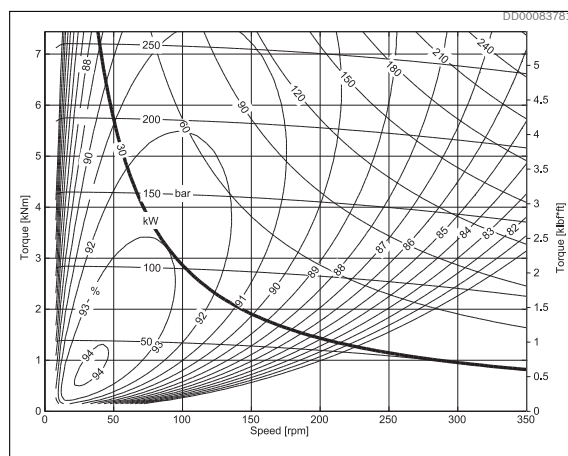


Fig. 17: CAB 30 30, 2 port connection

Bosch Rexroth AB, RE 15354, Edition: 12 2016

Radial piston hydraulic motor | Hägglunds CAb 15/44

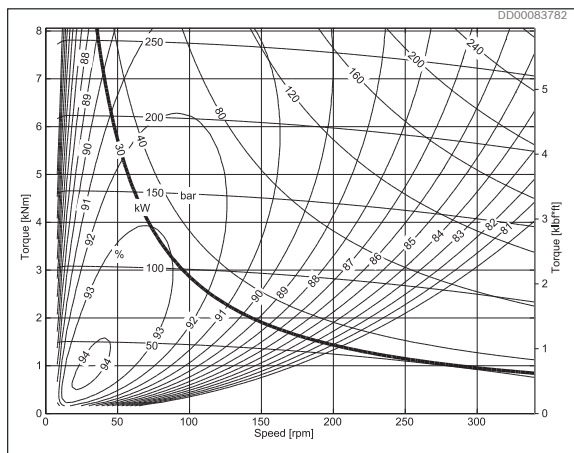


Fig. 18: CAb 30 32.5, 2 port connection

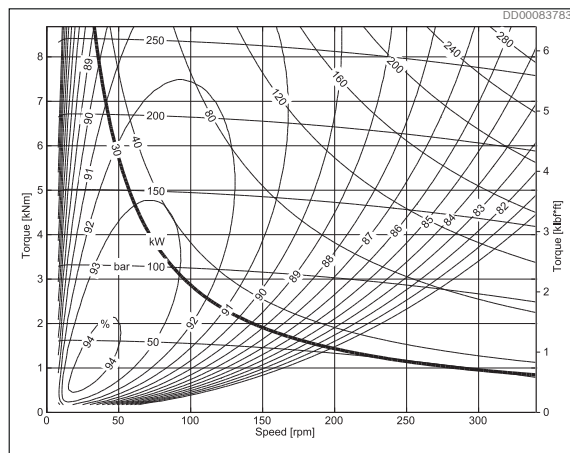


Fig. 19: CAb 30 35, 2 port connection

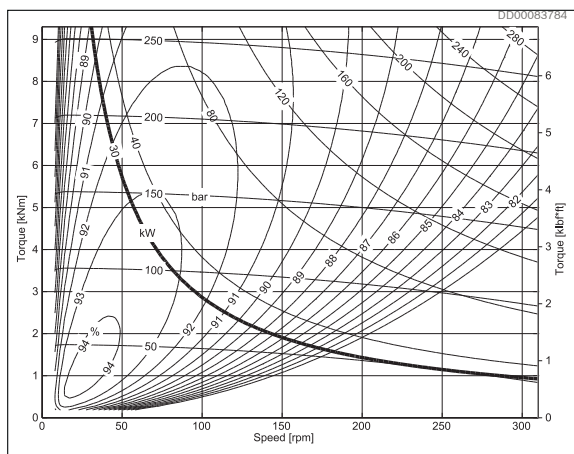


Fig. 20: CAb 30 37.5, 2 port connection

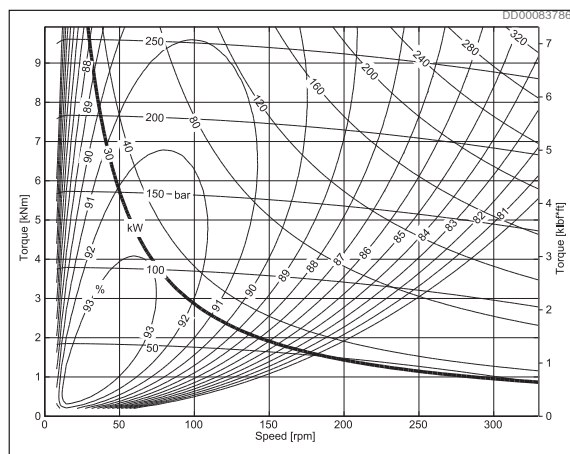


Fig. 21: CAb 40 40, 2 port connection

16/44 Hägglunds CAb | Radial piston hydraulic motor

4.6 Pressure loss diagrams

Pressure loss, oil viscosity 40 cSt

Actual pressure difference = $\frac{\text{output torque}}{\text{specific torque} \cdot \text{mechanical efficiency}}$ + pressure loss

$$\Delta p = \frac{T}{T_s \cdot \eta_m} + \Delta p_l$$

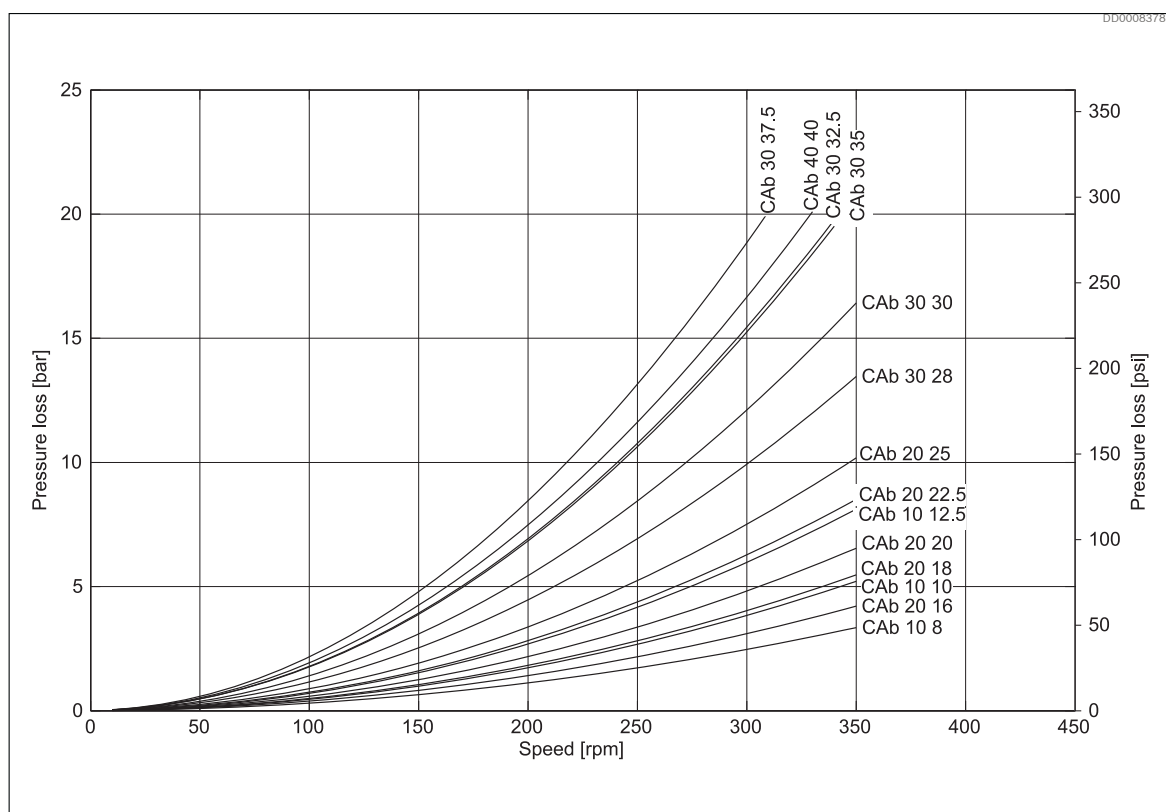


Fig. 22: CAb 10 to CAb 40 pressure loss

Bosch Rexroth AB, RE 15354, Edition: 12 2016

4.7 Quick selection diagram

Rated life for Häggglunds CAb is calculated according to DIN ISO 281 Appendix 1.

The diagram below represents the torque and speed, corresponding to a modified rating life $L_{10mh} = 20\,000$ h. Oil viscosity in motor case 40 cSt. Contamination level not exceeding ISO 4406:1999 18/16/13 (NAS 1638, class 7). The diagram is based on a charge pressure of 2 bar (29 psi).

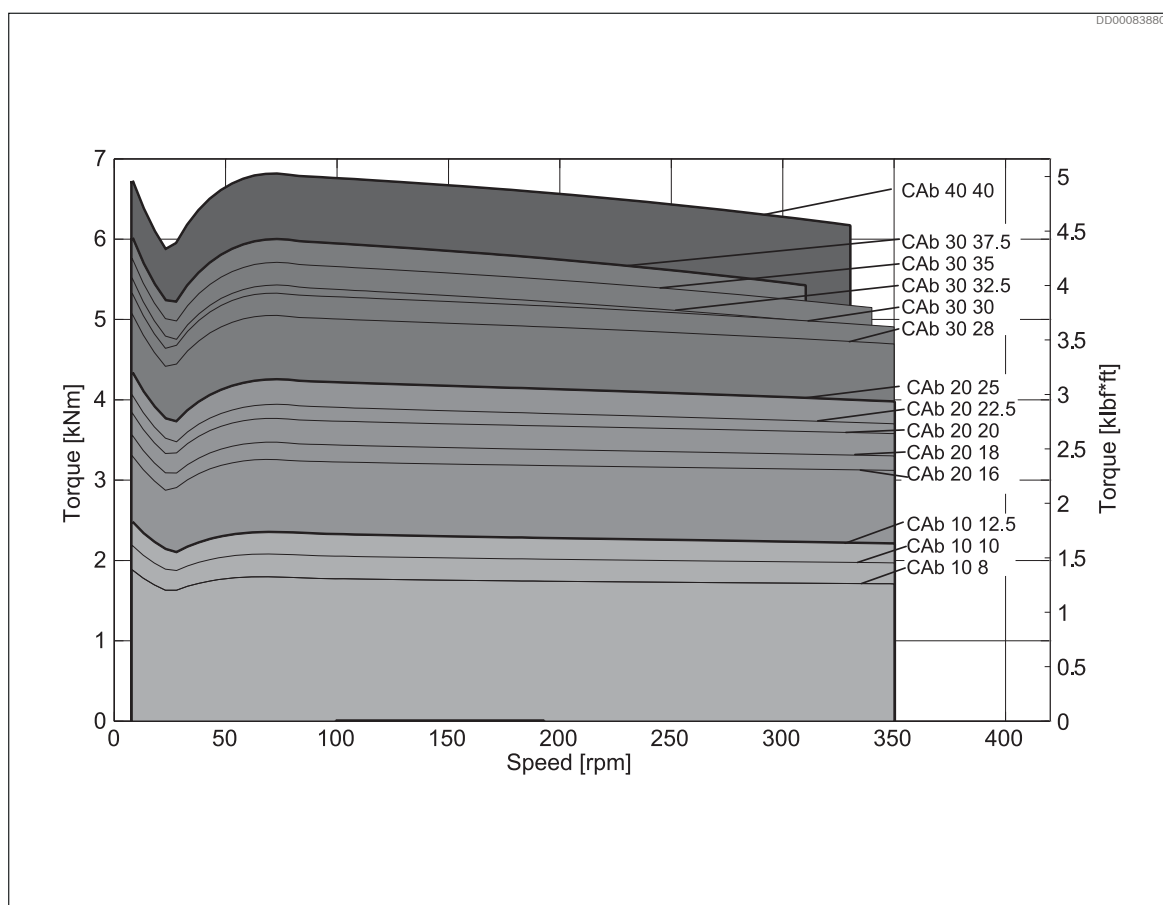


Fig. 23: Quick selection diagram

Notice!

Higher case oil viscosity increases the motor rating life considerably.
Reduced temperature in the motor case, increase rating life for the motor.

18/44 **Häggblunds CAB** | Radial piston hydraulic motor

4.8 Draining, venting and flushing of the motor

4.8.1 Horizontal mounting

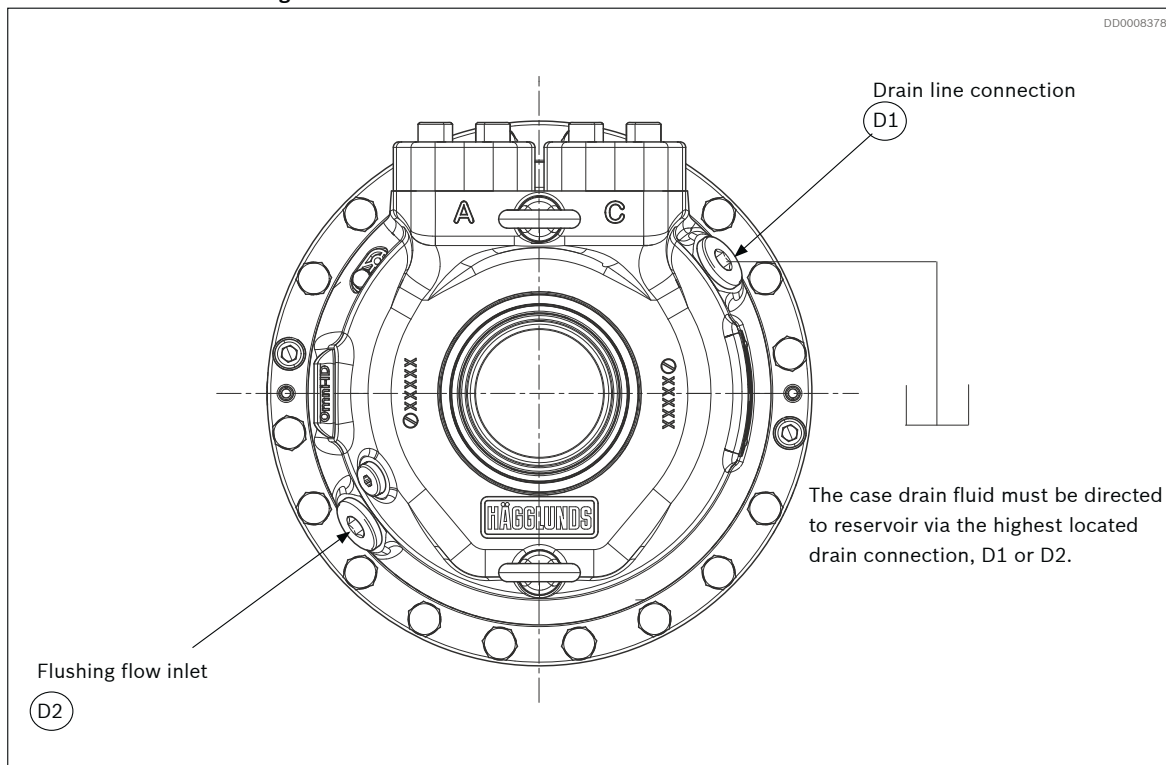


Fig. 24: Horizontal mounting

Horizontal mounting

When the motor is installed with the shaft in the horizontal plane, the highest of the two drain outlets D1 or D2 must always be used (see Fig. 24).

Drain line must be connected to the tank with a minimum of restrictions, to ensure that the maximum case pressure is not exceeded.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

4.8.2 Vertical mounting

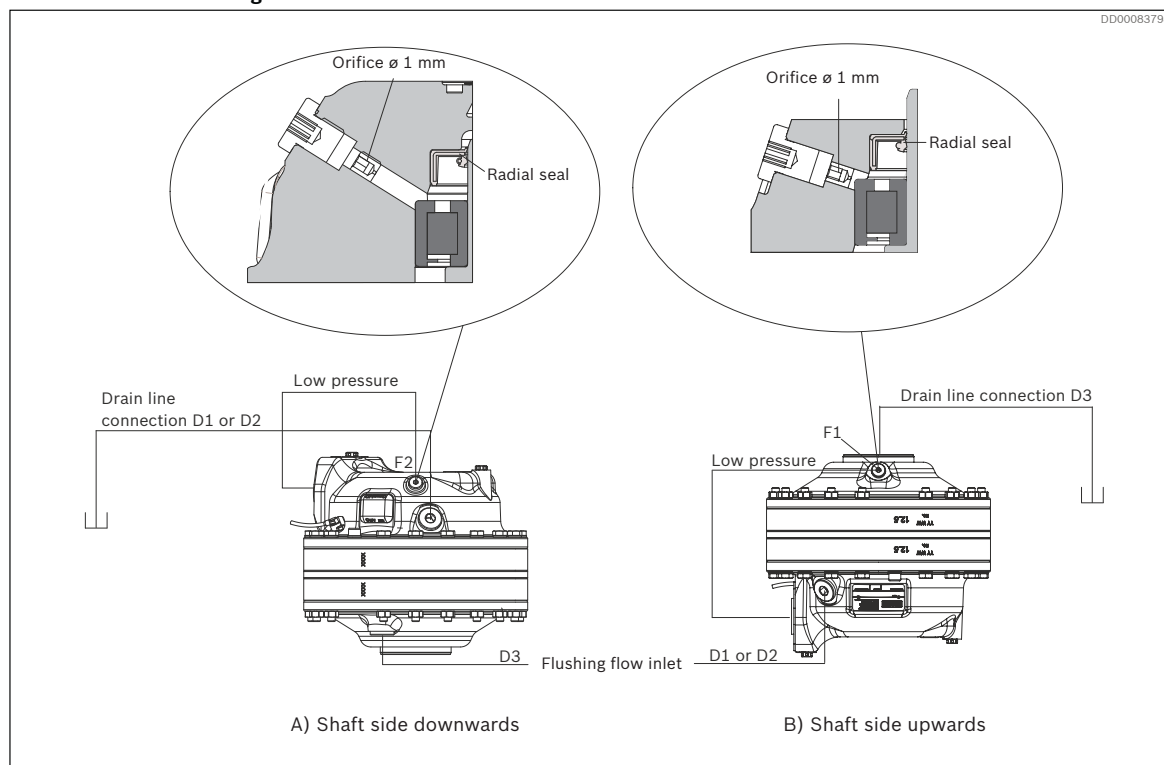


Fig. 25: Vertical mounting

Vertical mounting

When the motor is mounted vertically, one of the highest drain ports D1, D2 or D3 must be used.

Flushing (lubrication) of radial seal from low pressure is necessary.

A) Motor shaft pointing downwards

The drain line must be connected to one of the drain ports D1 or D2 in the connection housing. (See Fig. 25 alt.: A) *Shaft side downwards*).

The flushing connection F2 on the connection housing shall be connected to low pressure. With bidirectional drives, use the connection with lowest average pressure. (Connecting to high pressure will increase the motor drain flow).

B) Motor shaft pointing upwards

The drain line must be connected to the drain port D3 in the housing cover. (See Fig. 25, alt.: B) *Shaft side upwards*).

The flushing connection F1 on the housing cover should be connected to the low pressure. With bidirectional drives, use the connection with lowest average pressure.

(Connecting to high pressure will increase the motor drain flow).

4.9 Flushing

Flushing of motor case

Viscosity in the motor case must be controlled according to 4.4 Hydraulic fluids. The motor must be flushed when shaft power exceeds a defined limit, E_{FL} . The need is also governed by the duty cycle, as shown below.

Flushing can also be necessary if the system is not able to ensure required viscosity in the motor case as specified in 4.4 Hydraulic fluids.

Table 8: Maximum motor power without flushing

Frame size	Flushing limit power, E_{FL}	
	kW	hp
CAB 10 - CAB 40	30	40

Continuously running motor

The motor power is calculated:

$$E = \frac{p_h \times n \times V_i}{600 \times 1000} [\text{kW}], \quad E_{US} = \frac{p_h \times n \times V_i}{1714 \times 231} [\text{hp}]$$

where

p_h = motor high pressure [bar] [psi]

n = motor speed [rpm]

V_i = motor displacement [cm³/rev] [in³/rev]

Intermittently running motor

The time weighted arithmetic average of the motor power is:

$$E = \frac{\sum \Delta t_j \times E_j}{\sum \Delta t_j}, \quad E_{US} = \frac{\sum \Delta t_j \times E_j}{\sum \Delta t_j}$$

where

Δt_j = the time period the motor is running with the power E_j

E_j = intermittent motor power

A CAB 10 - CAB 40 motor typically reach close to the final temperature in 200 s, after a change in the power.

The calculation model is valid if the total period time of the cycle $\sum \Delta t_j$ is less than this time.

Required flushing

Fig. 26 shows required flushing to keep motor case temperature maximum 10 degrees Celcius (18 F) warmer than the flushing oil, when flushing according to Fig. 27

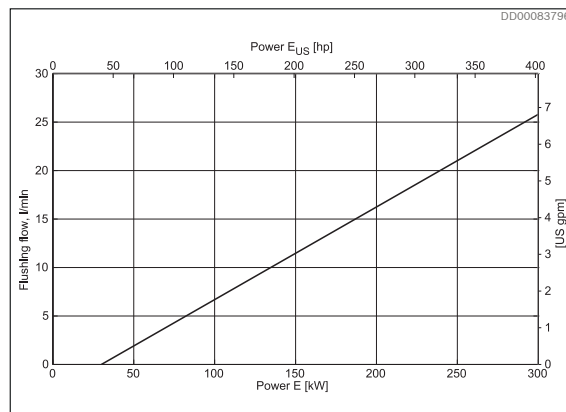


Fig. 26: Required flushing flow

Example 1: Continuously running motor

CAB 20 20

$p_h = 150$ bar

$V_i = 1257$ cm³/rev

$n = 160$ rpm.

The motor power is calculated:

$$E = \frac{150 \times 160 \times 1257}{600 \times 1000} = 50.3 \text{ kW}$$

$E > E_{FL}$, the motor should be flushed according to Fig. 26.

Example2: Intermittently running motor

CAB 20 20, working at two different conditions,

1) $p_h = 150$ bar

$n = 160$ rpm

$t = 5$ s

The motor power is calculated:

$$E = \frac{150 \times 160 \times 1257}{600 \times 1000} = 50.3 \text{ kW}$$

2) $p_h = 0$ bar

$n = 0$ rpm

$t = 25$ s

The motor power is calculated:

$$E = \frac{0 \times 0 \times 1257}{600 \times 1000} = 0 \text{ kW}$$

The average motor power is calculated:

$$E = \frac{\sum \Delta t_j \times E_j}{\sum \Delta t_j} = \frac{5 \times 50.3 + 25 \times 0}{5 + 25} = 8.4 \text{ kW}$$

$E < E_{FL}$, no need for flushing.

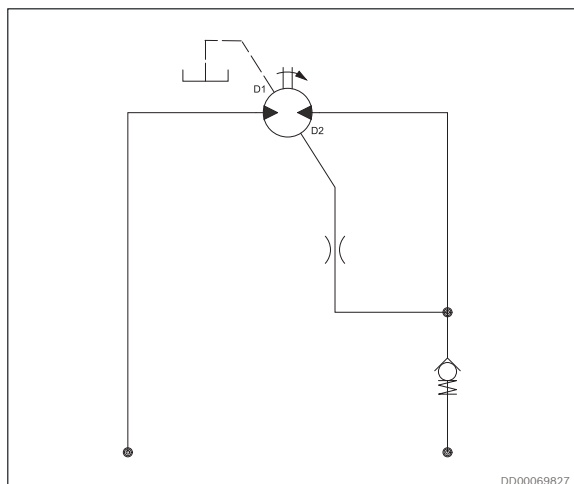


Fig. 27: Circuit design for flushing of motor case in open circuit

4.10 External leakage

External leakage is from the distributor to the motor case and from the piston assembly to the motor case.

Valid for 40 cSt.

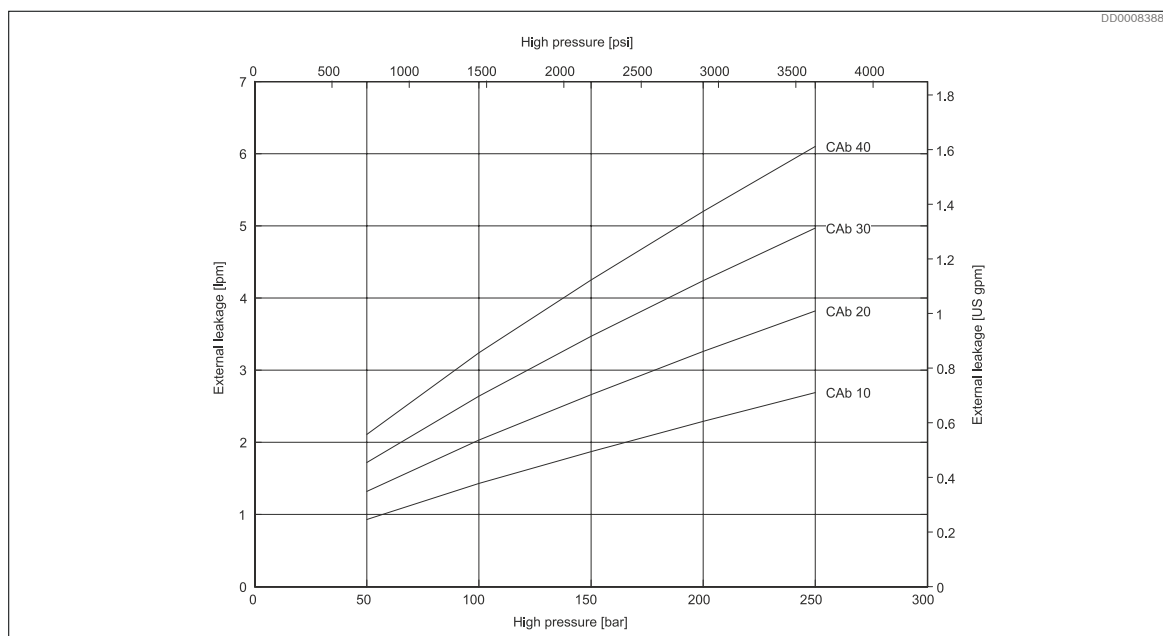


Fig. 28: External leakage. The diagram shows the average values, valid for 40 cSt

22/44 **Häggblunds CAb** | Radial piston hydraulic motor

4.11 Viscosity factor K

Variation in external leakage at different oil viscosities.
When calculating external leakage using other viscosities than 40 cSt, multiply the value given in the external leakage diagram by the factor K.

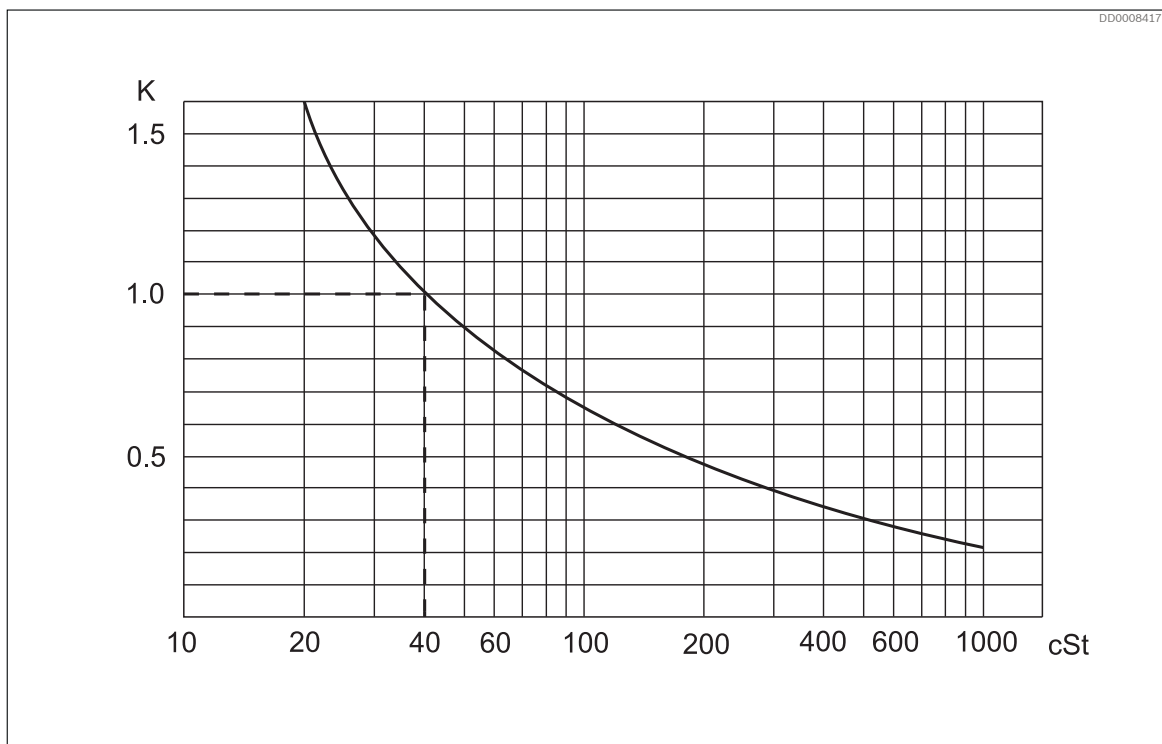


Fig. 29: Viscosity factor K

Bosch Rexroth AB, RE 15354, Edition: 12 2016

4.12 Permissible external loads

4.12.1 External load with torque arm mounting

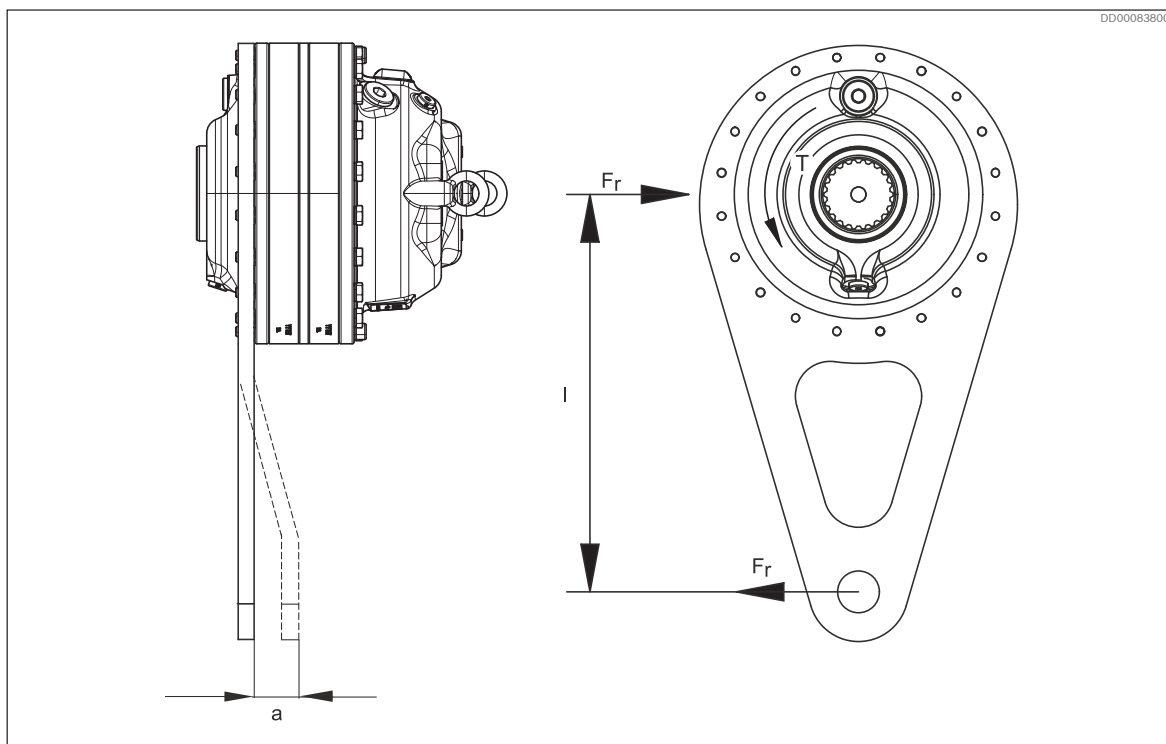


Fig. 30: Shaft mounted motor with torque arm.

If non standard torque arms TCA are used, forces must be checked for main bearings.

$$F_r = \frac{T}{l}$$

F_r = Total radial force on fixed motor mounting
 T = Output torque for motor
 l = Lever length
 a = The axial distance for action point of radial force

24/44 Hägglunds CAB | Radial piston hydraulic motor

4.12.2 Permissible external dynamic load

Torque arm mounted motor. Viscosity 40 cSt/187 SSU and $L_{10\text{aah}}$.

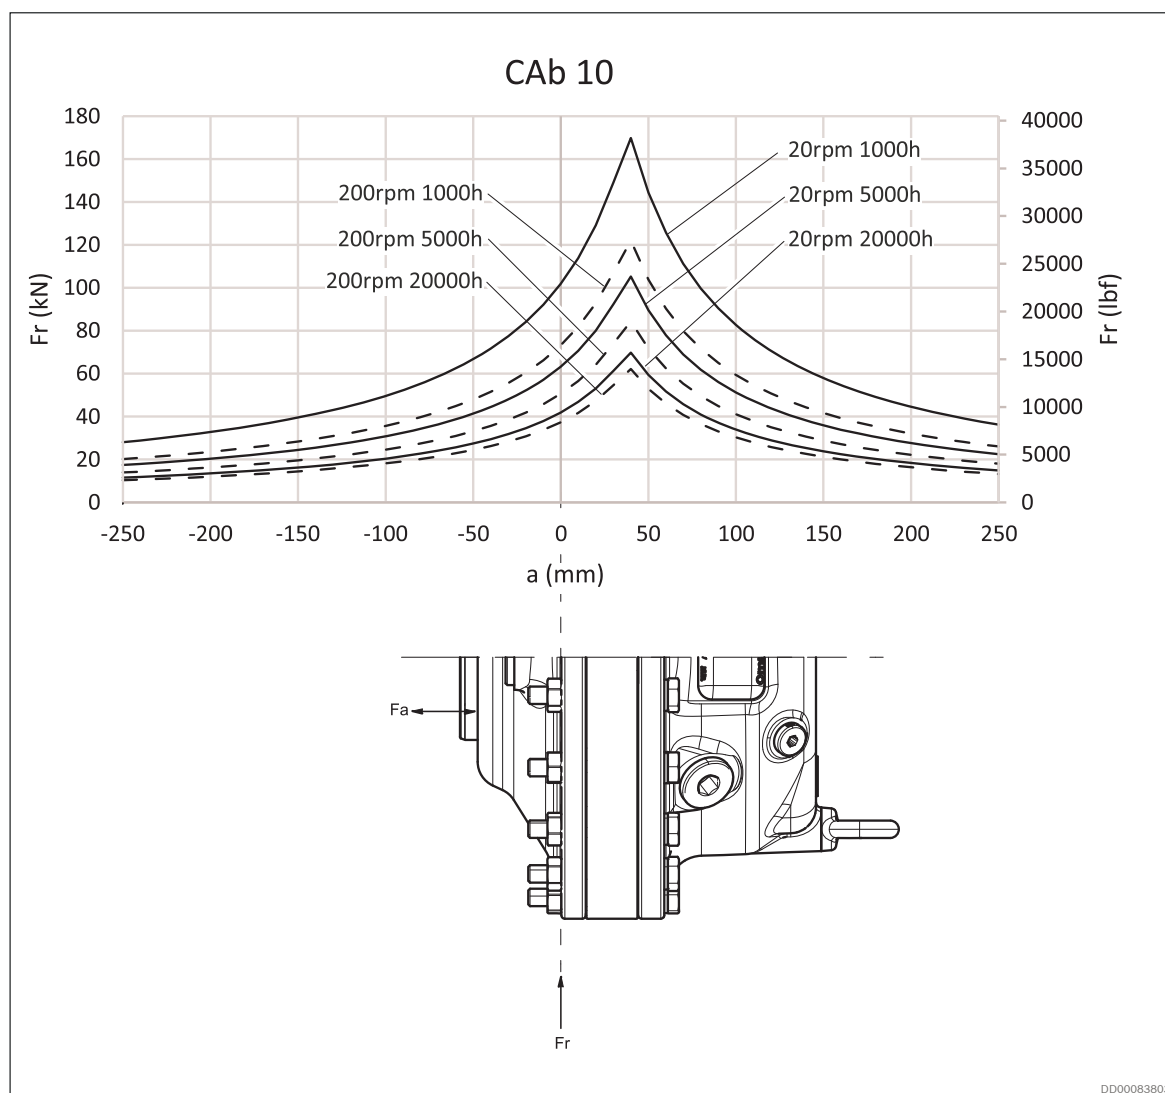


Fig. 31: Permissible external dynamic load Hägglunds CAB 10

Axial loads: Permissible axial load for intermittent duty
 $F_a = 10\,000\text{ N}$ (2 200 lbf).

Remark: For continuous axial load applications, please contact your Bosch Rexroth representative.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

Torque arm mounted motor. Viscosity 40 cSt/187 SSU and $L_{10\text{aah}}$.

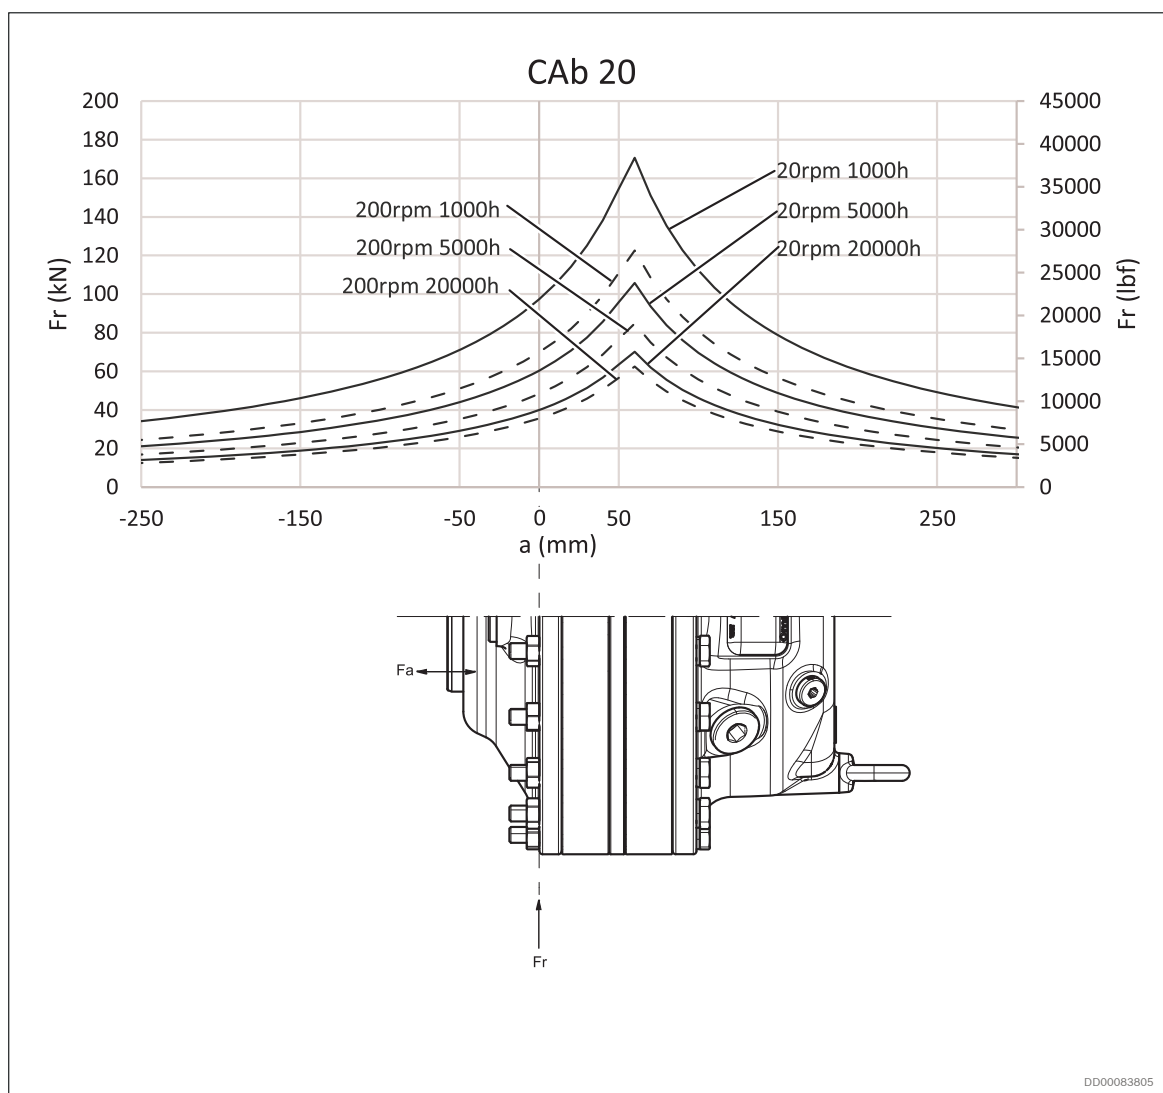


Fig. 32: Permissible external dynamic load Häggglunds CAb 20

Axial loads: Permissible axial load for intermittent duty
 $F_a = 10\,000\text{ N}$ (2 200 lbf).

Remark: For continuous axial load applications, please contact your Bosch Rexroth representative.

26/44 **Häggblunds CAB** | Radial piston hydraulic motor

Torque arm mounted motor. Viscosity 40 cSt/187 SSU and L_{10aah} .

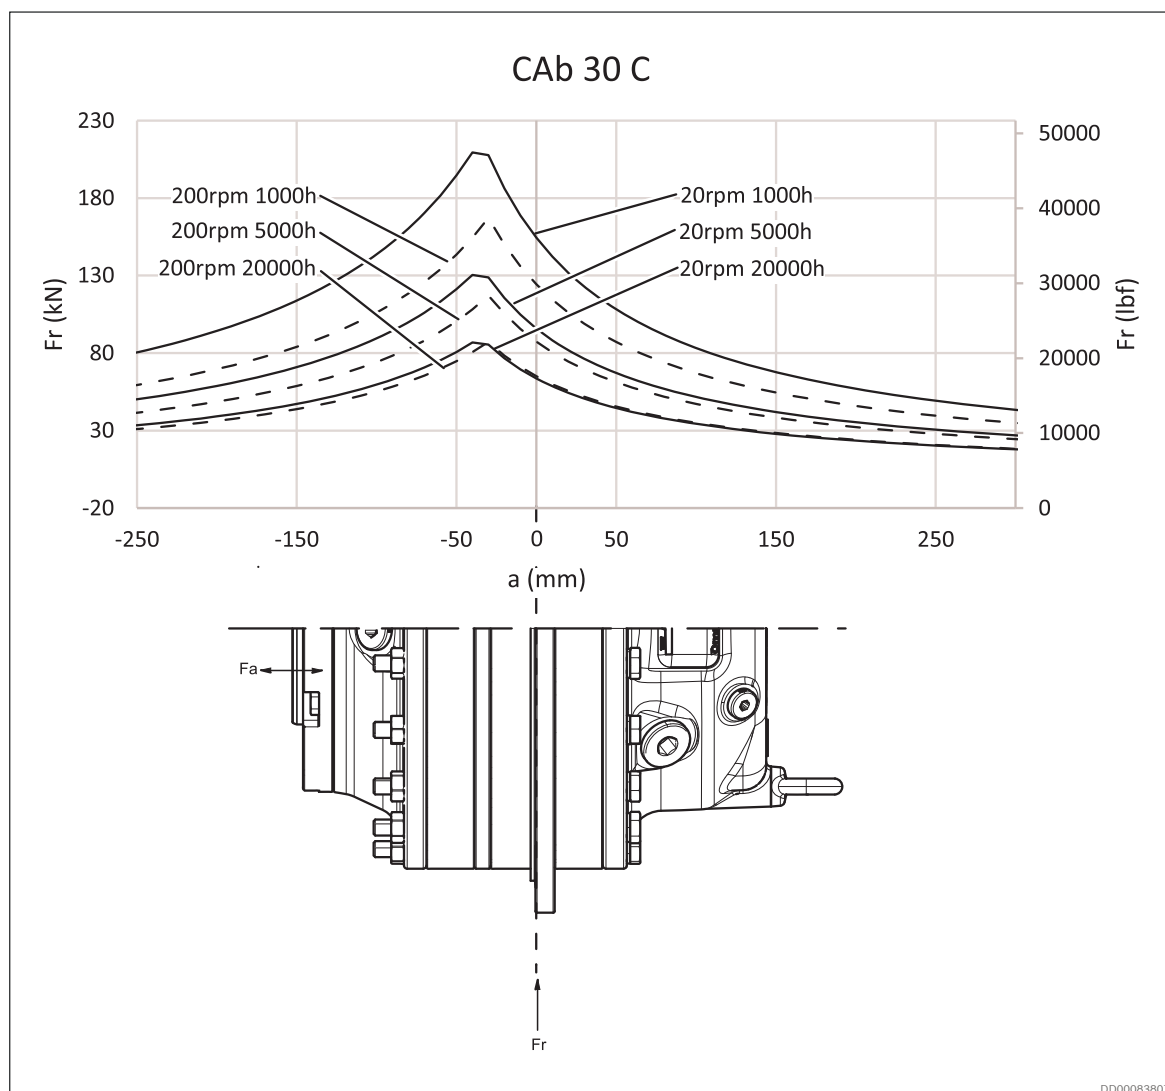


Fig. 33: Permissible external dynamic load Häggblunds CAB 30 C (center flange)

Axial loads: Permissible axial load for intermittent duty
 $F_a = 10\,000\text{ N}$ (2 200 lbf).

Remark: For continuous axial load applications, please contact your Bosch Rexroth representative.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

Torque arm mounted motor. Viscosity 40 cSt/187 SSU and L_{10aah} .

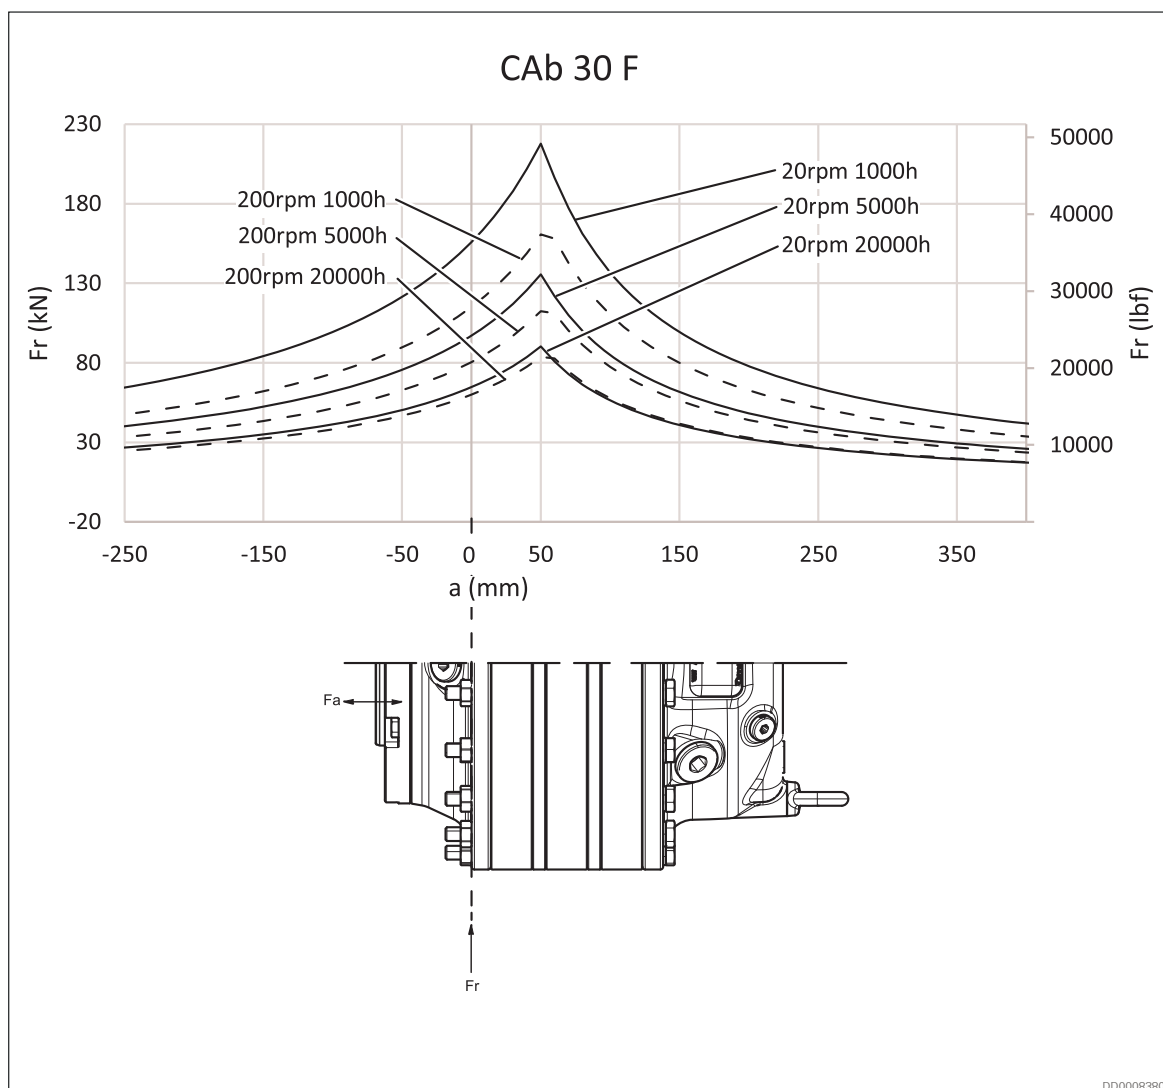


Fig. 34: Permissible external dynamic load Häggblunds CAb 30 28 F and CAb 30 30 F (front flange)

Axial loads: Permissible axial load for intermittent duty
 $F_a = 10\,000\text{ N}$ (2 200 lbf).

Remark: For continuous axial load applications, please contact your Bosch Rexroth representative.

28/44 **Häggblunds CAb** | Radial piston hydraulic motor

Torque arm mounted motor. Viscosity 40 cSt/187 SSU and $L_{10\text{aah}}$.

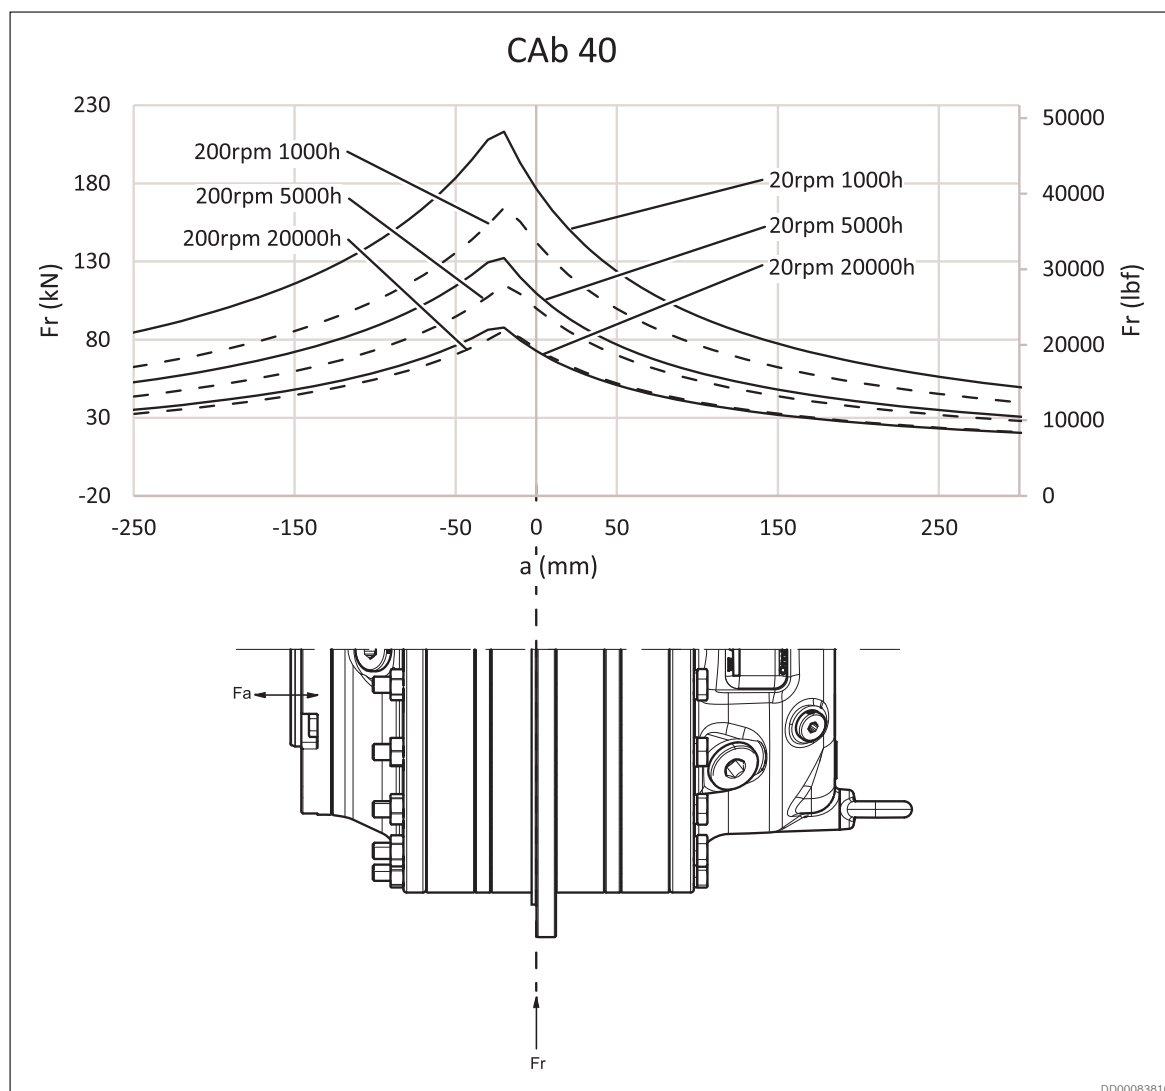


Fig. 35: Permissible external dynamic load Häggblunds CAb 40

Axial loads: Permissible axial load for intermittent duty
 $F_a = 10\,000\text{ N}$ (2 200 lbf).

Remark: For continuous axial load applications, please contact your Bosch Rexroth representative.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

4.12.3 Permissible external static load

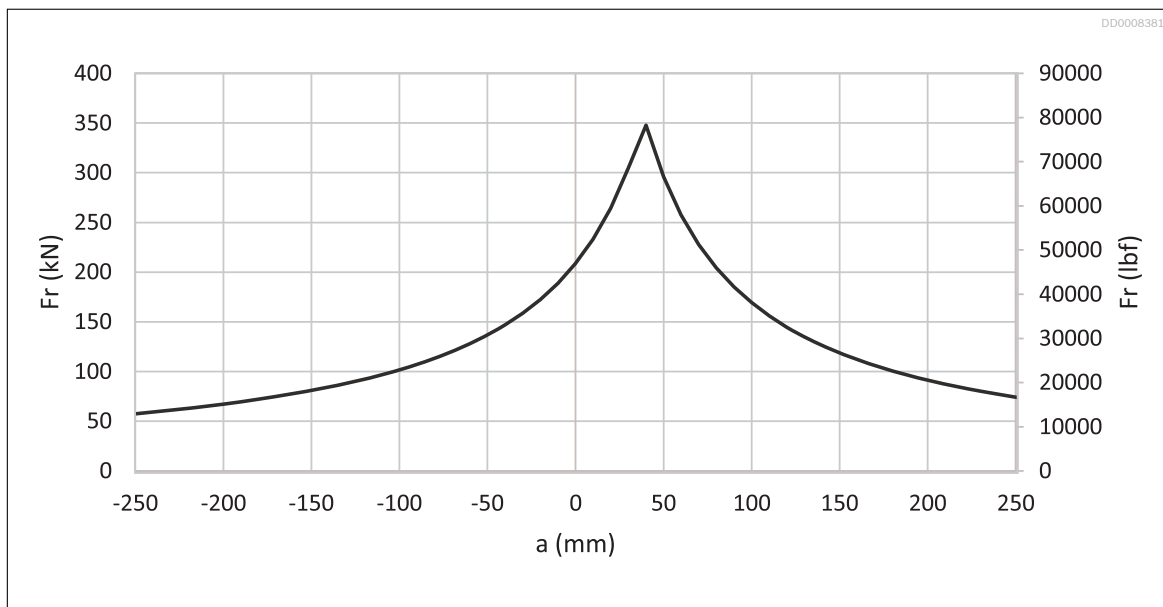


Fig. 36: Permissible external static load Häggblunds CAb 10

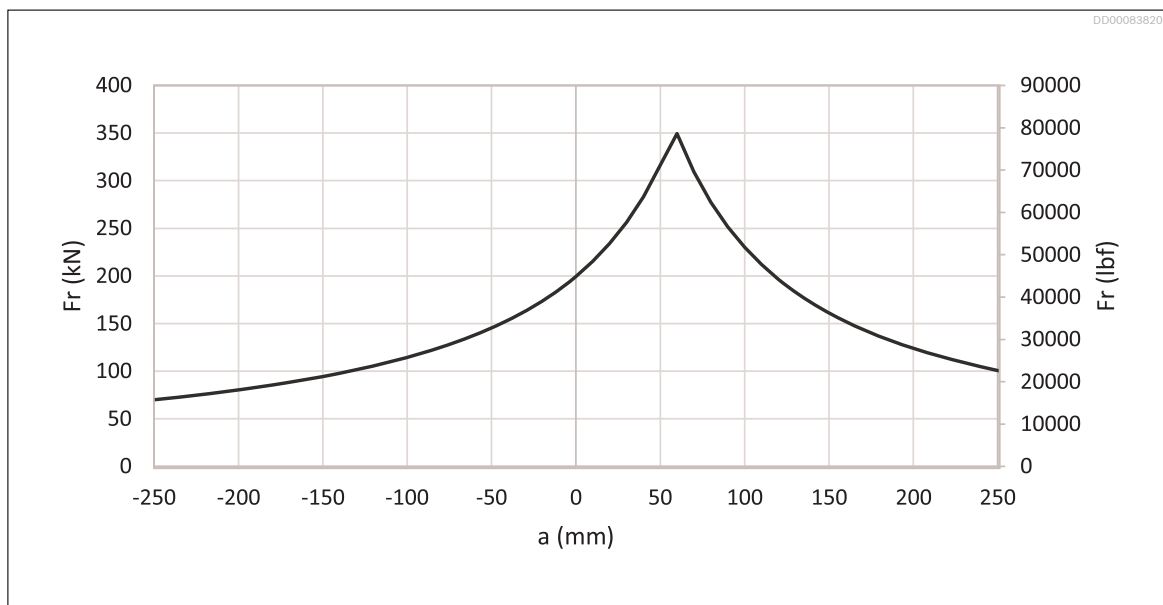


Fig. 37: Permissible external static load Häggblunds CAb 20

30/44 **Häggglunds CAB** | Radial piston hydraulic motor

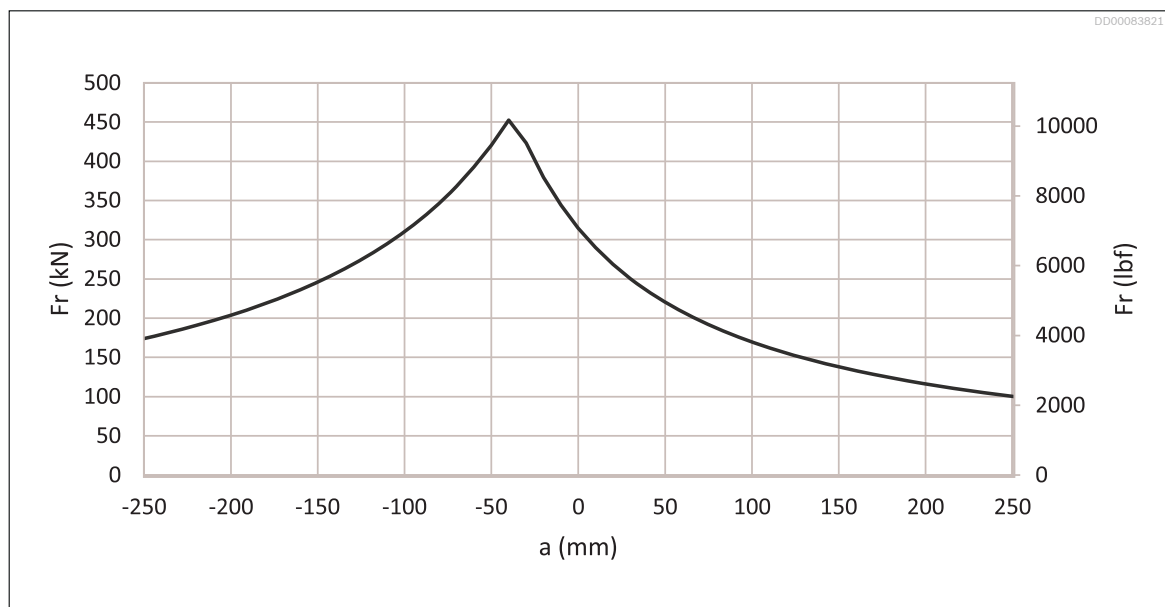


Fig. 38: Permissible external static load Häggglunds CAB 30 C (center flange)

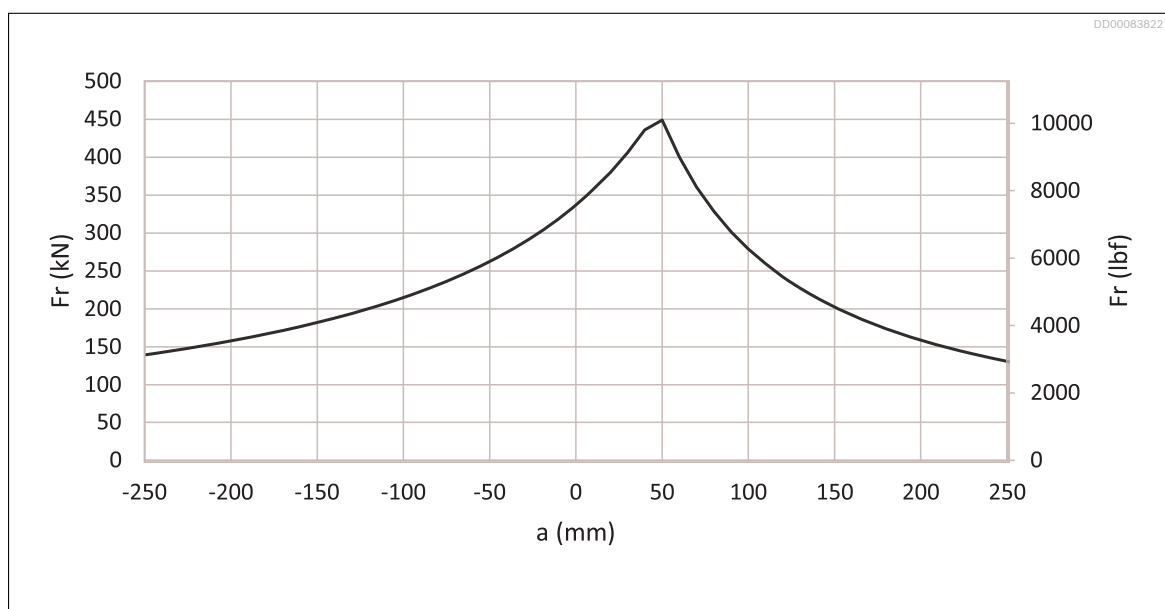


Fig. 39: Permissible external static load Häggglunds CAB 30 28 F and CAB 30 30 F (front flange)

Bosch Rexroth AB, RE 15354, Edition: 12 2016

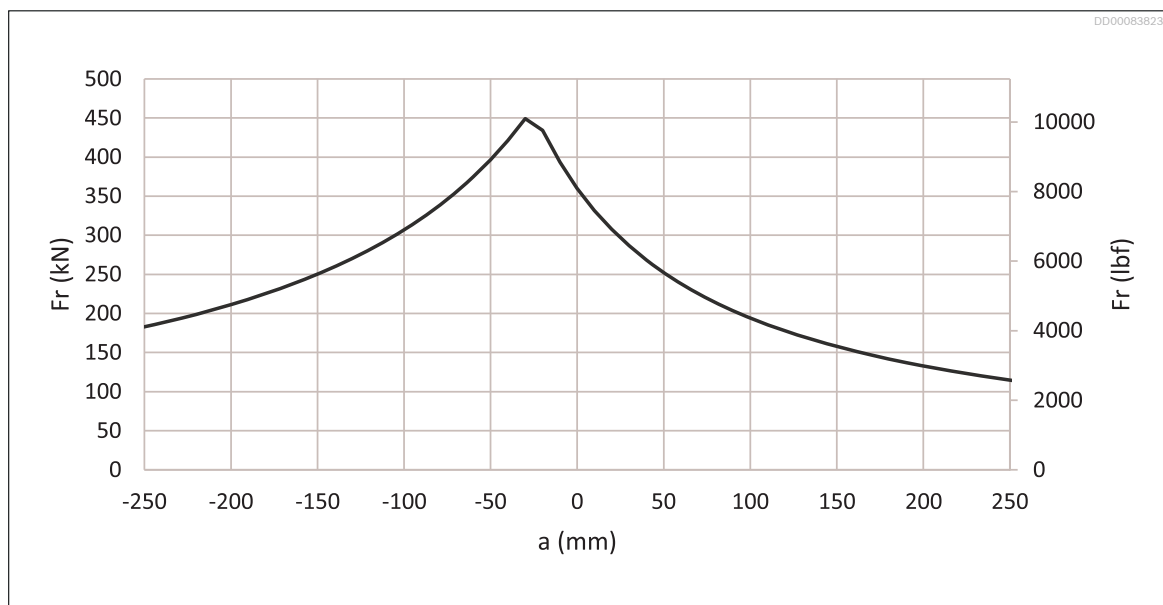


Fig. 40: Permissible external static load Häggglunds CAb 40

4.13 Painting system

Corrosion protection

The painting system of Häggglunds motors and accessories are available in two different corrosivity categories regarding corrosion protection in accordance with SS-EN ISO 12944.

- C3 - Corrosivity category Medium - which is recommended for normal urban and industrial atmosphere
- C5M - Corrosivity category Very High - which is recommended for marine environment with high salt load or other aggressive atmosphere

Colour

Standard colour for Häggglunds motors and accessories is orange (RAL 2002)

5 Type of seal

Option N:

NBR (Nitrile) Preferred alternative at low ambient temperatures and moderate case oil temperatures. See section 4.2: Motor data

Option V:

FPM (Viton) Not available

6 Increased robustness

Option 0:

CAb has uncoated piston assembly as standard.

Option C:

Not available

32/44 Hägglunds CAb | Radial piston hydraulic motor

7 Through hole kit

This device makes it possible to flush through the driven shaft or to draw electric cables through the motor.

Dimension drawing

See section 12: *Related documents*

Ordering code

See ordering code for Hägglunds CAb section 1: *Ordering code*.

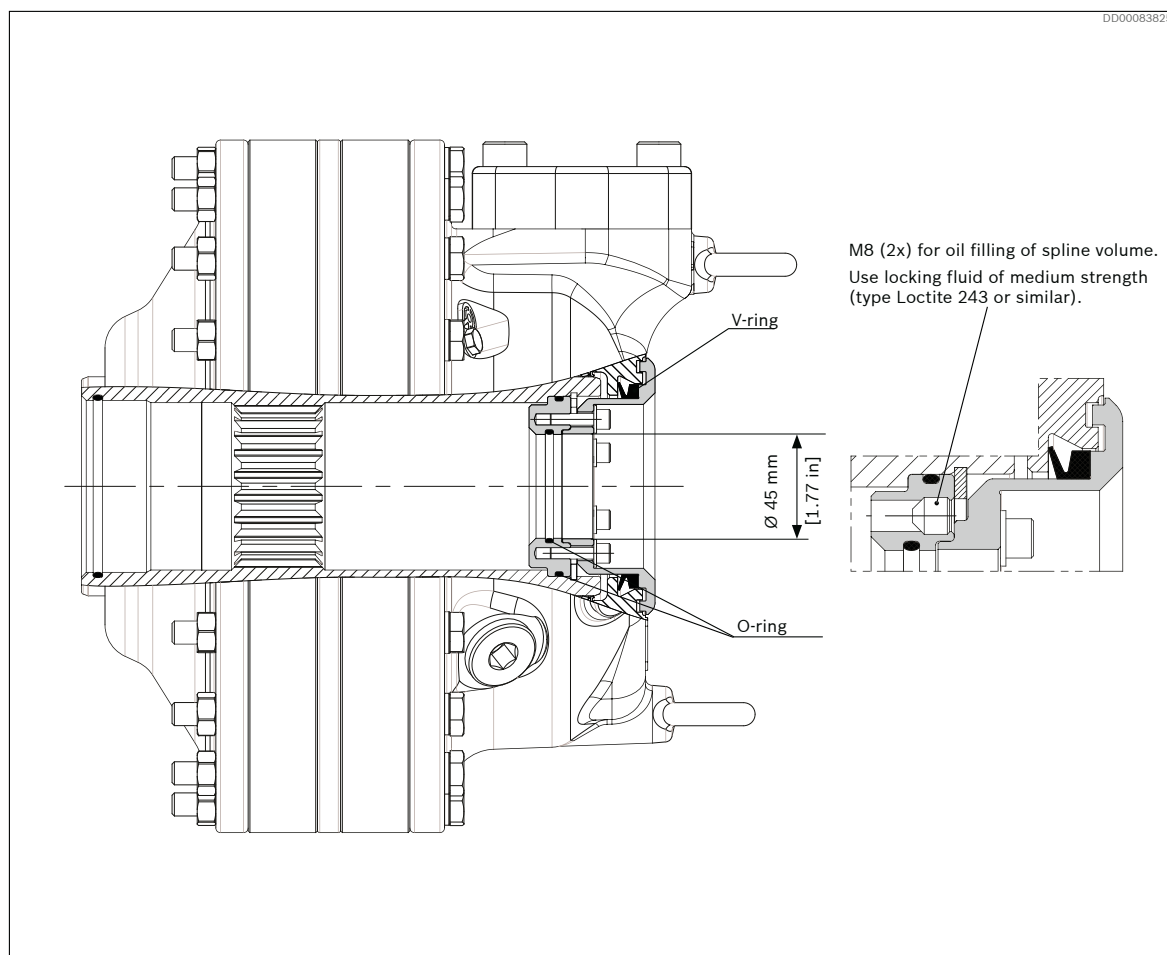


Fig. 41: Example: Hägglunds CAb 20 with through hole kit.

Bosch Rexroth AB, RE 15354, Edition: 12 2016

8 Dimensions / Interface

8.1 Dimensions

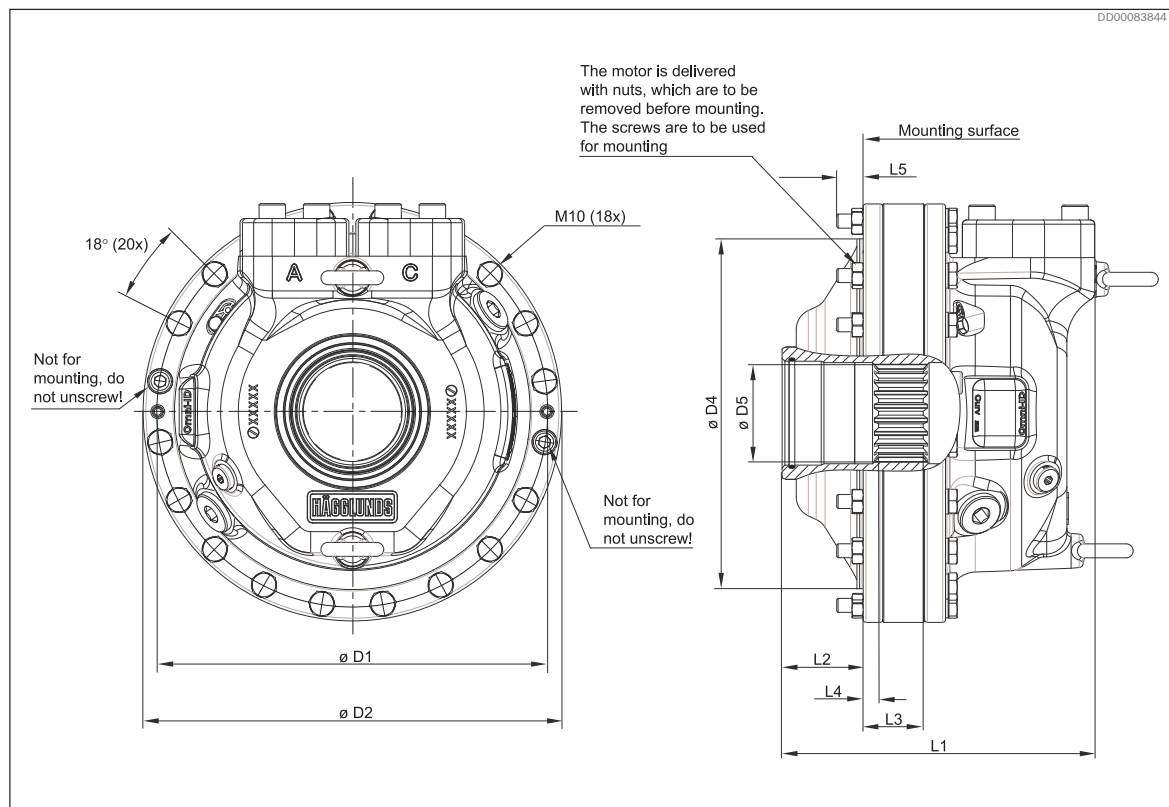


Fig. 42: CAb 10

Table 9: Dimensions CAb 10

		Dimensions	
		mm	in
D1	Pitch diameter	279	10.98
D2	Outer diameter	300	11.81
D4	Guide diameter	256	10.08
D5	Spline size	DIN 5480 N70 x 3 x 30 x 22	
L1	Total length	225	8.86
L2	Length to mounting surface	58	2.29
L3	Length to spline end	43	1.69
L4	Length to spline	11	0.43
L5	Protruding length of screws	19	0.75

For dimensional drawings CAb 10, see chapter 12 *Related documents*

34/44 Hägglunds CAb | Radial piston hydraulic motor

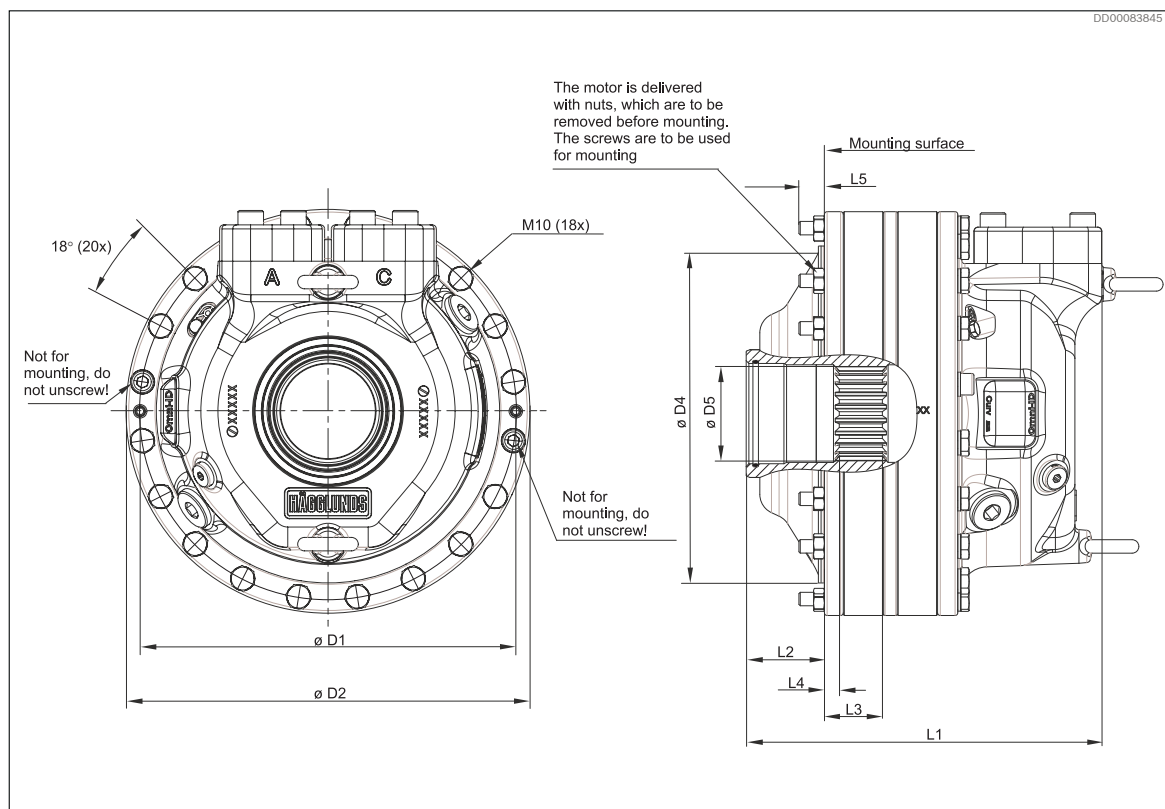


Fig. 43: CAb 20

Table 10: Dimensions CAb 20

		Dimensions	
		mm	in
D1	Pitch diameter	279	10.98
D2	Outer diameter	300	11.81
D4	Diameter of guide edge	256	10.08
D5	Spline size	DIN 5480 N70 x 3 x 30 x 22	
L1	Total length	265	10.43
L2	Length to mounting surface	58	2.28
L3	Length to spline end	43	1.69
L4	Length to spline	11	0.43
L5	Protruding length of screws	19	0.75

For dimensional drawings CAb 20, see chapter 12 *Related documents*

Bosch Rexroth AB, RE 15354, Edition: 12 2016

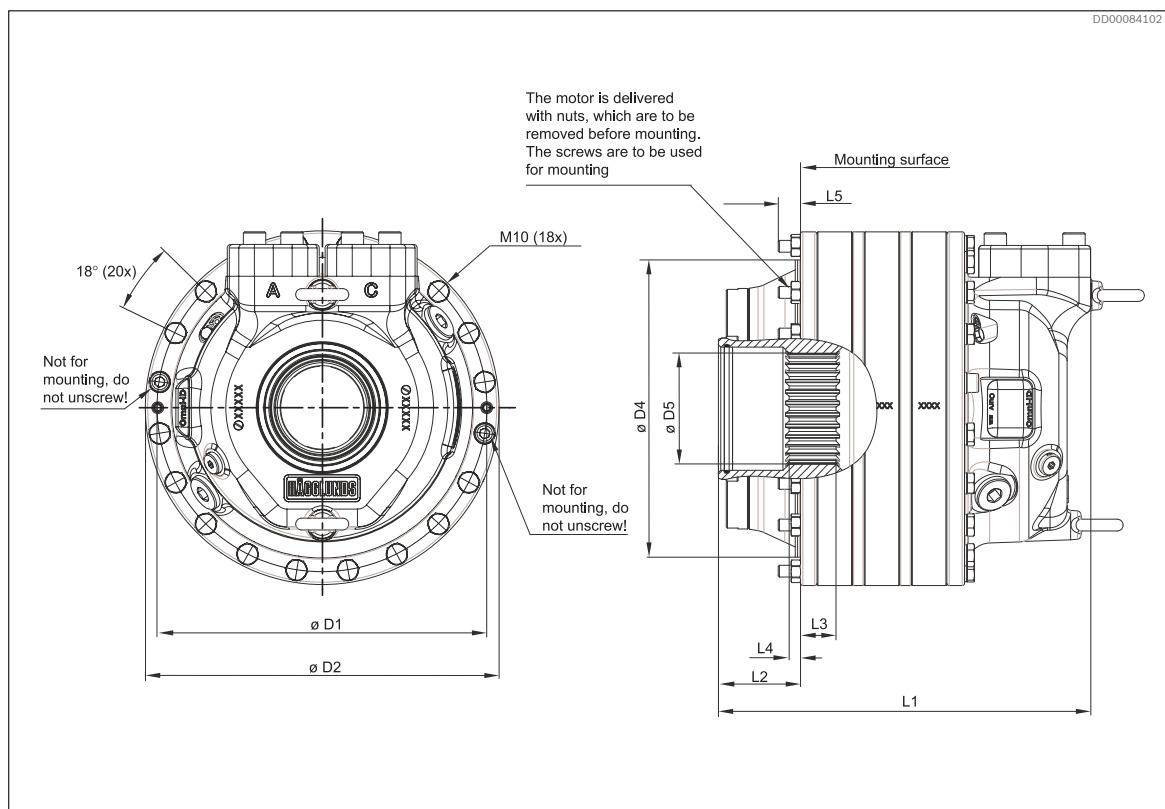


Fig. 44: CAb 30 28 F and CAb 30 30 F (front flange)

Table 11: Dimensions CAb 30 28 F and CAb 30 30 F (front flange).

		Dimensions	
		mm	in
D1	Pitch diameter	279	10.98
D2	Outer diameter	300	11.81
D4	Diameter of guide edge	256	10.08
D5	Spline size	DIN 5480 N100 x 3 x 30 x32	
L1	Total length	317	12.48
L2	Length to mounting surface	70	2.76
L3	Length to spline end	30	1.18
L4	Length to spline	10	0.39
L5	Protruding length of screws	19	0.75

For dimensional drawings CAb 30, see chapter 12 Related documents

36/44 Hägglunds CAb | Radial piston hydraulic motor

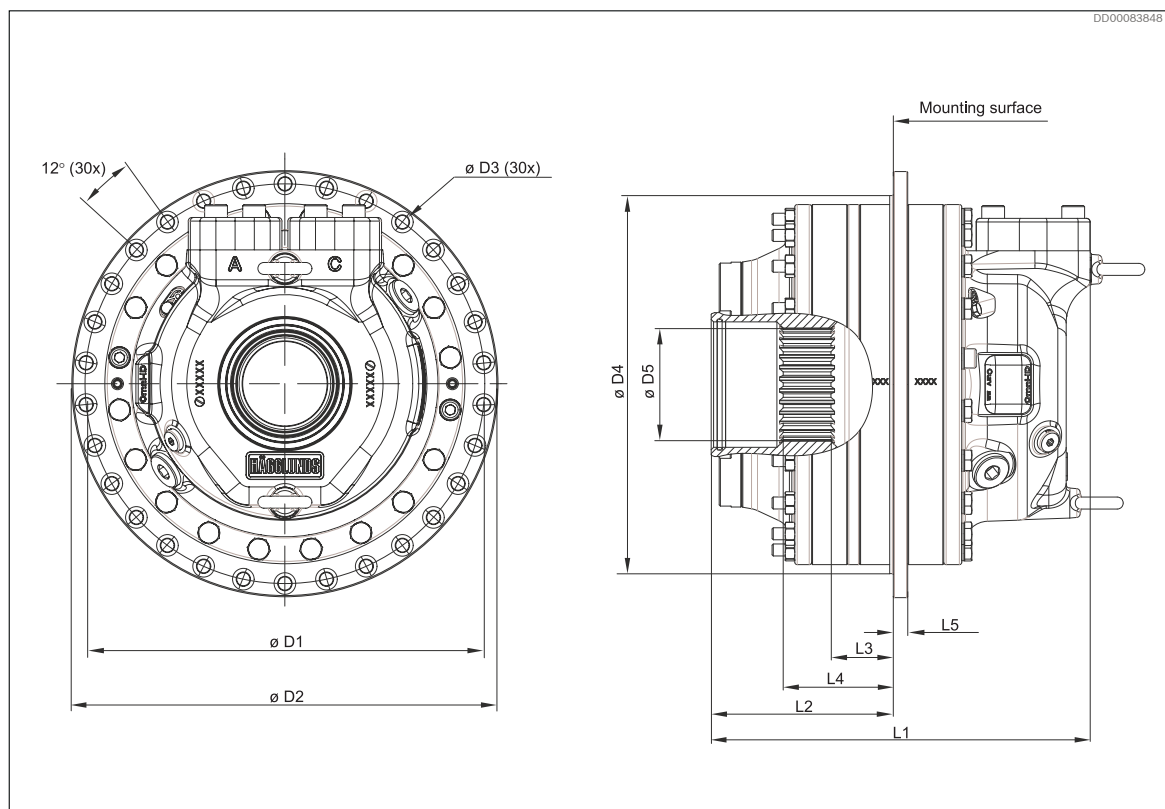


Fig. 45: CAb 30 C (center flange)

Table 12: Dimensions CAb 30 C (center flange)

		Dimensions	
		mm	in
D1	Pitch diameter	333	13.11
D2	Outer diameter	355	13.98
D3	Screw hole	11	0.43
D4	Guide diameter	315	12.40
D5	Spline size	DIN 5480 N100 x 3 x 30 x32	
L1	Total length	317	12.48
L2	Length to mounting surface	152	5.98
L3	Length to spline end	52	2.05
L4	Length to spline	92	3.62
L5	Thickness of mounting ring	12	0.47

For dimensional drawings CAb 30, see chapter 12 *Related documents*

Bosch Rexroth AB, RE 15354, Edition: 12 2016

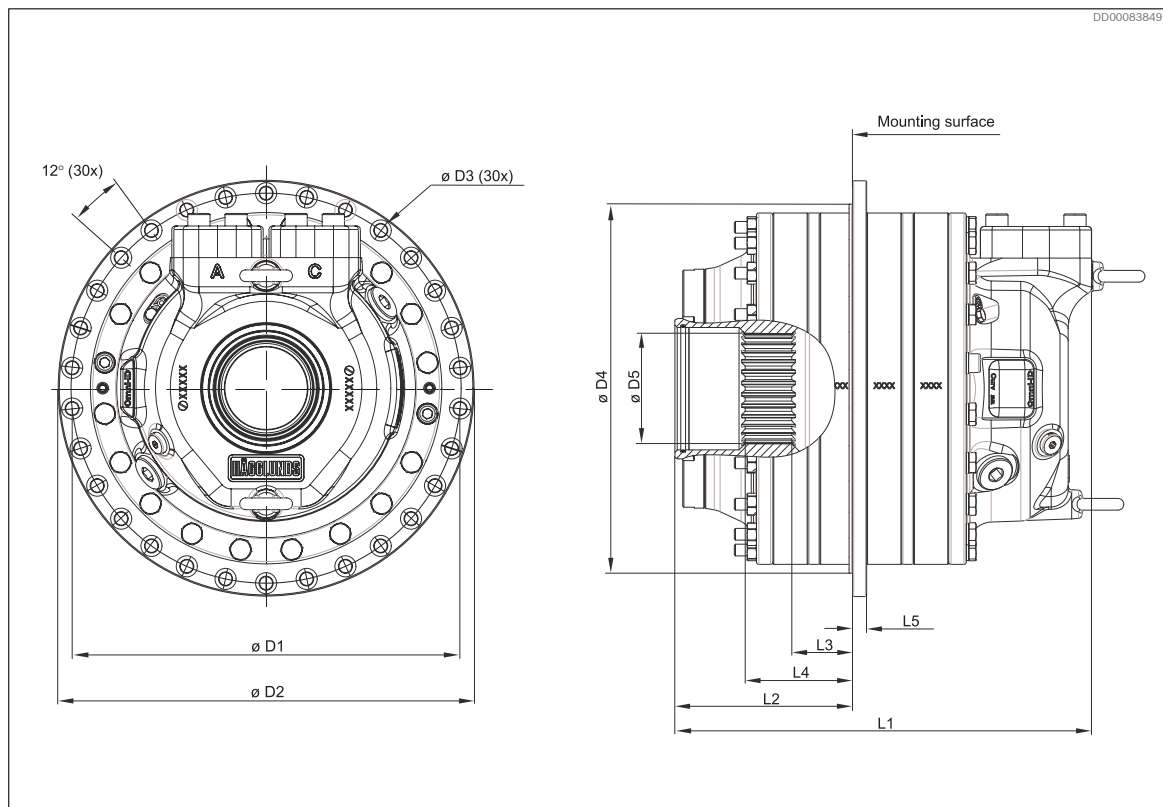


Fig. 46: CAB 40

Table 13: Dimensions CAB 40

		Dimensions	
		mm	in
D1	Pitch diameter	333	13.11
D2	Outer diameter	355	13.98
D3	Screw hole	11	0.43
D4	Guide diameter	315	12.40
D5	Spline size	DIN 5480 N100 x 3 x30 x32	
L1	Total length	357	14.06
L2	Length to mounting surface	152	5.98
L3	Length to spline end	52	2.05
L4	Length to spline	92	3.62
L5	Thickness of mounting ring	12	0.47

For dimensional drawings CAB 40, see chapter 12 *Related documents*

9 Mounting alternatives

9.1 General information

With splines for flange or torque arm mounting.

The splines shall be lubricated and filled with hydraulic oil at assembly, or filled with transmission oil from the connected gearbox. To avoid wear in the splines, the installation must be within the specified tolerances in Fig. 47, Fig. 48, Table 14. and Table 15. The splines must be according to Table 17. For production of driven shaft, see chapter 12 Related documents.

9.2 Flange mounting

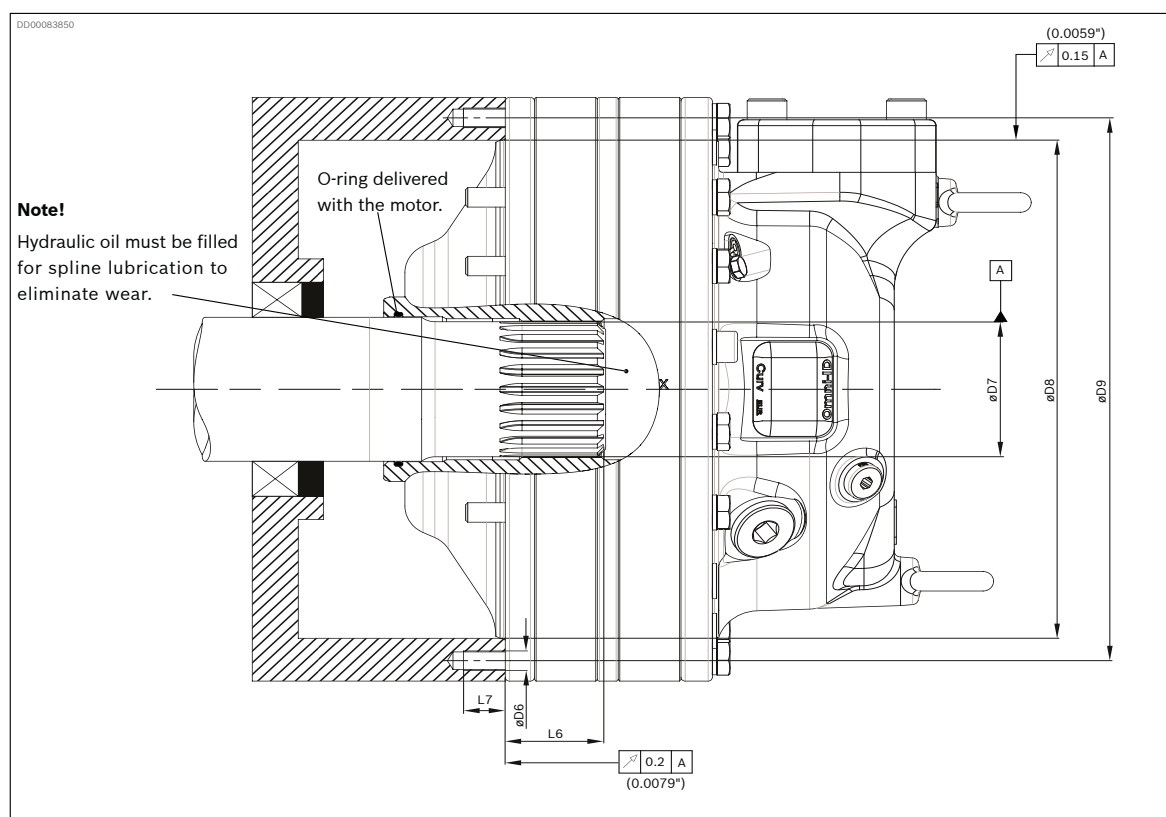


Fig. 47: Shaft installation tolerances CAb 10, CAb 20, CAb 30 28 F and CAb 30 30 F (front flange)

Table 14: Dimensions installation tolerances CAb 10, CAb 20, CAb 30 28 F and CAb 30 30 F

	Frame size CAb 10 - CAb 20			Tolerance	Frame size CAb 30 F		
	mm	in			mm	in	
D6 Screw hole	M10				M10		
D7 Spline size shaft	DIN 5480 W70				DIN 5480 W100		
D8 Guide diameter	256	10.08		H11	256	10.08	H11
D9 Pitch diameter	279	10.98			279	10.98	
L6 Length to spline	47	1.86			35	1.38	
L7 Length of thread	min. 20	min 0.79			min. 20	min 0.79	

Bosch Rexroth AB, RE 15354, Edition: 12 2016

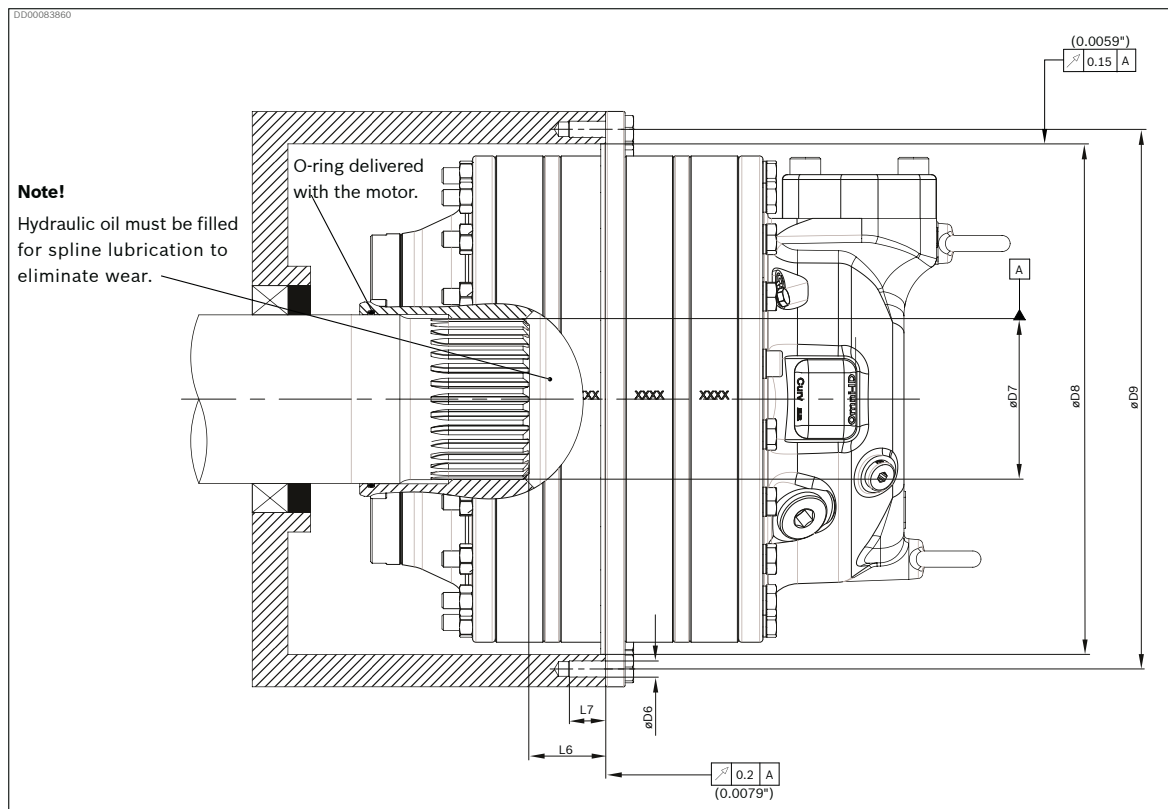


Fig. 48: Shaft installation tolerances CAb 30 C (center flange), CAb 40

Table 15: Dimensions installation tolerances CAb 30 C, CAb 40

Frame size CAb 30 C, CAb 40			
	mm	in	Tolerance
D6	Screw hole M10		
D7	Spline size shaft DIN 5480 W100		
D8	Guide diameter	315	12.40
D9	Pitch diameter	333	13.11
L6	Length to spline	48	1.89
L7	Length of thread	min. 20	min 0.79

Table 16: Recommended material in the driven shaft

Drive	Steel with yield strenght
Unidirectional drive	$Re_{lmin} = 450 \text{ N/mm}^2$
Bidirectional drive	$Re_{lmin} = 700 \text{ N/mm}^2$

Table 17: Spline design of driven shaft

Frame size	Spline	
	CAb 10 - CAb 20	CAb 30 - CAb 40
Designation	W70x3x30x22x8f	W100x3x30x32x8f
Standard DIN 5480		

9.3 Torque arm mounting

For torque arm mounting, please contact your Bosch Rexroth representative.

40/44 Hägglunds CAB | Radial piston hydraulic motor

10 Accesories

10.1 Speed sensor, DSA series 12

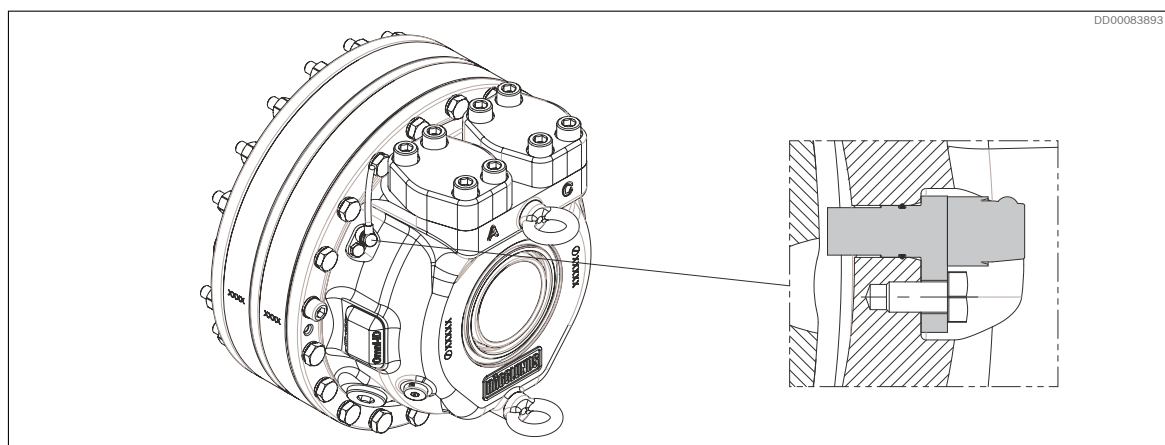


Fig. 49: DSA series 12

For technical data, see document nr: **RE 95133**

10.1.1 Description

The speed sensor is of hall-effect type for contactless sensing. The sensor has two sensing elements and will give two incremental pulse trains (S1 and S2) with 16 pulses per revolution. The signals can be used to sense rotational direction

10.1.2 Technical information

Connection

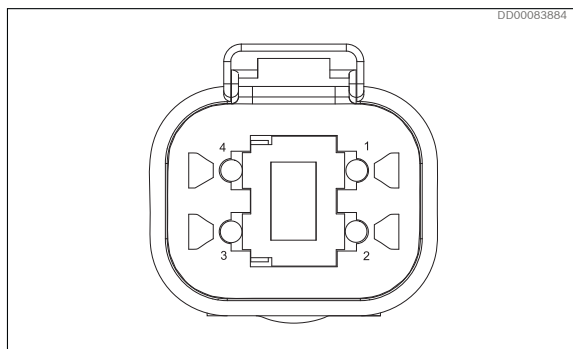


Fig. 50: Mating pin connector

Table 18: Mating pin connector

Pin	Function
1	Supply voltage U_B , 24 V _{DC}
2	Ground GND
3	S1 signal
4	S2 signal

Cable length 1.5 m (78.74 ft)

Bosch Rexroth AB, RE 15354, Edition: 12 2016

Table 19: Mating socket connector

	Material number
Socket	R902601805
Socket including cable	R939065113

Socket is not included in the delivery contents. This can be supplied by Bosch Rexroth on request.

Socket including extension cable. Length 30 m and open end. Not included in the delivery contents. This can be supplied by Bosch Rexroth on request.

Table 20: Output pulses

		Pulse	Gap	Tooth
Per revolution	n	16	16	16
Angle of a turn	α	22,5°	10,09°	12,41°
Duty		100%	44,84%	55,16%
S1 signal			0*U _B	1*U _B
S2 signal			1*U _B	0*U _B
Correction factor for 50%/50%	cf50	0,5	1,115	0,907

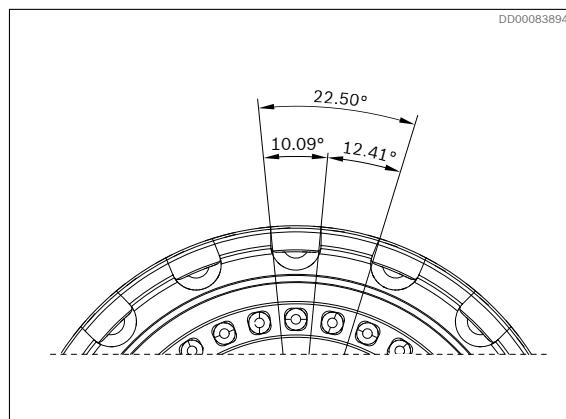


Fig. 53: Angle of turn per pulse at hydraulic motor cylinder block

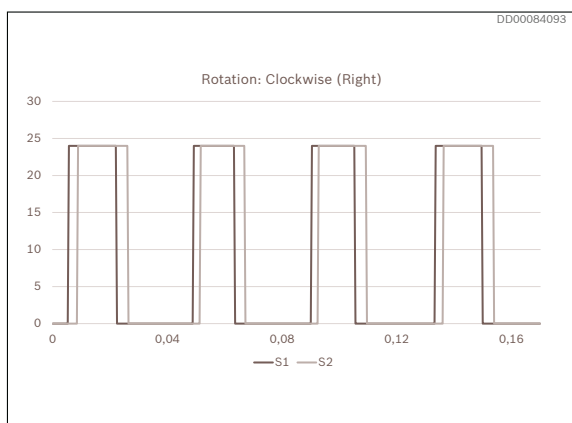


Fig. 51: Output pulses, clockwise

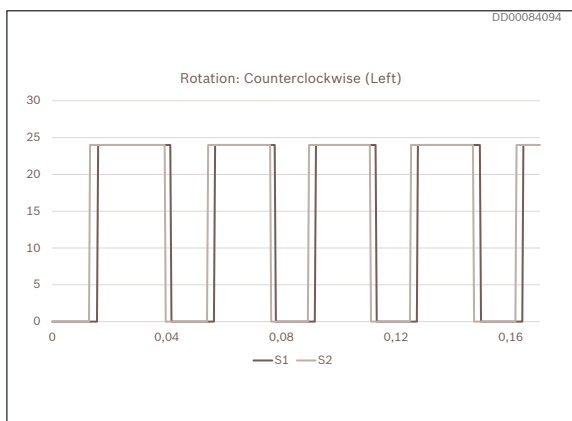


Fig. 52: Output pulses, counter clockwise

42/44 Hägglunds CAB | Radial piston hydraulic motor

11 Circuit design

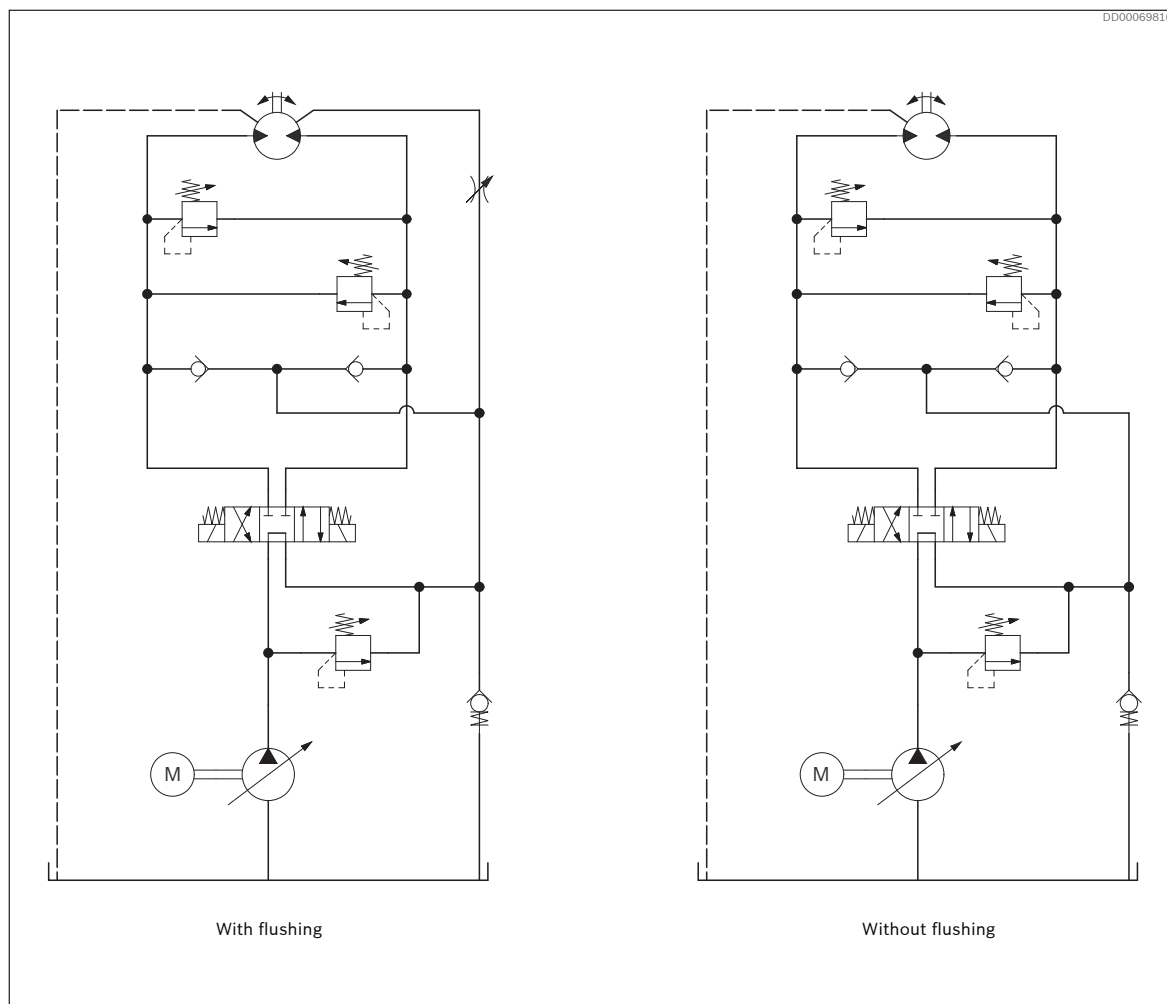


Fig. 54: Simplified open circuit design example

Bosch Rexroth AB, RE 15354, Edition: 12 2016

12 Related documents

Title	Document no	Document type
 Installation and maintenance manual CAb	RE 15354-WA	Installation & maintenance manual
 Hydraulic fluid quick reference	RE 15414	Data sheet
 Sound and vibrations	RE 15411	Data sheet
 Sound CAb	RE 15412	Data sheet
 Speed sensor DSA series 12	RE 95133	Data sheet
 Radial piston motor CAb 10	078 4399	Dimension drawing
 Radial piston motor CAb 20	078 4400	Dimension drawing
 Radial piston motor CAb 30	078 4401	Dimension drawing
 Radial piston motor CAb 40	078 4402	Dimension drawing
 Splined shaft CA 10- 20	078 3098	Dimension drawing
 Splined shaft CA 30- 40	078 3099	Dimension drawing
 Through hole unit	078 4670	Dimension drawing