

Electric Drives
and Controls

Hydraulics

Linear Motion and
Assembly Technologies

Pneumatics

Service

Rexroth
Bosch Group

Subplates size 4 with porting pattern according to DIN 24340 form A and C and ISO 4401

RE 45050/02.11
Replaces: 01.03


1/4

Maximum operating pressure 350 bar
Size 4

Table of contents

Contents	Page
Type G 96/01 (G1/4) – Porting pattern according to DIN 24340–A4 and C4	2
Type G 115/01 (G1/4) – Porting pattern according to DIN 24340–A4 and C4	2
Type G 647/01 (G1/4) – Porting pattern according to ISO 4401-02-01-0-94	3


Item explanation see page 3



Item explanation see page 3



Type G 647/01 (G1/4) (nominal dimensions in mm)

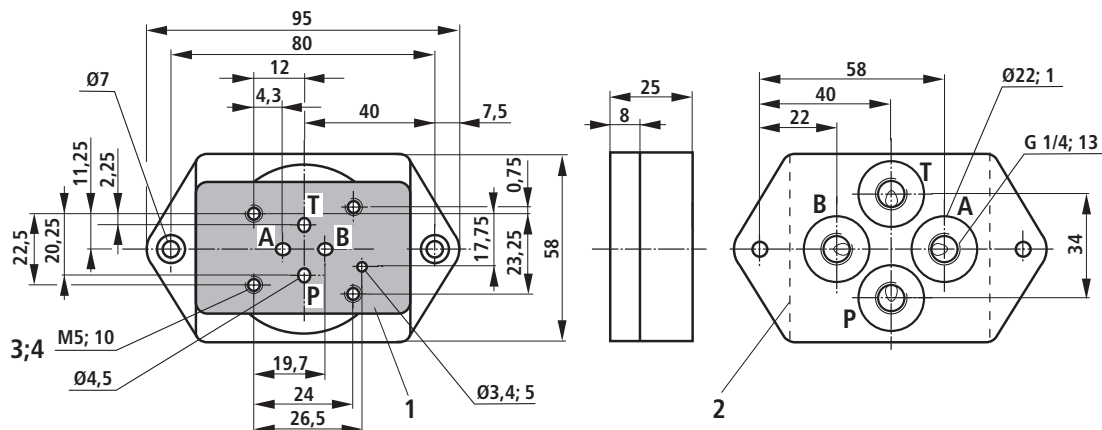

- 1 Valve mounting face
- 2 Front panel break-through
- 3 Valve mounting bores
- 4 Valve mounting screws
4 hexagon socket head cap screws ISO 4762 - M5 - 8.8
(separate order)

Note on the valve mounting screws:

Length and tightening torque of the valve mounting screws depend on the valve types and the sandwich plates that might be provided.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52 / 18-0
Fax +49 (0) 93 52 / 18-23 58
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.