

Filler neck

- Enables use of bellow actuators for vibration isolation
- G 1/4 1/4 - 18 NPTF



Working pressure min./max. 0 ... 20 bar
Ambient temperature min./max. -50 ... 130 °C
Medium Compressed air

Technical data

Part No.	Port G	Fig.
3900040040	G 1/4	Fig. 2
R412010046	1/4 - 18 NPTF	Fig. 3

Technical information

Material	
Material	Brass

Dimensions

Fig. 1

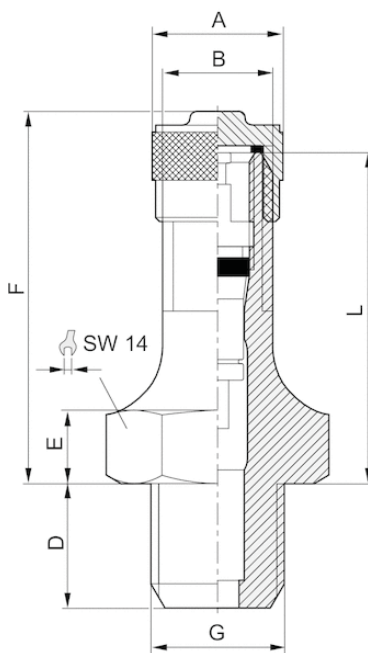


Fig. 2


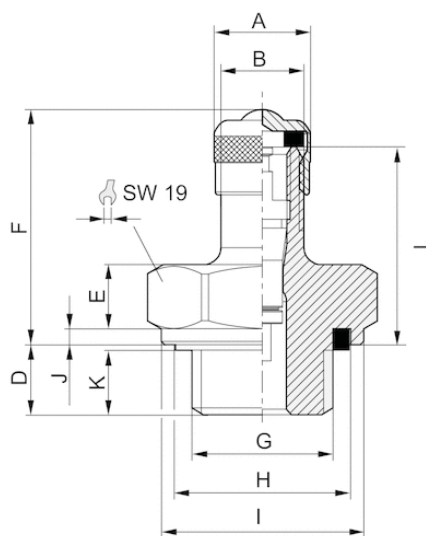


Fig. 3

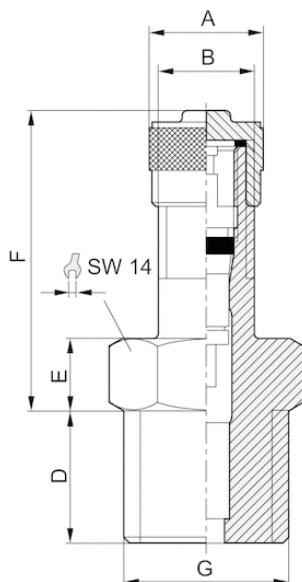

Dimensions

Part No.	Port G	ØA	B 1)	D	E	F	H	I	J	K 2)	L	Fig.
3900040040	G 1/4	9	8	6.5	6	22	16.5	18.9	1.5	5.5	18.5	Fig. 2
R412010046	1/4 - 18 NPTF	9.5	8	11	6	25	-	-	-	-	-	Fig. 3

1) 8V1-1↔ETRTO V0.07.3

2) Min.