
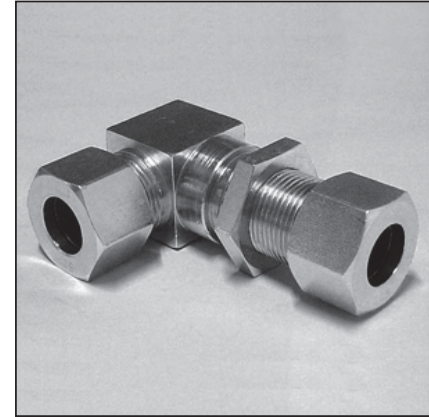


Elbow Bulkhead Couplings

WSV

Metric Tube end as per ISO 8434

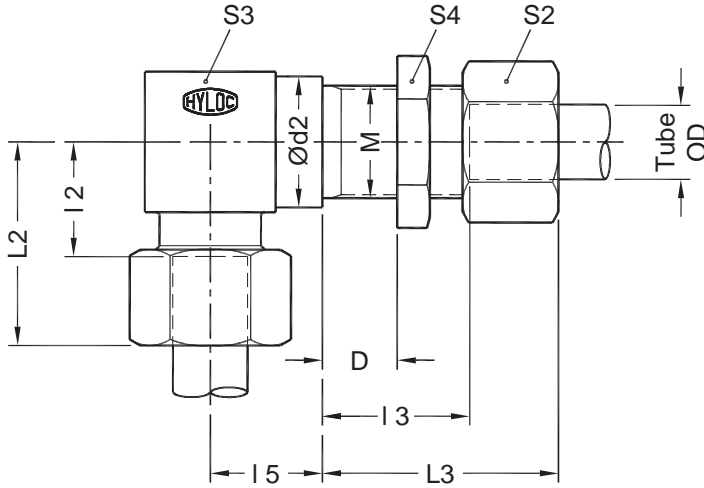

D = 16mm (max)

Lock nut part number - GM

* *

Part No.	Series	Tube OD	M	Ød2	I 2	I 3	I 5	L 2	L 3	S 2	S 3	S 4
WSV06PL	Light L 250 bar	6	M12 x 1.5	17	12.0	27.0	14	27.5	42.5	14	17	17
WSV08PL		8	M14 x 1.5	19	14.0	27.0	17	29.0	42.0	17	19	19
WSV10PL		10	M16 x 1.5	22	15.0	28.0	18	30.5	43.5	19	22	22
WSV12PL		12	M18 x 1.5	24	17.0	29.0	20	32.0	44.0	22	24	24
WSV15PL		15	M22 x 1.5	27	21.0	31.0	23	37.0	47.0	27	27	30
WSV18PL	160 bar	18	M26 x 1.5	32	23.5	32.5	24	40.5	49.5	32	32	36
WSV22PL		22	M30 x 2.0	36	27.5	34.5	30	44.5	51.5	36	36	41
WSV28PL	100 bar	28	M36 x 2.0	42	30.5	35.5	34	48.5	53.5	41	42	46
WSV35PL		35	M45 x 2.0	50	34.5	36.5	39	57.5	59.5	50	50	55
WSV42PL		42	M52 x 2.0	60	40.0	36.0	43	63.5	59.5	60	60	65
WSV06PS	Heavy S 630 bar	6	M14 x 1.5	19	16.0	29.0	17	31.5	44.5	17	19	19
WSV08PS		8	M16 x 1.5	22	17.0	29.0	18	32.0	44.0	19	22	22
WSV10PS		10	M18 x 1.5	24	17.5	29.5	20	34.5	46.5	22	24	24
WSV12PS		12	M20 x 1.5	27	21.5	30.5	21	38.0	47.0	24	27	27
WSV16PS	400 bar	16	M24 x 1.5	30	24.5	31.5	24	43.5	50.5	30	30	32
WSV20PS		20	M30 x 2.0	36	26.5	33.5	30	49.0	56.0	36	36	41
WSV25PS		25	M36 x 2.0	42	30.0	35.0	34	55.0	60.0	46	42	46
WSV30PS	250 bar	30	M42 x 2.0	50	35.5	37.5	39	63.5	65.5	50	50	50
WSV38PS		38	M52 x 2.0	60	41.0	37.0	43	72.5	68.5	60	60	65

Dimensions in mm

DIN Fittings

* Dimensions given are approx figures with tightened nut.