

## PGM-Series, Gasoline Hydraulic Pumps

▼ Shown: **PGM-2408R**



### PGM Series



Reservoir Capacity:  
**4 - 8 litres**

Flow at Rated Pressure:  
**0,66 l/min**

Motor Size:  
**2,2 kW**




Maximum Operating Pressure:  
**700 bar**



#### Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

- **Patented Genesis Technology means**
  - coaxial piston design ensures high performance
  - first-stage piston pump for improved efficiency
- **High by-pass pressures improve productivity**
- **All Atlas pumps feature sturdy roll cage for use in tough environments**
- **Four-cycle Honda motor 2,2 kW.**

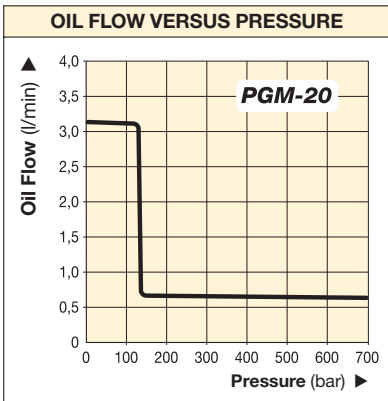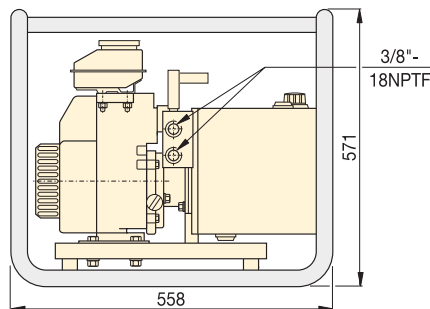

Used with Cylinder	Usable Oil Capacity (litres)	Model Number	Pressure Rating (bar)	Output Flow Rate (l/min)		By-Pass Pressure (bar)	Manual Valve Type	Valve Function	Sound Level (dBA)	Weight (kg)
				1 <sup>st</sup> stage	2 <sup>nd</sup> stage					
Single-Acting	3,8	PGM-2304R *	700	3,2	0,66	140	3/3	Advance / Hold / Retract	89	25
Double-Acting	3,8	PGM-2404R *	700	3,2	0,66	140	4/3	Advance / Hold / Retract	89	25
Single-Acting	7,6	PGM-2308R *	700	3,2	0,66	140	3/3	Advance / Hold / Retract	89	33
Double-Acting	7,6	PGM-2408R *	700	3,2	0,66	140	4/3	Advance / Hold / Retract	89	33

\* Note: The PGM-20 series are available with a carrying handle instead of a roll cage. For ordering omit the 'R' from the model number