


Tie rod cylinder ISO 15552, Series ITS

- Ø 160-320 mm
- Ports G 3/4, G 1
- double-acting
- Cushioning pneumatically, adjustable
- Piston rod External thread
- Heat resistant

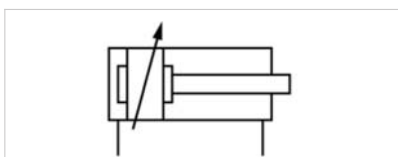

Standards	ISO 15552
Compressed air connection	Internal thread
Working pressure min./max.	2 ... 10 bar
Ambient temperature min./max.	-10 ... 150 °C
Medium temperature min./max.	-10 ... 150 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m³
Pressure for determining piston forces	6.3 bar

Technical data

Piston Ø Piston rod thread Ports Piston rod Ø	160 mm M36x2 G 3/4 40 mm	200 mm M36x2 G 3/4 40 mm	250 mm M42x2 G 1 50 mm	320 mm M48x2 G 1 63 mm
Stroke 25	R480634923	R480627379	R480627475	R480627559
50	R480627308	R480627380	R480627476	R480627560
80	R480627309	R480627381	R480627477	R480627561
100	R480627310	R480627382	R480627478	R480627562
125	R480627311	R480627383	R480627479	R480627563
160	R480627312	R480627384	R480627480	R480627564
200	R480627313	R480627385	R480627481	R480627565
250	R480627314	R480627386	R480627482	R480627566
320	R480627315	R480627387	R480627483	R480627567
400	R480627316	R480627388	R480627484	R480627568
500	R480627317	R480627389	R480627485	R480627569

Technical data

Piston Ø	160 mm	200 mm	250 mm	320 mm
Retracting piston force	11875 N	19000 N	29688 N	48704 N
Extracting piston force	12667 N	19792 N	30925 N	50668 N
Cushioning length	50 mm	50 mm	64 mm	55 mm
Cushioning energy	160 J	170 J	180 J	190 J
Weight 0 mm stroke	12,5 kg	15,67 kg	25,87 kg	46,89 kg
Weight +10 mm stroke	0,21 kg	0,21 kg	0,38 kg	0,61 kg
Stroke max.	2700 mm	2700 mm	2500 mm	2500 mm

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Cylinder tube	Aluminum, anodized
Piston rod	Stainless steel
Front cover	Aluminum
Seal	Fluorocautchouc
Nut for piston rod	Steel, galvanized
Scraper	Fluorocautchouc
Tie-rods	Stainless steel

Dimensions

Dimensions

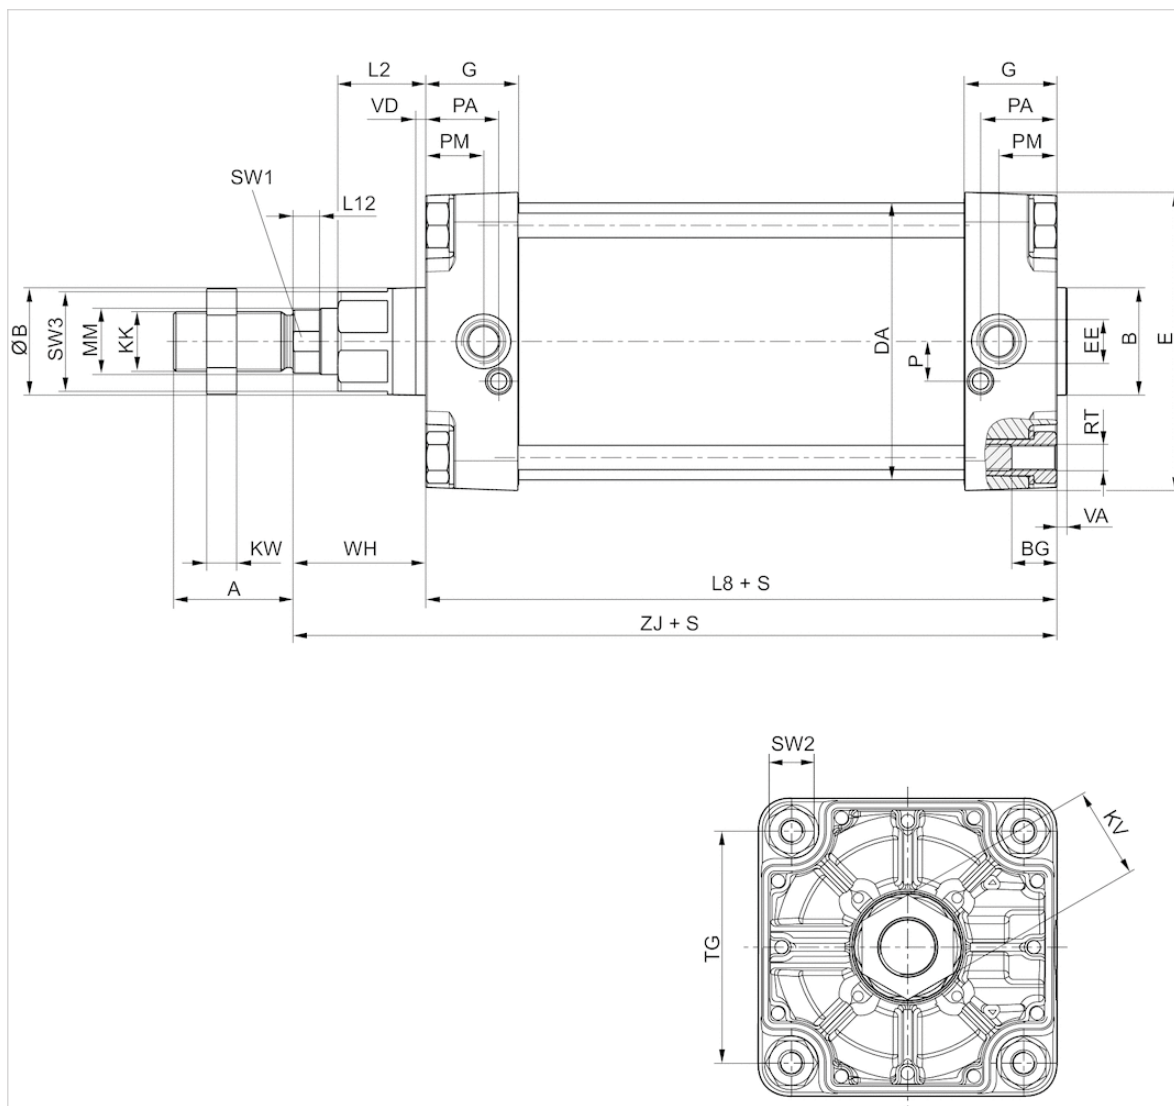

S = stroke


Dimensions

Piston Ø	A	B	ØB	BG	DA	E	EE	G	KK	KV	KW	L2	L8	L12	MM	P	PA	PM	RT	SW1	SW2	SW3	TG
160 mm	72	65	65	24	167	180	G 3/4	56	M36x2	55	18	53	180	16	40	24	45	35	M16	36	27	60	140
200 mm	72	75	75	24	210	220	G 3/4	54	M36x2	55	18	56	180	16	40	22.5	42	30	M16	36	27	60	175
250 mm	84	90	90	25	262	280	G 1	59.5	M42x2	65	21	67	200	20	50	29	46	32.8	M20	46	41	80	220
320 mm	96	110	110	28	336	350	G 1	61.5	M48x2	75	24	76	220	23.25	63	30	48	37	M24	55	50	95	270

Piston Ø	VA	VD	WH	ZJ
160 mm	6	6	80	260
200 mm	6	6	95	275
250 mm	10	31	105	305.3
320 mm	10	34	120	340.5

Diagrams


Cushioning diagram

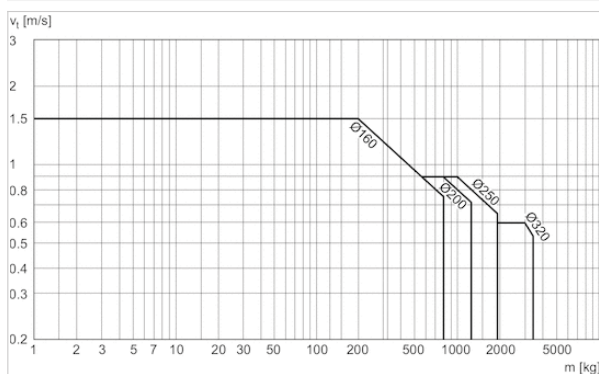

v = Piston velocity [m/s] m = Cushionable mass [kg]

Accessories overview

Overview drawing

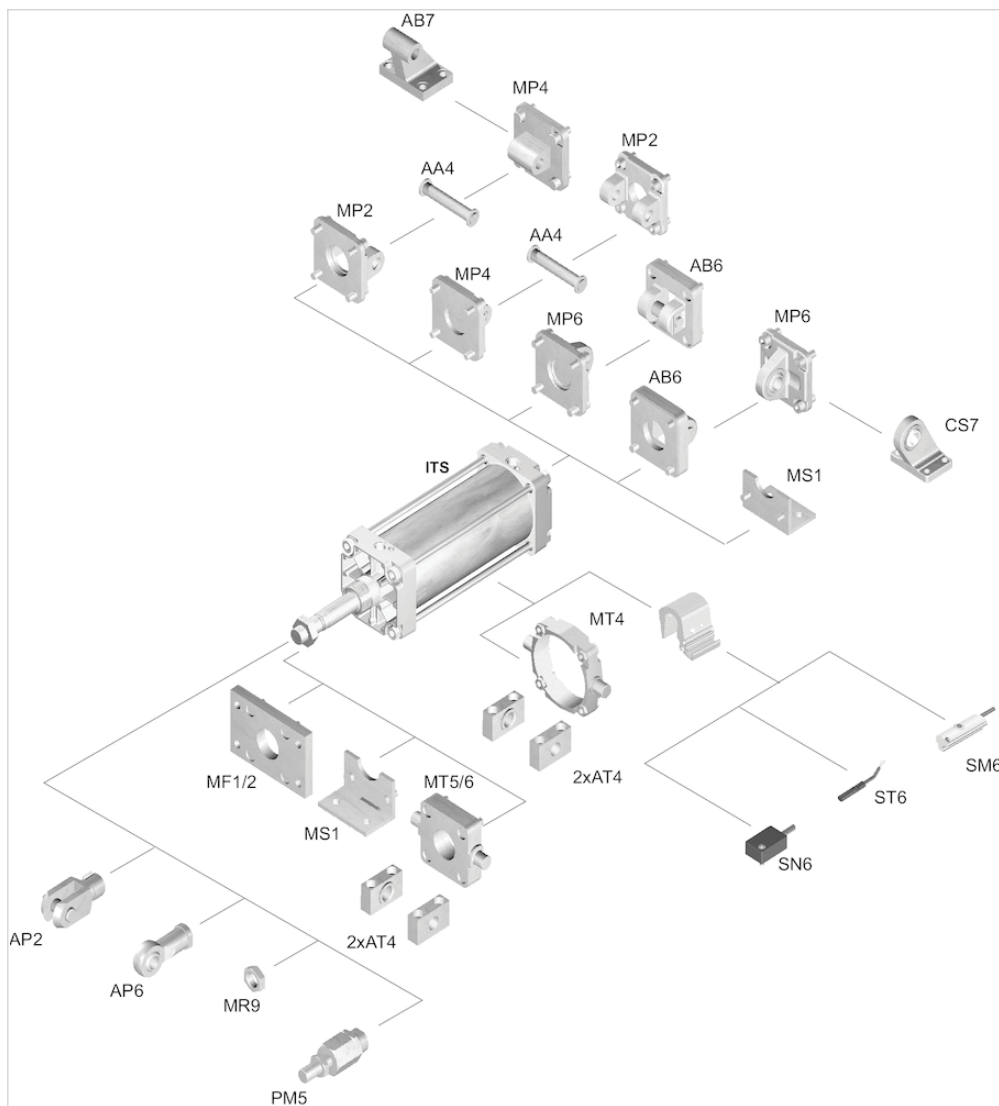

NOTE: This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.