

Compact cylinder ISO 21287, Series CCI

- Ø 16-100 mm
- Ports M5, G 1/8
- Single-acting, retracted without pressure
- with magnetic piston
- Cushioning elastic
- Piston rod External thread



Standards	ISO 21287
Compressed air connection	Internal thread
Ambient temperature min./max.	-20 ... 80 °C
Medium temperature min./max.	-20 ... 80 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m³
Pressure for determining piston forces	6 bar

Technical data

Piston Ø Piston rod thread Ports Piston rod Ø	16 mm M6x1 M5 8 mm	20 mm M8x1,25 M5 10 mm	25 mm M8x1,25 M5 10 mm	32 mm M10x1,25 G 1/8 12 mm	40 mm M10x1,25 G 1/8 12 mm	50 mm M12x1,25 G 1/8 16 mm	63 mm M12x1,25 G 1/8 16 mm	80 mm M16x1,5 G 1/8 20 mm
Stroke 5	R422001442	R422001443	R422001444	R422001445	R422001446	R422001447	R422001448	R422001449
10	R422001452	R422001453	R422001454	R422001455	R422001456	R422001457	R422001458	R422001459
15	R422001462	R422001463	R422001464	R422001465	R422001466	R422001467	R422001468	R422001469
20	R422001472	R422001473	R422001474	R422001475	R422001476	R422001477	R422001478	R422001479
25	R422001482	R422001483	R422001484	R422001485	R422001486	R422001487	R422001488	R422001489

Piston Ø Piston rod thread Ports Piston rod Ø	100 mm M16x1,5 G 1/8 25 mm
Stroke 5	R422001450
10	R422001460
15	R422001470
20	R422001480
25	R422001490

Technical data

Piston Ø	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Retracting piston force	12 N	13 N	25 N	35 N	43 N	82 N	82 N
Extracting piston force	94 N	151 N	234 N	387 N	622 N	953 N	1565 N
Impact energy	0,11 J	0,15 J	0,2 J	0,4 J	0,52 J	0,64 J	0,75 J
Weight 0 mm stroke	0,066 kg	0,127 kg	0,152 kg	0,26 kg	0,332 kg	0,501 kg	0,742 kg
Weight +10 mm stroke	0,016	0,023	0,026	0,043	0,052	0,07	0,087
Stroke max.	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm
Working pressure min./max.	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar	2 ... 10 bar

Piston Ø	80 mm	100 mm
Retracting piston force	105 N	215 N
Extracting piston force	2551 N	3930 N
Impact energy	0,75 J	1 J
Weight 0 mm stroke	1,223 kg	2,28 kg
Weight +10 mm stroke	0,116	0,168
Stroke max.	25 mm	25 mm
Working pressure min./max.	2 ... 10 bar	2 ... 10 bar

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
The oil content of compressed air must remain constant during the life cycle.
Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Cylinder tube	Aluminum, anodized
Piston rod	Stainless steel
Front cover	Aluminum
End cover	Aluminum
Seal	Polyurethane
Nut for cylinder mounting	Steel, galvanized
Scraper	Polyurethane

Dimensions

Ø 16 mm ... 100 mm

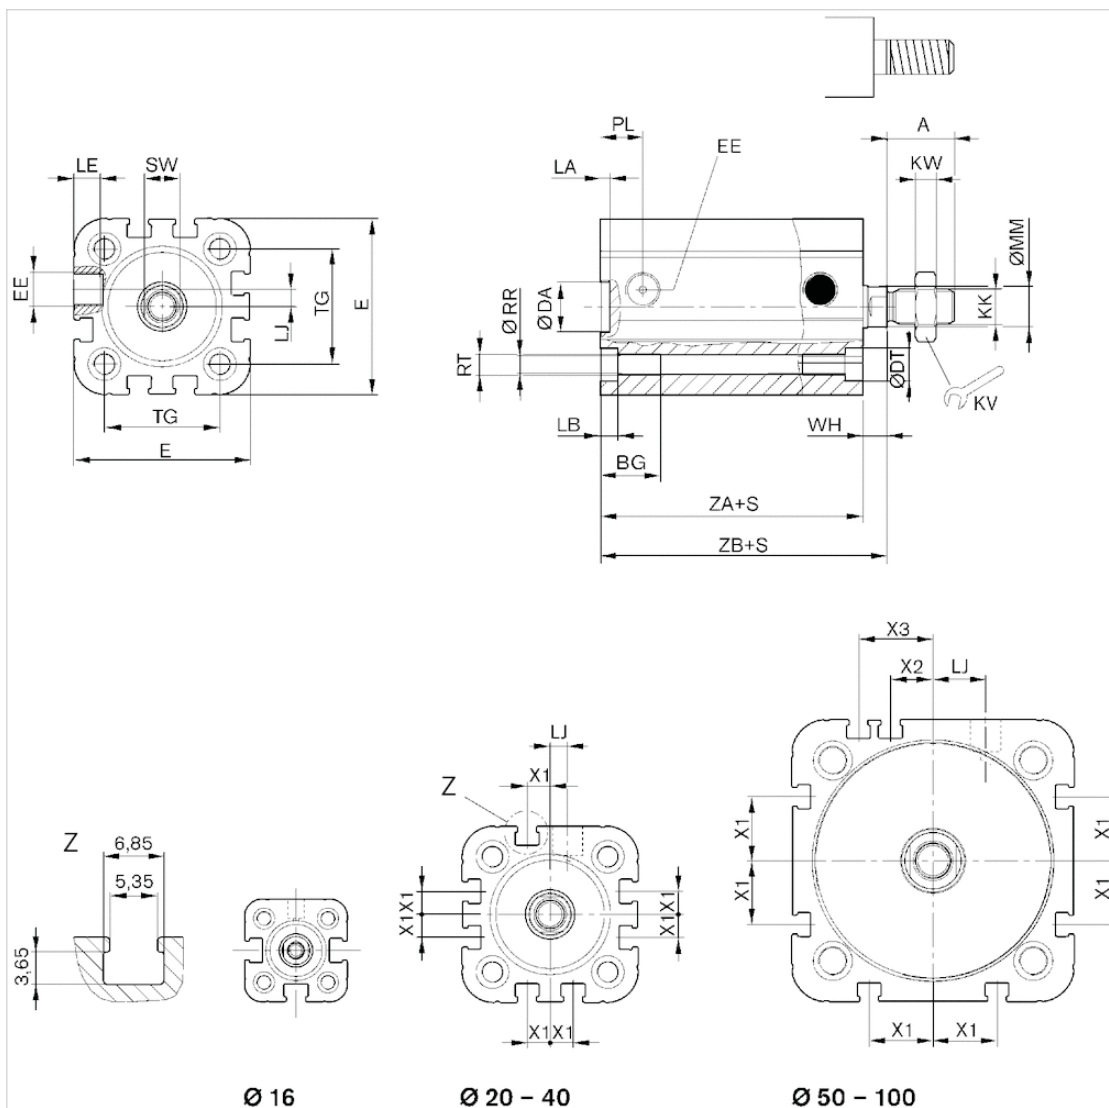

S = stroke

Dimensions

Piston Ø	A *)	BG	DA H11	DT	E	EE	KK	KV	KW	LA	LB	LE	LJ	MM f8	PL	RR	RT 6H	SW	TG	WH 1)	X1
16 mm	12	15	10	6	29.3	M5	M6	10	3	2.5	3.5	4.5	0	8	8	3.3	M4	7	18	4,8 ±0,9	-
20 mm	16	15.5	12	7.5	36.3	M5	M8	13	4	2.5	4.5	4.5	4.5	10	10	4.2	M5	8	22	6,3 ±0,9	4.2
25 mm	16	15.5	12	8	40.3	M5	M8	13	4	2.5	4.5	4.5	4	10	10	4.2	M5	8	26	5,6 ±0,9	4.5
32 mm	19	17	14	9.2	50	G 1/8	M10x1,25	17	5	2.5	5	7.5	4.85	12	12	5.1	M6	10	32.5	7,4 ±0,9	6.5
40 mm	19	17	14	9.2	58	G 1/8	M10x1,25	17	5	2.5	5	7.5	9.85	12	12	5.1	M6	10	38	7,4 ±0,9	11
50 mm	22	17	18	11	68.3	G 1/8	M12x1,25	19	6	2.5	5	7.5	12	16	12	6.7	M8	13	46.5	8,4 ±0,9	13

PDF creation date: 12.07.2018

Piston Ø	A *)	BG	DA H11	DT	E	EE	KK	KV	KW	LA	LB	LE	LJ	MM f8	PL	RR	RT 6H	SW	TG	WH 1)	X1
63 mm	22	17	18	11	80	G 1/8	M12x1,25	19	6	2.5	5	7.5	14.8	16	12	6.7	M8	13	56.5	8,5 ±0,9	18
80 mm	28	20	23	15	96	G 1/8	M16x1,5	24	8	3	5	7.5	22	20	14	8.5	M10	16	72	9,8 ±1	18
100 mm	28	20	28	15	116	G 1/8	M16x1,5	24	8	3	5	7.5	27	25	16.5	8.5	M10	21	89	9,8 ±1	20


X2	X3	ZA	ZB 1)
–	–	34,9 ±0,1	39,7 ±0,8
–	–	37,3 ±0,1	43,6 ±0,8
–	–	39 ±0,1	44,5 ±0,9
–	–	44 ±0,1	51,4 ±1
–	–	45 ±0,1	52,4 ±1
4	13	45,5 ±0,1	53,6 ±1
12	21	49 ±0,1	57,4 ±1
16.5	25.5	54,7 ±0,1	64,4 ±1
20	29	67 ±0,1	76,7 ±1

* With cylinders with external thread extension, dimension "A" is increased by the value of the thread extension.

1) With cylinders with a piston rod extension, dimensions "WH" and "ZB" are increased by the value of the piston rod extension.


Diagrams

Extracting piston force

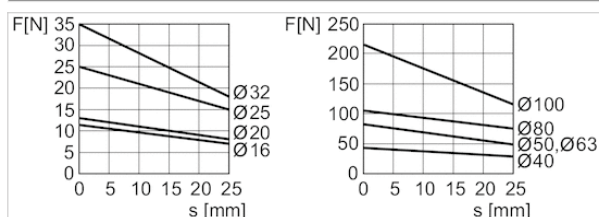

F = spring return force, s = return stroke


Maximum admissible lateral force static

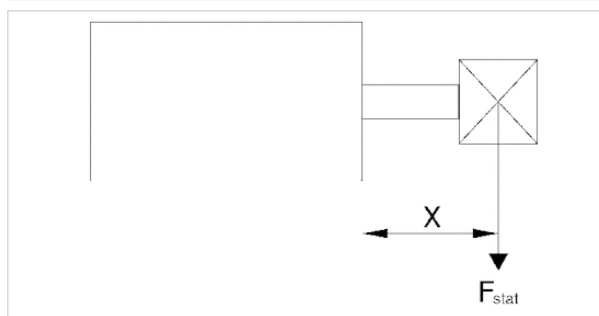

F stat. = static lateral force

X = distance between force application point and cylinder cover

Maximum admissible lateral force static

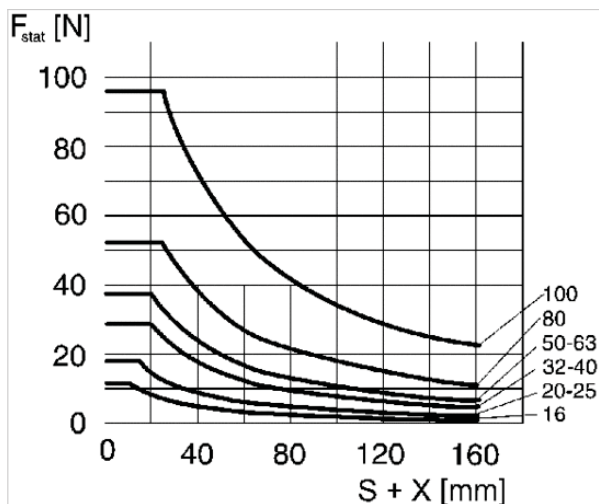


F stat. = static lateral force

X = distance between force application point and cylinder cover

S = stroke

Maximum admissible lateral force dynamic

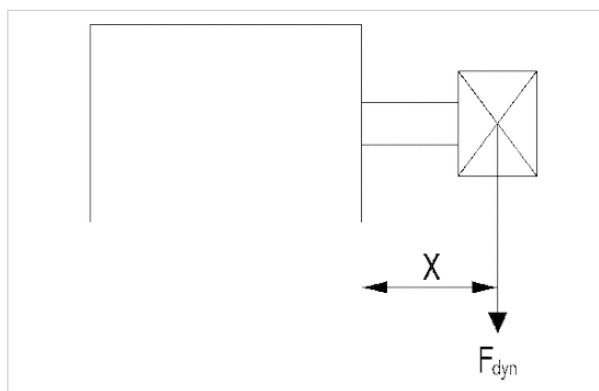


F dyn. = dynamic lateral force

X = distance between force application point and cylinder cover

S = stroke

Maximum admissible lateral force dynamic

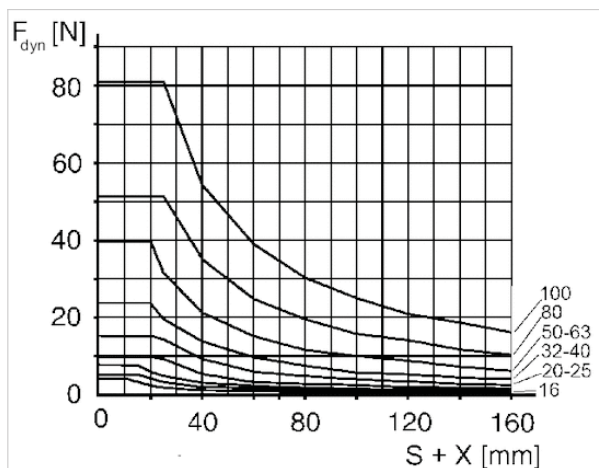


F_{dyn} = dynamic lateral force

X = distance between force application point and cylinder cover

S = stroke

Accessories overview

Overview drawing

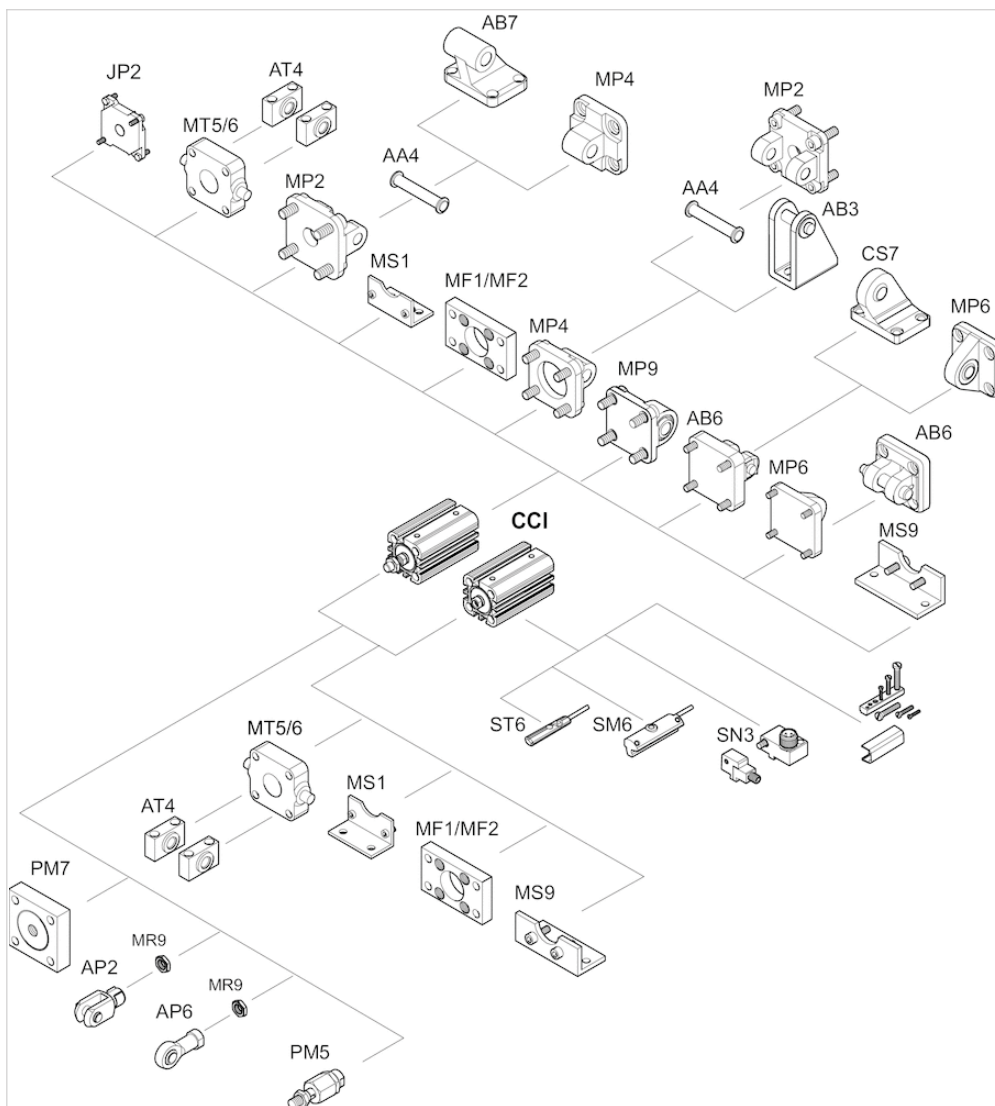

Due to the high possible forces, not all add-on parts are suitable for CCI tandem (see CCI-TD accessories overview).

NOTE: This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.