

The Drive & Control Company

Rexroth
Bosch Group

Pressure relief valve,
pilot-operated

Type DB...W65; DBW...W65; DB 20 K

RE 25818

Edition: 2017-06

Replaces: 2012-07



H6964

- ▶ Sizes 10 and 25
- ▶ Component series 1X; 4X
- ▶ Maximum operating pressure 350 bar
- ▶ Maximum flow 400 l/min

Features

- ▶ For subplate mounting
Porting pattern according to ISO 6264-06-09-*97 (NG10) and ISO 6264-08-13-*97 (NG25)
- ▶ For threaded connection
- ▶ As screw-in cartridge valve
- ▶ 4 adjustment types for pressure adjustment, optionally:
 - Rotary knob
 - Bushing with hexagon and protective cap
 - Lockable rotary knob with scale
 - Rotary knob with scale
- ▶ 5 pressure ratings
- ▶ Solenoid-actuated unloading via a built-on directional spool valve

Contents

Features	1
Ordering code	2, 3
Symbols	4
Function, section	5
Technical data	6, 7
Characteristic curves	7 ... 9
Dimensions	10 ... 15
Mounting cavity	14, 15
Dimensions	16
Mating connectors	19
General information, Further information	19
Type-examination tested safety valves type DB 20 K...E, component series 1X according to Pressure Equipment Directive 2014/68/EU	
Ordering code	17
Deviating technical data	17
Safety instructions	18

RE 25818, edition: 2017-06, **Bosch Rexroth AG**



2/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19
DB						-		/										*

01	Pressure relief valve	DB
02	Without directional valve	no code
	With attached directional valve	W ¹⁾

03	- Size 10	
	Subplate mounting "-"	10
	Threaded connection "G" (G1 1/2)	10
	- Size 25	
	Subplate mounting "-"	20
	Threaded connection "G" (G3/4)	15
	Threaded connection "G" (G1)	20
	Screw-in cartridge valve "K"	20

04	 <p>normally closed</p>	A ²⁾
	 <p>normally open</p>	B ²⁾

Type of connection

05	Subplate mounting	-
	Threaded connection	G
	Screw-in cartridge valve	K

Adjustment type

06	Rotary knob	1
	Bushing with hexagon and protective cap	2
	Lockable rotary knob with scale	3 ³⁾
	Rotary knob with scale	7
07	Component series 10 ... 19 (10 ... 19: unchanged installation and connection dimensions); (version "K" only)	1X
	Component series 40 ... 49 (40 ... 49: unchanged installation and connection dimensions); (version "-" and "G" only)	4X

¹⁾ Only with version "G".

²⁾ Ordering code only necessary with version "W".


³⁾ H-key with material no. **R900008158** is included in the scope of delivery.

⁴⁾ Dash "-" only necessary with version "W" and without specification of "U".

⁵⁾ Mating connectors, separate order, see page 19.

Notices:

In case spare parts of the screw-in cartridge valve for standard subplate mounting or threaded connection housing NG10 and 25 are required, **always** order type DB 20 K.-1X/.XY. Type-examination tested safety valves are **only** available as type DB 20 K.-1X/.Y...E.

 **Notice:** Preferred types and standard units are contained in the EPS (standard price list).

Bosch Rexroth AG, RE 25818, edition: 2017-06

Pressure relief valve | **DB...W65; DBW...W65; DB 20 K** 3/20

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19
DB						-	/											*

Pressure rating

08	Set pressure up to 50 bar	50
	Set pressure up to 100 bar	100
	Set pressure up to 200 bar	200
	Set pressure up to 315 bar	315
	Set pressure up to 350 bar (only version "DB")	350

Pilot oil supply and pilot oil return (see also Symbols on page 4)

09	Internal pilot oil supply and pilot oil return	- 4)
	External pilot oil supply, internal pilot oil return	X
	Internal pilot oil supply, external pilot oil return	Y
	External pilot oil supply and pilot oil return	XY

10	Standard version	no code
	Valve for minimum cracking pressure (not suitable for mutual relief!)	U

11	Without directional valve	no code
	With directional spool valve (data sheet 23178)	6E 2)

12	Direct voltage 24 V	G24 2)
	AC voltage 230 V 50/60 Hz	W230 2)

13	With concealed manual override (standard)	N9 2)
	With manual override	N 2)
	Without manual override	no code

Corrosion resistance

14	None	no code
	High corrosion protection (720 h salt spray test according to EN ISO 9227); (only version "K" and "2")	J5

Electrical connection

15	Individual connection	
	Without mating connector; connector DIN EN 175301-803	K4 2)

Seal material

16	NBR seals	no code
	FKM seals	V
	Observe compatibility of seals with hydraulic fluid used! (Other seals upon request)	

17	Vertical installation position of the screw-in cartridge valve (cartridge) (only version "-" and "G")	W65
	Any installation position of the screw-in cartridge valve (only version "K")	no code

Type-examination procedure


18	Without type-examination procedure	no code
	Safety valve according to Pressure Equipment Directive 2014/68/EU (version "K" only)	E

19	Further details in the plain text	
----	-----------------------------------	--

RE 25818, edition: 2017-06, Bosch Rexroth AG

4/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Symbols

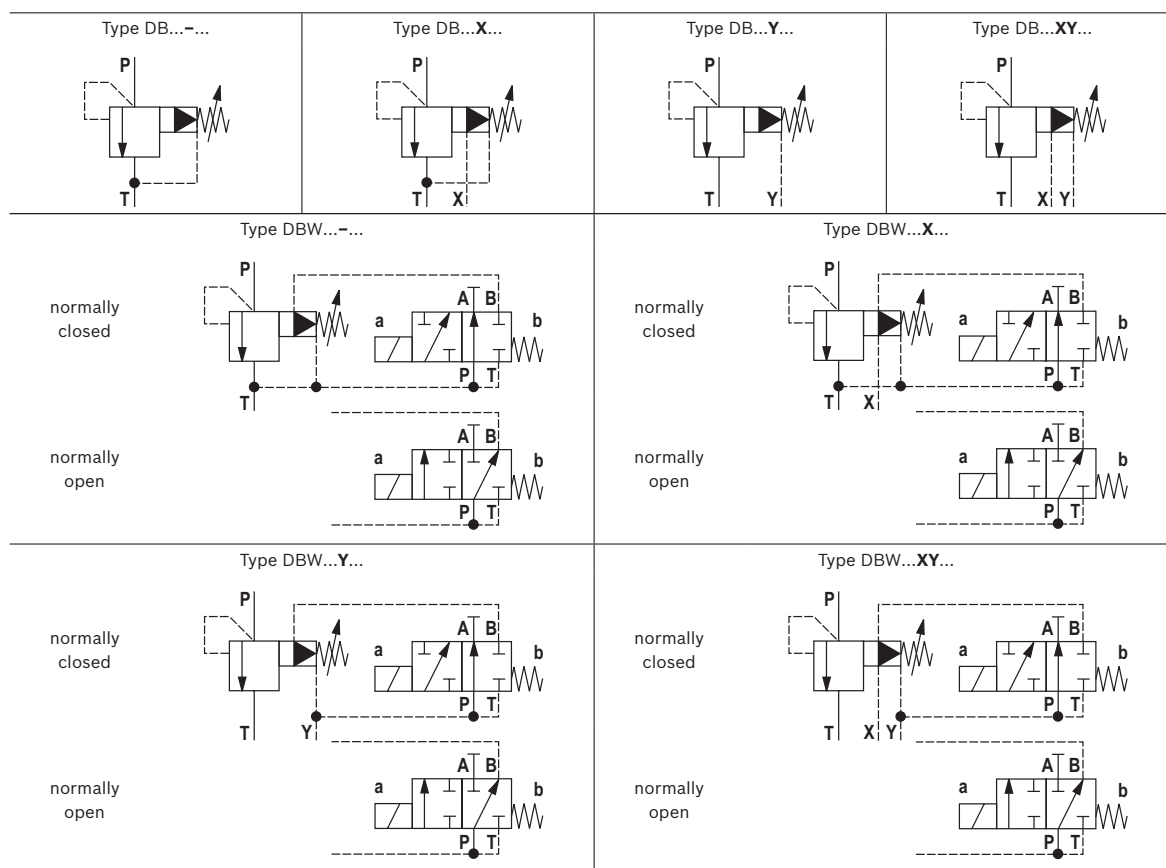

Bosch Rexroth AG, RE 25818, edition: 2017-06

Function, section

Valves of type DB and DBW are pilot-operated pressure relief valves. They are used for limitation (DB) or limitation and solenoid-actuated unloading (DBW) of the operating pressure.

The valves basically consist of housing (1) and pilot control valve (2) with adjustment type.

Pressure relief valve type DB

The pressure applied to channel P acts on the main spool (3). Via the nozzle bores (4 and 5), the pressure is at the same time applied to poppet (6). If the pressure in channel P exceeds the value set at spring (7), poppet (6) opens against spring (7). Via the nozzle bores (4 and 5), the hydraulic fluid from channel P now flows into the spring chamber (8). From here, it is led into the tank internally (version "-"), via the control line (9 and 10), or externally (version "Y") via the control line (9 and 11).

Due to the state of equilibrium at the main spool (3), hydraulic fluid flows from channel P to channel T, maintaining the set operating pressure.


A pressure gauge connection (12) allows for the control of the operating pressure.

The pressure relief valve can be unloaded or switched to another pressure (second pressure rating) via port X (13).

Pressure relief valve type DBW (only threaded connection)

The function of this valve is basically the same as that of valve type DB.

The main spool (3) is unloaded by controlling a built-on directional valve.

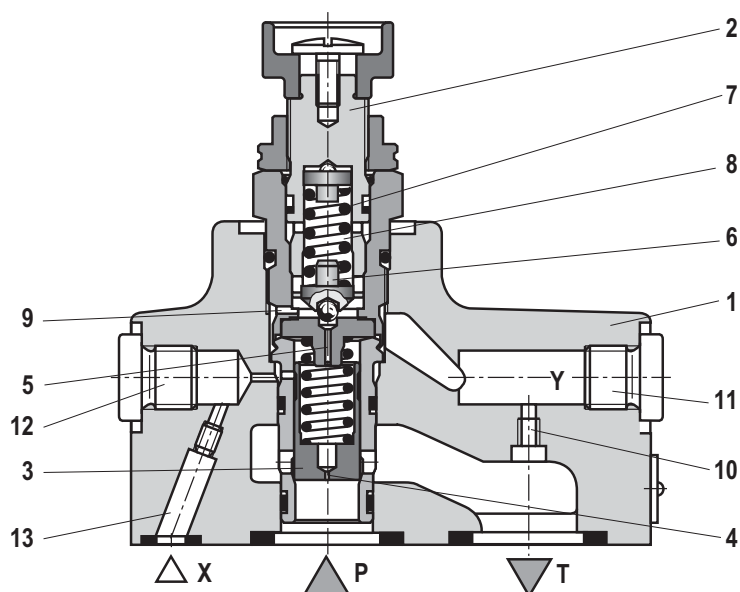

6/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Technical data

(For applications outside these parameters, please consult us!)

general							
Size			NG10		NG25		
Weight	▶ Subplate mounting "-"		kg	1.6		2.3	
	▶ Threaded connection "G"	– Type DB	kg	2.95		2.95	
		– Type DBW	kg	4.25		4.25	
		▶ Screw-in cartridge valve "K"		kg	–		0.35
Installation position			any				
Ambient temperature range			▶ Type DB	°C	–30 ... +80 (NBR seals)		
					–15 ... +80 (FKM seals)		
			▶ Type DBW		–30 ... +50 (NBR seals)		
					–15 ... +50 (FKM seals)		
Minimum stability of the housing materials				Housing materials are to be selected so that there is sufficient safety for all imaginable operating conditions (e.g. with reference to pressure resistance, thread stripping strengths and tightening torques).			
hydraulic							
Maximum operating pressure	▶ Port P, X		bar	350			
	▶ Port T		bar	315			
Maximum counter pressure	▶ Port Y – Type DB		bar	250			
	▶ Port Y, T – Type DBW		bar	210 (DC solenoid) 160 (AC solenoid)			
Minimum set pressure			bar	flow-dependent, see characteristic curves page 8 ... 9			
Maximum set pressure			bar	50; 100; 200; 315; 350 (only type DB)			
Maximum flow	▶ Subplate mounting "-"		l/min	200		400	
	▶ Threaded connection "G"			150		200 (G3/4); 300 (G1)	
Hydraulic fluid			see table page 7				
Hydraulic fluid temperature range (at the valve working ports)			°C	–20 ... +80 (NBR seals) –15 ... +80 (FKM seals)			
Viscosity range			mm²/s	10 ... 800			
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)				Class 20/18/15 ¹⁾			

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.
For the selection of the filters see www.boschrexroth.com/filter.

Technical data for directional spool valve see data sheet 23178.

Technical data

(For applications outside these parameters, please consult us!)

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP	NBR, FKM	DIN 51524	90220
Bio-degradable	► Insoluble in water	HETG	ISO 15380	90221
		HEES		
	► Soluble in water	HEPG	ISO 15380	




Important notices on hydraulic fluids:

- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.

- **Bio-degradable:** If these hydraulic fluids are used, small amounts of dissolved zinc may get into the hydraulic system.

Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5^\circ\text{C}$)


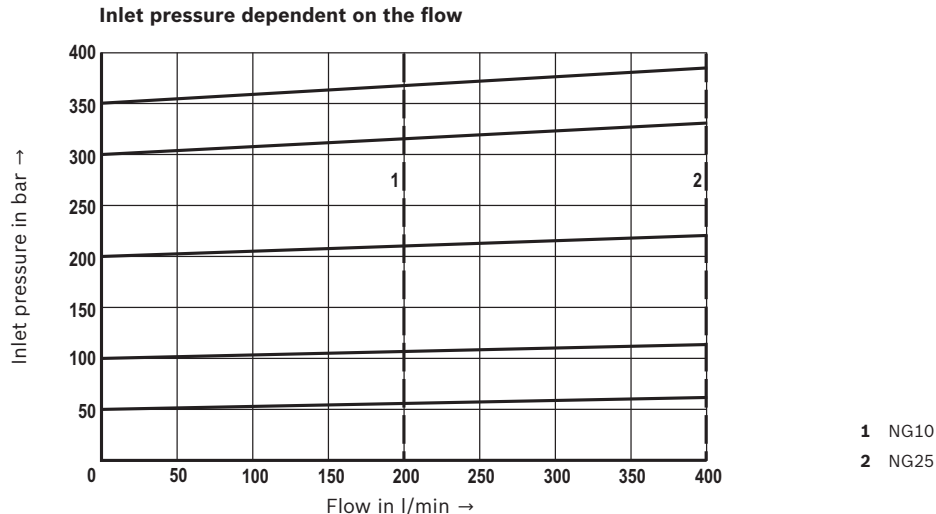


Notices:

The characteristic curves were measured with **external, depressurized pilot oil return**.
With internal pilot oil return, the inlet pressure increases by the output pressure present in port T.

8/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Characteristic curves: Subplate mounting
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

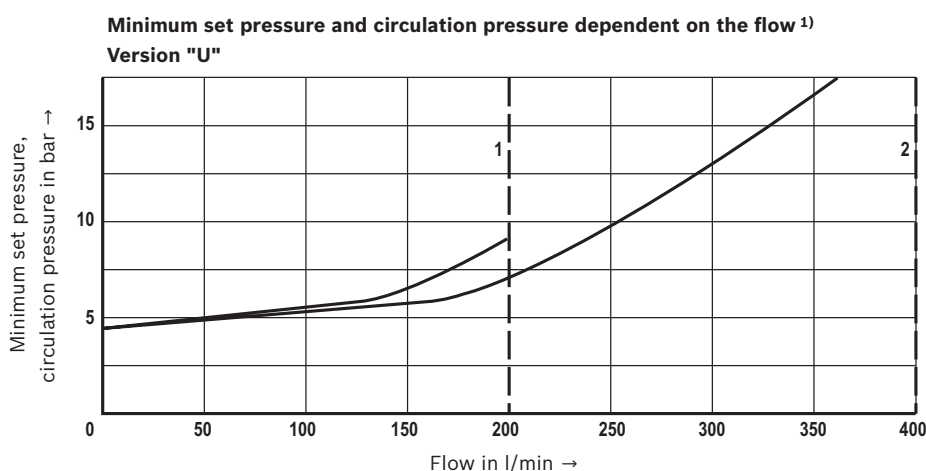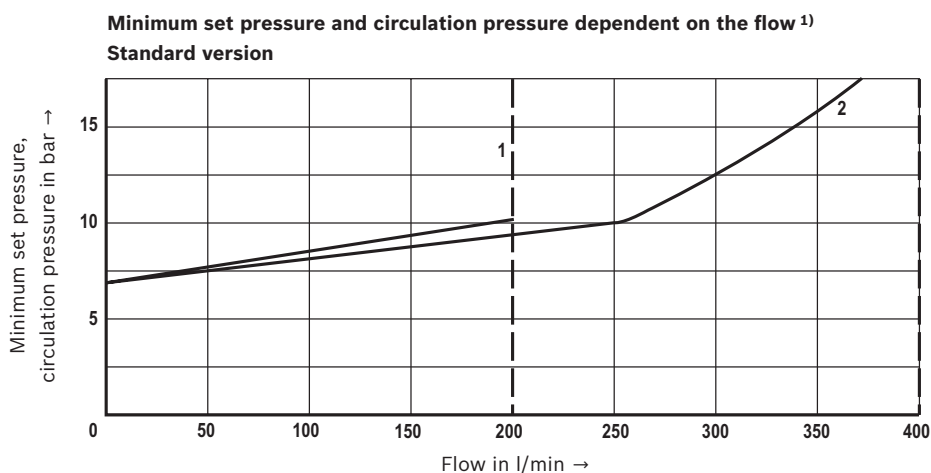


Notices:

The characteristic curves were measured with **external, depressurized pilot oil return**.
With internal pilot oil return, the inlet pressure increases by the output pressure present in port T.

¹⁾ The characteristic curves apply to the pressure at the valve output
 $p_T = 0 \text{ bar}$ across the entire flow range.


Characteristic curves: Threaded connection
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Minimum set pressure and circulation pressure dependent on the flow ¹⁾
Standard version

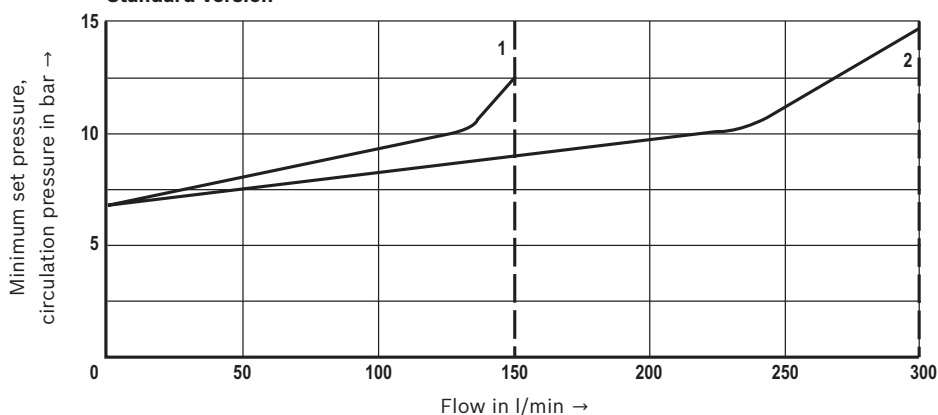

1 NG10
2 NG25

Minimum set pressure and circulation pressure dependent on the flow ¹⁾
Version "U"

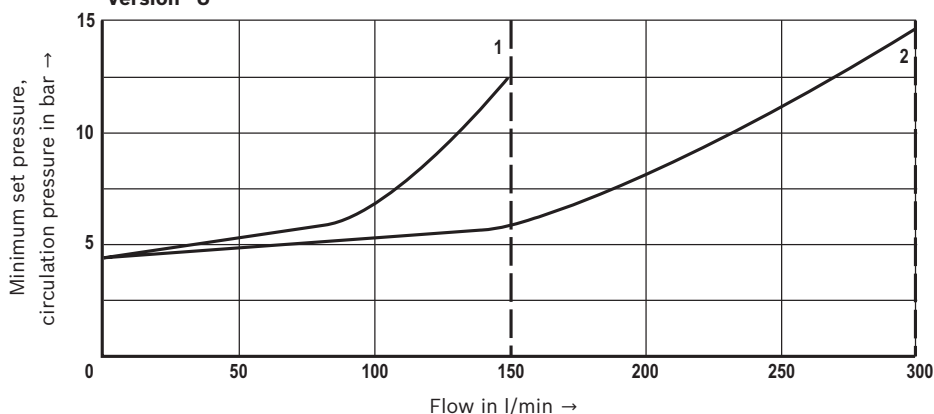

1 NG10
2 NG25



Notices:


The characteristic curves were measured with **external, depressurized pilot oil return**.

With internal pilot oil return, the inlet pressure increases by the output pressure present in port T.

¹⁾ The characteristic curves apply to the pressure at the valve output
 $p_T = 0 \text{ bar}$ across the entire flow range.

10/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Dimensions: Subplate mounting – size 10
(dimensions in mm)

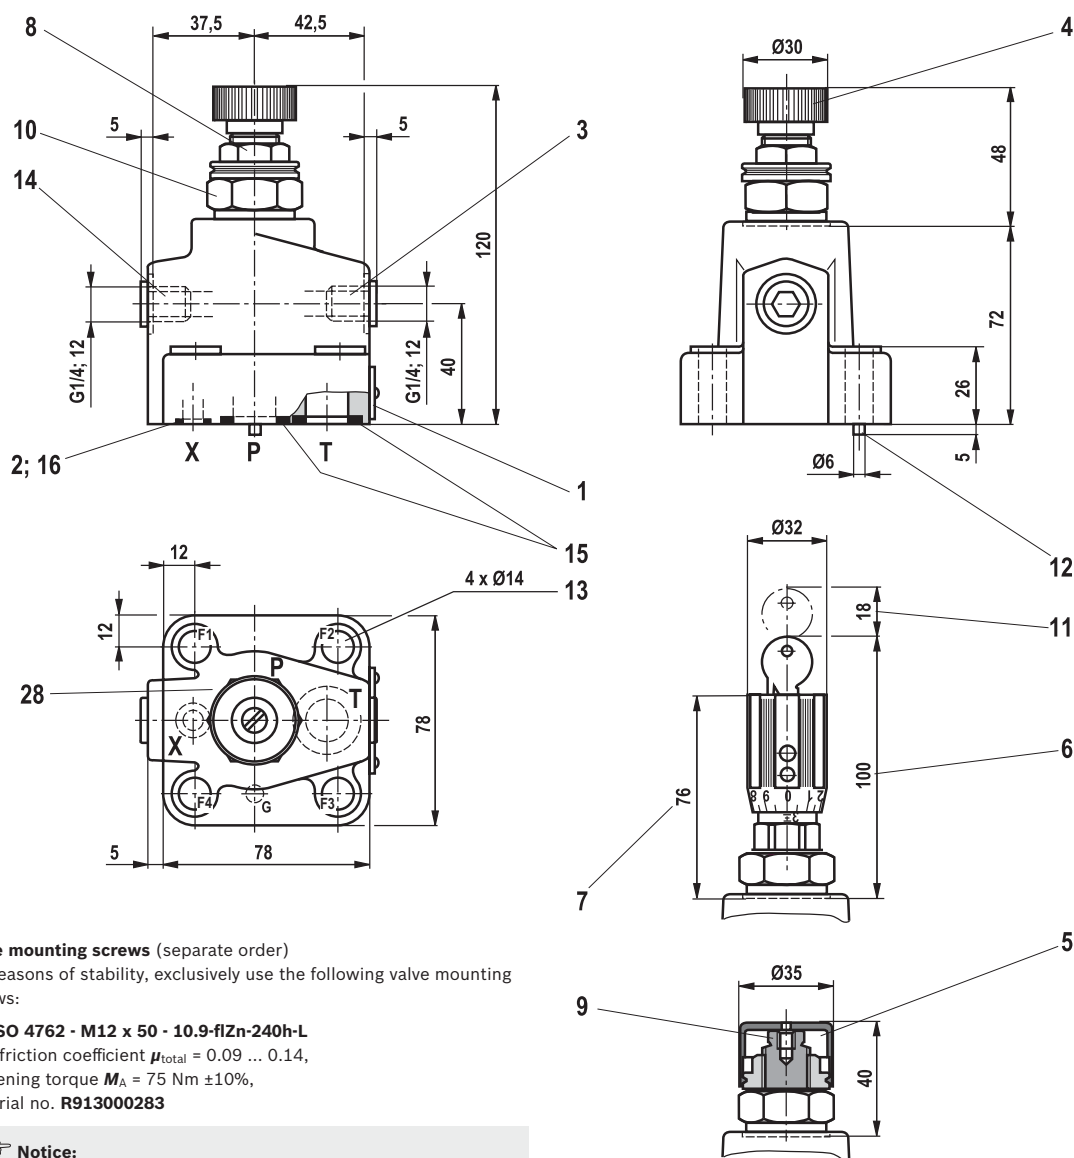

Valve mounting screws (separate order)

For reasons of stability, exclusively use the following valve mounting screws:


4 x ISO 4762 - M12 x 50 - 10.9-flZn-240h-L
with friction coefficient $\mu_{\text{total}} = 0.09 \dots 0.14$,
tightening torque $M_A = 75 \text{ Nm} \pm 10\%$,
material no. **R913000283**



Notice:

The tightening torques are guidelines when using screws with the specified friction coefficients and when using a manual torque wrench (tolerance $\pm 10\%$).


Subplates (separate order) with porting pattern according to ISO 6264-06-09-*97 see data sheet 45100.



Item explanations see page 16.

Bosch Rexroth AG, RE 25818, edition: 2017-06

Dimensions: Subplate mounting – size 25
(dimensions in mm)

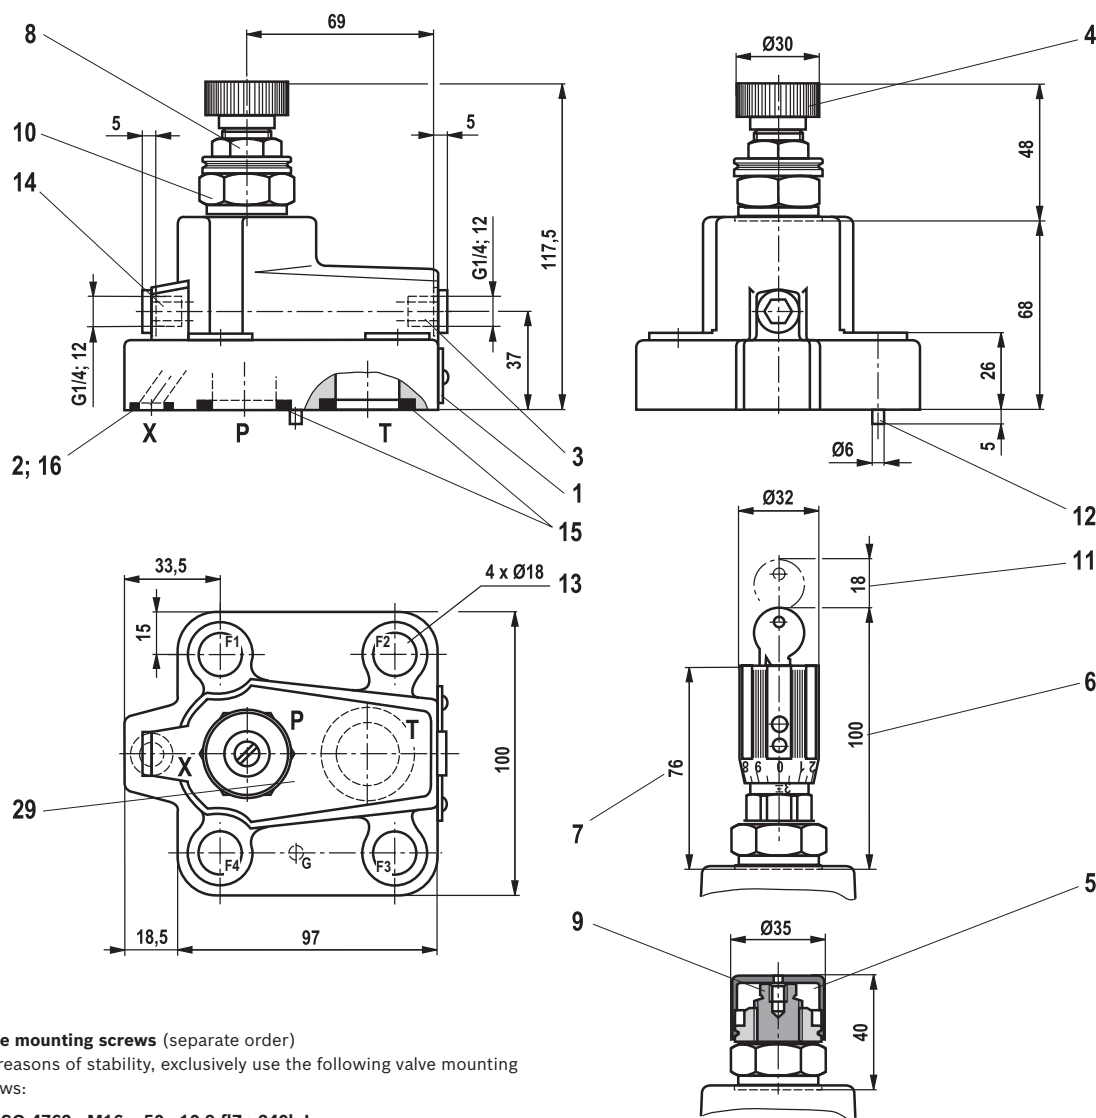

Valve mounting screws (separate order)

For reasons of stability, exclusively use the following valve mounting screws:

4 x ISO 4762 - M16 x 50 - 10.9-fZn-240h-L


with friction coefficient $\mu_{\text{total}} = 0.09 \dots 0.14$,
tightening torque $M_A = 185 \text{ Nm} \pm 10\%$,
material no. **R913000378**

Notice:

The tightening torques are guidelines when using screws with the specified friction coefficients and when using a manual torque wrench (tolerance $\pm 10\%$).

Subplates (separate order) with porting pattern according to ISO 6264-08-13*-97, see data sheet 45100.


Item explanations see page 16.



Required surface quality of the valve contact surface

Pressure relief valve | DB...W65; DBW...W65; DB 20 K 13/20

Dimensions: Screw-in cartridge valve
(dimensions in mm)

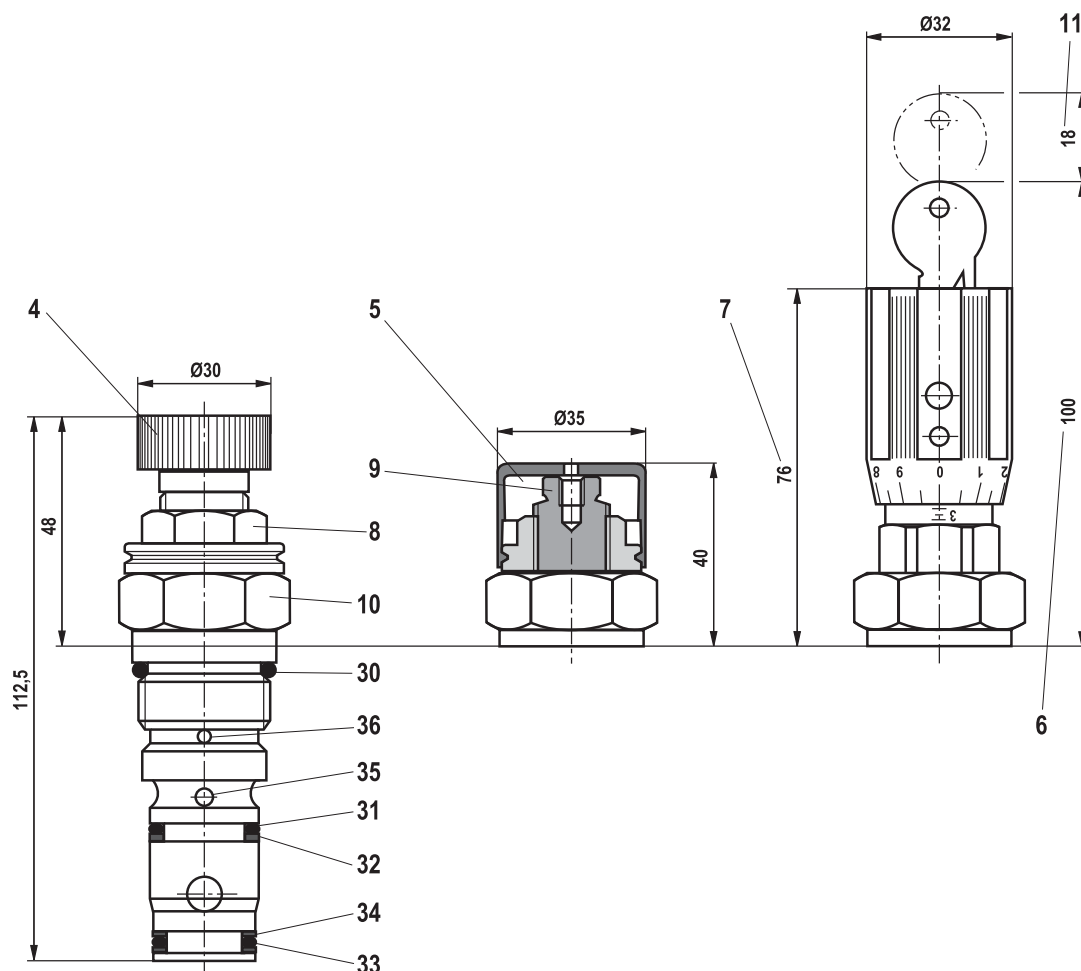


Item explanations see page 16.

RE 25818, edition: 2017-06, Bosch Rexroth AG

14/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Mounting cavity: Version "XY" and type-examination tested safety valves version "Y...E"
(dimensions in mm)

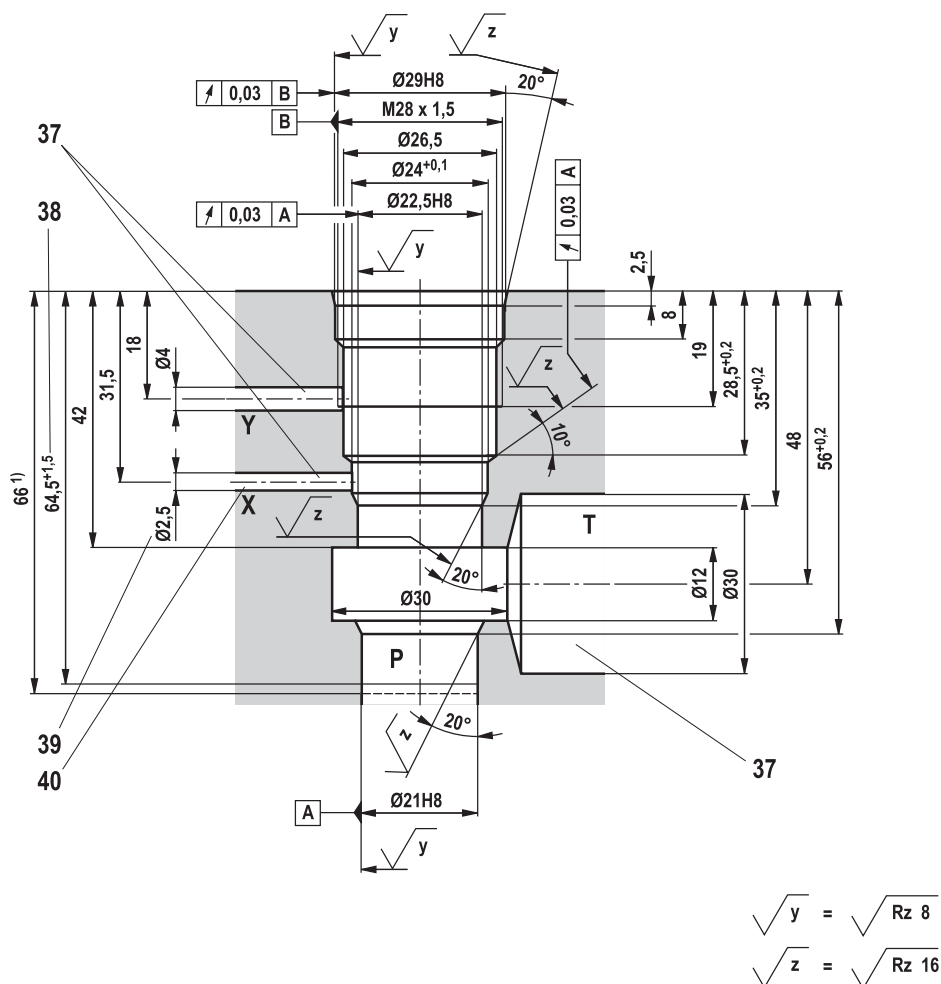


1) Installation depth

Item explanations see page 16.

Bosch Rexroth AG, RE 25818, edition: 2017-06

Mounting cavity: Version "Y"
(dimensions in mm)

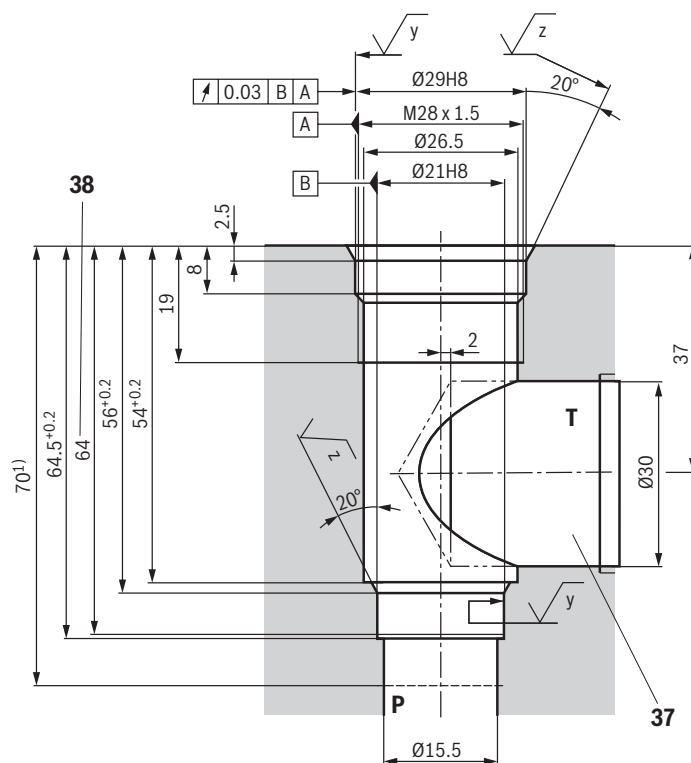

¹⁾ Installation depth

Item explanations see page 16.

16/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Dimensions

- 1 Name plate
- 2 Port X for remote control, optional
- 3 Port Y for external pilot oil return
- 4 Adjustment type "1"
- 5 Adjustment type "2"
- 6 Adjustment type "3"
- 7 Adjustment type "7"
- 8 Lock nut wrench size 22, tightening torque $M_A = 10^{+5}$ Nm
- 9 Hexagon, wrench size 10
- 10 Hexagon, wrench size 30, tightening torque $M_A = 50$ Nm
- 11 Space required to remove the key
- 12 Locating pin
- 13 Valve mounting bores
- 14 Pressure gauge connection
- 15 Identical seal rings for ports P and T
- 16 Seal ring for port X
- 17 Grub screw is omitted with internal pilot oil return
- 18 Directional spool valve NG6, see data sheet 23178
- 19 Mating connector **without** circuitry (separate order, see page 19)
- 20 Mating connector **with** circuitry (separate order, see page 19)
- 21 Dimension for valve without manual override
- 22 Dimension for valve with manual override "N"
- 23 Dimension for valve with concealed manual override "N9"
- 24 Housing for version "W"
- 25 Space required to remove the mating connector
- 26 Valve contact surface; port A is not bored
- 27 Space required to remove the solenoid coil
- 28 Porting pattern according to ISO 6264-06-09-*.97
- 29 Porting pattern according to ISO 6264-08-13-*.97
- 30 Seal ring
- 31 Seal ring (omitted with version "Y")
- 32 Support ring (omitted with version "Y")
- 33 Seal ring
- 34 2 support rings
- 35 Bore for port X not available with version "Y"
- 36 Bore for port Y available with version "XY" and "Y"
- 37 ► Bore X, Y and T optionally at the circumference for version "XY"
► Bore T optionally at the circumference for version "Y" (no separate bore Y required; pilot oil return via bore T)
- 38 Depth of fit
- 39 Bore Ø 2.5 is only to be bored if necessary
- 40 Port X does not have to be bored for type-examination tested safety valves version "Y...E" as it does not have any function.

Bosch Rexroth AG, RE 25818, edition: 2017-06

Pressure relief valve | DB...W65; DBW...W65; DB 20 K 17/20

Ordering code: Type-examination tested safety valves type DB 20 K...E, component series 1X according to Pressure Equipment Directive 2014/68/EU

NG	Type designation	Component marking	Maximum flow q_{Vmax} in l/min	Set response overpressure p in bar
25	DB 20 K <input type="text"/> ¹ -1X/ <input type="text"/> ² Y <input type="text"/> ³ E	TÜV.SV. <input type="text"/> -1001.14,4.F.G.p	70	30 ... 60
			100	61 ... 110
			150	111 ... 210
			200	211 ... 315
			300	316 ... 350

Adjustment type

1	Hand wheel (pressure adjustment sealed, unloading or setting of a lower response pressure possible!)	1
	With sealed protective cap (no adjustment/unloading possible)	2
2	Pressure in the designation is to be entered by the customer, pressure adjustment ≥ 30 bar and possible in 5-bar steps.	e. g. 150

Seal material

3	NBR seals	no code
	FKM seals	V
	Information is entered at the factory	

Deviating technical data: Type-examination tested safety valves type DB 20 K...E, component series 1X according to Pressure Equipment Directive 2014/68/EU ¹⁾

hydraulic				
Maximum counter pressure	- Port Y	bar	0	
	- Port T	"No code" version	bar	0
		"Y" version		10
Maximum flow				see preceding table
Hydraulic fluid				Mineral oil (HL, HLP) according to DIN 51524
Hydraulic fluid temperature range		°C	-10 ... +60	
Viscosity range		mm ² /s	12 ... 230	

¹⁾ For applications outside these parameters, please consult us!

RE 25818, edition: 2017-06, Bosch Rexroth AG

18/20 DB...W65; DBW...W65; DB 20 K | Pressure relief valve

Safety instructions: Type-examination tested safety valves type DB 20 K...E, component series 1X according to Pressure Equipment Directive 2014/68/EU

- ▶ Before ordering a type-examination tested safety valve, it must be ensured that at the desired **response pressure p** , the maximum admissible **flow $q_{V \max}$** (= numerical value at the position of letter "G" in the component marking) of the safety valve is higher than the maximum possible flow of the system/accumulator to be secured. In this, the corresponding regulations have to be observed!
- ▶ According to the **Pressure Equipment Directive 2014/68/EU**, the increase in the system pressure due to the flow must not exceed 10% of the set response pressure (see component marking).
- ▶ The maximum admissible flow **$q_{V \max}$** stated in the component marking must not be exceeded.
- ▶ Discharge lines of safety valves must end in a risk-free manner. The accumulation of fluids in the discharge lines must **not** be possible (see AD2000 - data sheet A2).





Always observe application notes!

- ▶ In the plant, the response pressure specified in the component marking is set with a flow of 2 l/min.
- ▶ The maximum admissible flow specified in the component marking applies to:
 - External pilot oil return **"Y"** without counter pressure in the pilot oil return line: admissible counter pressure in the discharge line (port T) < 10 bar.
- ▶ By removing a lead seal at the safety valve, the approval according to the Pressure Equipment Directive becomes void
- ▶ Mounting cavities (see page 14 and 15)
- ▶ The requirements of the Pressure Equipment Directives and of data sheet AD2000 A2 must be observed!

Bosch Rexroth AG, RE 25818, edition: 2017-06

Mating connectors according to DIN EN 175301-803

For details and more mating connectors, see data sheet 08006				
	Material no.			
Color	Without circuitry	With indicator light 12 ... 240 V	With rectifier 12 ... 240 V	With indicator light and Z-diode-suppressor 24 V
gray	R901017010	—	—	—
black	R901017011	R901017022	R901017025	R901017026

General information

- ▶ The unloading function (directional valve function with version "W") must not be used for safety functions!
- ▶ With version "B", the lowest adjustable pressure (circulation pressure) is set in case of power failure or cable break. With version "A", the pressure limiting function is set in case of power failure or cable break.
- ▶ Hydraulic counter pressures in port T with internal pilot oil return and/or port Y with external pilot oil return add 1:1 to the response pressure of the valve set at the pilot control.

Example:

Pressure adjustment of the valve by spring preload (item 7 on page 5) in the pilot control valve/adjustment type

$p_{\text{spring}} = 200 \text{ bar}$

Hydraulic counter pressure in port T with internal pilot oil return $p_{\text{hydraulic}} = 50 \text{ bar}$

=> Response pressure = $p_{\text{spring}} + p_{\text{hydraulic}} = 250 \text{ bar}$

Further information

- ▶ Safety equipment against excessive pressure – safety valves
- ▶ Subplates
- ▶ Hydraulic fluids on mineral oil basis
- ▶ Environmentally compatible hydraulic fluids
- ▶ Hydraulic valves for industrial applications
- ▶ Selection of the filters
- ▶ Information on available spare parts

Data sheet AD 2000 A 2

Data sheet 45100

Data sheet 90220

Data sheet 90221

Operating instructions 07600-B

www.boschrexroth.com/filter

www.boschrexroth.com/spc