

The Drive & Control Company

**Rexroth**  
Bosch Group

## Axial piston variable motor A6VM series 65

**RE 91607**

Edition: 06.2016

Replaces: 06.2014



- ▶ All-purpose high pressure motor
- ▶ Sizes 55 to 200
- ▶ Nominal pressure 400 bar
- ▶ Maximum pressure 450 bar
- ▶ Open and closed circuits

### Features

- ▶ Robust motor with long service life
- ▶ Approved for very high rotational speeds
- ▶ High control range (can be swiveled to zero)
- ▶ High torque
- ▶ Variety of controls
- ▶ Optionally with flushing and boost-pressure valve mounted
- ▶ Optionally with mounted high-pressure counterbalance valve
- ▶ Bent-axis design

### Contents

|  |    |
|--|----|
| Ordering code                                  | 2  |
| Hydraulic fluids                               | 6  |
| Flow direction                                 | 7  |
| Shaft seal                                     | 7  |
| Operating pressure range                       | 8  |
| Technical data                                 | 9  |
| HP – Proportional hydraulic control            | 11 |
| EP – Proportional electric control             | 14 |
| HZ – Two-point hydraulic control               | 16 |
| EZ – Two-point electric control                | 17 |
| HA – Automatic high-pressure related control   | 18 |
| DA – Automatic speed-related control           | 23 |
| Electric travel direction valve (for DA, HA.R) | 25 |
| Dimensions size 55 to 200                      | 26 |
| Connector for solenoids                        | 62 |
| Neutral position switch                        | 63 |
| Flushing and boost pressure valve              | 64 |
| Counterbalance valve BVD and BVE               | 66 |
| Speed sensor                                   | 69 |
| Setting range for displacement                 | 70 |
| Installation instructions                      | 72 |
| Project planning notes                         | 74 |
| Safety instructions                            | 75 |

RE 91607/06.2016, **Bosch Rexroth AG**

2 **A6VM series 65** | Axial piston variable motor  
Ordering code

**Ordering code**

|     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 01  | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |  |
| A6V | M  |    |    |    |    |    | 0  |    | /  | 65 | M  | W  | V  | 0  |    |    |    |    |    | -  |  |

**Axial piston unit**

|    |  |     |
|----|--|-----|
| 01 | Bent-axis design, variable, nominal pressure 400 bar, maximum pressure 450 bar | A6V |
|----|--|-----|

**Operating mode**

|    |       |   |
|----|-------|---|
| 02 | Motor | M |
|----|-------|---|

**Size (NG)**

|    |  |     |     |     |     |     |     |
|----|--|-----|-----|-----|-----|-----|-----|
| 03 | Geometric displacement, see technical data on page 9 | 055 | 080 | 107 | 140 | 160 | 200 |
|----|--|-----|-----|-----|-----|-----|-----|

**Control device**

|   |  | 055  | 080                              | 107 | 140 | 160 | 200 |   |     |
|---|--|--|----------------------------------|-----|-----|-----|-----|---|-----|
| 04  | Proportional control hydraulic         | positive control                               | $\Delta p_{St} = 10 \text{ bar}$ | •   | •   | •   | •   | • | HP1 |
|   |  |  | $\Delta p_{St} = 25 \text{ bar}$ | •   | •   | •   | •   | • | HP2 |
|   | negative control                       |  | $\Delta p_{St} = 10 \text{ bar}$ | •   | •   | •   | •   | • | HP5 |
|   |  |  | $\Delta p_{St} = 25 \text{ bar}$ | •   | •   | •   | •   | • | HP6 |
| Proportional control electrical   | positive control                       |  | $U = 12 \text{ V DC}$            | •   | •   | •   | •   | • | EP1 |
|   |  |  | $U = 24 \text{ V DC}$            | •   | •   | •   | •   | • | EP2 |
|   | negative control                       |  | $U = 12 \text{ V DC}$            | •   | •   | •   | •   | • | EP5 |
|   |  |  | $U = 24 \text{ V DC}$            | •   | •   | •   | •   | • | EP6 |
| Two-point control hydraulic   | negative control                       |  |                                  | -   | -   | -   | •   | • | HZ5 |
|   |  |  |                                  | •   | •   | •   | -   | - | -   |
| Two-point control electrical  | negative control                       |  | $U = 12 \text{ V DC}$            | -   | -   | -   | •   | • | EZ5 |
|   |  |  | $U = 24 \text{ V DC}$            | -   | -   | -   | •   | • | EZ6 |
|   |  | $U = 12 \text{ V DC}$                          | •                                | •   | •   | -   | -   | - | EZ7 |
|   |  | $U = 24 \text{ V DC}$                          | •                                | •   | •   | -   | -   | - | EZ8 |
| Automatic control high-pressure related, Positive control                   | with minimum pressure increase         | $\Delta p \leq \text{approx. } 10 \text{ bar}$ | •                                | •   | •   | •   | •   | • | HA1 |
|   | with pressure increase                 | $\Delta p = 100 \text{ bar}$                   | •                                | •   | •   | •   | •   | • | HA2 |
| Automatic control speed related, negative control $p_{St} / p_{HD} = 5/100$ | hydr. travel direction valve           |  | •                                | •   | •   | •   | •   | • | DA0 |
|   | electric travel direction valve        | $U = 12 \text{ V DC}$                          | •                                | •   | •   | •   | •   | • | DA1 |
|   | + electric $V_{g \text{ max}}$ circuit | $U = 24 \text{ V DC}$                          | •                                | •   | •   | •   | •   | • | DA2 |

**Pressure control/override**

|                       |  | 055   | 080                   | 107 | 140 | 160 | 200 |    |    |    |
|-----------------------|--|---|-----------------------|-----|-----|-----|-----|----|----|----|
| 05                    | Without pressure control/override                              | •   | •                     | •   | •   | •   | •   | 00 |    |    |
|                       | Pressure control fixed setting, only for HP5, HP6, EP5 and EP6 | •   | •                     | •   | •   | •   | •   | D1 |    |    |
|                       | Override of controls HA1 and HA2                               | hydraulic remote control, proportional        | •                     | •   | •   | •   | •   | •  | T3 |    |
|                       |  | electric, two-point                           | $U = 12 \text{ V DC}$ | •   | •   | •   | •   | •  | •  | U1 |
|                       |  |   | $U = 24 \text{ V DC}$ | •   | •   | •   | •   | •  | •  | U2 |
|                       |  | electric and travel direction valve, electric | $U = 12 \text{ V DC}$ | •   | •   | •   | •   | •  | •  | R1 |
| $U = 24 \text{ V DC}$ | •  |   | •                     | •   | •   | •   | •   | R2 |    |    |

**Connector for solenoids<sup>1)</sup>** (see page 62)

|    |  |   |
|----|--|---|
| 06 | Without connector (without solenoid, only for hydraulic control) | 0 |
|    | DEUTSCH - molded connector, 2-pin, without suppressor diode      | P |

• = Available    ◦ = On request    - = Not available

<sup>1)</sup> Connectors for other electric components can deviate.

Axial piston variable motor | **A6VM series 65** 3  
Ordering code

|            |          |    |    |    |    |    |          |    |    |          |           |          |          |          |          |    |    |    |    |          |  |
|------------|----------|----|----|----|----|----|----------|----|----|----------|-----------|----------|----------|----------|----------|----|----|----|----|----------|--|
| 01         | 02       | 03 | 04 | 05 | 06 | 07 | 08       | 09 | 10 | 11       | 12        | 13       | 14       | 15       | 16       | 17 | 18 | 19 | 20 | 21       |  |
| <b>A6V</b> | <b>M</b> |    |    |    |    |    | <b>0</b> |    |    | <b>/</b> | <b>65</b> | <b>M</b> | <b>W</b> | <b>V</b> | <b>0</b> |    |    |    |    | <b>-</b> |  |

|    |                             | 055 | 080 | 107 | 140 | 160 | 200 |          |
|----|-----------------------------|-----|-----|-----|-----|-----|-----|----------|
| 07 | Without additional function | •   | •   | •   | •   | •   | •   | <b>0</b> |
|    | Neutral position switch     | -   | •   | •   | •   | •   | •   | <b>N</b> |

|    |                             |          |
|----|-----------------------------|----------|
| 08 | Without additional function | <b>0</b> |
|----|-----------------------------|----------|

|   |   |          |
|---|---|----------|
| <b>Response time damping</b> (for selection, see control) |   |          |
| 09  | Without damping (standard with HP and EP)   | <b>0</b> |
|   | Damping HP, EP, HP5,6D. and EP5,6D., HZ, EZ, HA with counterbalance valve BVD/BVE | <b>1</b> |
|   | One-sided in inlet to large stroking chamber (HA)                                 | <b>4</b> |
|   | One-sided in outlet from large stroking chamber (DA)                              | <b>7</b> |

|    |                             | 055 | 080 | 107 | 140 | 160 | 200 |          |
|----|-----------------------------|-----|-----|-----|-----|-----|-----|----------|
| 10 | $V_{g \max}$ -setting screw |     |     |     |     |     |     |          |
|    | Without setting screw       |     |     |     |     |     |     |          |
|    | short (0-adjustable)        | •   | •   | •   | •   | •   | •   | <b>A</b> |
|    | medium                      | •   | •   | •   | •   | •   | •   | <b>B</b> |
|    | long                        | •   | •   | •   | •   | •   | •   | <b>C</b> |
|    | extra long                  | -   | -   | •   | •   | •   | •   | <b>D</b> |
|    | Short                       |     |     |     |     |     |     |          |
|    | short (0-adjustable)        | •   | •   | •   | •   | •   | •   | <b>E</b> |
|    | medium                      | •   | •   | •   | •   | •   | •   | <b>F</b> |
|    | long                        | •   | •   | •   | •   | •   | •   | <b>G</b> |
|    | extra long                  | -   | -   | •   | •   | •   | •   | <b>H</b> |
|    | Medium                      |     |     |     |     |     |     |          |
|    | short (0-adjustable)        | •   | •   | •   | •   | •   | •   | <b>J</b> |
|    | medium                      | •   | •   | •   | •   | •   | •   | <b>K</b> |
|    | long                        | •   | •   | •   | •   | •   | •   | <b>L</b> |
|    | extra long                  | -   | -   | •   | •   | •   | •   | <b>M</b> |

|               |                   |           |
|---------------|-------------------|-----------|
| <b>Series</b> |                   |           |
| 11            | Series 6, index 5 | <b>65</b> |

|   |  |          |
|---|--|----------|
| <b>Configuration of ports and fastening threads</b> |  |          |
| 12  | Metric, port threads with O-ring sealing according to ISO 6149 | <b>M</b> |

|                              |                                      |          |
|------------------------------|--------------------------------------|----------|
| <b>Direction of rotation</b> |                                      |          |
| 13                           | Viewed on drive shaft, bidirectional | <b>W</b> |

|                         |                       |          |
|-------------------------|-----------------------|----------|
| <b>Sealing material</b> |                       |          |
| 14                      | FKM (fluoroelastomer) | <b>V</b> |

|                            |                  |          |
|----------------------------|------------------|----------|
| <b>Drive shaft bearing</b> |                  |          |
| 15                         | Standard bearing | <b>0</b> |

|    |            | 055 | 080 | 107 | 140 | 160 | 200 |           |
|----|------------|-----|-----|-----|-----|-----|-----|-----------|
| 16 | ISO 3019-2 |     |     |     |     |     |     |           |
|    | 125-4      | •   | -   | -   | -   | -   | -   | <b>M4</b> |
|    | 140-4      | -   | •   | -   | -   | -   | -   | <b>N4</b> |
|    | 160-4      | -   | -   | •   | -   | -   | -   | <b>P4</b> |
|    | 180-4      | -   | -   | -   | •   | •   | -   | <b>R4</b> |
|    | 200-4      | -   | -   | -   | -   | -   | •   | <b>S4</b> |

• = Available    ◦ = On request    - = Not available

2) The settings for the setting screws can be found in the table (see pages 70 and 71).

RE 91607/06.2016, **Bosch Rexroth AG**

4 **A6VM series 65** | Axial piston variable motor  
Ordering code

|     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 01  | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| A6V | M  |    |    |    |    |    | 0  |    | /  | 65 | M  | W  | V  | 0  |    |    |    |    |    | -  |

| Drive shaft               |                              | 055                   | 080 | 107 | 140 | 160 | 200 |    |
|---------------------------|------------------------------|-----------------------|-----|-----|-----|-----|-----|----|
| 17                        | Splined shaft<br>ANSI B92.1a | 1 1/4 in 14T 12/24 DP | ●   | ●   | -   | -   | -   | S7 |
|                           |                              | 1 3/4 in 13T 8/16 DP  | -   | -   | ●   | ●   | ●   | T1 |
|                           |                              | 2 in 15T 8/16 DP      | -   | -   | -   | -   | ●   | T2 |
| Splined shaft<br>DIN 5480 | W30x2x14x9g                  | ●                     | -   | -   | -   | -   | -   | Z6 |
|                           | W35x2x16x9g                  | ●                     | ●   | -   | -   | -   | -   | Z8 |
|                           | W40x2x18x9g                  | -                     | ●   | ●   | -   | -   | -   | Z9 |
|                           | W45x2x21x9g                  | -                     | -   | ●   | ●   | ●   | -   | A1 |
|                           | W50x2x24x9g                  | -                     | -   | -   | -   | ●   | ●   | A2 |

| Working port |  | 055   | 080 | 107 | 140 | 160 | 200 |   |
|--------------|--|-------|-----|-----|-----|-----|-----|---|
| 18           | SAE working ports <b>A</b> and <b>B</b> at rear  | ●     | ●   | ●   | ●   | ●   | ●   | 1 |
|              | SAE working ports <b>A</b> and <b>B</b> at side, opposite  | ●     | ●   | ●   | ●   | ●   | ●   | 2 |
|              | Port plate with 1-stage pressure limitation valves for mounting a counterbalance valve <sup>3)</sup> | BVD20 | ●   | ●   | ●   | -   | -   | - |
|              | BVD25, BVE25   | -     | -   | ●   | ●   | ●   | ●   | 8 |

| Valve (see pages 64 to 68) |  | 055   | 080 | 107 | 140             | 160 | 200 |   |   |
|----------------------------|--|---|-----|-----|-----------------|-----|-----|---|---|
| 19                         | Without valve  | ●   | ●   | ●   | ●               | ●   | ●   | 0 |   |
|                            | With counterbalance valve BVD/BVE mounted <sup>4)</sup>            | ●   | ●   | ●   | ●               | ●   | ●   | W |   |
|                            | With flushing and boost pressure valve, mounted                    | <b>Flushing flow <math>q_v</math> [l/min]</b> |     |     |                 |     |     |   |   |
|                            | Flushing on both sides   | 3,5   | ●   | ●   | ●               | -   | -   | - | A |
|                            | Flushing flow at:  | 5   | ●   | ●   | ●               | -   | -   | - | B |
|                            | $\Delta p = p_{ND} - p_G = 25$ bar and $v = 10$ mm <sup>2</sup> /s | 8   | ●   | ●   | ●               | ●   | ●   | ● | C |
|                            | ( $p_{ND}$ = low pressure, $p_G$ = case pressure)                  | 10  | ●   | ●   | ●               | ●   | ●   | ● | D |
|                            | Only possible with port plates 1 and 2                             | 14  | ●   | ●   | ●               | -   | -   | - | F |
|                            |  | 17  | -   | -   | -               | ●   | ●   | ● | G |
|                            |  | 20  | -   | -   | ● <sup>5)</sup> | ●   | ●   | ● | H |
|                            |  | 25  | -   | -   | ● <sup>5)</sup> | ●   | ●   | ● | J |
|                            |  | 30  | -   | -   | ● <sup>5)</sup> | ●   | ●   | ● | K |
|                            |  | 35  | -   | -   | -               | ●   | ●   | ● | L |
|                            |  | 40  | -   | -   | -               | ●   | ●   | ● | M |

● = Available    ○ = On request    - = Not available

<sup>3)</sup> Only possible in combination with HP, EP and HA control. Note the restrictions described on page 66.  
<sup>4)</sup> State ordering code for counterbalance valve separately in accordance with data sheet 95522 – BVD or 95525 – BVE. Note the restrictions described on page 66.  
<sup>5)</sup> Not for EZ7, EZ8 and HZ7.

Axial piston variable motor | **A6VM series 65** 5  
Ordering code

|            |          |    |    |    |    |          |          |    |    |    |           |          |          |          |          |    |    |    |    |    |  |
|------------|----------|----|----|----|----|----------|----------|----|----|----|-----------|----------|----------|----------|----------|----|----|----|----|----|--|
| 01         | 02       | 03 | 04 | 05 | 06 | 07       | 08       | 09 | 10 | 11 | 12        | 13       | 14       | 15       | 16       | 17 | 18 | 19 | 20 | 21 |  |
| <b>A6V</b> | <b>M</b> |    |    |    |    | <b>0</b> | <b>0</b> |    |    | /  | <b>65</b> | <b>M</b> | <b>W</b> | <b>V</b> | <b>0</b> |    |    |    |    | -  |  |

**Speed sensor** (see page 69)

|    |   | 055 | 080 | 107 | 140 | 160 | 200 |          |
|----|---|-----|-----|-----|-----|-----|-----|----------|
| 20 | Without speed sensor                            | •   | •   | •   | •   | •   | •   | <b>0</b> |
|    | Prepared with speed sensor DSM/DSA              | •   | •   | •   | •   | •   | •   | <b>U</b> |
|    | With speed sensor DSM/DSA mounted <sup>6)</sup> | •   | •   | •   | •   | •   | •   | <b>V</b> |

**Standard / special version**

| 21 |   |          |
|----|---|----------|
|    | Standard version  | <b>0</b> |
|    | Standard version with installation variants, e.g. <b>T</b> ports against standard open and closed | <b>Y</b> |
|    | Special version   | <b>S</b> |

• = Available    ◦ = On request    - = Not available

**Notice**

► Note the project planning notes on page 74.

<sup>6)</sup> State ordering code for sensor separately in accordance with data sheet 95132 – DSM or 95133 – DSA and note the requirements relating to the electronics.

6 **A6VM series 65** | Axial piston variable motor  
Hydraulic fluids

### Hydraulic fluids

The variable motor A6VM is designed for operation with mineral oil HLP according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90223: Fire-resistant, water-containing hydraulic fluids (HFC, HFB)
- ▶ 90225: Axial piston units for operation with water-free and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFB, HFC).

The variable motor A6VM is not suitable for operation with HFA fluids. If operating with HFB-, HFC- and HFD or environmentally acceptable hydraulic fluids, the limitations regarding technical data or other seals must be observed.

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

### Note

At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.


If the above conditions cannot be maintained due to extreme operating parameters, we recommend the use of a flushing and boost-pressure valve (see page 64).

### Viscosity and temperature of hydraulic fluids

|                          | Viscosity   | Temperature   | Comment   |
|--------------------------|---|---|---|
| Cold start <sup>1)</sup> | $v_{min} \geq 1600 \text{ mm}^2/\text{s}$           | $\theta_{St} \geq -40 \text{ }^\circ\text{C}$                         | $t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$   |
|                          | Permissible temperature difference                  | $\Delta T \leq 25 \text{ K}$  | between axial piston unit and hydraulic fluid in the system   |
| Warm-up phase            | $v = 1600 \text{ to } 400 \text{ mm}^2/\text{s}$    | $\theta = -40 \text{ }^\circ\text{C to } -25 \text{ }^\circ\text{C}$  | at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$  |
| Continuous operation     | $v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$      |   | This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)   |
|                          |   | $\theta = -25 \text{ }^\circ\text{C to } +103 \text{ }^\circ\text{C}$ | measured at port T<br>Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 12 \text{ K}$ between the bearing/shaft seal and port T) |
|                          | $v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$ |   | Range of optimum operating viscosity and efficiency   |
| Short-term operation     | $v_{min} \geq 7 \text{ mm}^2/\text{s}$              |   | $t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$  |

1) For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range -40 °C to +90 °C).

### ▼ Selection diagram

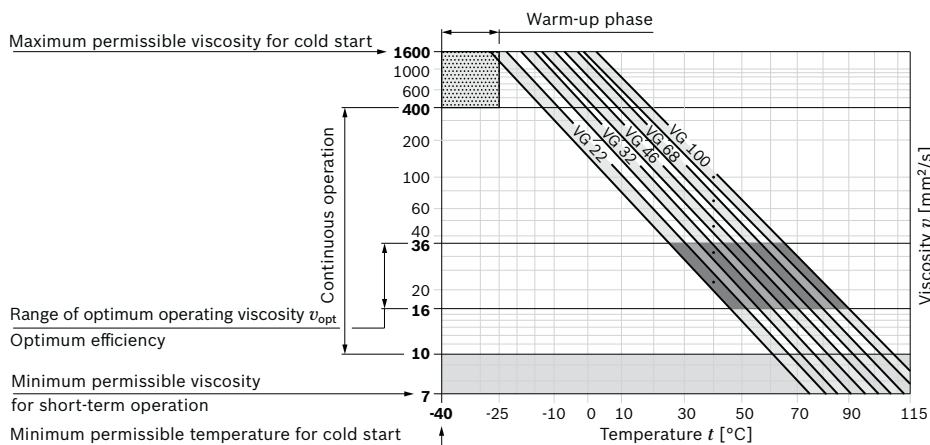

Bosch Rexroth AG, RE 91607/06.2016

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at port **T**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

### Influence of case pressure on beginning of control

An increase in case pressure affects the beginning of control of the variable motor when using the following control options:

- ▶ HP, HA.T3: increase
- ▶ DA: decrease

With the following settings, an increase in case pressure will have no effect on the beginning of control:

HA.R and HA.U, EP, HA

The factory setting of the beginning of control is made at  $p_{abs} = 2$  bar case pressure.

### Flow direction


| Direction of rotation, viewed on drive shaft |               |
|--|---------------|
| cw   | ccw           |
| <b>A to B</b>                                | <b>B to A</b> |

### Shaft seal

#### Permissible pressure loading

The service life of the shaft seal will be influenced by the speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary pressure spikes ( $t < 0.1$  s) of up to 10 bar are permitted. Case pressures of a continuous 2 bar maximum are permitted to be able to utilize the entire speed range. Higher case pressures are permissible at lower rotational speeds (see diagram). The service life of the shaft seal decreases with increasing frequency of pressure spikes and increasing mean differential pressure.

The case pressure must be equal to or higher than the ambient pressure.

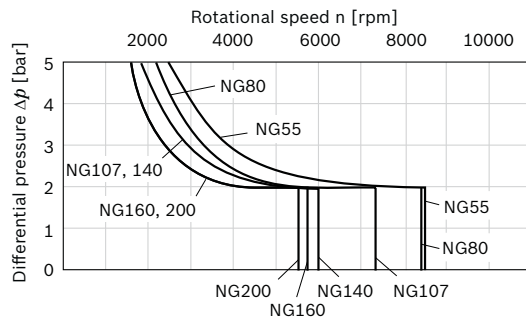


The FKM shaft seal may be used for leakage temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).

8 **A6VM series 65** | Axial piston variable motor  
Operating pressure range


### Operating pressure range

| Pressure at service line port A or B                  |                       | Definition  |
|---|-----------------------|---|
| Nominal pressure $p_{nom}$                            | 400 bar               | The nominal pressure corresponds to the maximum design pressure.  |
| Maximum pressure $p_{max}$                            | 450 bar               | The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.  |
| Single operating period                               | 10 s                  |   |
| Total operating period                                | 300 h                 |   |
| Minimum pressure (high-pressure side)                 | 25 bar absolute       | Minimum pressure at the high-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.  |
| Minimum pressure – pump operating mode (inlet)        | See the diagram below | To prevent damage to the axial piston motor in pump operating mode (change of high-pressure side with unchanged direction of rotation, e.g. when braking), a minimum pressure must be guaranteed at the service line port (inlet). This minimum pressure is dependent on the speed and displacement of the axial piston unit (see characteristic curve) |
| Summation pressure $p_{su}$ (pressure A + pressure B) | 700 bar               | The summation pressure is the sum of the pressures at both service line ports (A and B)   |
| Rate of pressure change $R_{A\ max}$                  |                       | Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.  |
| With integrated pressure-relief valve                 | 9000 bar/s            |   |
| Without pressure-relief valve                         | 16000 bar/s           |   |


▼ Rate of pressure change  $R_{A\ max}$



▼ Minimum pressure – pump operating mode (inlet)

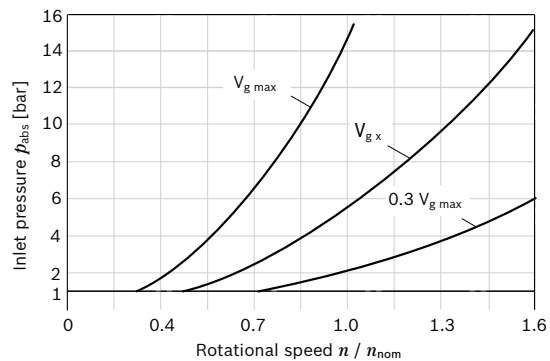

▼ Pressure definition

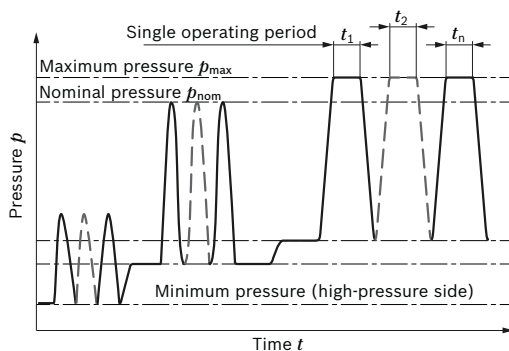

Total operating period =  $t_1 + t_2 + \dots + t_n$

This diagram is valid only for the optimum viscosity range from  $v_{opt} = 36$  to  $16\text{ mm}^2/\text{s}$ . Please contact us if these conditions cannot be satisfied.

**Notice**

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.



## Technical data

| Size   | NG                                      | 55              | 80                 | 107    | 140   | 160    | 200    |        |        |
|--|---|-----------------|--------------------|--------|-------|--------|--------|--------|--------|
| Displacement geometric, per revolution   | $V_{g,max}$                             | cm <sup>3</sup> | 54.8               | 80     | 107   | 140    | 160    | 200    |        |
|  | $V_{g,min}$                             | cm <sup>3</sup> | 0                  | 0      | 0     | 0      | 0      | 0      |        |
|  | $V_{g,x}$                               | cm <sup>3</sup> | 35                 | 51     | 68    | 88     | 61     | 76     |        |
| Maximum speed <sup>1)</sup><br>(complying with the maximum permissible inlet flow) | at $V_{g,max}$                          | $n_{nom}$       | rpm                | 4450   | 3900  | 3550   | 3250   | 3100   | 2900   |
|  | at $V_g < V_{g,x}$ (see diagram)        | $n_{max}$       | rpm                | 7000   | 6150  | 5600   | 5150   | 4900   | 4600   |
|  | at $V_{g,0}$                            | $n_{max}$       | rpm                | 8350   | 7350  | 6300   | 5750   | 5500   | 5100   |
| Inlet flow <sup>2)</sup>   | at $n_{nom}$ and $V_{g,max}$            | $q_{v,max}$     | l/min              | 244    | 312   | 380    | 455    | 496    | 580    |
| Torque <sup>3)</sup>   | at $V_{g,max}$ and $\Delta p = 400$ bar | $T$             | Nm                 | 349    | 509   | 681    | 891    | 1019   | 1273   |
| Rotary stiffness   | $V_{g,max}$ to $V_{g,0}$                | $c_{min}$       | kNm/rad            | 10     | 16    | 21     | 34     | 35     | 44     |
|  | $V_{g,0}$ to 0 (interpolated)           | $c_{min}$       | kNm/rad            | 32     | 48    | 65     | 93     | 105    | 130    |
| Moment of inertia for rotary group   |   | $J_{TW}$        | kgm <sup>2</sup>   | 0.0042 | 0.008 | 0.0127 | 0.0207 | 0.0253 | 0.0353 |
| Maximum angular acceleration   |   | $\alpha$        | rad/s <sup>2</sup> | 31500  | 24000 | 19000  | 11000  | 11000  | 11000  |
| Case volume  |   | $V$             | l                  | 0.75   | 1.2   | 1.5    | 1.8    | 2.4    | 2.7    |
| Weight, approx.  |   | $m$             | kg                 | 28     | 36    | 46     | 61     | 62     | 78     |


## Speed range

The minimum rotational speed  $n_{min}$  is not limited. For applications with requirements on the evenness of the rotation at low rotational speeds, please contact us.

### Notice

- Theoretical values, without efficiency levels and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

## Permissible displacement in relation to speed

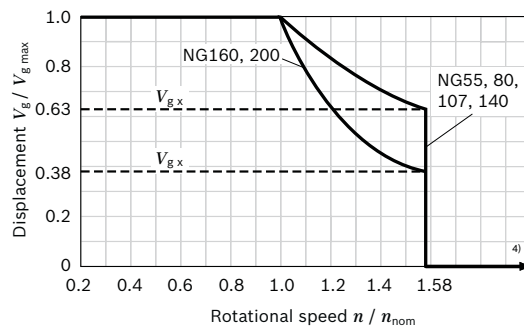

### Determining the operating characteristics

$$\text{Inlet flow } q_v = \frac{V_g \times n}{1000 \times \eta_v} \quad [\text{l/min}]$$

$$\text{Rotational speed } n = \frac{q_v \times 1000 \times \eta_v}{V_g} \quad [\text{rpm}]$$

$$\text{Torque } T = \frac{V_g \times \Delta p \times \eta_{mh}}{20 \times \pi} \quad [\text{Nm}]$$

$$\text{Power } P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p \times \eta_t}{600} \quad [\text{kW}]$$



### Key



|             |   |  |
|-------------|---|--|
| $V_g$       | = | Displacement per revolution [cm <sup>3</sup> ]         |
| $\Delta p$  | = | Differential pressure [bar]                            |
| $n$         | = | Rotational speed [rpm]                                 |
| $\eta_v$    | = | Volumetric efficiency                                  |
| $\eta_{mh}$ | = | Mechanical-hydraulic efficiency                        |
| $\eta_t$    | = | Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ ) |

- The values are valid:
  - for the optimum viscosity range from  $\nu_{opt} = 36$  to  $16$  mm<sup>2</sup>/s
  - with hydraulic fluid based on mineral oils
- Observe limitation of input flow due to counterbalance valve (see page 66).
- Torque without radial force, With radial force see page 10.
- Values in this range on request

10 **A6VM series 65** | Axial piston variable motor  
Technical data

**Permissible radial and axial forces of the drive shafts**


| Size   | NG  | 55             | 80      | 107   | 140   | 160   | 200   |       |
|--|---|----------------|---------|-------|-------|-------|-------|-------|
| Drive shaft  |   | in 1 1/4       | 1 1/4   | 1 3/4 | 1 3/4 | 1 3/4 | 2     |       |
| Maximum radial force at distance a (from shaft collar)         |  | $F_{q \max}$   | N 7811  | 7559  | 12256 | 16036 | 14488 | 20047 |
|  |   | a              | mm 24.0 | 24.0  | 33.5  | 33.5  | 33.5  | 33.5  |
| Maximum torque at $F_{q \max}$                                 | $T_{q \max}$  | Nm 310         | 300     | 681   | 891   | 920   | 1273  |       |
| Maximum differential pressure at $V_{g \max}$ and $F_{q \max}$ | $\Delta p_{q \max}$   | bar 315        | 236     | 400   | 400   | 361   | 400   |       |
| Maximum axial force at standstill or depressurized operation   |  | $+F_{ax \max}$ | N 0     | 0     | 0     | 0     | 0     |       |
|  |   | $-F_{ax \max}$ | N 500   | 710   | 900   | 1030  | 1120  | 1250  |
| Permissible axial force per bar operating pressure             | $+F_{ax \text{ zul}/bar}$   | N/bar 7.5      | 9.6     | 11.3  | 13.3  | 15.1  | 17.0  |       |

| Size   | NG  | 55             | 55      | 80   | 80    | 107   | 107   | 140   | 160   | 160   | 200   |       |
|--|---|----------------|---------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Drive shaft  | $\varnothing$   | mm W30         | W35     | W35  | W40   | W40   | W45   | W45   | W45   | W50   | W50   |       |
| Maximum radial force at distance a (from shaft collar)         |   | $F_{q \max}$   | N 7581  | 8069 | 10867 | 10283 | 13758 | 12215 | 15982 | 18278 | 16435 | 20532 |
|  |   | a              | mm 17.5 | 20.0 | 20.0  | 22.5  | 22.5  | 25.0  | 25.0  | 25.0  | 27.5  | 27.5  |
| Maximum torque at $F_{q \max}$                                 | $T_{q \max}$  | Nm 281         | 349     | 470  | 509   | 681   | 681   | 891   | 1019  | 1019  | 1273  |       |
| Maximum differential pressure at $V_{g \max}$ and $F_{q \max}$ | $\Delta p_{q \max}$   | bar 322        | 400     | 369  | 400   | 400   | 400   | 400   | 400   | 400   | 400   |       |
| Maximum axial force at standstill or depressurized operation   |  | $+F_{ax \max}$ | N 0     | 0    | 0     | 0     | 0     | 0     | 0     | 0     | 0     |       |
|  |   | $-F_{ax \max}$ | N 500   | 500  | 710   | 710   | 900   | 900   | 1030  | 1120  | 1120  | 1250  |
| Permissible axial force per bar operating pressure             | $+F_{ax \text{ zul}/bar}$   | N/bar 7.5      | 7.5     | 9.6  | 9.6   | 11.3  | 11.3  | 13.3  | 15.1  | 15.1  | 17.0  |       |

**Effect of radial force  $F_q$  on the service life of bearings**

By selecting a suitable direction of radial force  $F_q$ , the load on the bearings, caused by the internal rotary group forces can be reduced, thus optimizing the service life of the bearings. Recommended position of mating gear is dependent on direction of rotation. Examples:

▼ **Toothed gear output drive**

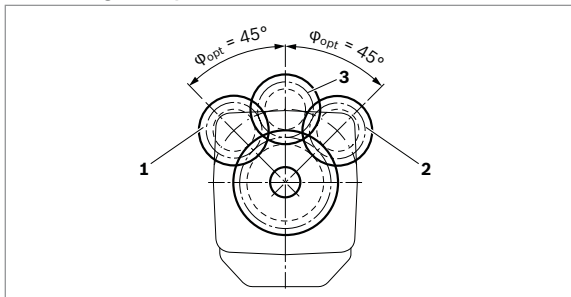

- 1 Direction of rotation "counter-clockwise", pressure at port A
- 2 Direction of rotation "clockwise", pressure at port B
- 3 Alternating direction of rotation

**Notice**

- ▶ The values given are maximum values and do not apply to continuous operation.
- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided as the lifetime of the bearing is reduced.
- ▶ Special requirements apply in the case of belt drives. Please contact us.

## HP – Proportional hydraulic control

The proportional hydraulic control provides infinite adjustment of the displacement. Control is proportional to the pilot pressure applied to port **X**.

### HP1, HP2 positive control

- ▶ Beginning of control at  $V_{g \min}$  (minimum torque, maximum permissible speed at minimum pilot pressure)
- ▶ End of control at  $V_{g \max}$  (maximum torque, minimum speed at maximum pilot pressure)

### HP5, HP6 negative control

- ▶ Beginning of control at  $V_{g \max}$  (maximum torque, minimum speed at minimum pilot pressure)
- ▶ End of control at  $V_{g \min}$  (minimum torque, maximum permissible speed at maximum pilot pressure)

### Notice

- ▶ Maximum permissible pilot pressure:  $p_{St} = 100$  bar
- ▶ The control oil is internally taken out of the high pressure side of the motor (**A** or **B**). For reliable control, a working pressure of at least 30 bar is required in **A** (**B**). If a control operation is performed at a working pressure < 30 bar, an auxiliary pressure of at least 30 bar must be applied at port **G** using an external check valve. For lower pressures, please contact us. Bear in mind that pressures up to 450 bar can occur at port **G**.
- ▶ Specify the desired beginning of control in plain text when ordering, e.g.: beginning of control at 10 bar.
- ▶ The beginning of control and the HP characteristic curve are influenced by the case pressure. An increase in case pressure causes an increase in the beginning of control (see page 7) and thus a parallel shift of the characteristic.
- ▶ A leakage flow of maximum 0.3 l/min can occur at port **X** due to internal leakage (working pressure > pilot pressure). The control is to be suitably configured to avoid an independent build-up of pilot pressure.

### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

### Standard for sizes 55 to 200

HP without damping.

HP.D with throttle pin on both sides, symmetrical (see table)

### Optional for sizes 55 to 200

HP with throttle pin on both sides, symmetrical (see table)

### ▼ Throttle pin overview

| Size             | 55   | 80   | 107  | 140  | 160  | 200  |
|------------------|------|------|------|------|------|------|
| Groove size [mm] | 0.45 | 0.45 | 0.55 | 0.55 | 0.55 | 0.65 |

### HP1, HP5 pilot pressure increase $\Delta p_{St} = 10$ bar

#### HP1 positive control

A pilot pressure increase of 10 bar at port **X** results in an increase in displacement from  $V_{g \min}$  to  $V_{g \max}$ .


#### HP5 negative control

A pilot pressure increase of 10 bar at port **X** results in a decrease in displacement from  $V_{g \max}$  to  $V_{g \min}$ .

Beginning of control, setting range 2 to 20 bar

Standard setting: beginning of control at 3 bar (end of control at 13 bar)

### ▼ Characteristic curve

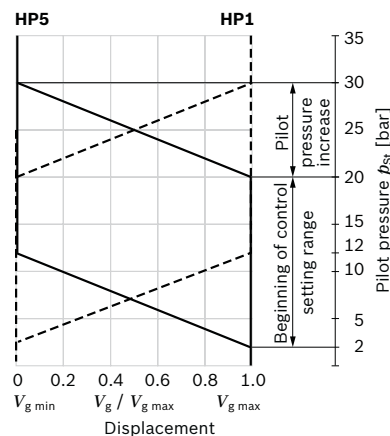

12 **A6VM series 65** | Axial piston variable motor  
HP – Proportional hydraulic control

**HP2, HP6 pilot pressure increase  $\Delta p_{St} = 25$  bar**

**HP2 positive control**

A pilot pressure increase of 25 bar at port **X** results in an increase in displacement from  $V_{g \min}$  to  $V_{g \max}$ .

**HP6 negative control**


A pilot pressure increase of 25 bar at port **X** results in a decrease in displacement from  $V_{g \max}$  to  $V_{g \min}$ .

Beginning of control, setting range 5 to 35 bar


Standard setting:

beginning of control at 10 bar (end of control at 35 bar)


▼ **Characteristic curve**

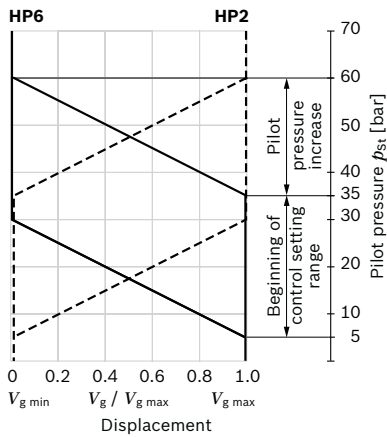

▼ **Circuit diagram HP5, HP6 (negative control)**

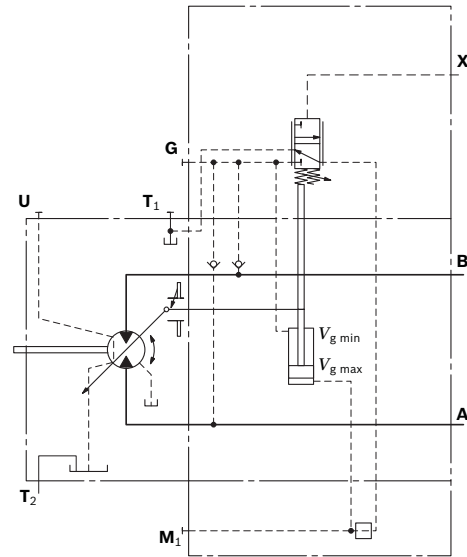

▼ **Circuit diagram HP1, HP2 (positive control)**

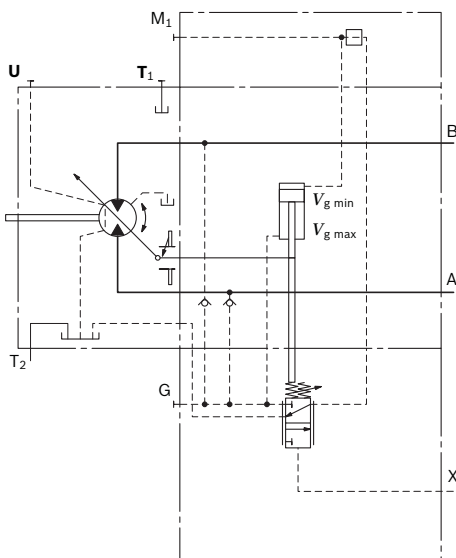


### HP5D1, HP6D1 Pressure control, fixed setting

The pressure control overrides the HP control function. If the load torque or a reduction in motor swivel angle causes the system pressure to reach the setpoint value of the pressure control, the motor will swivel towards a larger displacement.

The increase in the displacement and the resulting reduction in pressure cause the control deviation to decrease. With the increase in displacement the motor develops more torque, while the pressure remains constant.

Setting range of the pressure control valve 80 to 400 bar

#### ▼ Circuit diagram HP5D1, HP6D1 (negative control)

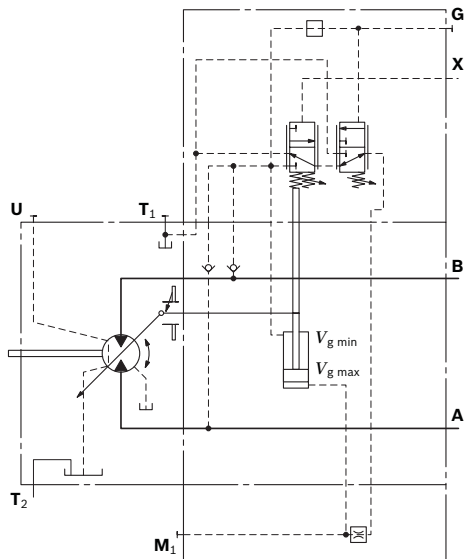

14 **A6VM series 65** | Axial piston variable motor  
EP – Proportional electric control

### EP – Proportional electric control

The proportional electric control, type EP, provides infinite adjustment of the displacement, proportional to the control current applied to the solenoid.


#### EP1, EP2 positive control

- ▶ Beginning of control at  $V_{g \min}$  (minimum torque, maximum permissible speed at minimum control current)
- ▶ End of control at  $V_{g \max}$  (maximum torque, minimum speed at maximum control current)

#### EP5, EP6 negative control

- ▶ Beginning of control at  $V_{g \max}$  (maximum torque, minimum speed at minimum control current)
- ▶ End of control at  $V_{g \min}$  (minimum torque, maximum permissible speed at maximum control current)

#### ▼ Characteristic curve

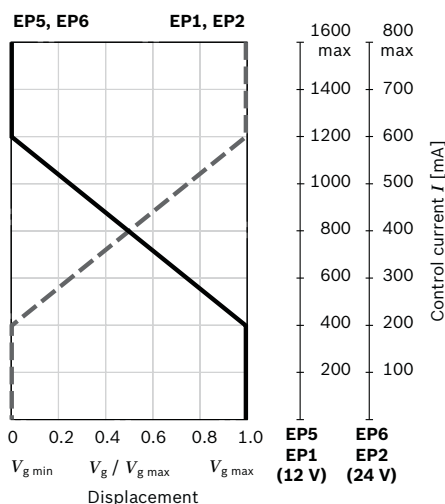

#### Notice

The control oil is internally taken from the high pressure side of the motor (**A** or **B**). For reliable control, an operating pressure of at least 30 bar is required in **A** (**B**). If a control operation is performed at an operating pressure < 30 bar, an auxiliary pressure of at least 30 bar must be applied at port **G** via an external check valve. For lower pressures, please contact us.

Please note that pressures up to 450 bar can occur at port **G**.

#### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

#### Standard for sizes 55 to 200

EP without damping.

EP.D with throttle pin on both sides, symmetrical (see table)

#### Optional for sizes 55 to 200

EP with throttle pin on both sides, symmetrical (see table)

#### ▼ Throttle pin overview

| Size             | 55   | 80   | 107  | 160  | 200  |
|------------------|------|------|------|------|------|
| Groove size [mm] | 0.45 | 0.45 | 0.55 | 0.55 | 0.65 |


| Technical data, solenoid                             | EP1, EP5            | EP2, EP6            |
|--|---------------------|---------------------|
| Voltage  | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| Control current                                      |                     |                     |
| Beginning of control                                 | 400 mA              | 200 mA              |
| End of control                                       | 1200 mA             | 600 mA              |
| Current limit  | 1.54 A              | 0.77 A              |
| Nominal resistance (at 20 °C)                        | 5.5 $\Omega$        | 22.7 $\Omega$       |
| Dither   |                     |                     |
| Frequency  | 100 Hz              | 100 Hz              |
| Minimum oscillation range <sup>1)</sup>              | 240 mA              | 120 mA              |
| Duty cycle   | 100%                | 100%                |
| Type of protection: see connector version on page 62 |                     |                     |

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.


Further information can also be found on the internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

<sup>1)</sup> Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)

▼ **Circuit diagram EP1, EP2 (positive control)**

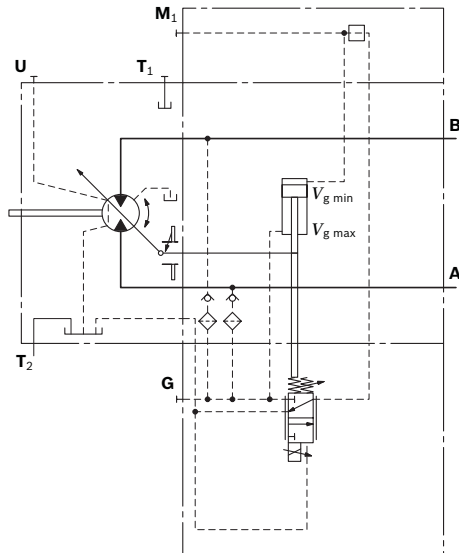

▼ **Circuit diagram EP5, EP6 (negativ control)**

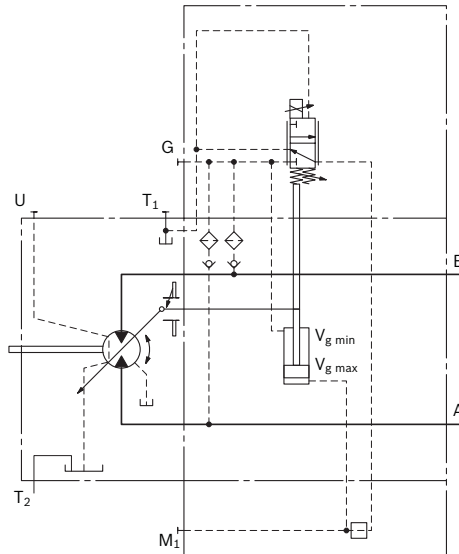


**EP5D1, EP6D1 Pressure control, fixed setting**

The pressure control overrides the EP control function. If the load torque or a reduction in motor swivel angle causes the system pressure to reach the setpoint value of the pressure control, the motor will swivel towards a larger displacement.

The increase in the displacement and the resulting reduction in pressure cause the control deviation to decrease. With the increase in displacement the motor develops more torque, while the pressure remains constant.

Setting range of the pressure control valve 80 to 400 bar

▼ **Circuit diagram EP5D1, EP6D1 (negativ control)**

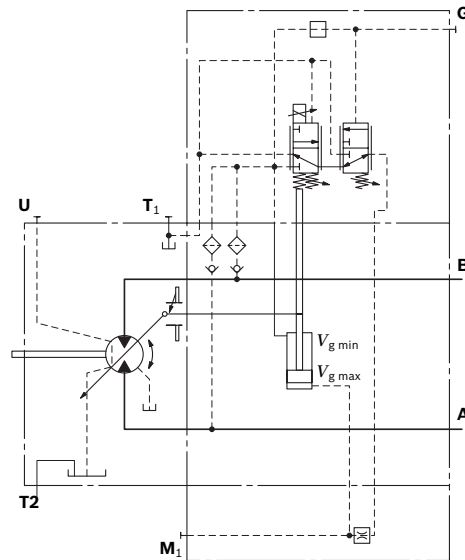

16 **A6VM series 65** | Axial piston variable motor  
HZ – Two-point hydraulic control


## HZ – Two-point hydraulic control

The two-point hydraulic control allows the displacement to be set to either  $V_{g \min}$  or  $V_{g \max}$  by switching the pilot pressure at port **X** on or off.

### HZ5, HZ7 negative control

- ▶ Position at  $V_{g \max}$  (without pilot pressure, maximum torque, minimum speed)
- ▶ Position at  $V_{g \min}$  (with pilot pressure > 15 bar activated, minimum torque, maximum permissible speed)

### ▼ Characteristic curve HZ5, HZ7



### Notice

- ▶ Maximum permissible pilot pressure: 100 bar
- ▶ The control oil is internally taken out of the high pressure side of the motor (**A** or **B**). For reliable control, an operating pressure of at least 30 bar is required in **A** (**B**). If a control operation is performed at an operating pressure < 30 bar, an auxiliary pressure of at least 30 bar must be applied at port **G** via an external check valve. For lower pressures, please contact us. Please note that pressures up to 450 bar can occur at port **G**.
- ▶ At port **X** a leakage flow of maximum 0.3 l/min occurs (working pressure > pilot pressure). To avoid a build-up of pilot pressure, pressure is to be relieved from port **X** to the reservoir.

### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

### Standard for sizes 140 to 200

HZ5 with throttle pin on both sides, symmetrical (see table)


### Standard for sizes 55 to 107

HZ7 (synchronous piston) with throttle pin on both sides, symmetrical (see table)


### ▼ Throttle pin overview

| Size             | 55   | 80   | 107  | 140  | 160  | 200  |
|------------------|------|------|------|------|------|------|
| Groove size [mm] | 0.30 | 0.30 | 0.30 | 0.55 | 0.55 | 0.65 |

### ▼ Circuit diagram HZ5 (negative control) sizes 140 and 200

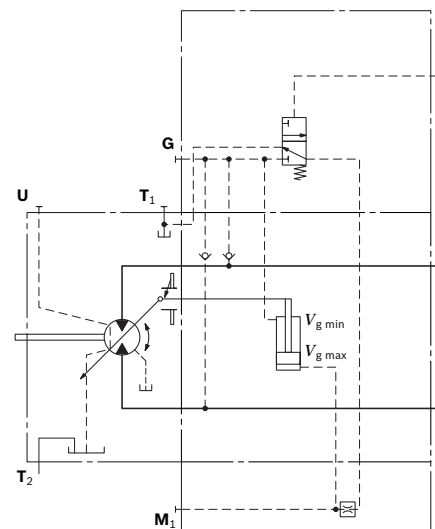

### ▼ Circuit diagram HZ7 (negative Kennung) Nennggröße 55 bis 107

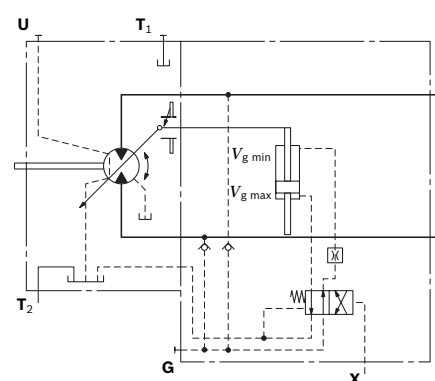



## EZ – Two-point electric control

The two-point electric control allows the displacement to be set to either  $V_{g \min}$  or  $V_{g \max}$  by switching the electric current to a switching solenoid on or off.

### Notice

The control oil is internally taken out of the high pressure side of the motor (**A** or **B**). For reliable control, an operating pressure of at least 30 bar is required in **A** (**B**). If a control operation is performed at an operating pressure < 30 bar, an auxiliary pressure of at least 30 bar must be applied at port **G** via an external check valve. For lower pressures, please contact us. Please note that pressures up to 450 bar can occur at port **G**.

### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

### Standard for sizes 140 to 200

EZ5, EZ6 with throttle pin on both sides, symmetrical (see table)

### Standard for sizes 55 to 107

EZ7, EZ8 (synchronous piston) with throttle pin on both sides, symmetrical (see table)


### ▼ Throttle pin overview

| Size             | 55   | 80   | 107  | 140  | 160  | 200  |
|------------------|------|------|------|------|------|------|
| Groove size [mm] | 0.30 | 0.30 | 0.30 | 0.55 | 0.55 | 0.65 |

### Sizes 140 to 200

| Technical data, solenoid with $\varnothing 37$       | EZ5                 | EZ6                 |
|--|---------------------|---------------------|
| Voltage  | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| Position $V_{g \max}$                                | de-energized        | de-energized        |
| Position $V_{g \min}$                                | energized           | energized           |
| Nominal resistance (at 20 °C)                        | 5.5 $\Omega$        | 21.7 $\Omega$       |
| Nominal power  | 26.2 W              | 26.5 W              |
| Minimum required active current                      | 1.32 A              | 0.67 A              |
| Duty cycle   | 100%                | 100%                |
| Type of protection: see connector version on page 62 |                     |                     |


### ▼ Circuit diagram EZ5, EZ6 (negative control)

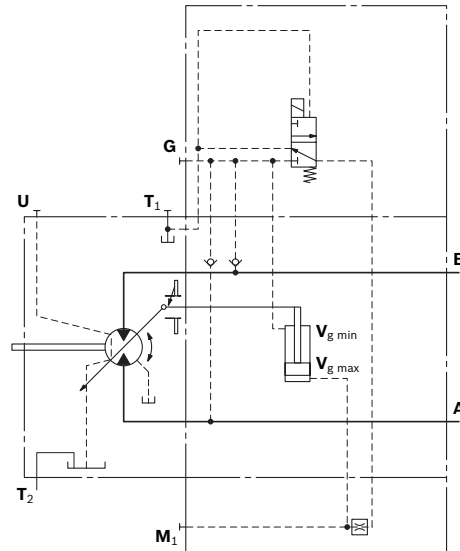

### Sizes 55 to 107

| Technical data, solenoid with $\varnothing 45$       | EZ7                 | EZ8                 |
|--|---------------------|---------------------|
| Voltage  | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| Position $V_{g \max}$                                | de-energized        | de-energized        |
| Position $V_{g \min}$                                | energized           | energized           |
| Nominal resistance (at 20 °C)                        | 4.8 $\Omega$        | 19.2 $\Omega$       |
| Nominal power  | 30 W                | 30 W                |
| Minimum required active current                      | 1.5 A               | 0.75 A              |
| Duty cycle   | 100%                | 100%                |
| Type of protection: see connector version on page 62 |                     |                     |

### ▼ Circuit diagram EZ7, EZ8 (negative control)

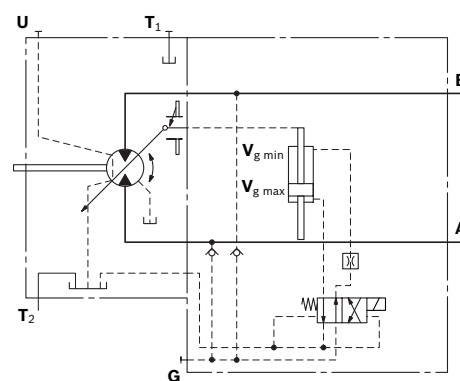

- 18 **A6VM series 65** | Axial piston variable motor  
HA – Automatic high-pressure related control

## HA – Automatic high-pressure related control

The automatic high-pressure related control adjusts the displacement automatically depending on the operating pressure.

The displacement of the A6VM motor with HA control is  $V_{g\ min}$  (maximum speed and minimum torque). The control device measures internally the operating pressure at **A** or **B** (no control line required) and upon reaching the set beginning of control, the controller swivels the motor from  $V_{g\ min}$  to  $V_{g\ max}$  with increase of operating pressure. The displacement is modulated between  $V_{g\ min}$  and  $V_{g\ max}$ , thereby depending on load conditions.

### HA1, HA2 positive control

- ▶ Beginning of control at  $V_{g\ min}$  (minimum torque, maximum speed)
- ▶ End of control at  $V_{g\ max}$  (maximum torque, minimum speed)

### Notice

- ▶ For safety reasons, winch drives are not permissible with beginning of control at  $V_{g\ min}$  (standard for HA).
- ▶ The control oil is internally taken from the high pressure side of the motor (**A** or **B**). For reliable control, an operating pressure of at least 30 bar is required in **A** (**B**). If a control operation is performed at an operating pressure < 30 bar, an auxiliary pressure of at least 30 bar must be applied at port **G** via an external check valve. For lower pressures, please contact us.  
Please note that pressures up to 450 bar can occur at port **G**.
- ▶ The beginning of control and the HA.T3 characteristic curve are influenced by case pressure. An increase in case pressure causes an increase in the beginning of control (see page 7) and thus a parallel shift of the characteristic.
- ▶ At port **X** a leakage flow of maximum 0.3 l/min occurs (working pressure > pilot pressure). To avoid a build-up of pilot pressure, pressure is to be relieved from port **X** to the reservoir. **Only with HA.T control**

### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

### Standard for sizes 55 to 200

HA1,2 with one-sided throttle pin, throttling occurs from  $V_{g\ min}$  to  $V_{g\ max}$ . (see table)  
HA3 and HA3T3 with BVI and throttle pin on both sides, 0.30, symmetrical

#### ▼ Throttle pin overview

| Size             | 55   | 80   | 107  | 140  | 160  | 200  |
|------------------|------|------|------|------|------|------|
| Groove size [mm] | 0.45 | 0.45 | 0.55 | 0.55 | 0.55 | 0.65 |

### Standard for sizes 55 to 200

HA with BVD or BVE counterbalance valve, with throttle screw (see table)


#### ▼ Throttle screw

| Size          | 55   | 80   | 107  | 140  | 160  | 200  |
|---------------|------|------|------|------|------|------|
| Diameter [mm] | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |


**HA1 with minimum pressure increase, positive control**

An operating pressure increase of  $\Delta p \leq$  approx. 10 bar results in an increase in displacement from  $V_{g \text{ min}}$  towards  $V_{g \text{ max}}$ .  
Beginning of control, setting range 80 to 350 bar  
Please state the desired beginning of control in plain text when ordering, e.g.: beginning of control at 300 bar.

▼ **Characteristic curve HA1**

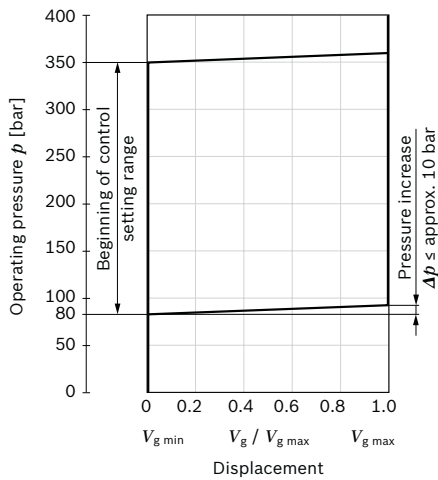


▼ **Circuit diagram HA1**

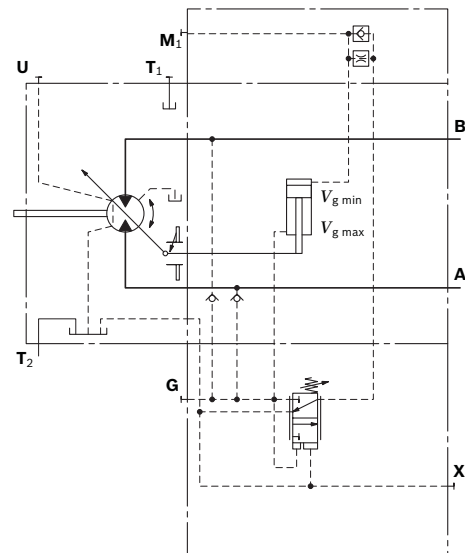


**HA2 with pressure increase, positive control**

An operating pressure increase of  $\Delta p$  approx. 100 bar results in an increase in displacement from  $V_{g \text{ min}}$  to  $V_{g \text{ max}}$ .  
Beginning of control, setting range 80 to 350 bar  
Please state the desired beginning of control in plain text when ordering, e.g.: beginning of control at 200 bar.

▼ **Characteristic curve HA2**

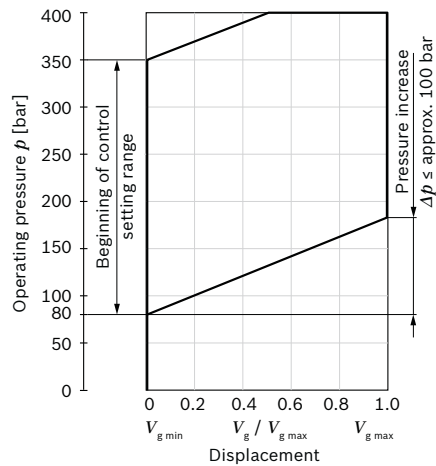

▼ **Circuit diagram HA2**

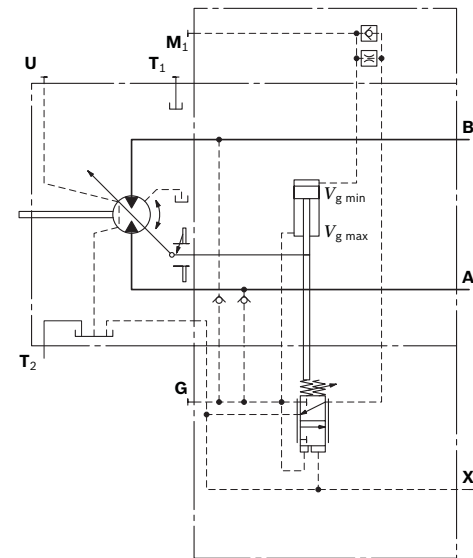

20 **A6VM series 65** | Axial piston variable motor  
HA – Automatic high-pressure related control

**HA.T3 override, hydraulic, remote controlled, proportional**


With the HA.T3 control, the beginning of control can be influenced by applying a pilot pressure to port **X**. For every 1 bar of pilot pressure increase, the beginning of control is reduced by 17 bar.

| Beginning of control setting    | 300 bar | 300 bar |
|---------------------------------|---------|---------|
| Pilot pressure at port <b>X</b> | 0 bar   | 10 bar  |
| Beginning of control at         | 300 bar | 130 bar |


**Notice**

Maximum permissible pilot pressure 100 bar.

▼ **Circuit diagram HA1T3**

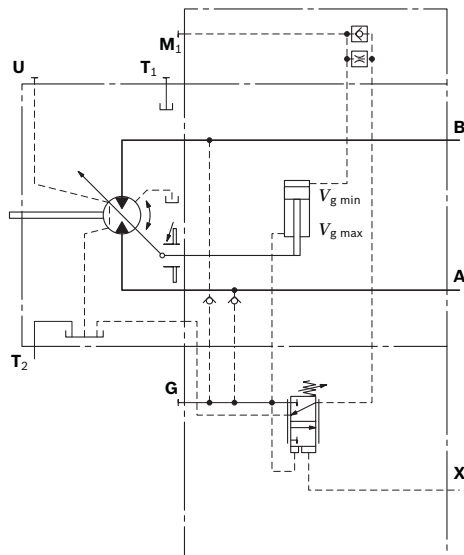

▼ **Circuit diagram HA2T3**

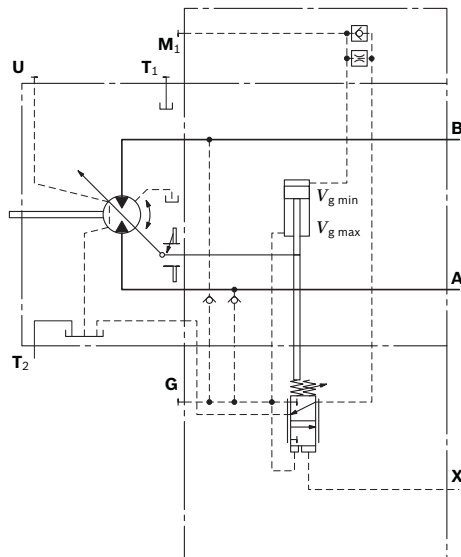

### HA.U1, HA.U2 electric override, two-point


With the HA.U1 or HA.U2 control, the beginning of control can be overridden by an electric signal to a switching solenoid. When the override solenoid is energized, the variable motor swivels to maximum swivel angle, without intermediate position.

The beginning of control can be set between 80 and 300 bar (specify required setting in plain text when ordering).


| Technical data, solenoid with $\varnothing 45$ | U1                  | U2                  |
|--|---------------------|---------------------|
| Voltage  | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| No override                                    | de-energized        | de-energized        |
| Position $V_{g \max}$                          | energized           | energized           |
| Nominal resistance (at 20 °C)                  | 4.8 $\Omega$        | 19.2 $\Omega$       |
| Nominal power                                  | 30 W                | 30 W                |
| Minimum required active current                | 1.5 A               | 0.75 A              |
| Duty cycle                                     | 100%                | 100%                |

Type of protection: see connector version on page 62

### ▼ Circuit diagram HA2U1, HA2U2

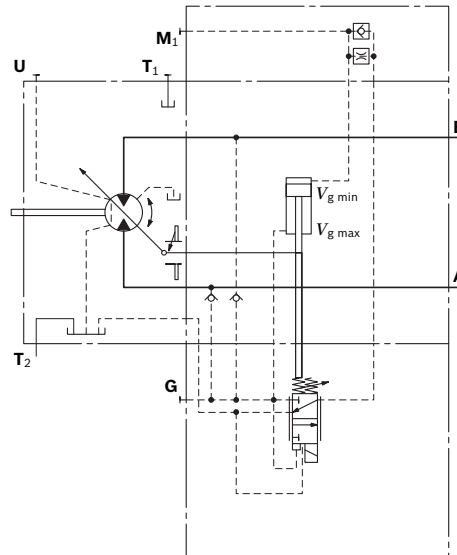

### ▼ Circuit diagram HA1U1, HA1U2

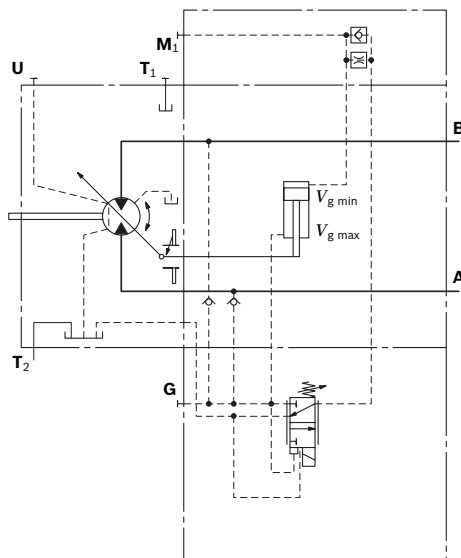

22 **A6VM series 65** | Axial piston variable motor  
HA – Automatic high-pressure related control

**HA.R1, HA.R2 electric override, electric travel direction valve**

With the HA.R1 or HA.R2 control, the beginning of control can be overridden by an electric signal to switching solenoid **b**. When the override solenoid is energized, the variable motor swivels to maximum swivel angle, without intermediate position.

The travel direction valve ensures that the preselected pressure side of the hydraulic motor (**A** or **B**) is always connected to the HA control, and thus determines the swivel angle, even if the high-pressure side changes (e.g. -travel drive during a downhill operation). This thereby prevents undesired jerky deceleration and/or braking characteristics.

The travel direction valve (see page 25) is either pressure spring or switched by energizing switching solenoid **a**, depending on the direction of rotation (travel direction).


**Electric override**

| Technical data, solenoid <b>b</b> with ø45           | R1           | R2           |
|--|--------------|--------------|
| Voltage  | 12 V (±20%)  | 24 V (±20%)  |
| No override  | de-energized | de-energized |
| Position $V_{g \max}$                                | energized    | energized    |
| Nominal resistance (at 20 °C)                        | 4.8 Ω        | 19.2 Ω       |
| Nominal power  | 30 W         | 30 W         |
| Minimum required active current                      | 1.5 A        | 0.75 A       |
| Duty cycle   | 100%         | 100%         |
| Type of protection: see connector version on page 62 |              |              |


**Travel direction valve, electric**

| Technical data, solenoid <b>a</b> with ø37           |                       | R1           | R2           |
|--|-----------------------|--------------|--------------|
| Voltage  |                       | 12 V (±20%)  | 24 V (±20%)  |
| Direction of rotation                                | Operating pressure in |              |              |
| ccw  | <b>B</b>              | energized    | energized    |
| cw   | <b>A</b>              | de-energized | de-energized |
| Nominal resistance (at 20 °C)                        |                       | 5.5 Ω        | 21.7 Ω       |
| Nominal power  |                       | 26.2 W       | 26.5 W       |
| Minimum required active current                      |                       | 1.32 A       | 0.67 A       |
| Duty cycle   |                       | 100%         | 100%         |
| Type of protection: see connector version on page 62 |                       |              |              |

▼ **Circuit diagram HA1R1, HA1R2**

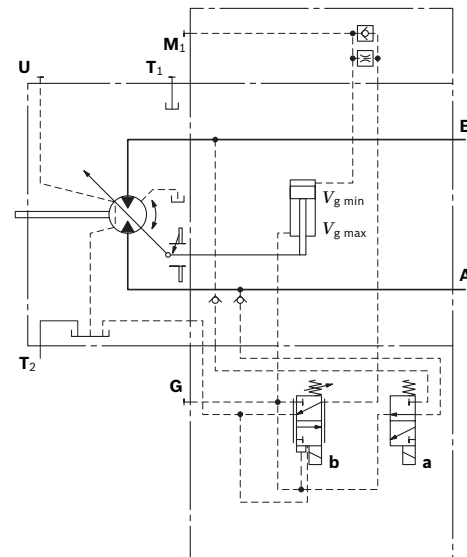

▼ **Circuit diagram HA2R1, HA2R2**

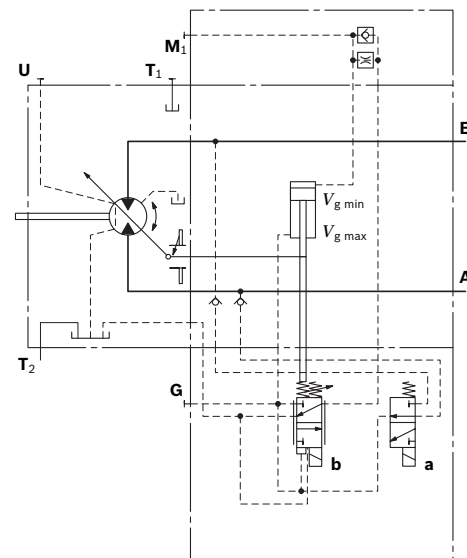

## DA – Automatic speed-related control

The variable motor A6VM with automatic speed-related control, type DA, is intended for use in hydrostatic travel drives in combination with the variable pump A4VG with DA control.

A drive-speed-related pilot pressure signal is generated by the A4VG variable pump, and that signal, together with the operating pressure, regulates the swivel angle of the hydraulic motor.

Increasing pump speed, i.e. increasing pilot pressure, causes the motor to swivel to a smaller displacement (lower torque, higher speed), depending on the operating pressure.

If the operating pressure exceeds the pressure setpoint set on the controller, the variable motor swivels to a larger displacement (higher torque, lower speed).

- ▶ Pressure ratio  $p_{St}/p_{HD} = 5/100$

DA closed loop control is only suitable for certain types of drive systems and requires review of the engine and vehicle parameters to ensure that the motor is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

Detailed information is available from our sales organization.

### Notice

The beginning of control and the DA characteristic curve are influenced by case pressure. An increase in case pressure causes a decrease in the beginning of control (see page 7) and thus a parallel shift of the characteristic.

### Response time damping

The response time damping impacts the swivel behavior of the motor and consequently the machine response speed.

### Standard for sizes 55 to 200

DA with throttle pin on one side, throttling occurs from  $V_{g \min}$  to  $V_{g \max}$  (see table).

#### ▼ Throttle pin overview


| Size             | 55   | 80   | 107  | 140  | 160  | 200  |
|------------------|------|------|------|------|------|------|
| Groove size [mm] | 0.45 | 0.45 | 0.55 | 0.55 | 0.55 | 0.65 |

### DA0 hydraulic travel direction valve, negative control

Depending on the direction of rotation (travel direction), the travel direction valve is switched by using pilot pressure connections  $X_1$  or  $X_2$ .

| Direction of rotation | Operating pressure in | Pilot pressure in |
|-----------------------|-----------------------|-------------------|
| cw                    | A                     | $X_1$             |
| ccw                   | B                     | $X_2$             |

#### ▼ Circuit diagram DA0

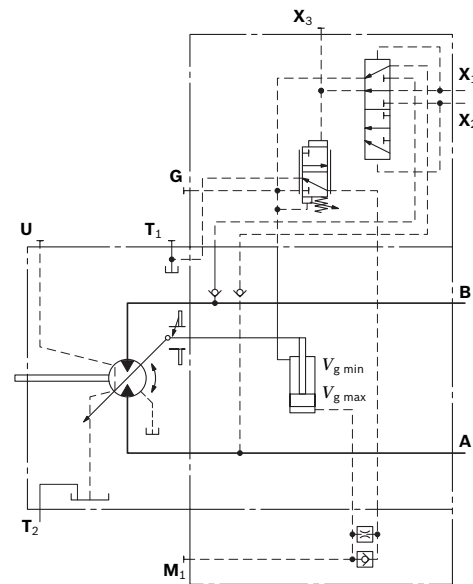

24 **A6VM series 65** | Axial piston variable motor  
DA – Automatic speed-related control

**DA1, DA2 electric travel direction valve + electric  $V_{g \max}$  circuit, negative control**

Depending on the direction of rotation (direction of travel), the travel direction valve is actuated through the compression spring or the switching solenoid **a**.

When switching solenoid **b** is energized, the control can be overridden and the motor can be swiveled to maximum displacement (high torque, lower rotational speed) (electric  $V_{g \max}$ -circuit).

**Travel direction valve, electric**

| Technical data, solenoid a with $\varnothing 37$ |                       | DA1                   | DA2                 |
|--|-----------------------|-----------------------|---------------------|
| Voltage  |                       | 12 V ( $\pm 20\%$ )   | 24 V ( $\pm 20\%$ ) |
| Direction of rotation                            | Operating pressure in |                       |                     |
|  | ccw                   | <b>B</b> de-energized | de-energized        |
|  | cw                    | <b>A</b> energized    | energized           |
| Nominal resistance (at 20 °C)                    |                       | 5.5 $\Omega$          | 21.7 $\Omega$       |
| Nominal power                                    |                       | 26.2 W                | 26.5 W              |
| Minimum required active current                  |                       | 1.32 A                | 0.67 A              |
| Duty cycle                                       |                       | 100%                  | 100%                |


Type of protection: see connector version on page 62

**Electric override**

| Technical data, solenoid b with $\varnothing 37$ |  | DA1                 | DA2                 |
|--|--|---------------------|---------------------|
| Voltage  |  | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| No override                                      |  | de-energized        | de-energized        |
| Position $V_{g \max}$                            |  | energized           | energized           |
| Nominal resistance (at 20 °C)                    |  | 5.5 $\Omega$        | 21.7 $\Omega$       |
| Nominal power                                    |  | 26.2 W              | 26.5 W              |
| Minimum required active current                  |  | 1.32 A              | 0.67 A              |
| Duty cycle                                       |  | 100%                | 100%                |

Type of protection: see connector version on page 62

▼ **Circuit diagram DA1, DA2**

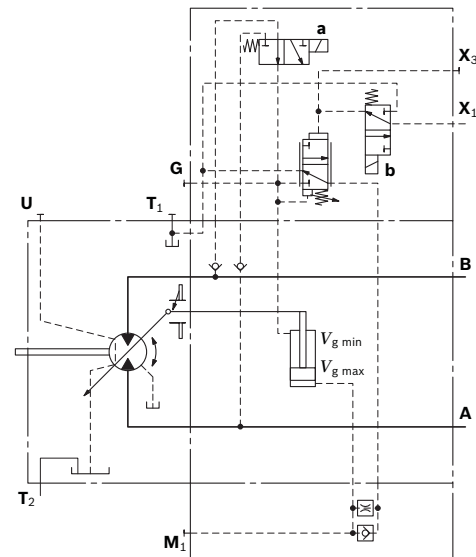



## Electric travel direction valve (for DA, HA.R)

Application in travel drives in closed circuits. The travel direction valve of the motor is actuated by an electric signal that also switches the swivel direction of the travel drive pump (e.g. A4VG with DA control valve).


If the pump in the closed circuit is switched to the neutral position or into reverse, the vehicle may experience jerky deceleration or braking, depending on the vehicle weight and current travel speed.

When the travel direction valve, which must be logically coordinated with the pump control, of the pump (e.g. 4/3-way directional valve of the DA-control) is switched toneutral position,

- ▶ the neutral position,
  - the electrical circuitry causes the previous signal on the travel direction valve on the motor to be retained.
- ▶ Reversing,
  - the electrical circuitry causes the travel direction valve of the motor to switch to the other travel direction following a time delay (approx. 0.8 s) with respect to the pump.

As a result, jerky deceleration or braking is prevented in both cases. Circuit diagram, electric travel direction valve


### ▼ Circuit diagram, electric travel direction valve

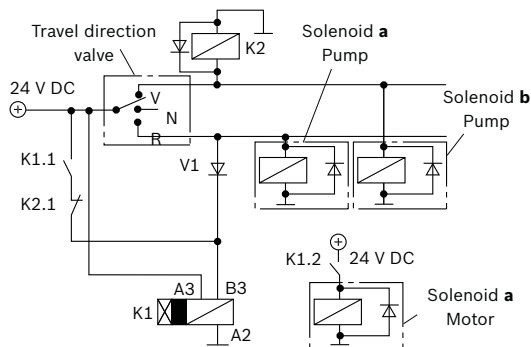


#### Notice

The shown diodes and relays are not included in the scope of delivery of the motor.

### ▼ Control DA1, DA

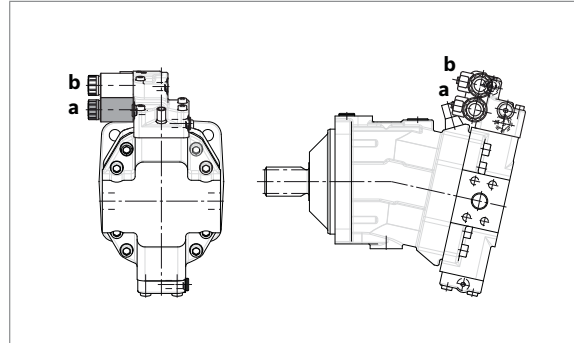

### ▼ Control HA1R., HA2R.

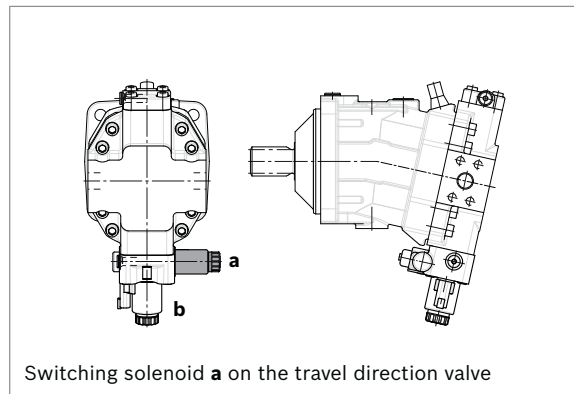


26 **A6VM series 65** | Axial piston variable motor  
Dimensions size 55

## Dimensions size 55

### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports **A** and **B** at side, opposite

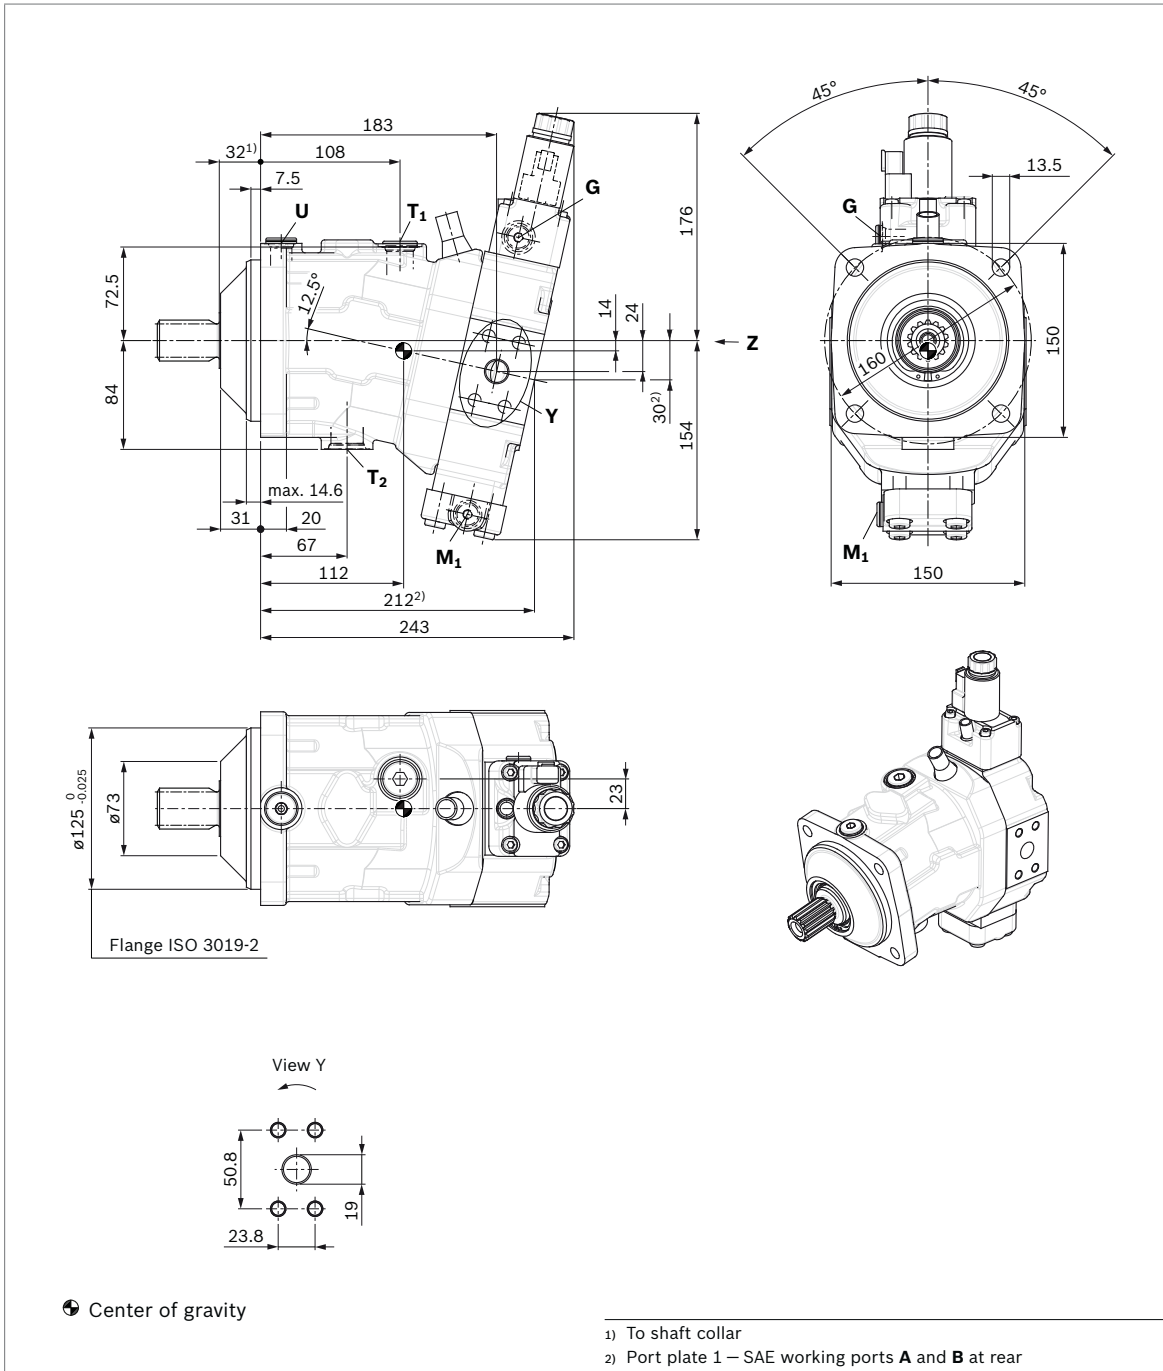


Bosch Rexroth AG, RE 91607/06.2016


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 27  
Dimensions size 55


▼ Location of the service line ports on the port plates (view Z)

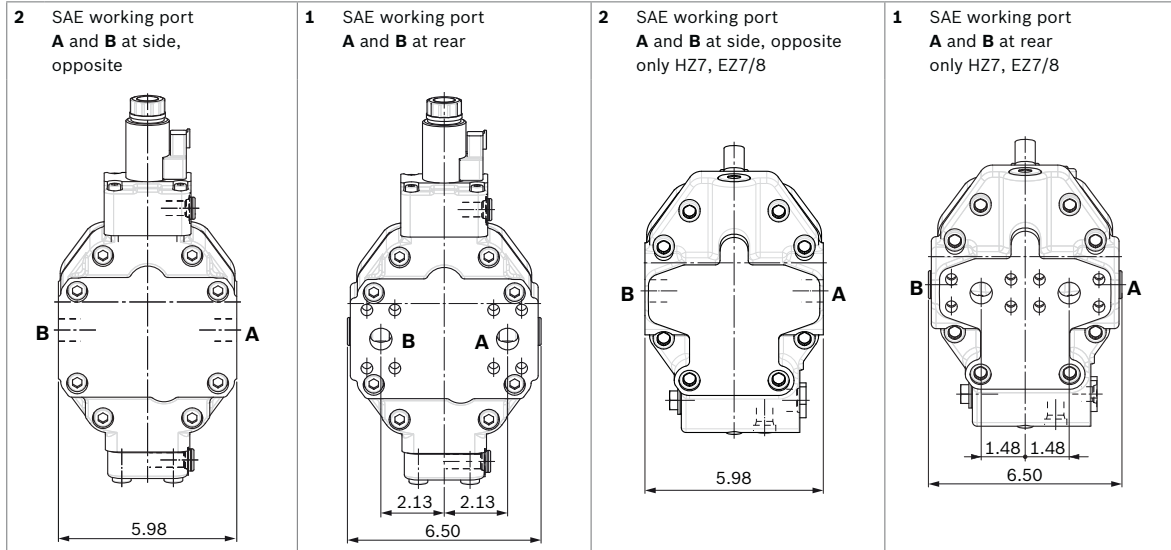


▼ Splined shaft SAE J744

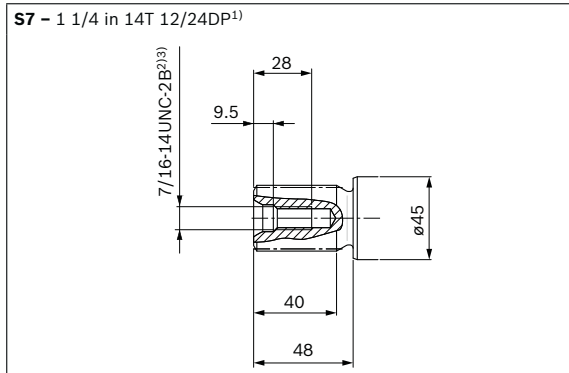

▼ Splined shaft DIN 5480

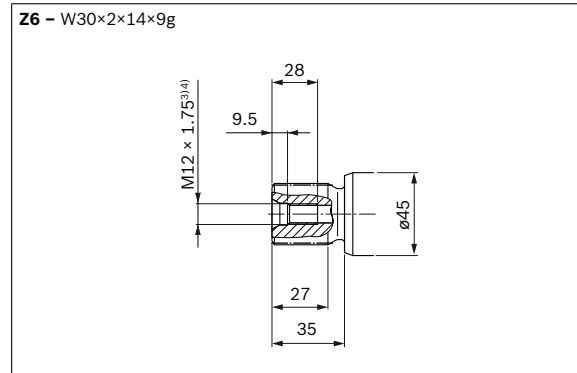

▼ Splined shaft DIN 5480

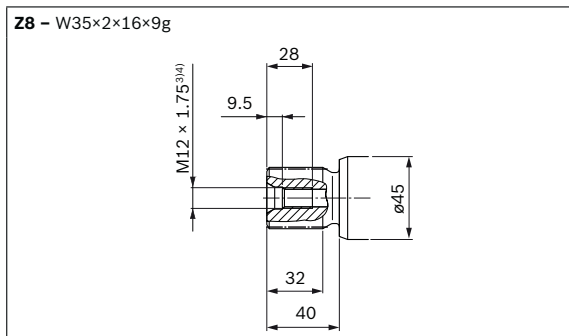

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

28 **A6VM series 65** | Axial piston variable motor  
Dimensions size 55

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 3/4 in               | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M10 × 1.5; 17 deep   |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M22 × 1.5; 15.5 deep | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M27 × 2; 19 deep     | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M18 × 1.5; 14.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.


6) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 29  
Dimensions size 55


▼ **EP1, EP2** – Electric proportional control, positive control

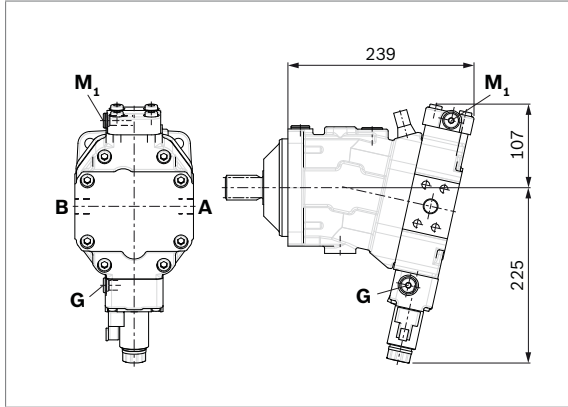


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

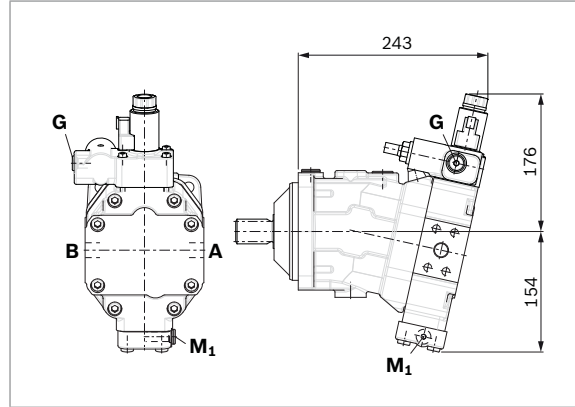


▼ **HP1, HP2** – Hydraulic proportional control, positive control

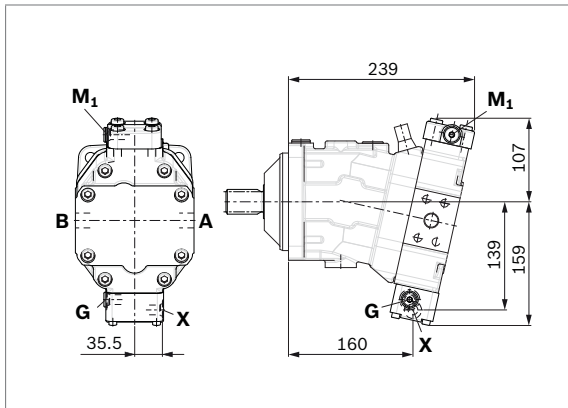

▼ **HP5, HP6** – Hydraulic proportional control, negative control

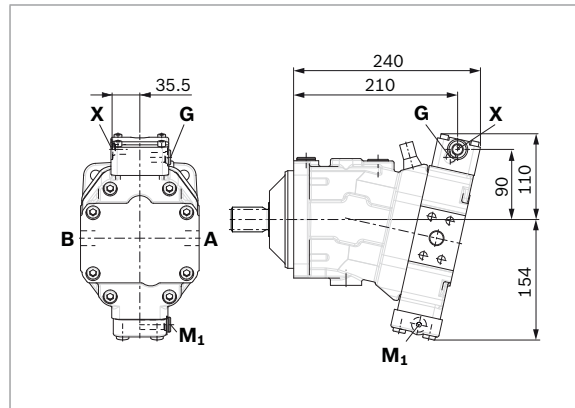

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

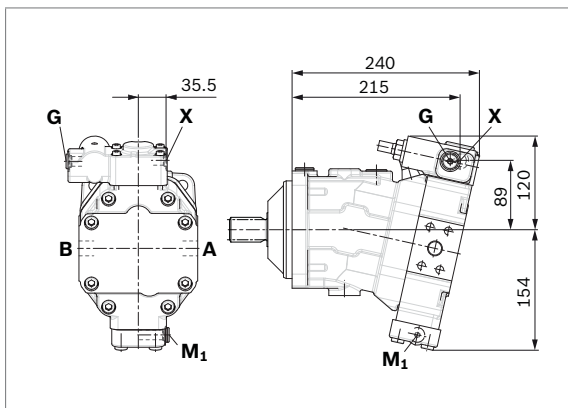


RE 91607/06.2016, **Bosch Rexroth AG**


30 **A6VM series 65** | Axial piston variable motor  
Dimensions size 55

Dimensions [mm]


▼ **HZ7** – Hydraulic two-point control, negative control

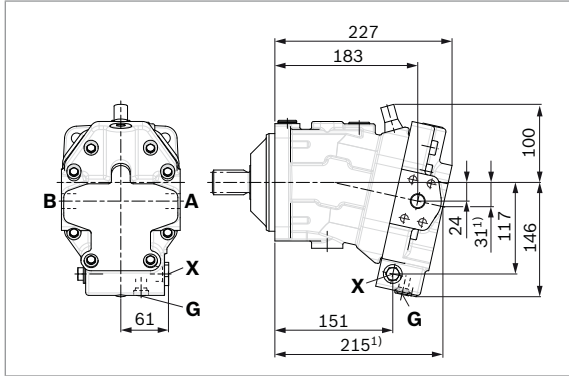

▼ **EZ7, EZ8** – Electric two-point control, negative control

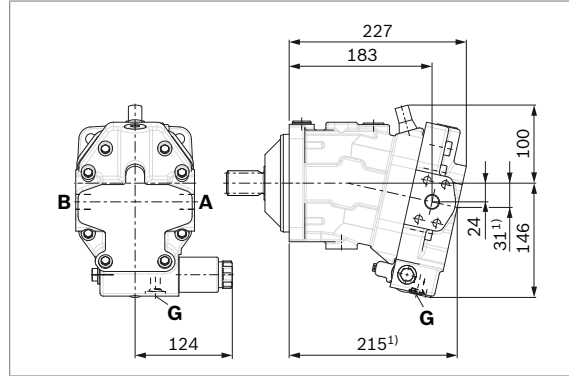


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

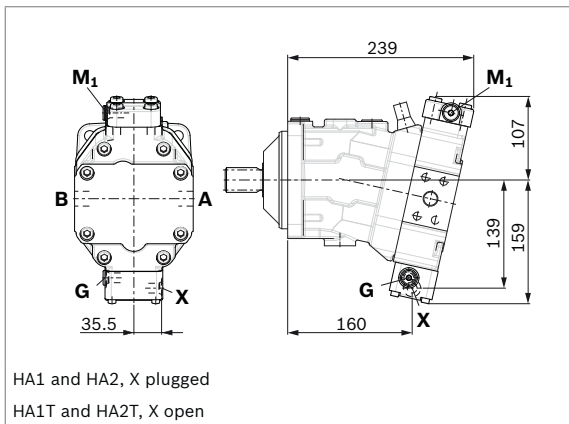


HA1 and HA2, X plugged  
HA1T and HA2T, X open

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

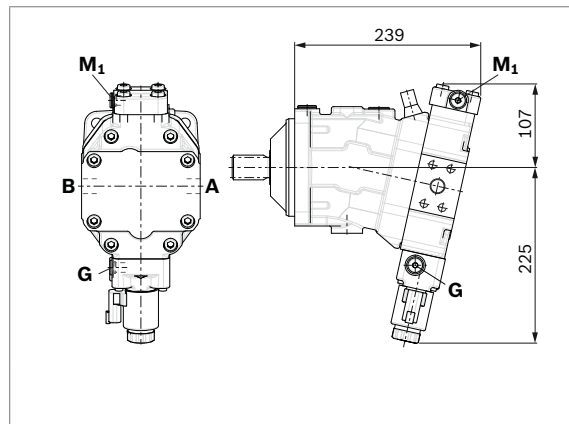

▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

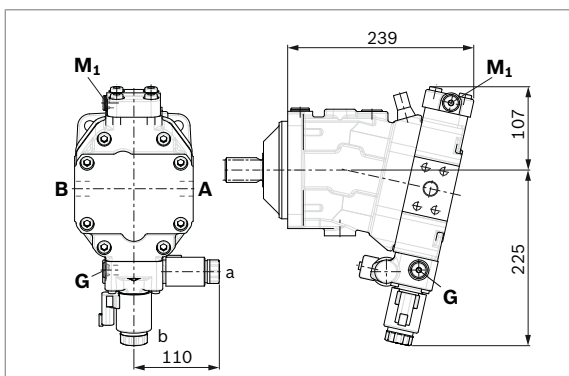


1) Port plate 1 – SAE working ports **A** and **B** at rear


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 31  
Dimensions size 55

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

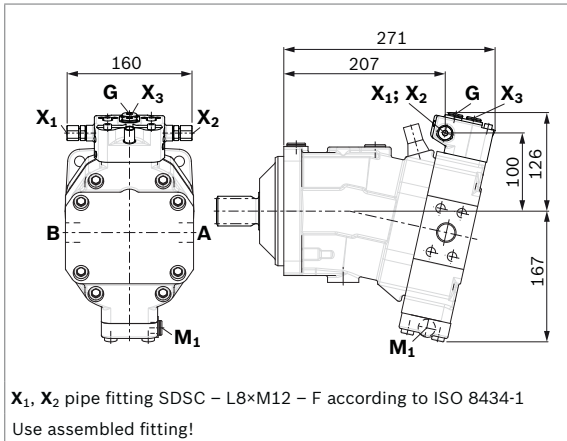

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g\ max}$  circuit

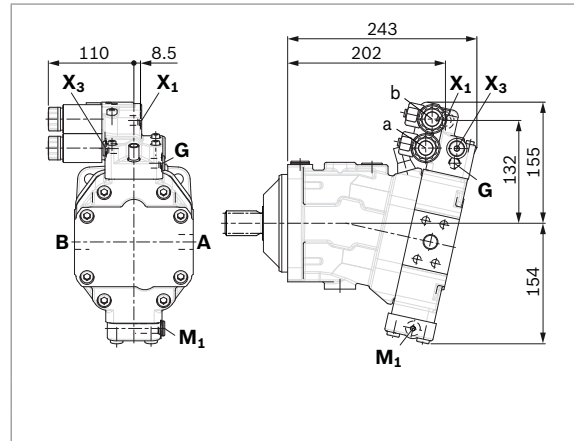

RE 91607/06.2016, **Bosch Rexroth AG**


32 **A6VM series 65** | Axial piston variable motor  
Dimensions size 80

Dimensions [mm]

## Dimensions size 80

### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports **A** and **B** at side, opposite

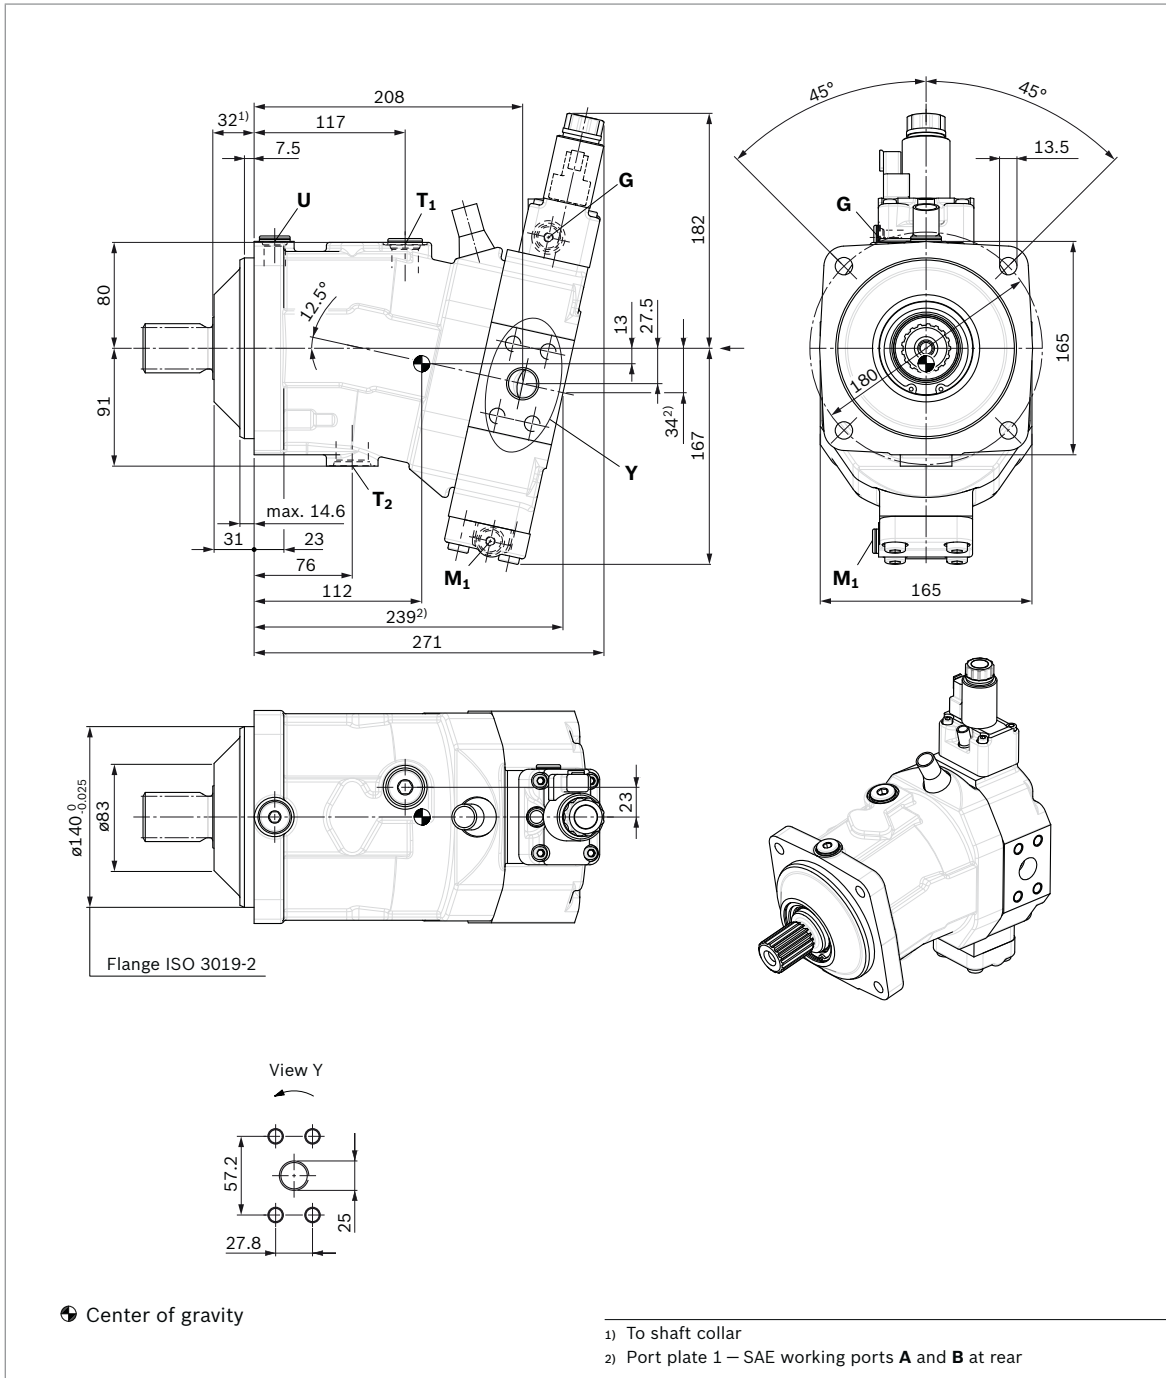


Bosch Rexroth AG, RE 91607/06.2016




Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 33  
Dimensions size 80


▼ Location of the service line ports on the port plates (view Z)

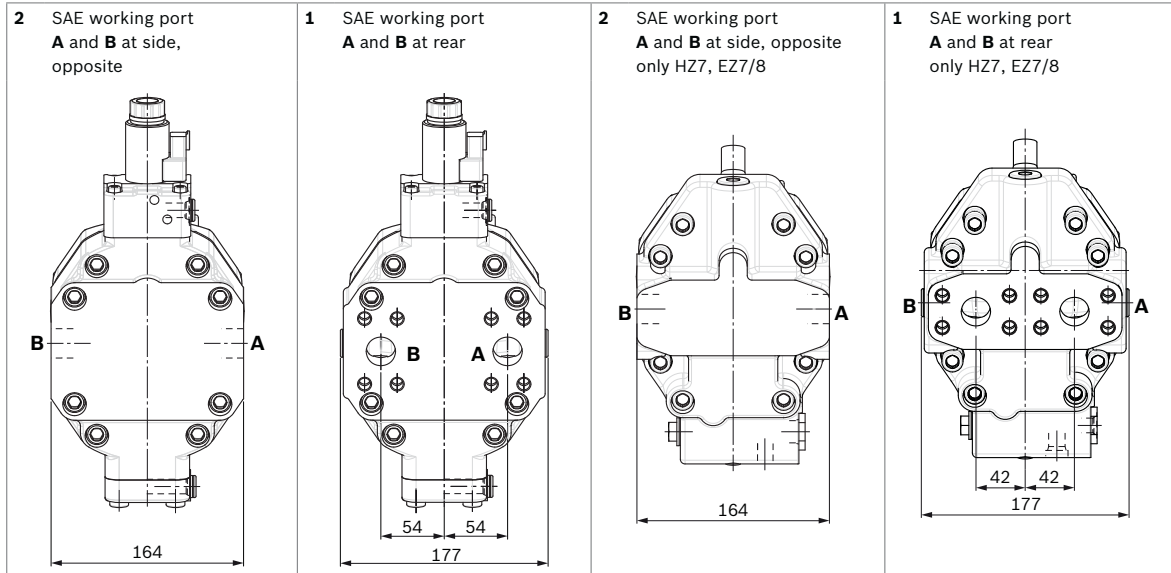


▼ Splined shaft SAE J744

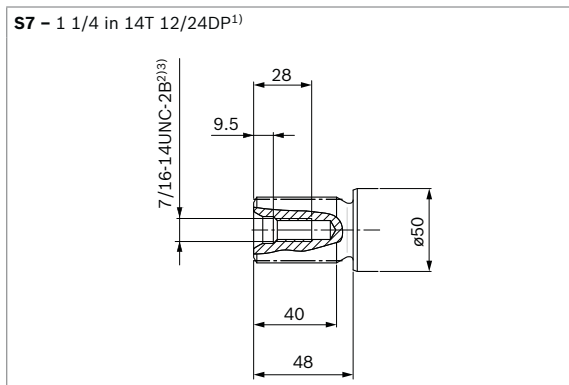

▼ Splined shaft DIN 5480

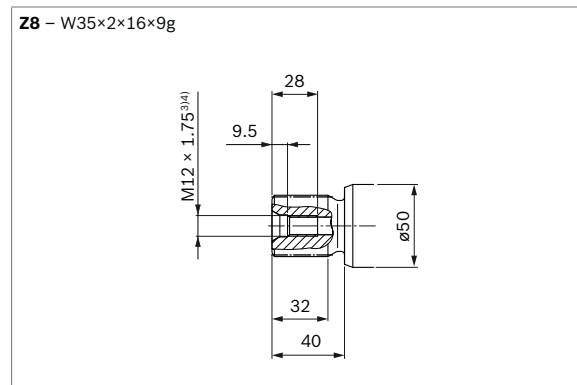

▼ Splined shaft DIN 5480

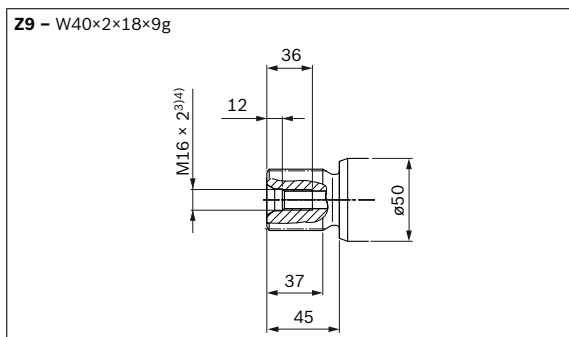

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

34 **A6VM series 65** | Axial piston variable motor  
Dimensions size 80

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 1 in                 | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M12 × 1.75; 17 deep  |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M22 × 1.5; 15.5 deep | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M27 × 2; 19 deep     | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M18 × 1.5; 14.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.


6) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 35  
Dimensions size 80


▼ **EP1, EP2** – Electric proportional control, positive control

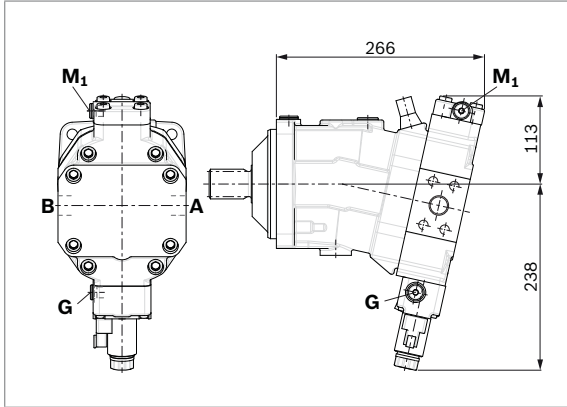


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

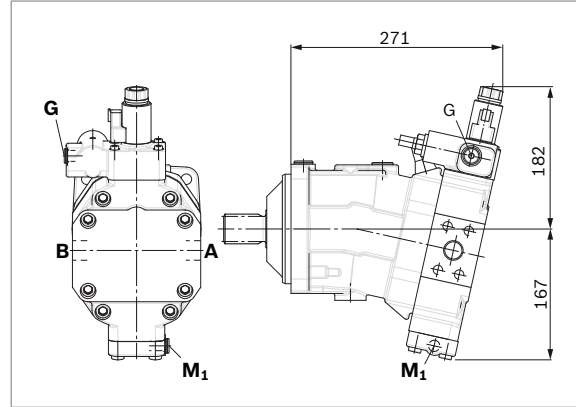


▼ **HP1, HP2** – Hydraulic proportional control, positive control

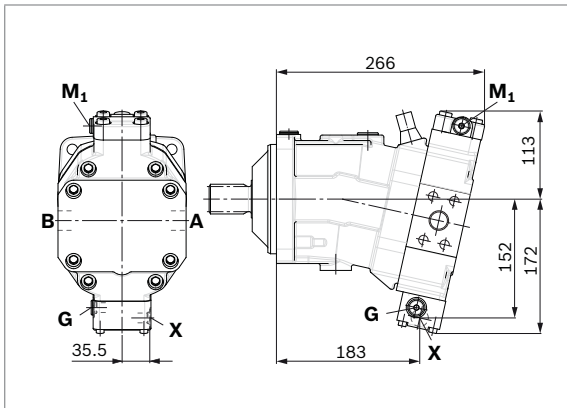

▼ **HP5, HP6** – Hydraulic proportional control, negative control

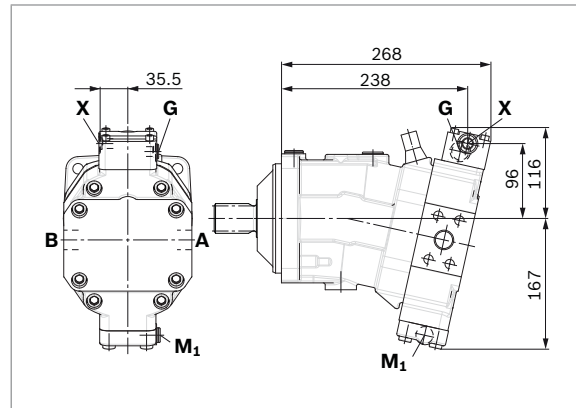

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

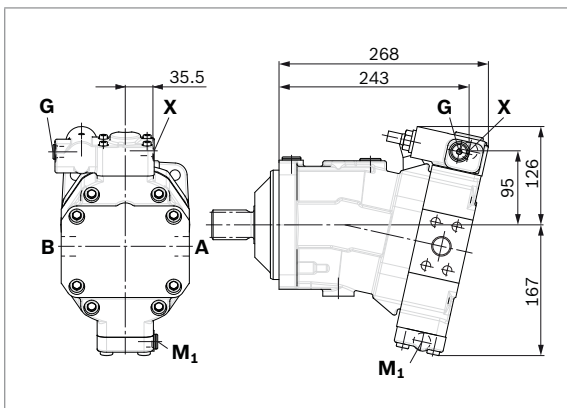


RE 91607/06.2016, **Bosch Rexroth AG**


36 **A6VM series 65** | Axial piston variable motor  
Dimensions size 80

Dimensions [mm]


▼ **HZ7** – Hydraulic two-point control, negative control

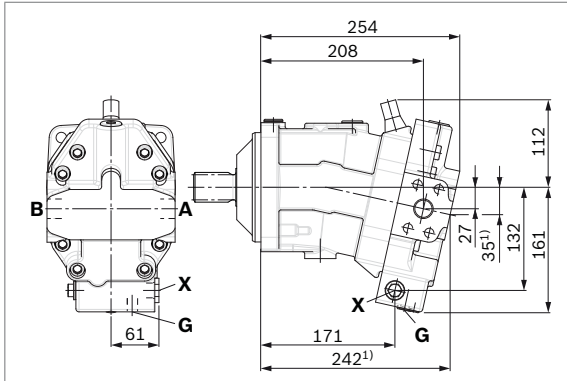

▼ **EZ7, EZ8** – Electric two-point control, negative control

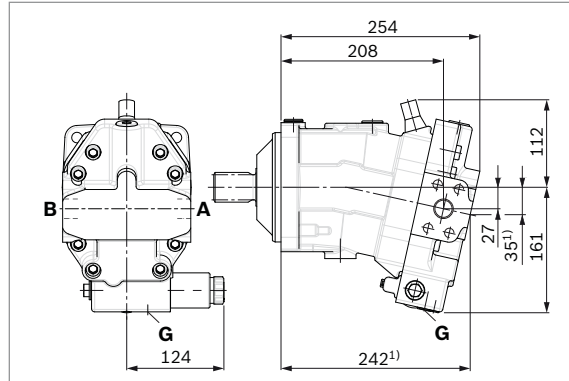


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

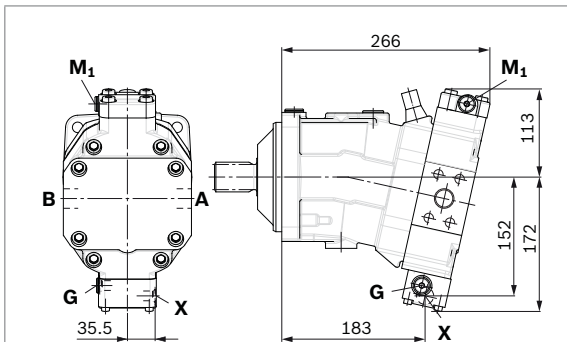


HA1 and HA2, X plugged  
HA1T and HA2T, X open

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

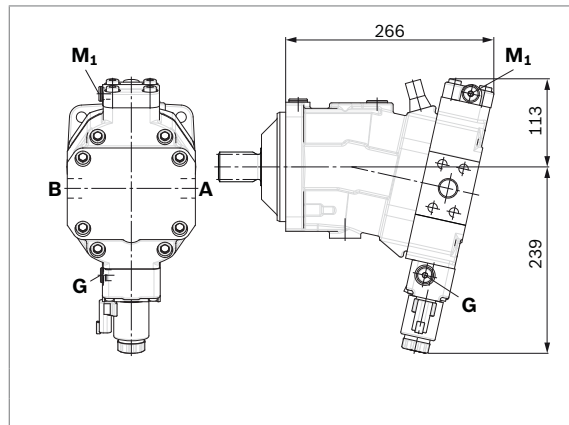

▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

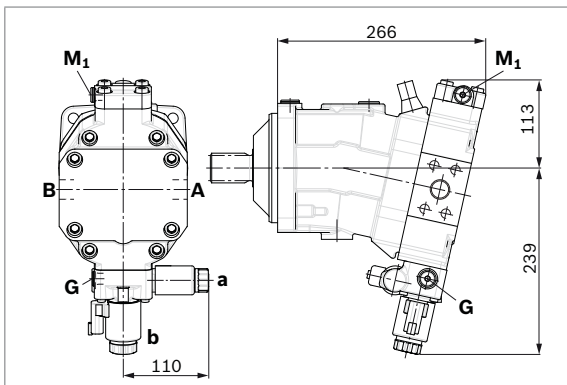


1) Port plate 1 – SAE working ports **A** and **B** at rear


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 37  
Dimensions size 80

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

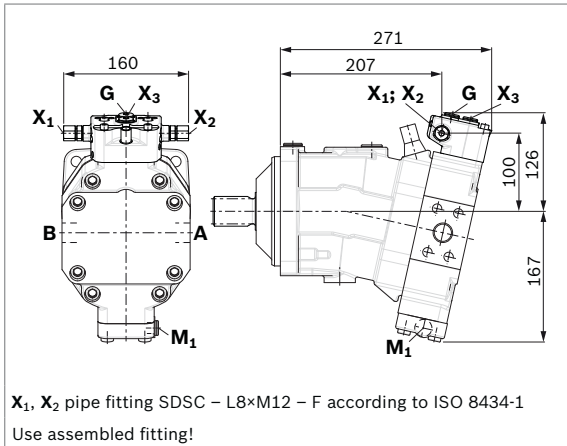

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g\max}$  circuit

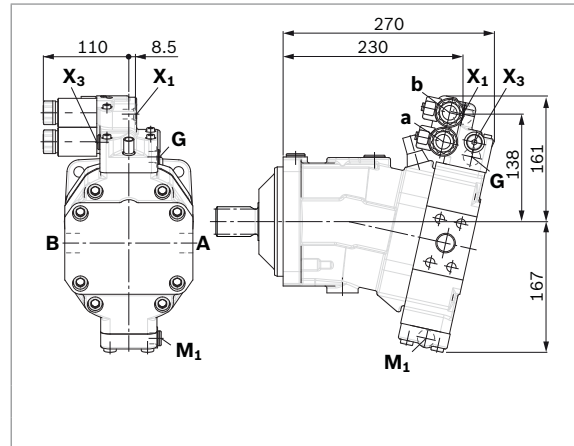

RE 91607/06.2016, **Bosch Rexroth AG**


38 **A6VM series 65** | Axial piston variable motor  
Dimensions size 107

Dimensions [mm]

## Dimensions size 107

### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports **A** and **B** at side, opposite

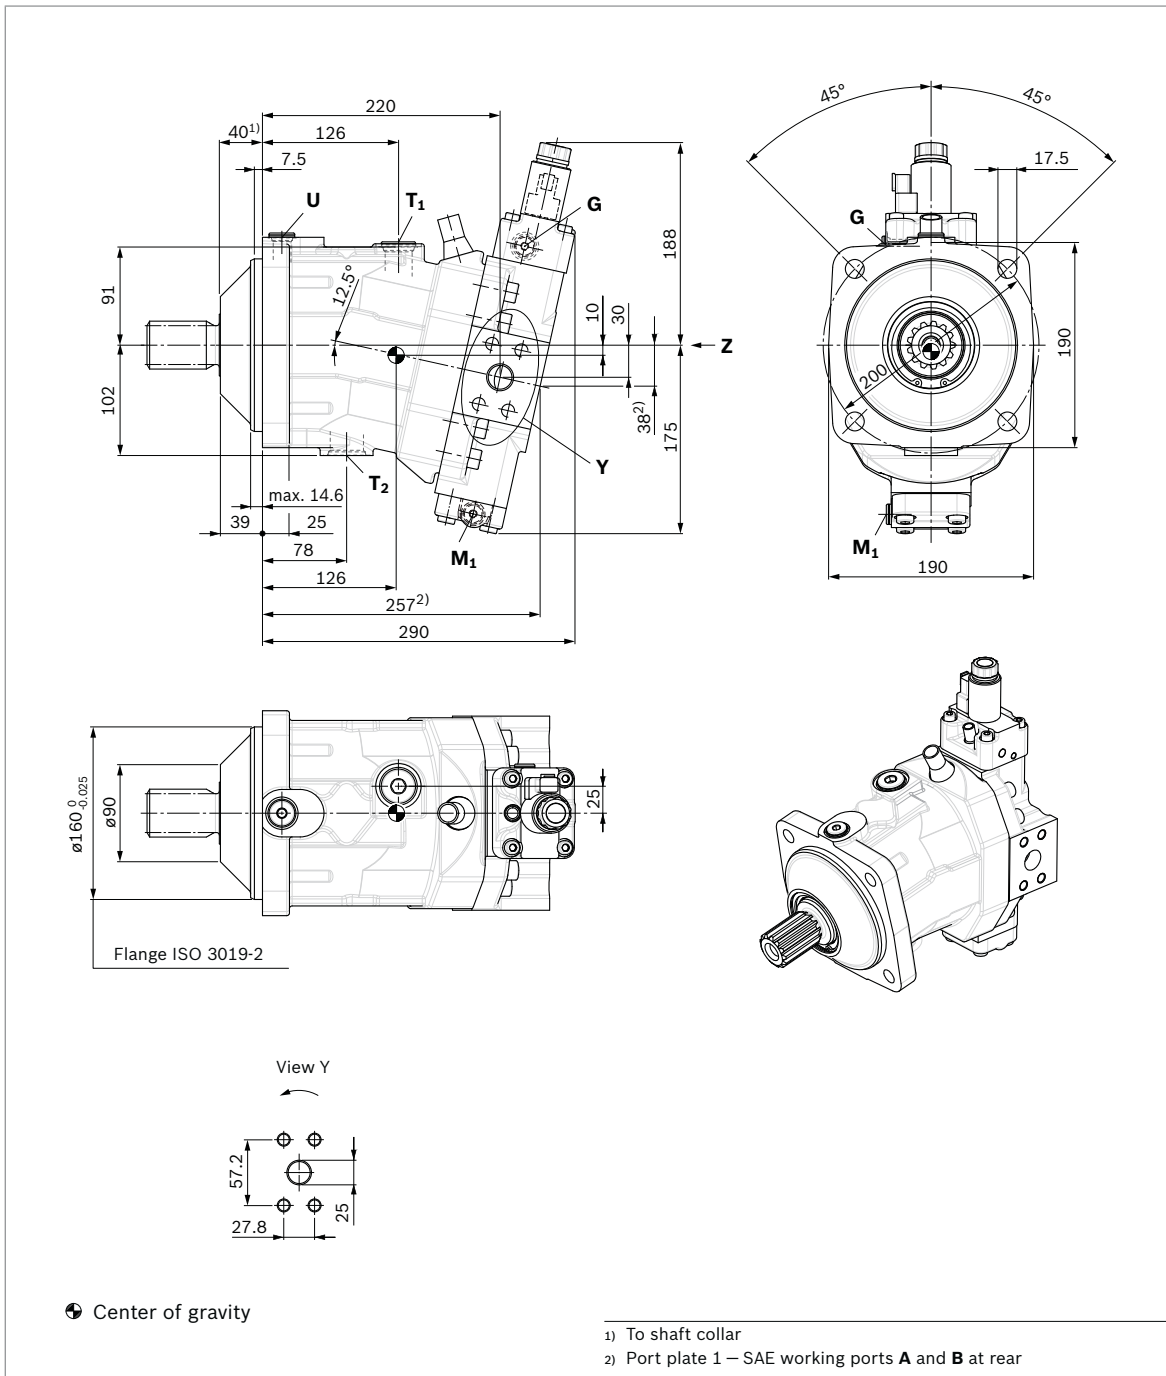


Bosch Rexroth AG, RE 91607/06.2016


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 39  
Dimensions size 107


▼ Location of the service line ports on the port plates (view Z)

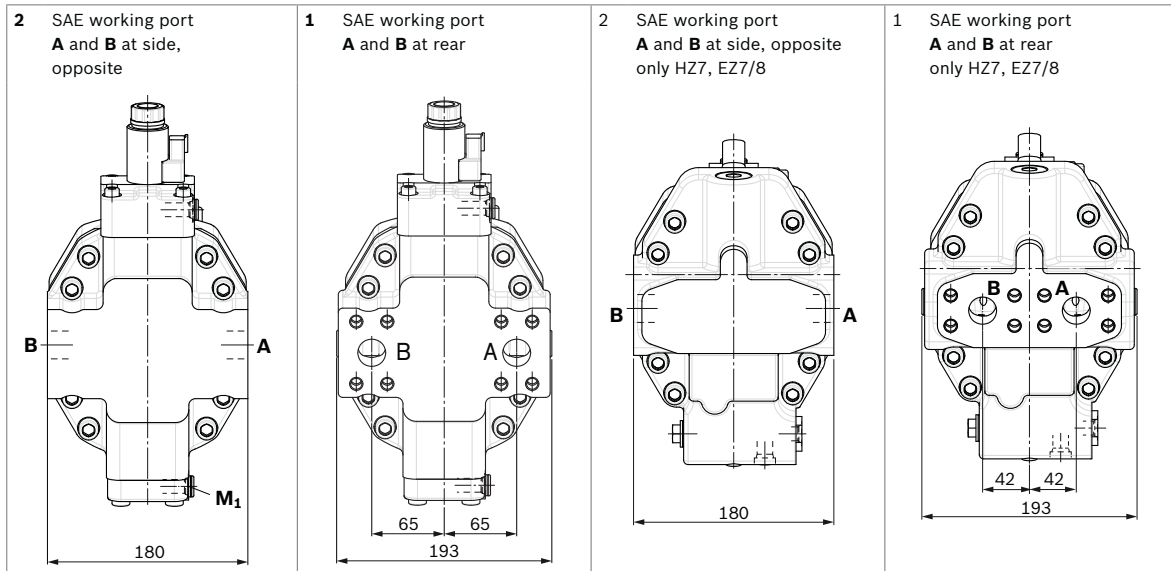


▼ Splined shaft SAE J744

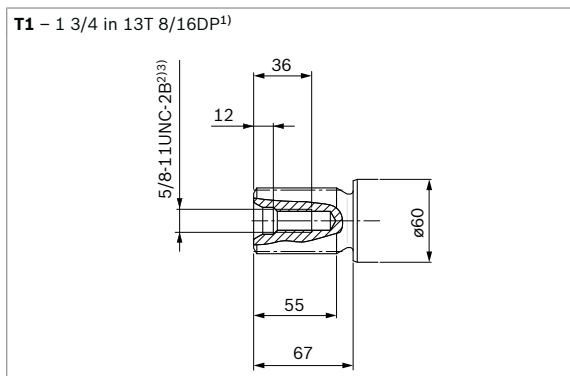

▼ Splined shaft DIN 5480

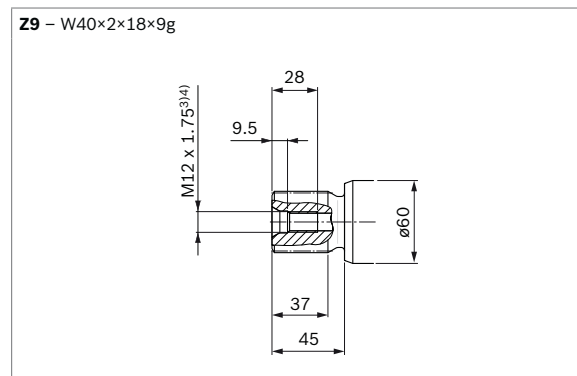

▼ Splined shaft DIN 5480

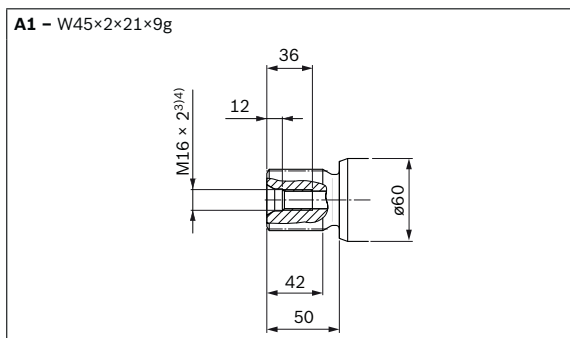

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

40 **A6VM series 65** | Axial piston variable motor  
Dimensions size 107

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 1 in                 | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M12 × 1.75; 17 deep  |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M27 × 2; 19 deep     | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M33 × 2; 19 deep     | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M18 × 1.5; 14.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.

6) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)




Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 41  
Dimensions size 107


▼ **EP1, EP2** – Electric proportional control, positive control

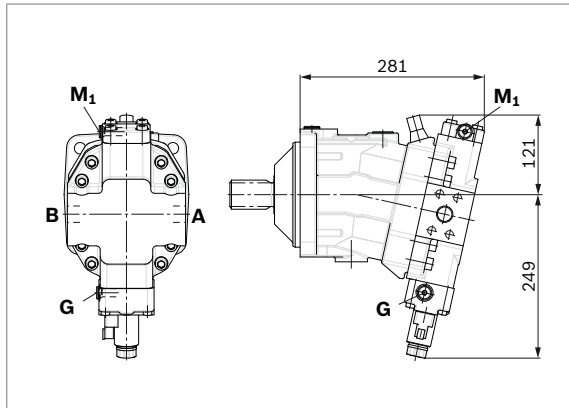


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

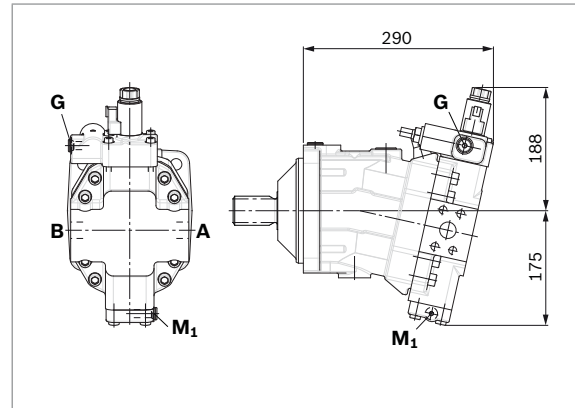


▼ **HP1, HP2** – Hydraulic proportional control, positive control

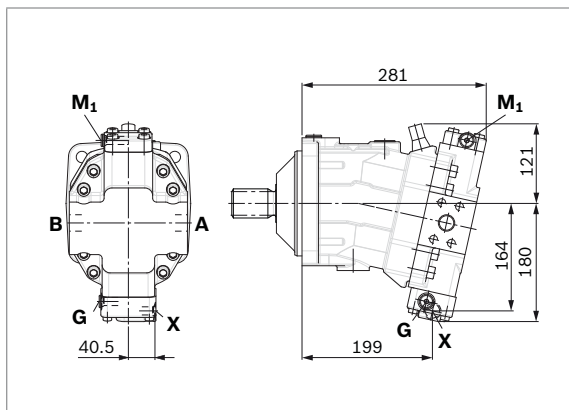

▼ **HP5, HP6** – Hydraulic proportional control, negative control

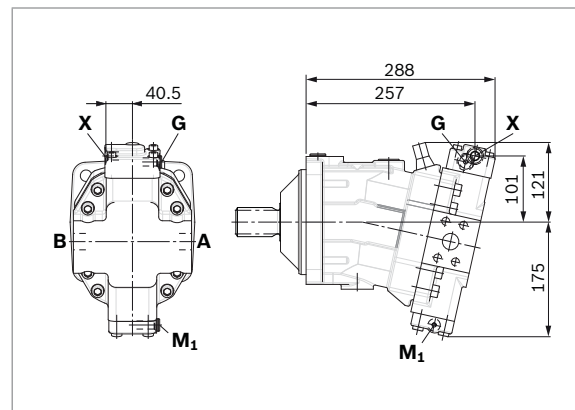

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

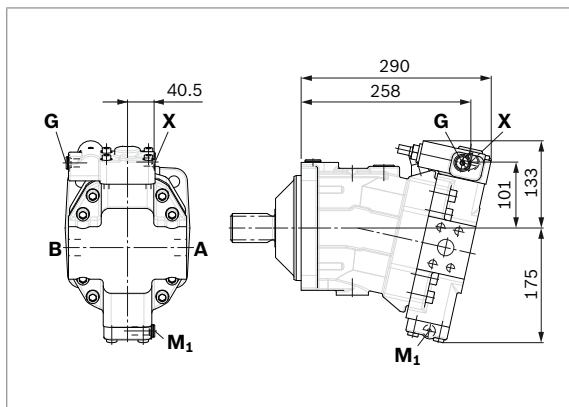


RE 91607/06.2016, **Bosch Rexroth AG**


42 **A6VM series 65** | Axial piston variable motor  
Dimensions size 107

Dimensions [mm]


▼ **HZ7** – Hydraulic two-point control, negative control

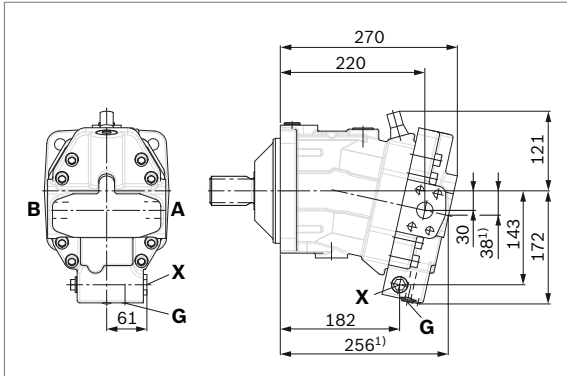

▼ **EZ7, EZ8** – Electric two-point control, negative control

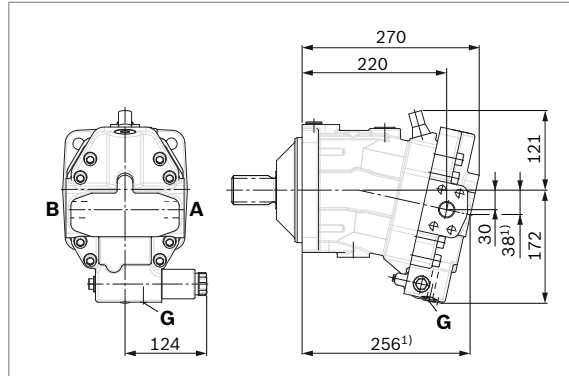


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

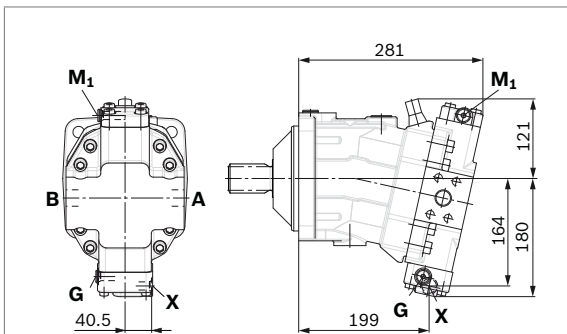


HA1 and HA2, **X** plugged  
HA1T and HA2T, **X** open

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

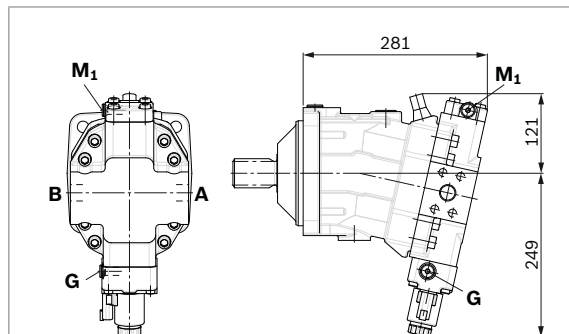

▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

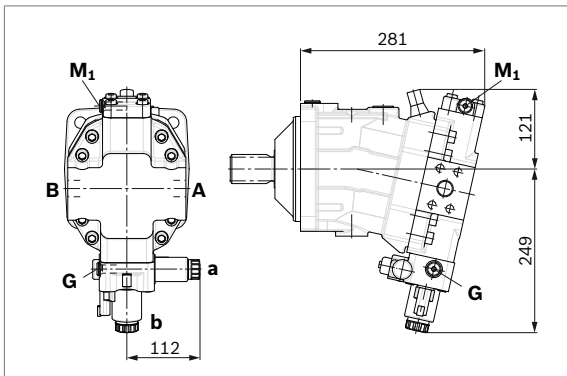


1) Port plate 1 – SAE working ports **A** and **B** at rear


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 43  
Dimensions size 107

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

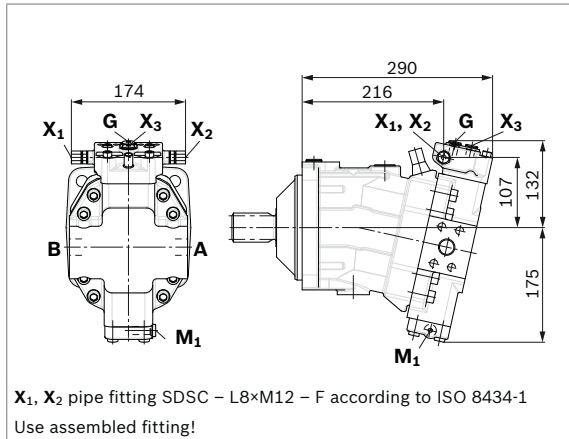

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g\max}$  circuit

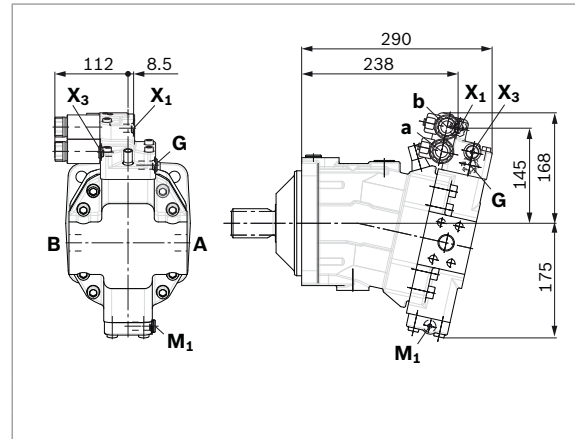

RE 91607/06.2016, **Bosch Rexroth AG**


44 **A6VM series 65** | Axial piston variable motor  
Dimensions size 140

Dimensions [mm]

## Dimensions size 140

### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports A and B at side, opposite

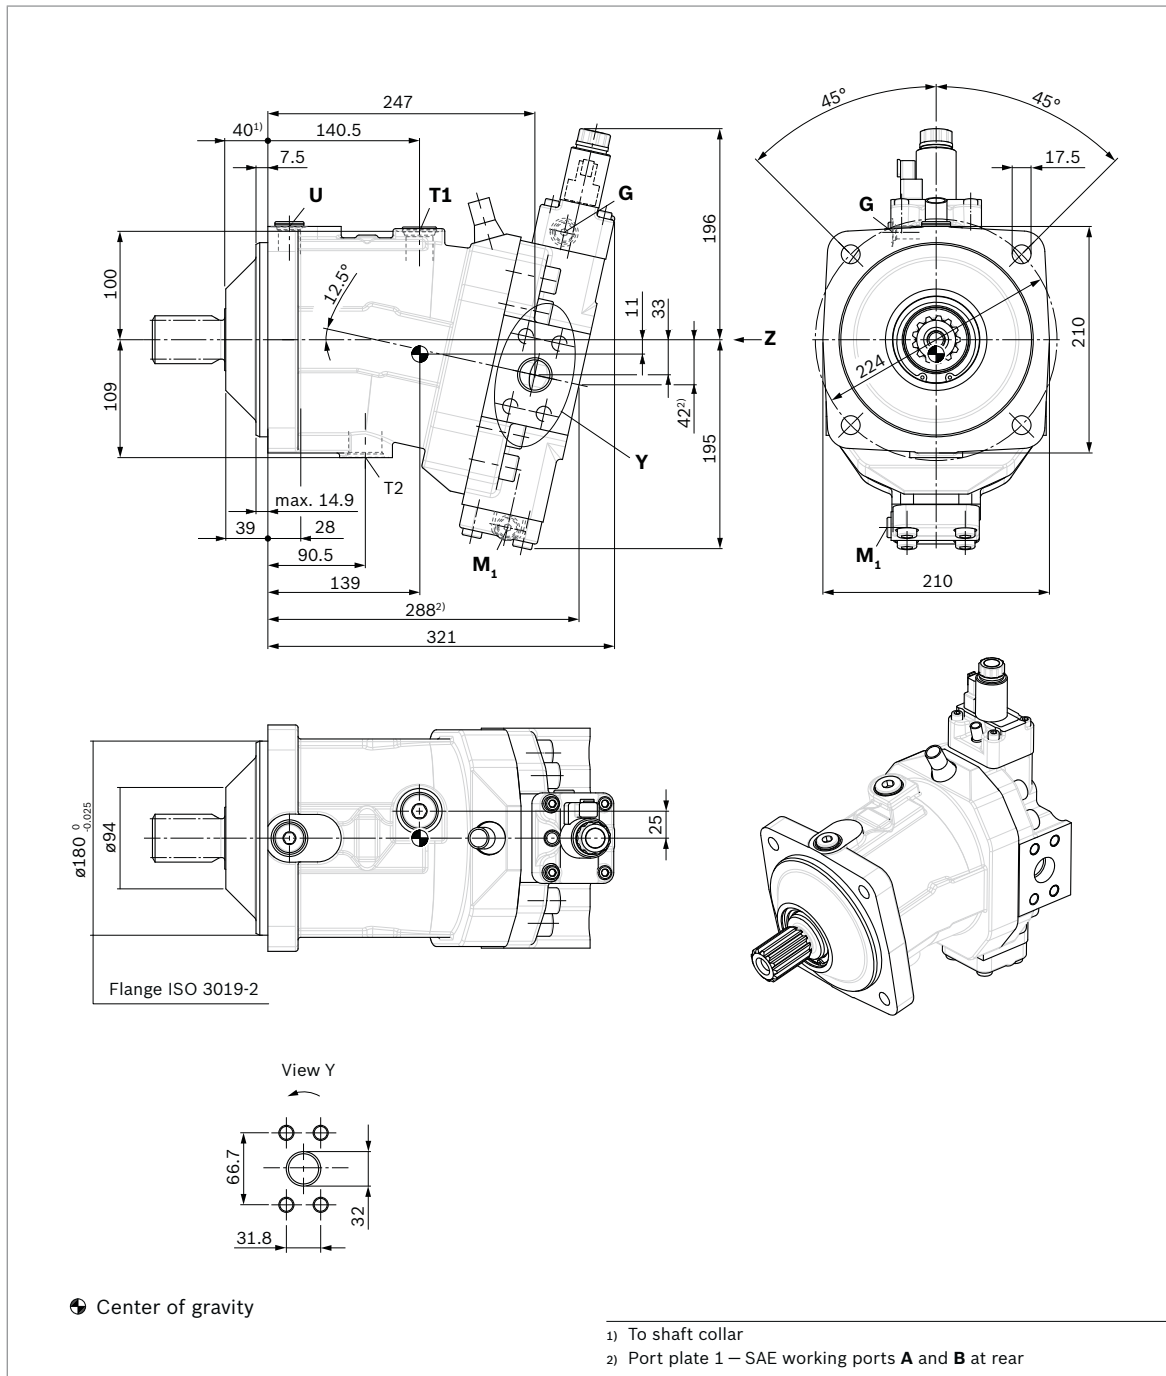


Bosch Rexroth AG, RE 91607/06.2016


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 45  
Dimensions size 140


▼ Location of the service line ports on the port plates (view Z)

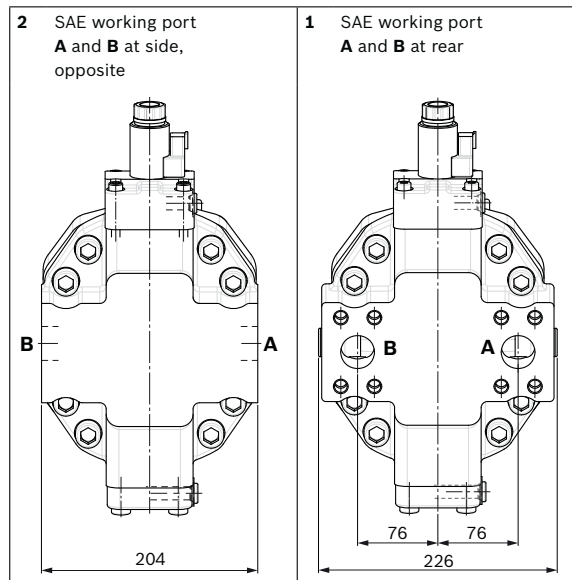

▼ Splined shaft SAE J744

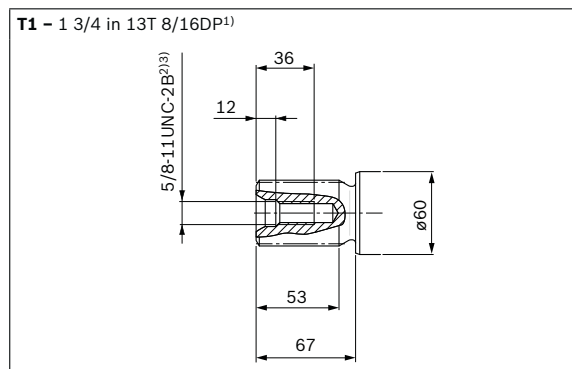

▼ Splined shaft DIN 5480

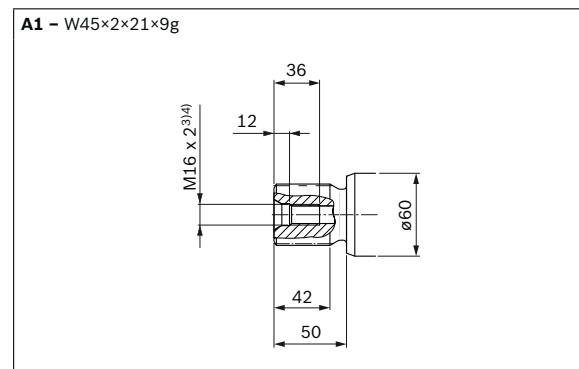

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

46 **A6VM series 65** | Axial piston variable motor  
Dimensions size 140

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 1 1/4 in             | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M14 × 2; 19 deep     |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M27 × 2; 19 deep     | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M33 × 2; 19 deep     | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M22 × 1.5; 15.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.


6) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 47  
Dimensions size 140


▼ **EP1, EP2** – Electric proportional control, positive control

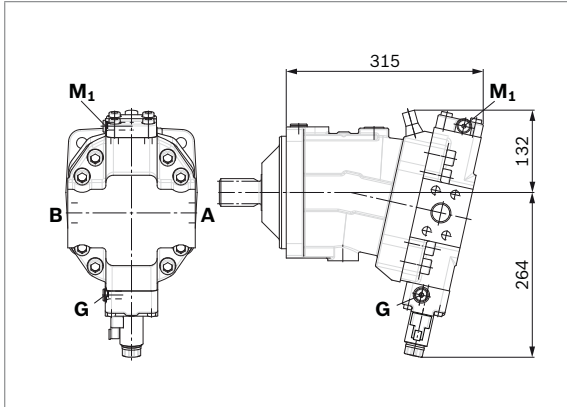


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

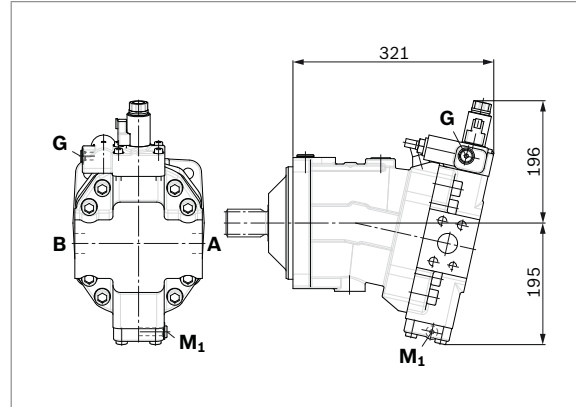


▼ **HP1, HP2** – Hydraulic proportional control, positive control

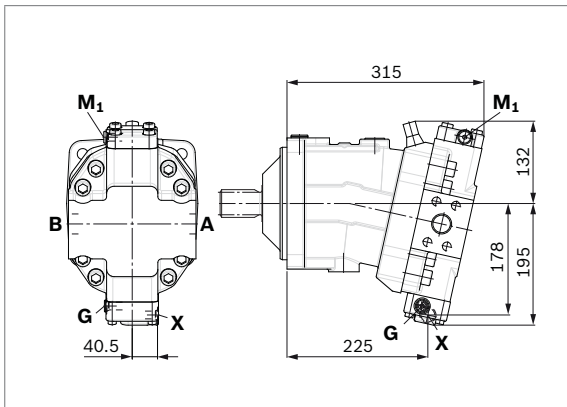

▼ **HP5, HP6** – Hydraulic proportional control, negative control

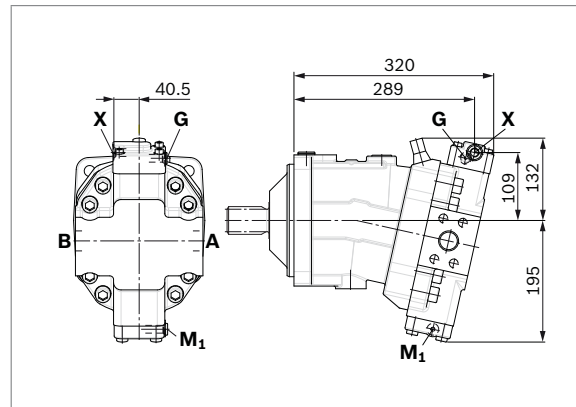

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

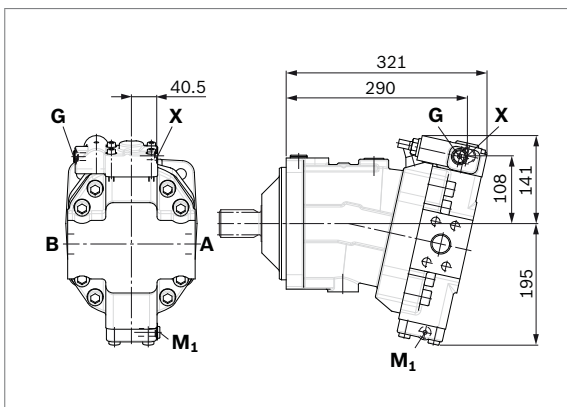


RE 91607/06.2016, **Bosch Rexroth AG**


48 **A6VM series 65** | Axial piston variable motor  
Dimensions size 140

Dimensions [mm]


▼ **HZ5** – Hydraulic two-point control, negative control

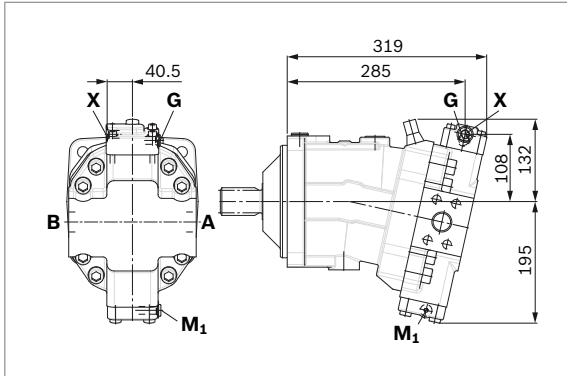


▼ **EZ5, EZ6** – Electric two-point control, negative control

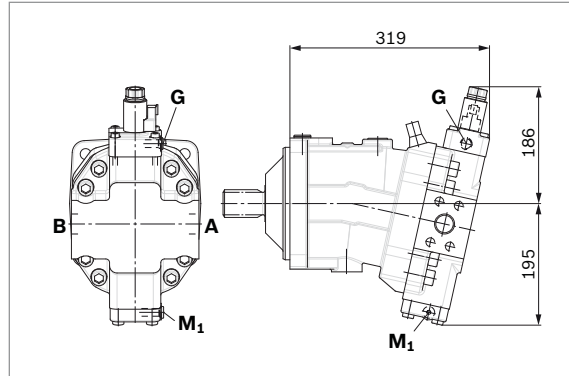


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

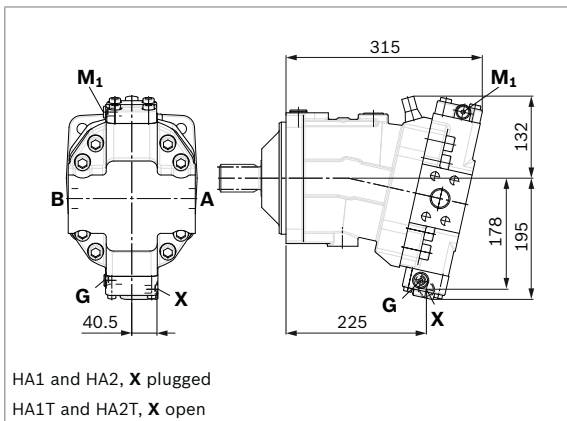

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

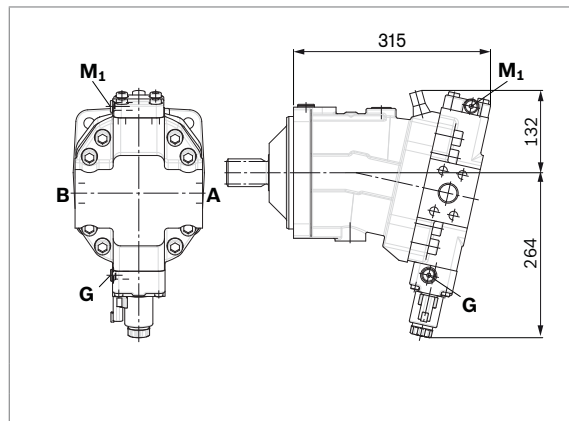

▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

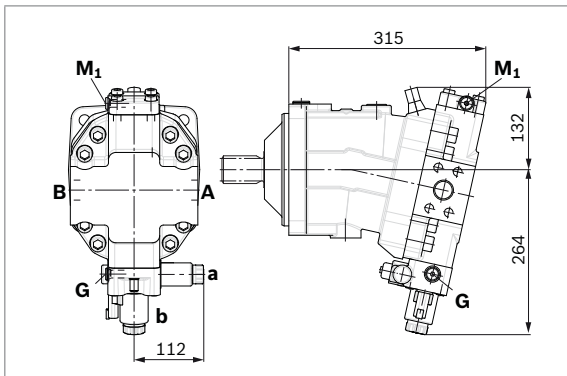





Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 49  
 Dimensions size 140

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

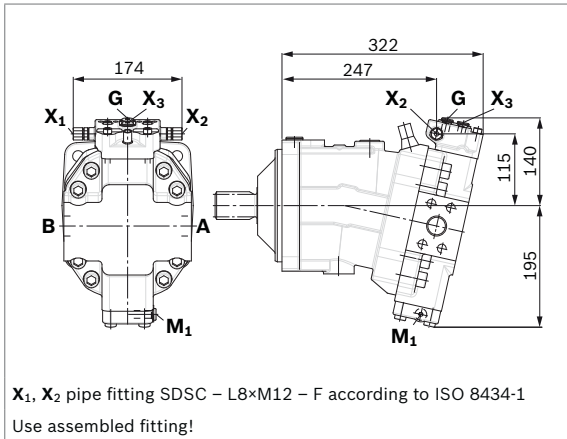

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g\ max}$  circuit

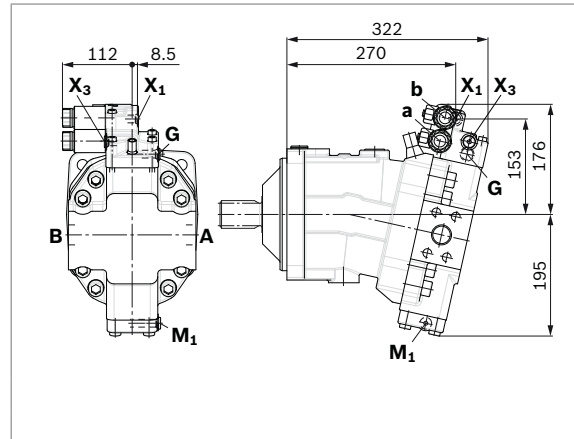

RE 91607/06.2016, **Bosch Rexroth AG**


50 **A6VM series 65** | Axial piston variable motor  
Dimensions size 160

Dimensions [mm]

## Dimensions size 160

### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports **A** and **B** at side, opposite

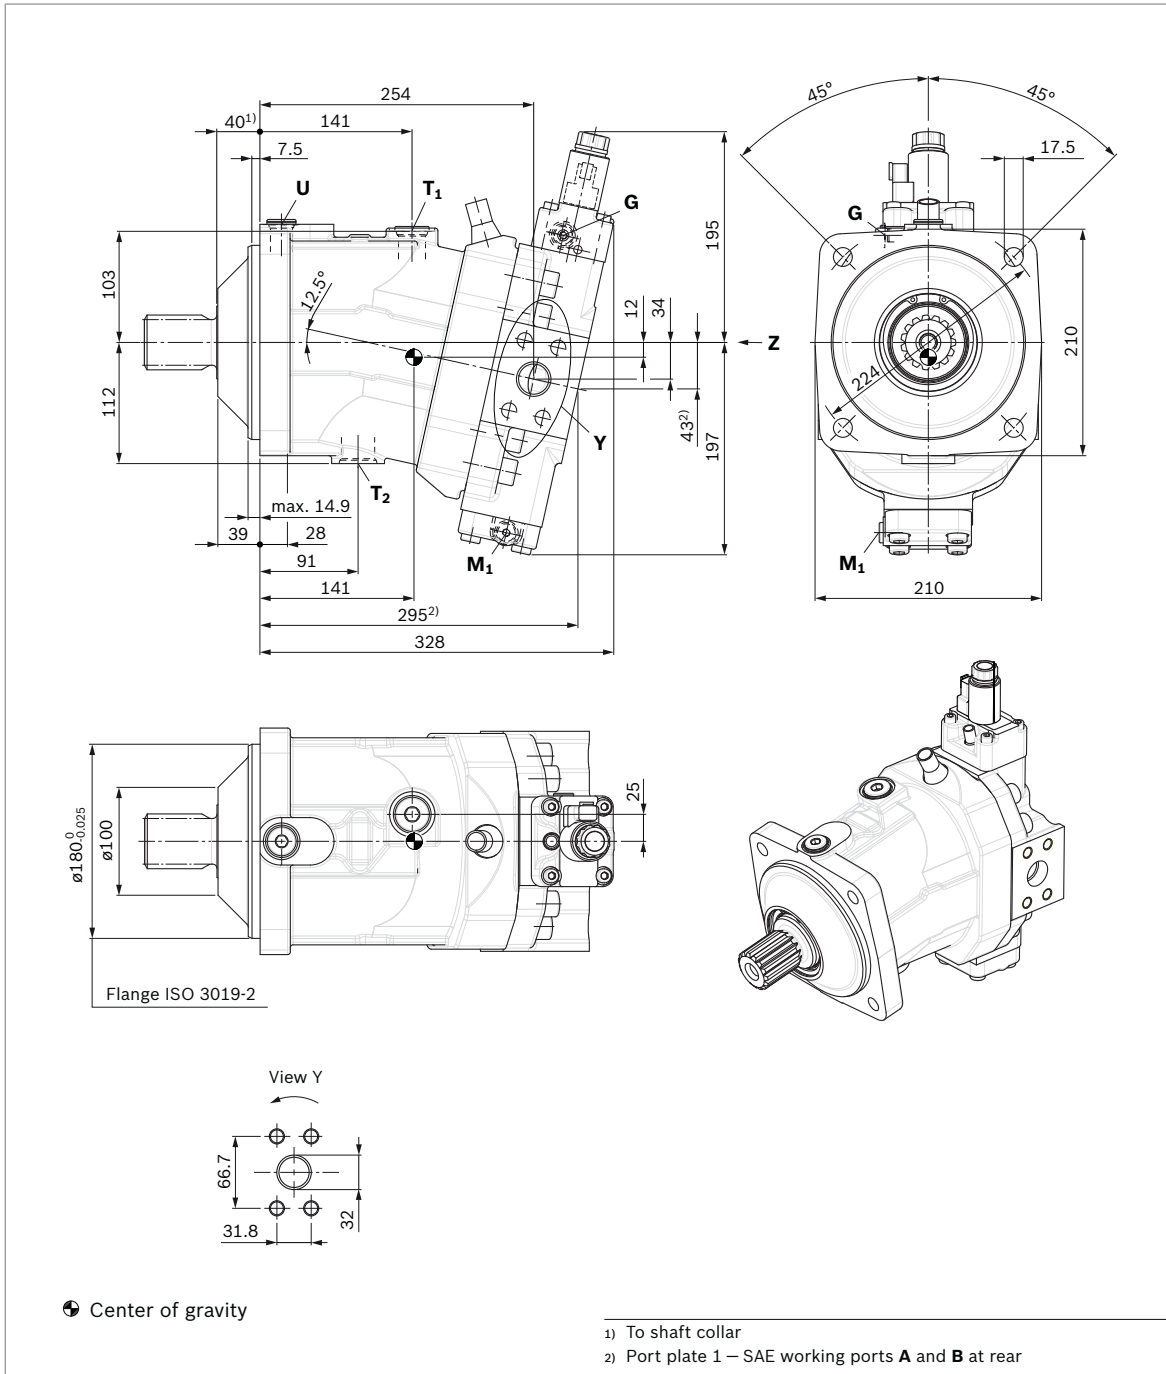


Bosch Rexroth AG, RE 91607/06.2016


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 51  
Dimensions size 160


▼ Location of the service line ports on the port plates (view Z)

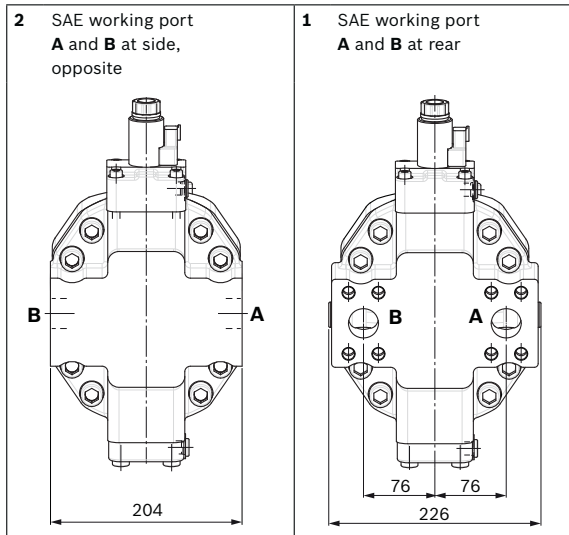


▼ Splined shaft SAE J744

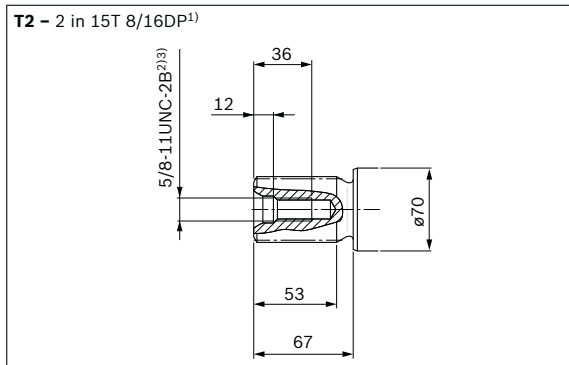

▼ Splined shaft DIN 5480

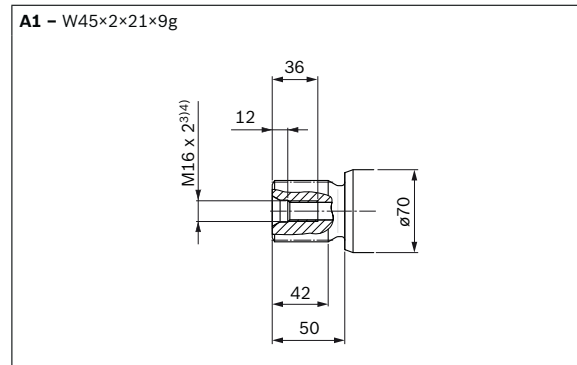

▼ Splined shaft DIN 5480

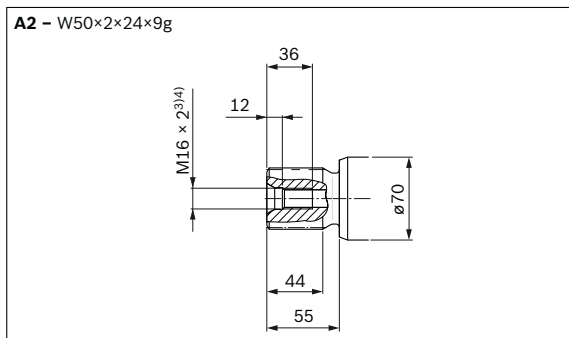

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

52 **A6VM series 65** | Axial piston variable motor  
Dimensions size 160

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 1 1/4 in             | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M14 × 2; 19 deep     |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M27 × 2; 19 deep     | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M33 × 2; 19 deep     | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M22 × 1.5; 15.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.


6) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 53  
Dimensions size 160


▼ **EP1, EP2** – Electric proportional control, positive control

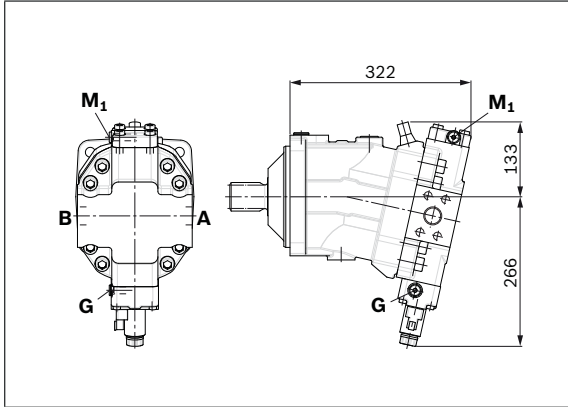


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

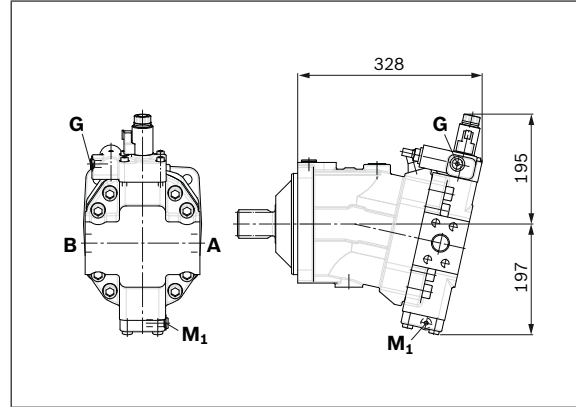


▼ **HP1, HP2** – Hydraulic proportional control, positive control

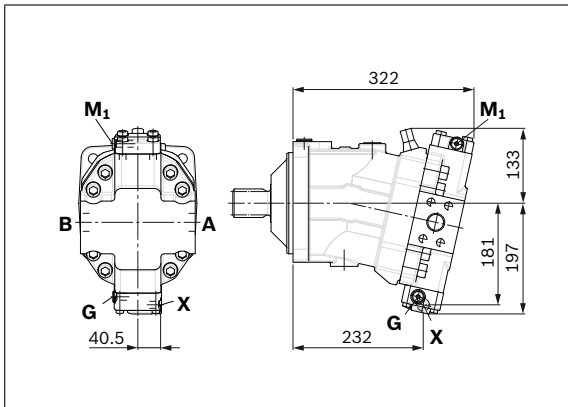

▼ **HP5, HP6** – Hydraulic proportional control, negative control

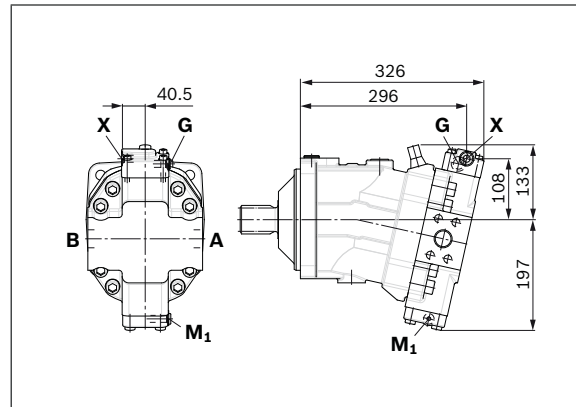

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

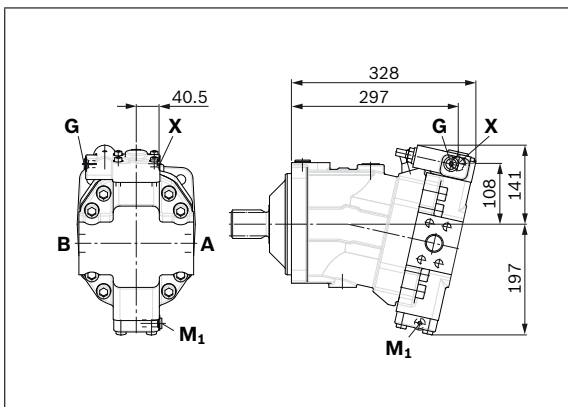


RE 91607/06.2016, **Bosch Rexroth AG**


54 **A6VM series 65** | Axial piston variable motor  
Dimensions size 160

Dimensions [mm]


▼ **HZ5** – Hydraulic two-point control, negative control

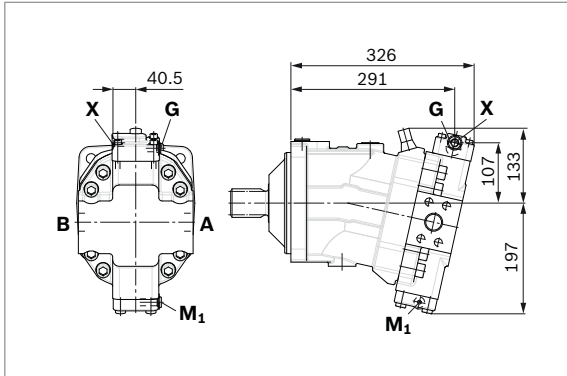


▼ **EZ5, EZ6** – Electric two-point control, negative control

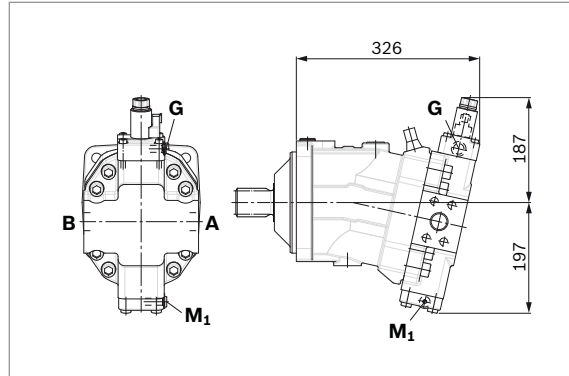


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

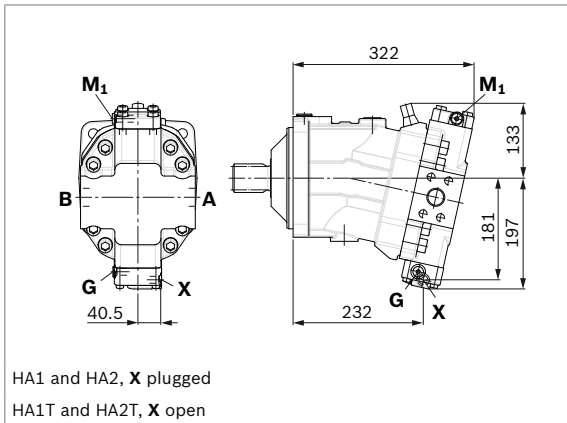

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

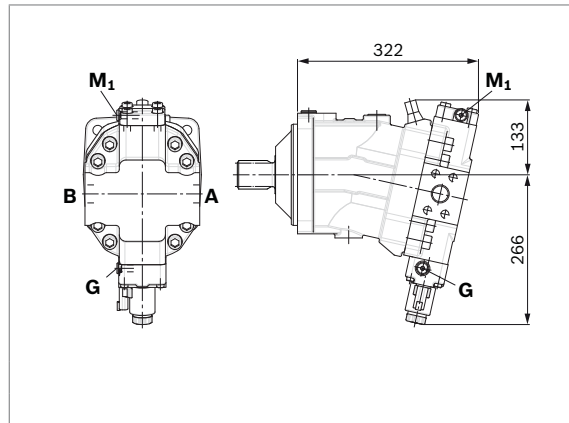


▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

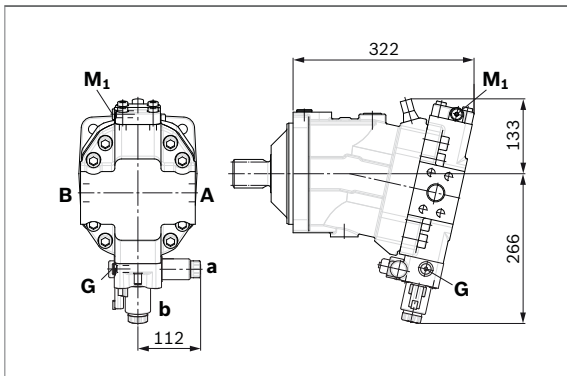


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 55  
Dimensions size 160

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

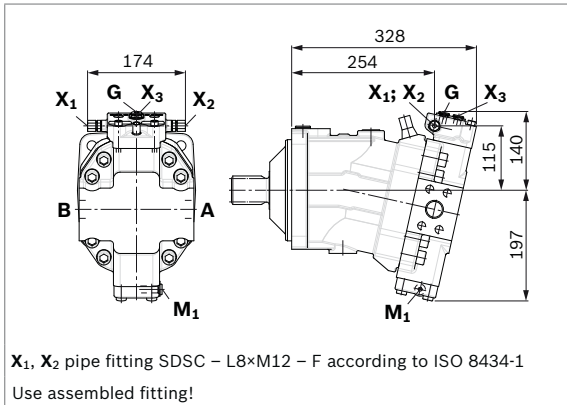

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g,max}$  circuit

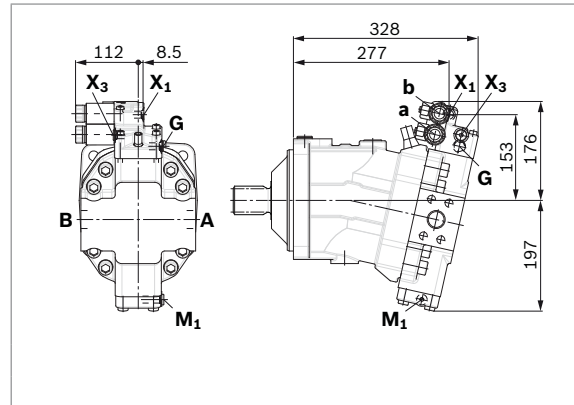

RE 91607/06.2016, **Bosch Rexroth AG**


56 **A6VM series 65** | Axial piston variable motor  
Dimensions size 200

Dimensions [mm]

### Dimensions size 200

#### EP5, EP6 – Proportional electric control, negative control

Port plate 2 – SAE working ports **A** and **B** at side, opposite

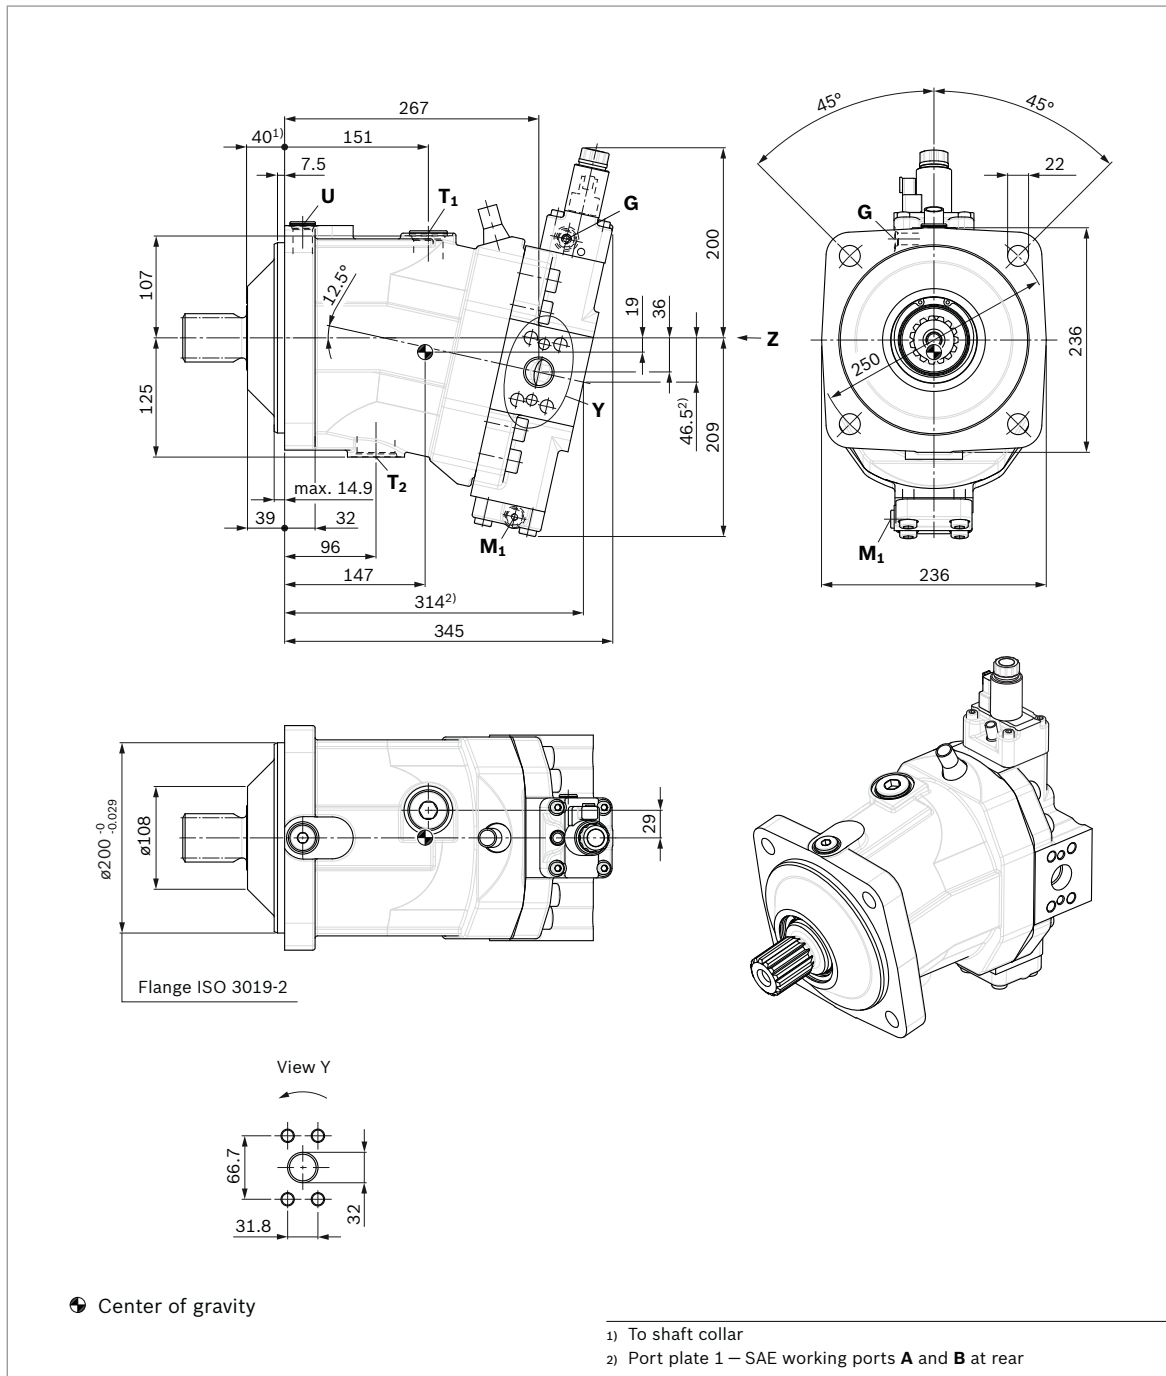


Bosch Rexroth AG, RE 91607/06.2016




Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 57  
Dimensions size 200


▼ Location of the service line ports on the port plates (view Z)

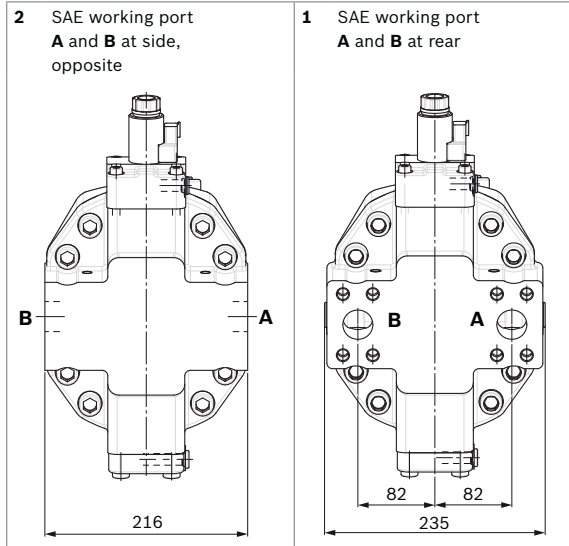

▼ Splined shaft SAE J744

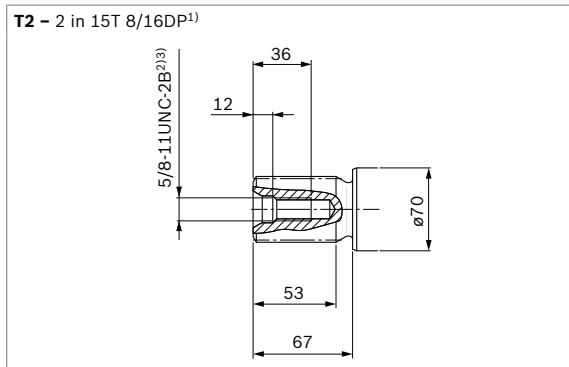

▼ Splined shaft DIN 5480

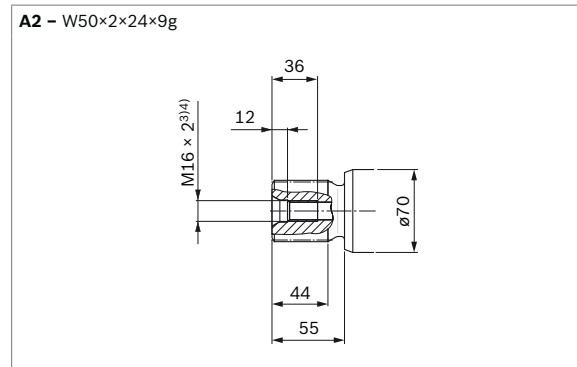

- 1) Involute spline acc. to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) For notes on tightening torques, see instruction manual
- 4) Center bore according to DIN 332 (thread according to DIN 13)

RE 91607/06.2016, **Bosch Rexroth AG**

58 **A6VM series 65** | Axial piston variable motor  
Dimensions size 200

Dimensions [mm]

| Ports                               |                                  | Standard               | Size <sup>1)</sup>   | $p_{max}$ [bar] <sup>2)</sup> | Status <sup>6)</sup> |
|-------------------------------------|----------------------------------|------------------------|----------------------|-------------------------------|----------------------|
| <b>A, B</b>                         | Working port                     | SAE J518 <sup>3)</sup> | 1 1/4 in             | 450                           | O                    |
|                                     | Fastening thread A/B             | DIN 13                 | M14 × 2; 19 deep     |                               |                      |
| <b>T<sub>1</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M33 × 2; 19 deep     | 3                             | X <sup>4)</sup>      |
| <b>T<sub>2</sub></b>                | Drain port                       | ISO 6149 <sup>5)</sup> | M42 × 2; 19.5 deep   | 3                             | O <sup>4)</sup>      |
| <b>G</b>                            | Synchronous control              | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |
| <b>U</b>                            | Bearing flushing                 | ISO 6149 <sup>5)</sup> | M22 × 1.5; 15.5 deep | 3                             | X                    |
| <b>X</b>                            | Pilot signal (HP, HZ, HA1T/HA2T) | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 100                           | O                    |
| <b>X</b>                            | Pilot signal (HA1, HA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 3                             | X                    |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Pilot signal (DA0)               | ISO 8434-1             | SDSC-L8×M12-F        | 40                            | O                    |
| <b>X<sub>1</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | O                    |
| <b>X<sub>3</sub></b>                | Pilot signal (DA1, DA2)          | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 40                            | X                    |
| <b>M<sub>1</sub></b>                | Stroking chamber measurement     | ISO 6149 <sup>5)</sup> | M14 × 1.5; 11.5 deep | 450                           | X                    |

1) For notes on tightening torques, see instruction manual

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

4) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 72).

5) The countersink can be deeper than as specified in the standard.


6) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 59  
Dimensions size 200


▼ **EP1, EP2** – Electric proportional control, positive control

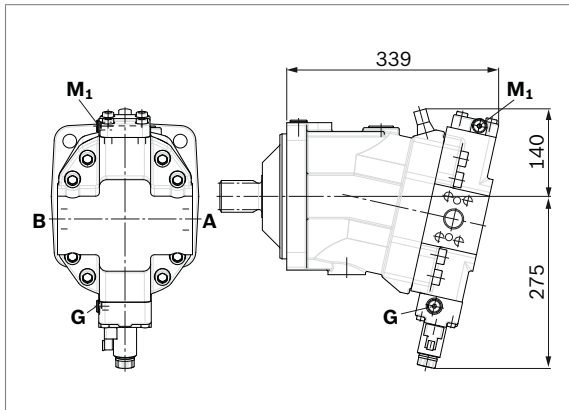


▼ **EP5D1, EP6D1** – Electric proportional control, negative control, with pressure control, fixed

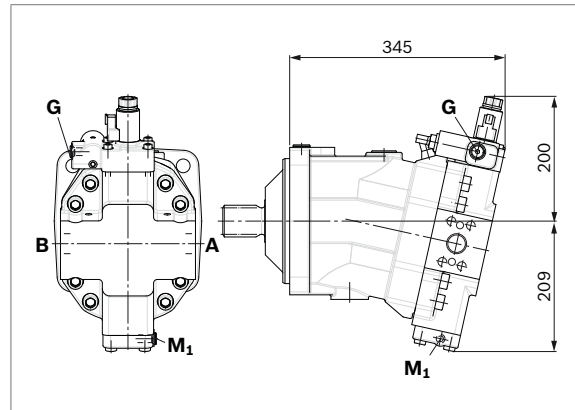


▼ **HP1, HP2** – Hydraulic proportional control, positive control

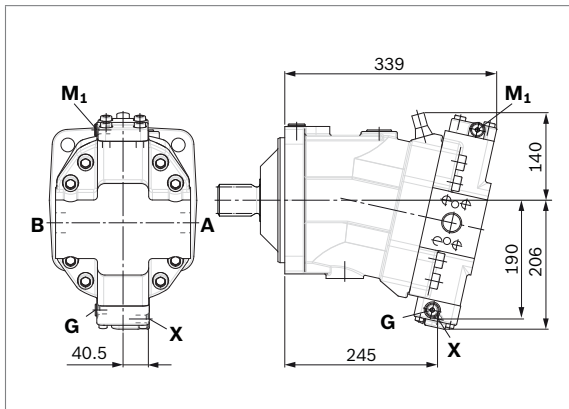

▼ **HP5, HP6** – Hydraulic proportional control, negative control

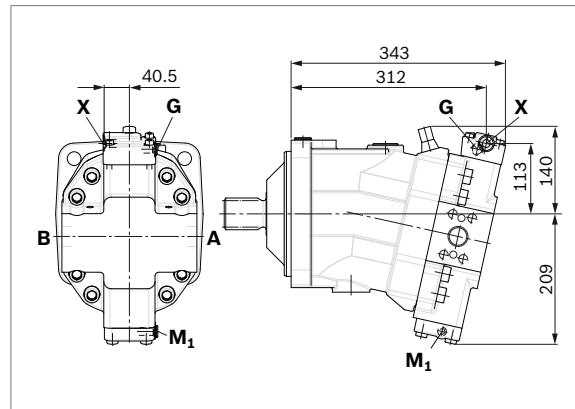

▼ **HP5D1, HP6D1** – Hydraulic proportional control, negative control, with pressure control, fixed

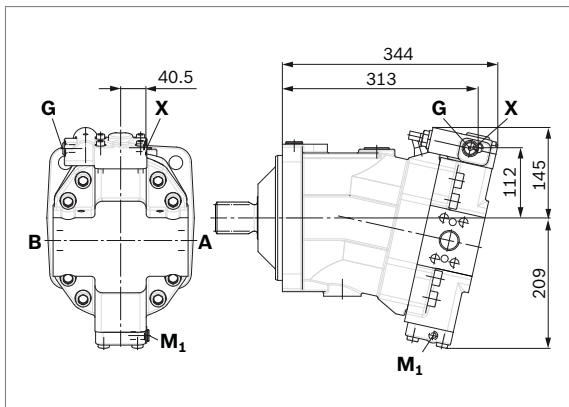


RE 91607/06.2016, **Bosch Rexroth AG**


60 **A6VM series 65** | Axial piston variable motor  
Dimensions size 200

Dimensions [mm]


▼ **HZ5** – Hydraulic two-point control, negative control

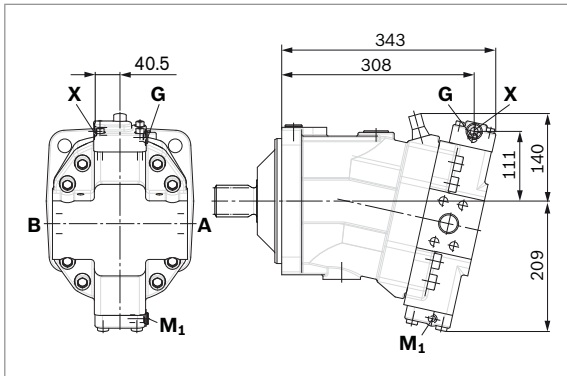


▼ **EZ5, EZ6** – Electric two-point control, negative control

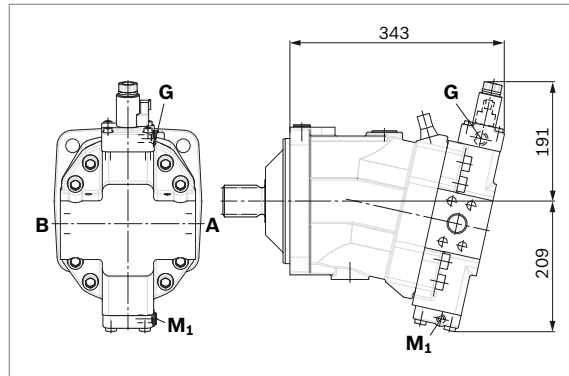


▼ **HA1, HA2 / HA1T3, HA2T3** – Automatic high-pressure-related control, positive control, with override hydraulic remote controlled, proportional

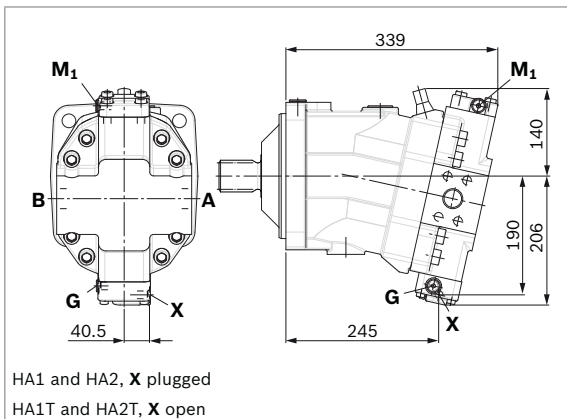

▼ **HA1U1, HA2U2** – Automatic high-pressure-related control, positive control, with override, electric, two-point

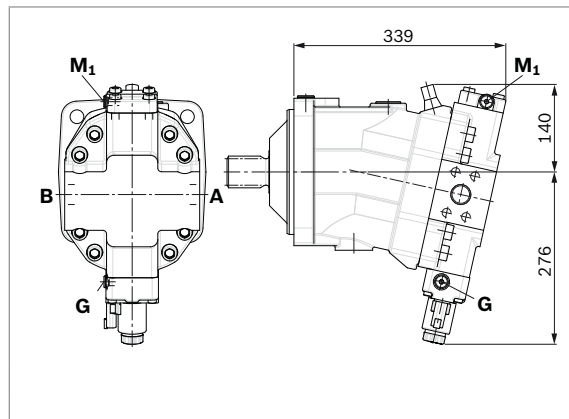


▼ **HA1R1, HA2R2** – Automatic high-pressure-related control, positive control, with override, electric and travel direction valve, electric

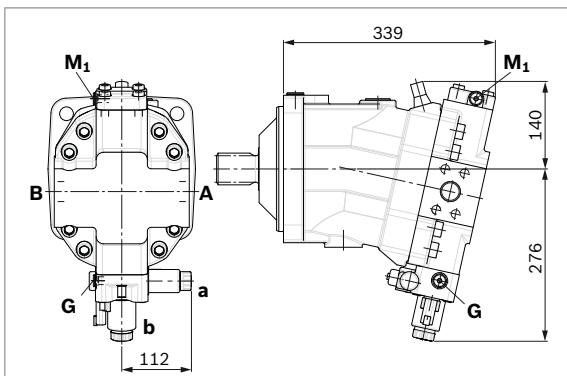


Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 61  
 Dimensions size 200

▼ **DA0** – Automatic speed-related control, negative control, with hydraulic travel direction valve

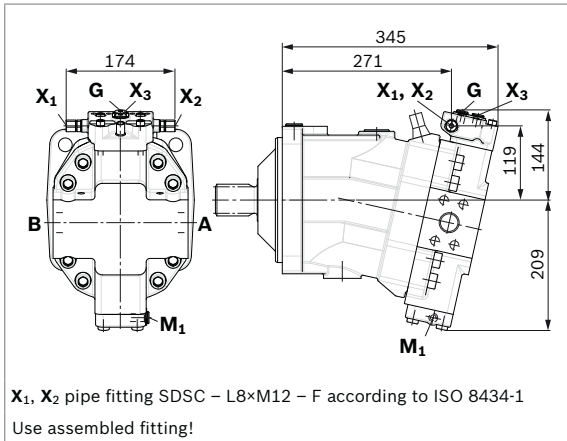

▼ **DA1, DA2** – Automatic speed-related control, negative control, with electric travel direction valve and electric  $V_{g\max}$  circuit

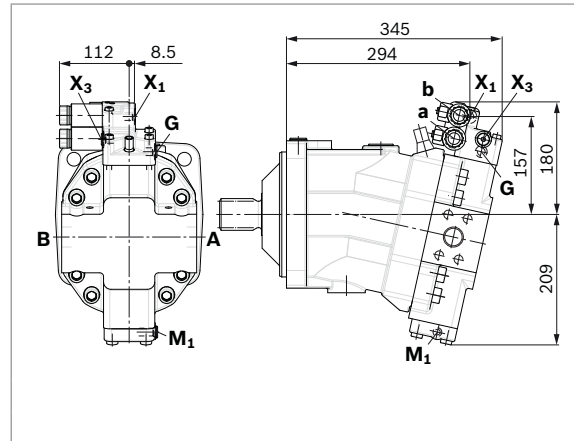

RE 91607/06.2016, **Bosch Rexroth AG**

62 **A6VM series 65** | Axial piston variable motor  
Connector for solenoids

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

| Consisting of | DT designation |
|---------------|----------------|
| 1 housing     | DT06-2S-EP04   |
| 1 wedge       | W2S            |
| 2 sockets     | 0462-201-16141 |

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid.
- ▶ The procedure is defined in the instruction manual.

Bosch Rexroth AG, RE 91607/06.2016

## Neutral position switch

The neutral position switch NLS electronically detects the neutral position of the A6VM, thereby ensuring the torque freedom of the motor. The use of the NLS in a transmission control provides a faster switching cycle in the drive. In addition, the switch reliability is improved and thereby the service life of the drive is increased. Type code, technical data, dimensions and parameters for the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95152 – NLS.

### Technical data

| Type   | NLS  |
|--|--|
| Recommended operating voltage  | 5 V  |
| Maximum voltage  | not actuated                                     |
|  | 32 V   |
|  | actuated   |
|  | 11.5 V   |
| Minimum permissible current  | 0 mA   |
| Maximum permissible current  | 10 mA  |
| Maximum switching cycle number   | 1 million  |
| Contact type   | normally open contact (open in unactuated state) |
| Type of protection (with mating connector plugged)                         | IP67/IP69K                                       |
| Temperature range of sensor (medium and ambient temperature) <sup>1)</sup> | -40 °C ... 125 °C                                |
| Temperature range of thread seal ring FKM <sup>1)</sup>                    | -15 °C ... 125 °C                                |
| Pressure resistance  | nominal  |
|  | 3 bar  |
|  | maximum  |
|  | 10 bar <sup>2)</sup>                             |
|  | (momentary peaks)                                |

### Notice

The minimum swivel angle is dependent on the  $V_{g \text{ min-stop}}$


### ▼ Mating Connector

| Consisting of    | Material number |
|------------------|-----------------|
| 1 housing        | 282080          |
| 1 socket contact | 282403-1        |

The mating connector is not included in the scope of delivery. This mating connector can be ordered from AMP.

### ▼ Dimensions

Version "N" with neutral position switch mounted

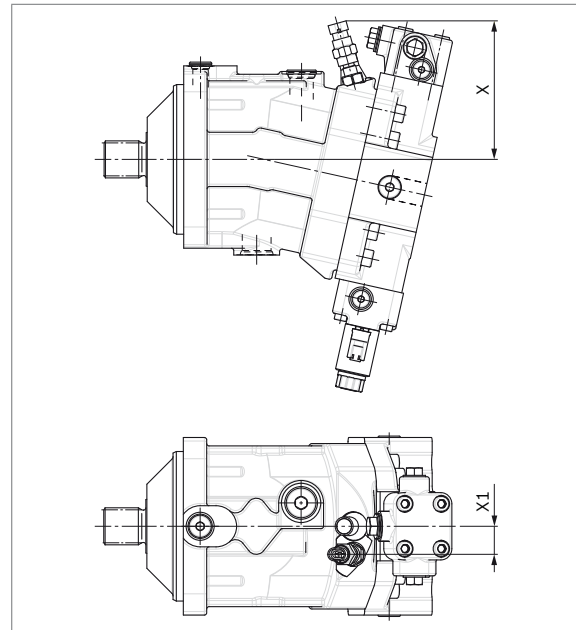

| Size | Adjustable angle |      | X [mm]       |              | X1 [mm] |
|------|------------------|------|--------------|--------------|---------|
|      | min.             | max. | at min angle | at max angle |         |
| 80   | 0°               | 2°   | 144.7        | 141.4        | 28.0    |
| 107  | 0°               | 4°   | 148.1        | 140.4        | 30.0    |
| 140  | 0°               | 1°   | 153.1        | 150.9        | 30.0    |
| 160  | 0°               | 0°   |              | 153.1        | 30.0    |
| 200  | 0°               | 0°   |              | 159.1        | 30.0    |

- 1) Observe the permissible temperature range of the axial piston motor.
- 2) Observe the permissible viscosity range of the axial piston motor. At oil viscosities >1800 mm<sup>2</sup>/s, the switch may be unintentionally actuated by case pressure peaks of > 10 bar.

64 **A6VM series 65** | Axial piston variable motor  
Flushing and boost pressure valve

## Flushing and boost pressure valve

The flushing and boost pressure valve is used to remove heat from the hydraulic circuit.

In a closed circuit, it is used for flushing the case and safeguarding the minimum boost pressure.

Hydraulic fluid is directed from the respective low pressure side into the motor housing. This is then fed into the reservoir, together with the leakage. The hydraulic fluid, removed out of the closed circuit must be replaced by cooled hydraulic fluid from the boost pump.

The valve is mounted onto the port plate or integrated (depending on the control type and size).

**Cracking pressure of pressure retaining valve**  
(observe when adjusting the primary valve)

- Sizes 55 to 200, fixed setting 16 bar

**Switching pressure of flushing spool  $\Delta p$**

- Sizes 55 to 107 (small flushing valve)  $8 \pm 1$  bar
- Sizes 107 to 200 (medium and large flushing valve)  $17.5 \pm 1.5$  bar

**Flushing flow  $q_v$**

Orifices can be used to adjust the flushing flows as required. The following information is based on:

$$\Delta p_{ND} = p_{ND} - p_G = 25 \text{ bar and } v = 10 \text{ mm}^2/\text{s}$$

( $p_{ND}$  = low pressure,  $p_G$  = case pressure)

### Small flushing valve for sizes 55 to 107

| Material number of orifice | $\phi$ [mm] | $q_v$ [l/min] | Code |
|----------------------------|-------------|---------------|------|
| R909651766                 | 1.2         | 3.5           | A    |
| R909419695                 | 1.4         | 5             | B    |
| R909419696                 | 1.8         | 8             | C    |
| R909419697                 | 2.0         | 10            | D    |
| R909444361                 | 2.4         | 14            | F    |


### Medium flushing valve for size 107

| Material number of orifice | $\phi$ [mm] | $q_v$ [l/min] | Code |
|----------------------------|-------------|---------------|------|
| R909431310                 | 2.8         | 18            | I    |
| R909435172                 | 3.5         | 27            | K    |
| R909449967                 | 5.0         | 37            | L    |

### Large flushing valve for sizes 140 to 200

| Material number of orifice | $\phi$ [mm] | $q_v$ [l/min] | Code |
|----------------------------|-------------|---------------|------|
| R909449998                 | 1.8         | 8             | C    |
| R909431308                 | 2.0         | 10            | D    |
| R909431309                 | 2.5         | 15            | G    |
| R909431310                 | 2.8         | 18            | I    |
| R902138235                 | 3.1         | 21            | J    |
| R909435172                 | 3.5         | 27            | K    |
| R909436622                 | 4.0         | 31            | L    |
| R909449967                 | 5.0         | 37            | M    |

### ▼ Schematic EP

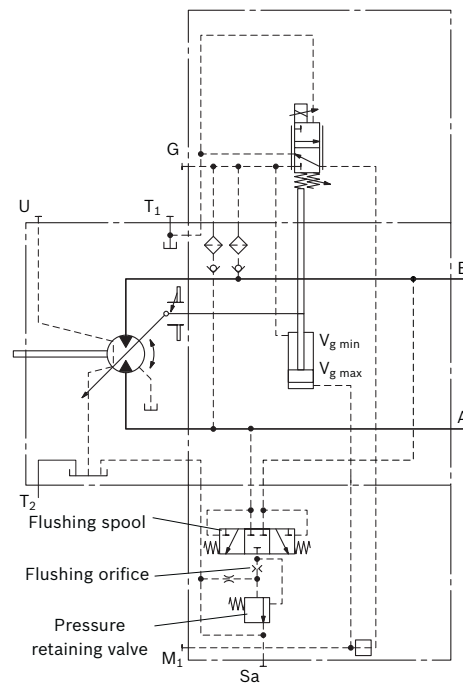

### Notice


- Port **S<sub>a</sub>** only for sizes 140 to 200
- For a flushing flow of 35 l/min, it is recommended that port **S<sub>a</sub>** be connected in order to prevent an increase in case pressure. An increased case pressure reduces the flushing flow.



Dimensions [mm]


Axial piston variable motor | **A6VM series 65** 65  
Flushing and boost pressure valve

▼ Dimensions of sizes 55 to 107 (small flushing valve)

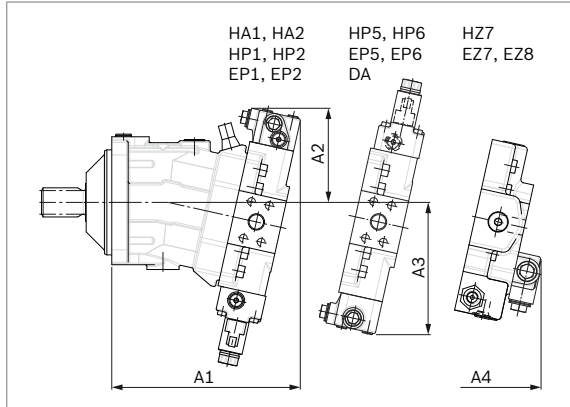


| NG  | A1  | A2  | A3  | A4  |
|-----|-----|-----|-----|-----|
| 55  | 245 | 137 | 183 | 236 |
| 80  | 273 | 142 | 194 | 254 |
| 107 | 287 | 143 | 202 | 269 |

▼ Dimensions for sizes 140 to 200 (large flushing valve)

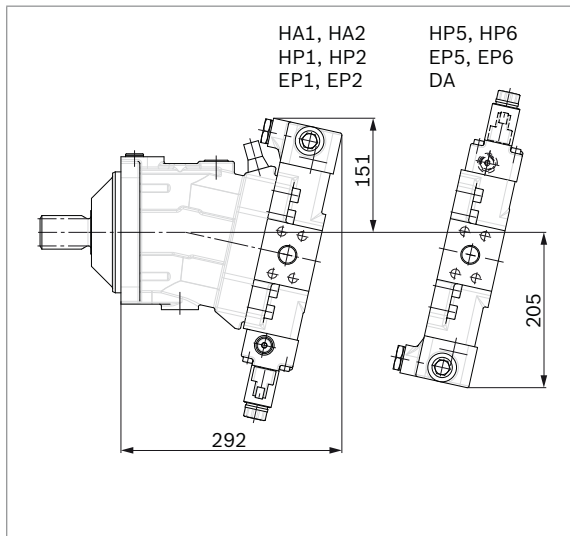

▼ Dimensions of size 107 (medium flushing valve)

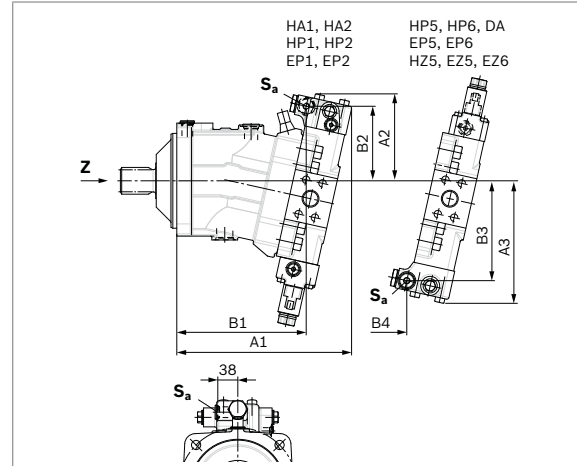

| NG  | A1  | B1  | A2  | B2  | A3  | B3  | B4  | Sa <sup>1)</sup>     |
|-----|-----|-----|-----|-----|-----|-----|-----|----------------------|
| 140 | 325 | 239 | 165 | 142 | 230 | 187 | 166 | M22 × 1.5; 15.5 deep |
| 160 | 332 | 246 | 165 | 142 | 233 | 190 | 172 | M22 × 1.5; 15.5 deep |
| 200 | 349 | 263 | 172 | 148 | 244 | 201 | 185 | M22 × 1.5; 15.5 tief |

<sup>1)</sup> ISO 6149, ports plugged (in normal operation)  
For notes on tightening torques, see instruction manual.  
The spot face may be deeper than that specified in the standard.

66 **A6VM series 65** | Axial piston variable motor  
Counterbalance valve BVD and BVE

## Counterbalance valve BVD and BVE

### Function

Counterbalance valves for travel drives and winches operations are designed to reduce the danger of overspeeding and cavitation of axial piston motors in open circuits.

Cavitation occurs if, during braking, when driving downhill or during the load-lowering process, the motor speed is greater than it should be for the given inlet flow and thus the supply pressure collapses.

If the supply pressure falls below the level specified for the relevant counterbalance valve, the counterbalance valve piston moves into the closed position. The cross-sectional area of the counterbalance valve return duct is then reduced, creating a bottleneck in the return flow of the hydraulic fluid. The pressure increases and brakes the motor until the rotational speed of the motor is again as it should be for the given inlet flow.

### Notice

- ▶ BBVD available for sizes 55 to 200 and BVE available for sizes 107 to 200.
- ▶ The counterbalance valve must be ordered additionally. We recommend ordering the counterbalance valve and the motor as a set.  
Ordering example: A6VM080HA1T30004A/65MWW0N4S 97W0-0 + BVD20F27S/41B-V03K16D0400S12

- ▶ For safety reasons, controls with beginning of control at  $V_{g \min}$  (e.g. HA) are not permissible for winch drives!
- ▶ Counterbalance valves must be optimized during prototype commissioning to prevent unacceptable operating conditions and compliance with the specification must be verified.
- ▶ The counterbalance valve does not replace the mechanical service brake and holding brake.
- ▶ Observe the detailed notes on the counterbalance valve in data sheet 95522 – BVD and in data sheet 95525 – BVE!
- ▶ For the design of the brake release valve, we require the following data for the mechanical holding brake:
  - the cracking pressure
  - the volume of the counterbalance spool between minimum travel (brake closed) and maximum stroke (brake released with 21 bar)
  - the required closing time for a warm device (oil viscosity approx. 15 mm<sup>2</sup>/s)

### Permissible inlet flow or pressure when using DBV and BVD/BVE

| Motor<br>NG | Without valve              |                         | Limited values when using DBV and BVD/BVE |                            |                  |      |   |                            |                  |      |
|-------------|----------------------------|-------------------------|---|----------------------------|------------------|------|---|----------------------------|------------------|------|
|             | $p_{nom}/p_{max}$<br>[bar] | $q_{V \max}$<br>[l/min] | DBV <sup>1)</sup><br>NG                   | $p_{nom}/p_{max}$<br>[bar] | $q_V$<br>[l/min] | Code | BVD <sup>2)/BVE<sup>3)</sup><br/>NG</sup> | $p_{nom}/p_{max}$<br>[bar] | $q_V$<br>[l/min] | Code |
| 55          | 400/450                    | 244                     | 22  | 350/420                    | 240              | 7    | 20<br>(BVD)                               | 350/420                    | 220              | 7W   |
| 80          |                            | 312                     |   |                            |                  |      |   |                            |                  |      |
| 107         |                            | 380                     |   |                            |                  |      |   |                            |                  |      |
| 107         |                            | 380                     | 32  |                            | 400              | 8    | 25<br>(BVD/BVE)                           |                            | 320              | 8W   |
| 140         |                            | 455                     |   |                            |                  |      |   |                            |                  |      |
| 160         |                            | 496                     |   |                            |                  |      |   |                            |                  |      |
| 200         |                            | 580                     | On request                                |                            |                  |      |   |                            |                  |      |

### Mounting of the counterbalance valve

When delivered, the counterbalance valve is fastened to the motor with two tacking screws (transport lock). The tacking screws may not be removed while mounting the working lines! If the counterbalance valve and motor are delivered separately, the counterbalance valve must first be fastened to the motor port plate using the provided tacking screws.

The counterbalance valve is finally mounted to the motor by fitting the SAE flange.

The screws to be used and the instructions for mounting can be found in the instruction manual.

- 1) Pressure-relief valve
- 2) Counterbalance valve, double-acting
- 3) Counterbalance valve, one-sided

Bosch Rexroth AG, RE 91607/06.2016


### Counterbalance valve for travel drive BVD...F

Application option

- ▶ Travel drive for wheeled excavators (BVD and BVE)

#### ▼ Example circuit diagram for travel drive on wheeled excavators

A6VM080HA1T30004A/65MWW0N4S97W0-0 + BVD20F27S/41B-V03K16D0400S12

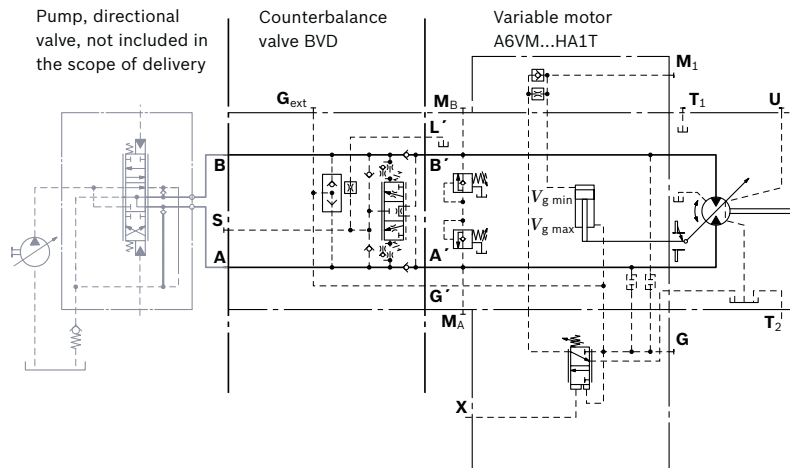


### Counterbalance valve for winches and track drives BVD...W and BVE

Application option

- ▶ Winch drives in cranes (BVD and BVE)
- ▶ Track drive in excavator crawlers (BVD)

#### ▼ Example circuit diagram for winch drive in cranes

A6VM080HP5D10001A/65MWW0N4S97W0-0 + BVE25W38S/51ND-V100K00D4599T30S00-0

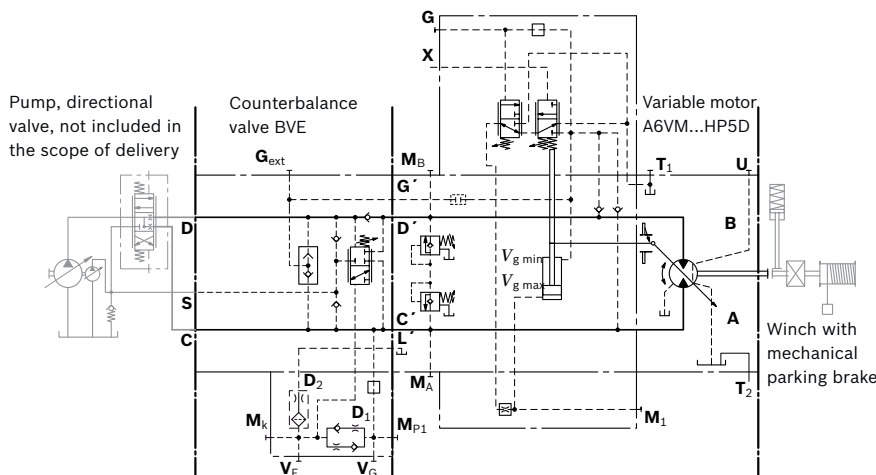


68 **A6VM series 65** | Axial piston variable motor  
Counterbalance valve BVD and BVE


Dimensions [mm]

**Dimensions**

▼ **A6VM...HA, HP1, HP2 and EP1, EP2**

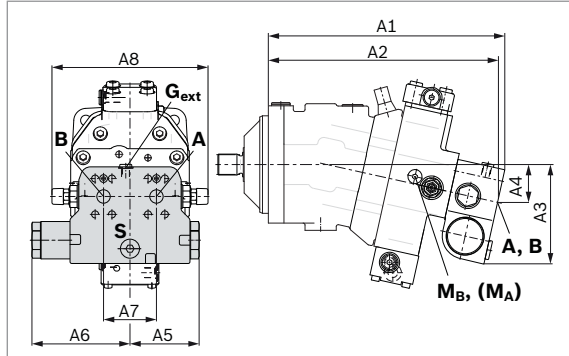

▼ **A6VM...HP5, HP6 and EP5, EP6<sup>1)</sup>**

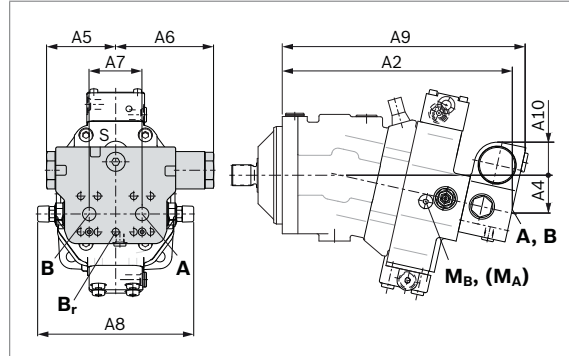

| A6VM<br>NG...plate | Counterbalance valve<br>Type | Ports    | Dimensions |     |     |    |       |     |    |     |     |    |
|--------------------|------------------------------|----------|------------|-----|-----|----|-------|-----|----|-----|-----|----|
|                    |                              |          | A, B       | A1  | A2  | A3 | A4    | A5  | A6 | A7  | A8  | A9 |
| 55...7             | BVD20...17                   | 3/4 in   | 311        | 302 | 143 | 50 | 98    | 139 | 75 | 222 | 326 | 50 |
| 80...7             | BVD20...27                   | 1 in     | 340        | 331 | 148 | 55 | 98    | 139 | 75 | 222 | 355 | 46 |
| 107...7            | BVD20...28                   | 1 in     | 362        | 353 | 152 | 59 | 98    | 139 | 84 | 234 | 377 | 41 |
| 107...8            | BVD25...38                   | 1 1/4 in | 380        | 370 | 165 | 63 | 120.5 | 175 | 84 | 238 | 395 | 56 |
| 140...8            | BVD25...38                   | 1 1/4 in | 411        | 401 | 168 | 67 | 120.5 | 175 | 84 | 238 | 426 | 53 |
| 160...8            | BVD25...38                   | 1 1/4 in | 417        | 407 | 170 | 68 | 120.5 | 175 | 84 | 238 | 432 | 51 |
| 200...8            | BVD25...38                   | 1 1/4 in | 448        | 438 | 176 | 74 | 120.5 | 175 | 84 | 299 | 463 | 46 |
| 107...8            | BVE25...38                   | 1 1/4 in | 380        | 370 | 171 | 63 | 137   | 214 | 84 | 238 | 397 | 63 |
| 140...8            | BVE25...38                   | 1 1/4 in | 411        | 401 | 175 | 67 | 137   | 214 | 84 | 238 | 423 | 59 |
| 160...8            | BVE25...38                   | 1 1/4 in | 417        | 407 | 176 | 68 | 137   | 214 | 84 | 238 | 432 | 59 |
| 200...8            | BVE25...38                   | 1 1/4 in | 448        | 438 | 182 | 74 | 137   | 214 | 84 | 299 | 463 | 52 |

| Ports                           | Version                              | A6VM plate   | Standard               | Size <sup>2)</sup>   | P <sub>max</sub> [bar] <sup>3)</sup> | Status <sup>5)</sup> |
|---------------------------------|--------------------------------------|--------------|------------------------|----------------------|--------------------------------------|----------------------|
| A, B                            | Working port                         |              | SAE J518               | see table above      | 420                                  | O                    |
| S                               | Infeed                               | BVD20        | DIN 3852 <sup>4)</sup> | M22 × 1.5; 14 deep   | 30                                   | X                    |
|                                 |                                      | BVD25, BVE25 | DIN 3852 <sup>4)</sup> | M27 × 2; 16 deep     | 30                                   | X                    |
| Br                              | Brake release, reduced high pressure | L            | DIN 3852 <sup>4)</sup> | 7                    | 30                                   | O                    |
|                                 |                                      | 8            |                        | 30                   | O                                    |                      |
| G <sub>ext</sub>                | Brake release, high pressure         | S            | DIN 3852 <sup>4)</sup> | M12 × 1.5; 12.5 deep | 420                                  | X                    |
| M <sub>A</sub> , M <sub>B</sub> | Pressure measurement<br>A and B      |              | ISO 6149 <sup>4)</sup> | M18 × 1.5; 14.5 deep | 420                                  | X                    |

1) At the mounting version for the controls HP5, HP6 and EP5, EP6, the cast-in port designations **A** and **B** on the BVD counterbalance valve do not correspond with the port designation of the A6VM motor.  
The designation of the ports on the installation drawing of the motor is binding!

2) For notes on tightening torques, see instruction manual

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) The countersink can be deeper than as specified in the standard.

5) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 69  
Speed sensor

## Speed sensor

Version A6VM...U ("prepared for speed sensor", i.e. without sensor) is equipped with a spline on the rotary group.


A signal proportional to motor speed can be generated with the fitted DSA/DSM speed sensor. The DSA/DSM sensor registers the speed and direction of rotation.

Ordering code, technical data, dimensions and details on the connector, plus safety instructions about the sensor can be found in the relevant data sheet (95132 – DSM, 95133 – DSA).

The sensor is mounted on the port provided for this purpose with a mounting bolt. On deliveries without sensor, the port is plugged with a pressure-resistant cover.


We recommend ordering the A6VM variable motor complete with mounted sensor.

### ▼ Circuit diagram EP



### ▼ Dimensions

"V" design with mounted speed sensor

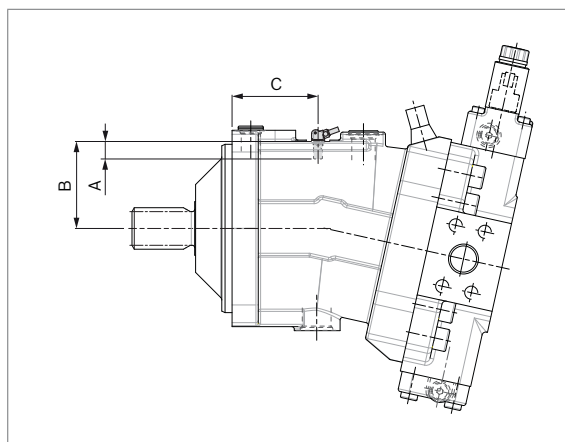

| Size                                   | 55   | 80   | 107  | 140  | 160  | 200  |
|--|------|------|------|------|------|------|
| Number of teeth                        | 54   | 58   | 67   | 72   | 75   | 80   |
| A Insertion depth<br>(tolerance -0.25) | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 |
| B Contact surface                      | 75   | 79   | 88   | 93   | 96   | 101  |
| C                                      | 66.2 | 75.2 | 77.2 | 91.2 | 91.7 | 95.2 |

RE 91607/06.2016, **Bosch Rexroth AG**

70 **A6VM series 65** | Axial piston variable motor  
Setting range for displacement

Dimensions [mm]

## Setting range for displacement

|          | 55                                  |      |                                     |      | 80                                  |      |                                     |      | 107                                 |       |                                     |      |
|----------|-------------------------------------|------|-------------------------------------|------|-------------------------------------|------|-------------------------------------|------|-------------------------------------|-------|-------------------------------------|------|
|          | $V_{g \max}$ (cm <sup>3</sup> /rev) |      | $V_{g \min}$ (cm <sup>3</sup> /rev) |      | $V_{g \max}$ (cm <sup>3</sup> /rev) |      | $V_{g \min}$ (cm <sup>3</sup> /rev) |      | $V_{g \max}$ (cm <sup>3</sup> /rev) |       | $V_{g \min}$ (cm <sup>3</sup> /rev) |      |
|          | from                                | to   | from                                | to   | from                                | to   | from                                | to   | from                                | to    | from                                | to   |
| <b>A</b> | 54.8                                | 54.8 | 0.0                                 | 13.3 | 80.0                                | 80.0 | 0.0                                 | 9.0  | 107.0                               | 107.0 | 0.0                                 | 22.2 |
|          | without screw                       |      | M10 × 60<br>R909154690              |      | ohne Schraube                       |      | M12 × 60<br>R909083530              |      | without screw                       |       | M12 × 70<br>R909085976              |      |
| <b>B</b> | 54.8                                | 54.8 | > 13.3                              | 27   | 80.0                                | 80.0 | > 9.0                               | 26.0 | 107.0                               | 107.0 | > 22.2                              | 43.8 |
|          | without screw                       |      | M10 × 70<br>R909153779              |      | ohne Schraube                       |      | M12 × 70<br>R909085976              |      | without screw                       |       | M12 × 80<br>R909153075              |      |
| <b>C</b> | 54.8                                | 54.8 | > 27.0                              | 38.0 | 80.0                                | 80.0 | > 26.0                              | 44.0 | 107.0                               | 107.0 | > 43.8                              | 65.5 |
|          | without screw                       |      | M10 × 80<br>R909154058              |      | ohne Schraube                       |      | M12 × 80<br>R909153075              |      | without screw                       |       | M12 × 90<br>R909154041              |      |
| <b>D</b> | x                                   |      | x                                   |      | 80.0                                | 80.0 | > 44.0                              | 56.0 | 107.0                               | 107.0 | > 65.5                              | 75.0 |
|          |                                     |      |                                     |      | ohne Schraube                       |      | M12 × 90<br>R909154041              |      | without screw                       |       | M12 × 100<br>R909153975             |      |
| <b>E</b> | < 54.8                              | 42.0 | 0.0                                 | 13.3 | < 80.0                              | 72.0 | 0.0                                 | 9.0  | < 107.0                             | 86.0  | 0.0                                 | 22.2 |
|          | M10 × 60<br>R909154690              |      | M10 × 60<br>R909154690              |      | M12 × 60<br>R909083530              |      | M12 × 60<br>R909083530              |      | M12 × 70<br>R909085976              |       | M12 × 70<br>R909085976              |      |
| <b>F</b> | < 54.8                              | 42.0 | > 13.3                              | 27.0 | < 80.0                              | 72.0 | > 9.0                               | 26.0 | < 107.0                             | 86.0  | > 22.2                              | 43.8 |
|          | M10 × 60<br>R909154690              |      | M10 × 70<br>R909153779              |      | M12 × 60<br>R909083530              |      | M12 × 70<br>R909085976              |      | M12 × 70<br>R909085976              |       | M12 × 80<br>R909153075              |      |
| <b>G</b> | < 54.8                              | 42.0 | > 27.0                              | 38.0 | < 80.0                              | 72.0 | > 26.0                              | 44.0 | < 107.0                             | 86.0  | > 43.8                              | 65.5 |
|          | M10 × 60<br>R909154690              |      | M10 × 80<br>R909154058              |      | M12 × 60<br>R909083530              |      | M12 × 80<br>R909153075              |      | M12 × 70<br>R909085976              |       | M12 × 90<br>R909154041              |      |
| <b>H</b> | x                                   |      | x                                   |      | < 80.0                              | 72.0 | > 44.0                              | 56.0 | < 107.0                             | 86.0  | > 65.5                              | 75.0 |
|          |                                     |      |                                     |      | M12 × 60<br>R909083530              |      | M12 × 90<br>R909154041              |      | M12 × 70<br>R909085976              |       | M12 × 100<br>R909153975             |      |
| <b>J</b> | < 42.0                              | 29.0 | 0.0                                 | 13.3 | < 72.0                              | 55.0 | 0.0                                 | 9.0  | < 86.0                              | 64.0  | 0.0                                 | 22.2 |
|          | M10 × 70<br>R909153779              |      | M10 × 60<br>R909154690              |      | M12 × 70<br>R909085976              |      | M12 × 60<br>R909083530              |      | M12 × 80<br>R909153075              |       | M12 × 70<br>R909085976              |      |
| <b>K</b> | < 42.0                              | 29.0 | > 13.3                              | 27.0 | < 72.0                              | 55.0 | > 9.0                               | 26.0 | < 86.0                              | 64.0  | > 22.2                              | 43.8 |
|          | M10 × 70<br>R909153779              |      | M10 × 70<br>R909153779              |      | M12 × 70<br>R909085976              |      | M12 × 70<br>R909085976              |      | M12 × 80<br>R909153075              |       | M12 × 80<br>R909153075              |      |
| <b>L</b> | < 42.0                              | 29.0 | > 27.0                              | 38.0 | < 72.0                              | 55.0 | > 26.0                              | 44.0 | < 86.0                              | 64.0  | > 43.8                              | 65.5 |
|          | M10 × 70<br>R909153779              |      | M10 × 80<br>R909154058              |      | M12 × 70<br>R909085976              |      | M12 × 80<br>R909153075              |      | M12 × 80<br>R909153075              |       | M12 × 90<br>R909154041              |      |
| <b>M</b> | x                                   |      | x                                   |      | < 72.0                              | 55.0 | > 44.0                              | 56.0 | < 86.0                              | 64.0  | > 65.5                              | 75.0 |
|          |                                     |      |                                     |      | M12 × 70<br>R909085976              |      | M12 × 90<br>R909154041              |      | M12 × 80<br>R909153075              |       | M12 × 100<br>R909153975             |      |

Specify exact settings for  $V_{g \min}$  and  $V_{g \max}$  in plain text when ordering:

▶  $V_{g \min} = \dots \text{ cm}^3$ ,  $V_{g \max} = \dots \text{ cm}^3$

Theoretical, maximum setting:

▶ for  $V_{g \min} = 0.7 \times V_{g \max}$

▶ for  $V_{g \max} = 0.3 \times V_{g \max}$

Settings that are not listed in the table may lead to damage.

Please contact us.

Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 71  
Setting range for displacement

|          | 140                                 |       |                                     |      | 160                                 |       |                                     |       | 200                                 |       |                                     |       |
|----------|-------------------------------------|-------|-------------------------------------|------|-------------------------------------|-------|-------------------------------------|-------|-------------------------------------|-------|-------------------------------------|-------|
|          | $V_{g \max}$ (cm <sup>3</sup> /rev) |       | $V_{g \min}$ (cm <sup>3</sup> /rev) |      | $V_{g \max}$ (cm <sup>3</sup> /rev) |       | $V_{g \min}$ (cm <sup>3</sup> /rev) |       | $V_{g \max}$ (cm <sup>3</sup> /rev) |       | $V_{g \min}$ (cm <sup>3</sup> /rev) |       |
|          | from                                | to    | from                                | to   | from                                | to    | from                                | to    | from                                | to    | from                                | to    |
| <b>A</b> | 140.0                               | 140.0 | 0.0                                 | 38.0 | 160.0                               | 160.0 | 0.0                                 | 32.6  | 200.0                               | 200.0 | 0.0                                 | 39.0  |
|          | without screw                       |       | M12 × 80<br>R909153075              |      | without screw                       |       | M12 × 80<br>R909153075              |       | without screw                       |       | M12 × 80<br>R909153075              |       |
| <b>B</b> | 140.0                               | 140.0 | > 38.0                              | 63.5 | 160.0                               | 160.0 | > 32.6                              | 59.2  | 200.0                               | 200.0 | > 39.0                              | 72.0  |
|          | without screw                       |       | M12 × 90<br>R909154041              |      | without screw                       |       | M12 × 90<br>R909154041              |       | without screw                       |       | M12 × 90<br>R909154041              |       |
| <b>C</b> | 140.0                               | 140.0 | > 63.5                              | 89.0 | 160.0                               | 160.0 | > 59.2                              | 89.0  | 200.0                               | 200.0 | > 72.0                              | 105.0 |
|          | without screw                       |       | M12 × 100<br>R909153975             |      | without screw                       |       | M12 × 100<br>R909153975             |       | without screw                       |       | M12 × 100<br>R909153975             |       |
| <b>D</b> | 140.0                               | 140.0 | > 89.0                              | 98.0 | 160.0                               | 160.0 | > 89.0                              | 112.0 | 200.0                               | 200.0 | > 105.0                             | 140.0 |
|          | without screw                       |       | M12 × 110<br>R909154212             |      | without screw                       |       | M12 × 110<br>R909154212             |       | without screw                       |       | M12 × 110<br>R909154212             |       |
| <b>E</b> | < 140.0                             | 105.0 | 0.0                                 | 38.0 | < 160.0                             | 129.0 | 0.0                                 | 32.6  | < 200.0                             | 164.0 | 0.0                                 | 39.0  |
|          | M12 × 80<br>R909153075              |       | M12 × 80<br>R909153075              |      | M12 × 80<br>R909153075              |       | M12 × 80<br>R909153075              |       | M12 × 80<br>R909153075              |       | M12 × 80<br>R909153075              |       |
| <b>F</b> | < 140.0                             | 105.0 | > 38.0                              | 63.5 | < 160.0                             | 129.0 | > 32.6                              | 59.2  | < 200.0                             | 164.0 | > 39.0                              | 72.0  |
|          | M12 × 80<br>R909153075              |       | M12 × 90<br>R909154041              |      | M12 × 80<br>R909153075              |       | M12 × 90<br>R909154041              |       | M12 × 80<br>R909153075              |       | M12 × 90<br>R909154041              |       |
| <b>G</b> | < 140.0                             | 105.0 | > 63.5                              | 89.0 | < 160.0                             | 129.0 | > 59.2                              | 89.0  | < 200.0                             | 164.0 | > 72.0                              | 105.0 |
|          | M12 × 80<br>R909153075              |       | M12 × 100<br>R909153975             |      | M12 × 80<br>R909153075              |       | M12 × 100<br>R909153975             |       | M12 × 80<br>R909153075              |       | M12 × 100<br>R909153975             |       |
| <b>H</b> | < 140.0                             | 105.0 | > 89.0                              | 98.0 | < 160.0                             | 129.0 | > 89.0                              | 112.0 | < 200.0                             | 164.0 | > 105.0                             | 140.0 |
|          | M12 × 80<br>R909153075              |       | M12 × 110<br>R909154212             |      | M12 × 80<br>R909153075              |       | M12 × 110<br>R909154212             |       | M12 × 80<br>R909153075              |       | M12 × 110<br>R909154212             |       |
| <b>J</b> | < 105.0                             | 80.0  | 0.0                                 | 38.0 | < 129.0                             | 100.0 | 0.0                                 | 32.6  | < 164.0                             | 130.5 | 0.0                                 | 39.0  |
|          | M12 × 90<br>R909154041              |       | M12 × 80<br>R909153075              |      | M12 × 90<br>R909154041              |       | M12 × 80<br>R909153075              |       | M12 × 90<br>R909154041              |       | M12 × 80<br>R909153075              |       |
| <b>K</b> | < 105.0                             | 80.0  | > 38.0                              | 63.5 | < 129.0                             | 100.0 | > 32.6                              | 59.2  | < 164.0                             | 130.5 | > 39.0                              | 72.0  |
|          | M12 × 90<br>R909154041              |       | M12 × 90<br>R909154041              |      | M12 × 90<br>R909154041              |       | M12 × 90<br>R909154041              |       | M12 × 90<br>R909154041              |       | M12 × 90<br>R909154041              |       |
| <b>L</b> | < 105.0                             | 80.0  | > 63.5                              | 89.0 | < 129.0                             | 100.0 | > 59.2                              | 89.0  | < 164.0                             | 130.5 | > 72.0                              | 105.0 |
|          | M12 × 90<br>R909154041              |       | M12 × 100<br>R909153975             |      | M12 × 90<br>R909154041              |       | M12 × 100<br>R909153975             |       | M12 × 90<br>R909154041              |       | M12 × 100<br>R909153975             |       |
| <b>M</b> | < 105.0                             | 80.0  | > 89.0                              | 98.0 | < 129.0                             | 100.0 | > 89.0                              | 112.0 | < 164.0                             | 130.5 | > 105.0                             | 140.0 |
|          | M12 × 90<br>R909154041              |       | M12 × 110<br>R909154212             |      | M12 × 90<br>R909154041              |       | M12 × 110<br>R909154212             |       | M12 × 90<br>R909154041              |       | M12 × 110<br>R909154212             |       |

Specify exact settings for  $V_{g \min}$  and  $V_{g \max}$  in plain text when ordering:

▶  $V_{g \min} = \dots \text{ cm}^3$ ,  $V_{g \max} = \dots \text{ cm}^3$

Theoretical, maximum setting:

▶ for  $V_{g \min} = 0.7 \times V_{g \max}$

▶ for  $V_{g \max} = 0.3 \times V_{g \min}$

Settings that are not listed in the table may lead to damage.

Please contact us.

RE 91607/06.2016, **Bosch Rexroth AG**

72 **A6VM series 65** | Axial piston variable motor  
Installation instructions

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the fluid from the axial piston unit may drain back to the reservoir via the hydraulic lines.

Particularly in the installation position "drive shaft upwards" filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the motor housing must be directed to the reservoir via the highest available drain port (**T<sub>1</sub>**, **T<sub>2</sub>**). For combinations of multiple units, make sure that the respective case pressure in each unit is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the maximum permissible case pressure of all connected units is not exceeded at any operational conditions. If this is not possible, separate drain lines must be laid.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the drain line must flow into the reservoir below the minimum fluid level.

### Notice

In certain installation positions, an influence on the control characteristic can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.

### Key

|                                     |   |
|-------------------------------------|---|
| <b>F</b>                            | Filling / air bleeding                                |
| <b>U</b>                            | Bearing flushing / air bleed port                     |
| <b>T<sub>1</sub>, T<sub>2</sub></b> | Drain port  |
| <b>h<sub>t min</sub></b>            | Minimum required immersion depth (200 mm)             |
| <b>h<sub>min</sub></b>              | Minimum required spacing to reservoir bottom (100 mm) |





### Installation position

See examples **1** to **8** below.

Additional installation positions are available upon request. Recommended installation position: **1** and **2**

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.





| Installation position  | Air bleed | Filling              |
|--|-----------|----------------------|
| <p><b>1</b></p>   |           | <b>T<sub>1</sub></b> |
| <p><b>2</b></p>  |           | <b>T<sub>2</sub></b> |
| <p><b>3</b></p>  |           | <b>T<sub>1</sub></b> |
| <p><b>4</b></p>  | <b>U</b>  | <b>T<sub>1</sub></b> |



### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. Recommendation for installation position 8 (drive shaft upward):

A check valve in the drain line (cracking pressure 0.5 bar) can prevent draining of the motor housing.
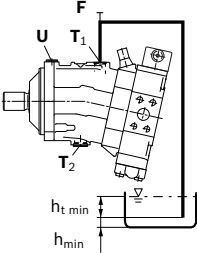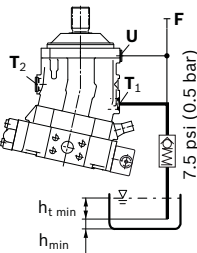
| Installation position   | Air bleed | Filling            |
|---|-----------|--------------------|
| <b>5</b><br>   | U (F)     | T <sub>1</sub> (F) |
| <b>6</b><br>  | F         | T <sub>2</sub> (F) |
| <b>7</b><br> | F         | T <sub>1</sub> (F) |
| <b>8</b><br> | U         | T <sub>1</sub> (F) |

#### Notice

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

74 **A6VM series 65** | Axial piston variable motor  
Project planning notes

### Project planning notes

- ▶ The motor A6VE is designed to be used in open and closed circuits.
  - ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
  - ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
  - ▶ Before finalizing your design, please request a binding installation drawing.
  - ▶ The specified data and notes contained herein must be observed.
  - ▶ For safety reasons, controls with beginning of control at  $V_{g\ min}$  (e.g. HA) are not permissible for winch drives, e.g. anchor winches.
  - ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
  - ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
  - ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
  - ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
  - ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ Working ports:
    - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
    - The working ports and function ports are only intended to accommodate hydraulic lines.

Bosch Rexroth AG, RE 91607/06.2016

Dimensions [mm]

Axial piston variable motor | **A6VM series 65** 75  
Safety instructions

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve pistons) can, under certain circumstances get stuck in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk.

The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

- ▶ Moving parts in high-pressure relief valves may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid). This can result in restriction or loss of the load holding function in lifting winches.

The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to keep the load in a safe position and ensure they are properly implemented.

- ▶ When using the axial piston motor in winch drives, make certain that the technical limit values are not exceeded under all operating conditions. If the axial piston motor is extremely overloaded (e.g. if the maximum permissible rotational speeds are exceeded during weighing of the anchor while the ship is in motion), the rotary group may be damaged and, in the worst case, the axial piston motor may burst. The machine manufacturer / system manufacturer is to undertake additional measures, up to and including encapsulation.

RE 91607/06.2016, **Bosch Rexroth AG**