




ROEMHELD
HILMA ■ STARK


F 9.300

Fittings with 24° cone as per DIN EN ISO 8434-1

Fitting accessories, plug-type connectors,
hydraulic pipes, pipe clamps, pressure gauges

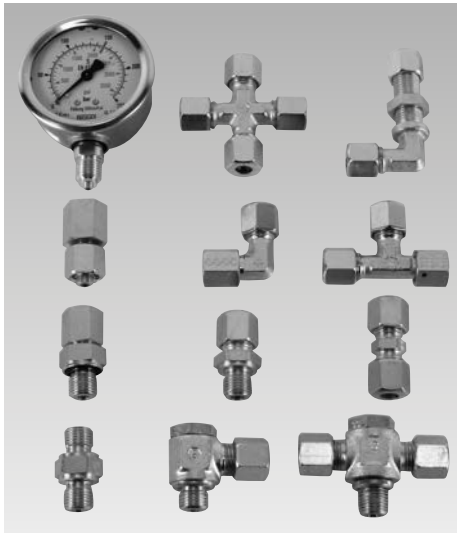

Application example

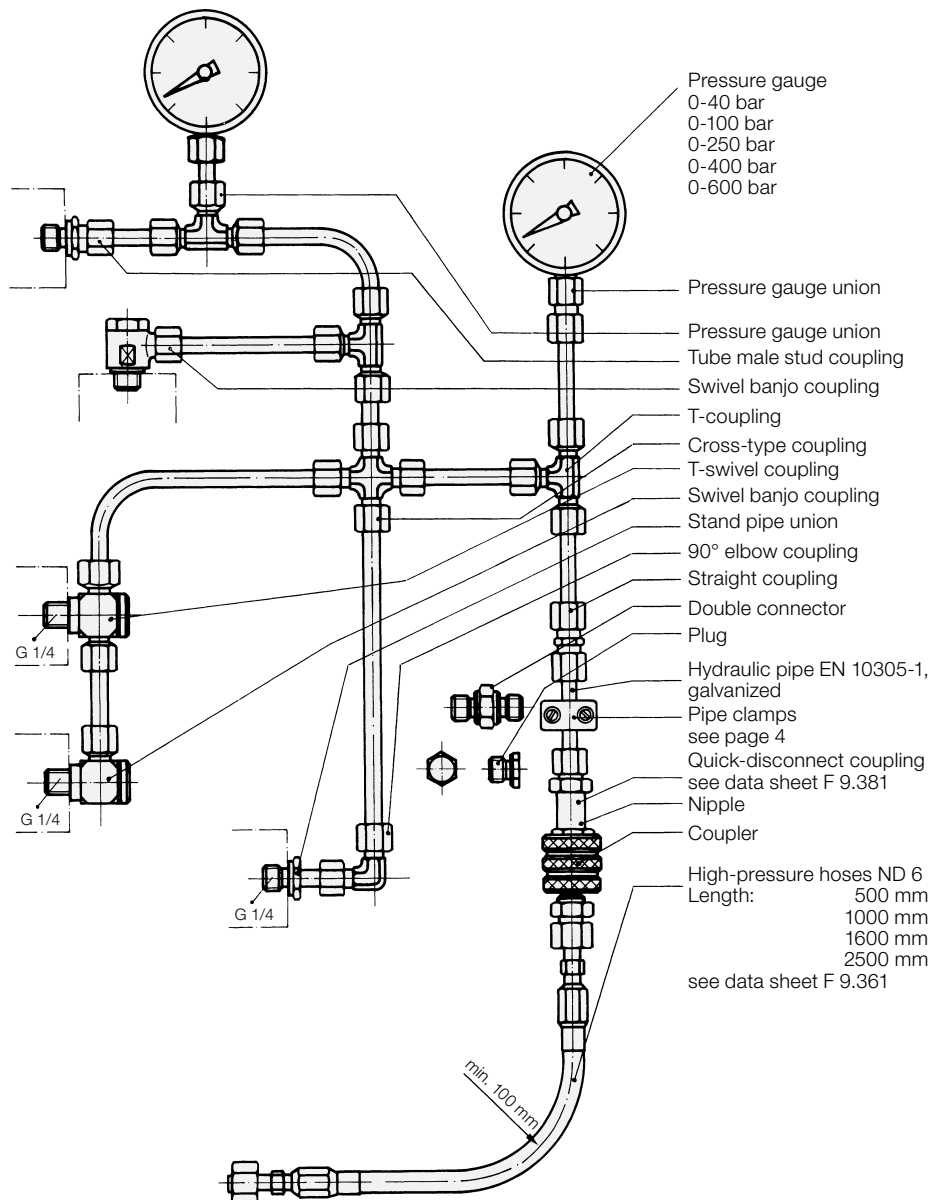


Advantages

- Worldwide spread high-pressure fitting system with quadruple safety
- Leak-free connection of piping and components
- Positive and safe connection by defined and limited digging into the hydraulic pipe
- Secure grip even with vibration stress due to the spring effect of the cutting ring
- Retightening of the union nut is not required
- The fitting can be disconnected and connected again as often as required.
- Fitting components free from Cr(VI)


Tube male stud coupling with cutting ring and union nut

Before tightening After tightening

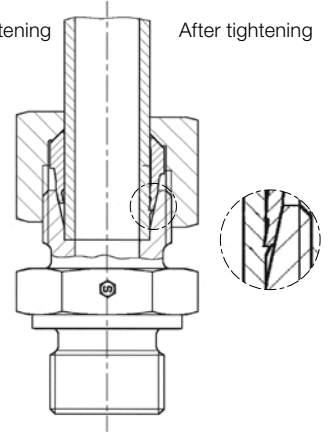

Screwed plug with knife edge

DIN 3852 T2 form B and EN ISO 1179-4




Suitable for high temperatures and aggressive media.

Screwed plug with elastic sealing

DIN 3852 T11 form E and EN ISO 1179-2

NBR: -35°C.....+100°C (series)


FKM: -25°C.....+200°C (available)








Suitable for soft mating materials (Alu).
High precision sealing (no sweating).
No retightening required.
Unlimited repeated mounting.
Interchangeable sealing ring.

Tapped hole with Whitworth pipe thread

EN ISO 1179-1 counterbore form N








Fittings as per DIN EN ISO 8434-1

Description	Pipe Ø	Screw-in threads	Form B with sealing edge			Form E with elastic seal		
			Type	PN [bar]	Part no.	Type	PN [bar]	Part no.
 Tube male stud coupling	6	G 1/8	D6L	250	9206 003	D6L ED	250	9206 028
	8	G 1/8	D8L G 1/8	250	9208 034	D8L G 1/8 ED	250	9208 075
	8	G 1/4	D8L	250	9208 003	D8L ED	250	9208 131
	10	G 1/4	D10L	250	9210 004	D10L ED	250	9210 028
	15	G 1/2	D15L	250	9215 003	D15L ED	250	9215 033
	8	G 1/8	D8S G 1/8	400	9208 116	D8S G 1/8 ED	500	9208 164
	8	G 1/4	D8S	400	9208 102	D8S ED	630	9208 132
	10	G 3/8	D10S	400	9210 104	D10S ED	630	9210 029
	16	G 1/2	D16S	400	9216 004	D16S ED	500	9216 021
 Stand pipe union with sealing cone	8	G 1/4				DCD8L	250	9208 017
	10	G 1/4				DCD10L	250	9210 109
	8	G 1/4				DCD8S	630	9208 018
	10	G 3/8				DCD10S	630	9210 136
 Swivel banjo coupling	6	G 1/8	SVH6LR	250	9206 004	DSVK6LROKDS	250	9206 044
	8	G 1/4	SVH8LR	250	9208 004	DSVK8LROKDS	250	9208 080
	10	G 1/4	SVH10LR	250	9210 015	DSVK10LROKDS	250	9210 038
	15	G 1/2	SVH15LR	250	9215 004	DSVK15LROKDS	250	9215 048
	8	G 1/4				SVH8SR ED	500	9208 177
	10	G 3/8	SVH10SR	315	9210 105	DSVK10SROKDS	400	9210 149
	16	G 1/2	SVH16SR	250	9216 005	DSVK16SROKDS	315	9216 033
 T-swivel coupling	6	G 1/8	DSVQ6LRO	250	9206 019	DSVQ6LROKDS	250	9206 048
	8	G 1/4	DSVQ8LRO	250	9208 120	DSVQ8LROKDS	250	9208 169
	10	G 1/4	DSVQ10LRO	250	9210 006	DSVQ10LROKDS	250	9210 154
	15	G 1/2	DSVQ15LRO	250	9215 030	DSVQ15LROKDS	250	9215 050
	8	G 1/4				DSVQ8SR ED	500	9208 178
	10	G 3/8	DSVQ10SRO	315	9210 107	DSVQ10SROKDS	400	9210 153
	16	G 1/2	DSVQ16SRO	315	9216 007	DSVQ16SROKDS	315	9216 035
 Plug		G 1/8	VSDG 1/8 A	400	3610 047	VSG 1/8 ED	400	3610 158
		G 1/4	VSDG 1/4 A	400	3300 821	VSG 1/4 ED	400	3610 191
		G 3/8				VSG 3/8 ED	400	3610 099
		G 1/2	VSDG 1/2 A	400	3610 045	VSG 1/2 ED	400	3610 098
		G 1/8				SW 14 x 7 high	500	3610 263
		G 1/4				SW 19 x 8 high	500	3610 264
		G 3/8				SW 22 x 10 high	500	3610 325
		G 1/2				SW 27 x 11 high	500	3610 265
 Thread reducing adaptor		G 3/8	GWR 3/8 - 1/4	400	3613 016	GWR 3/8 ED - 1/4	400	3613 073
		G 1/2	GWR 1/2 - 1/4	315	3613 015	GWR 1/2 ED - 1/4	400	3613 055
		G 1/2	GWR 1/2 - 3/8	315	3613 018	GWR 1/2 ED - 3/8	400	3613 074
 Double connector		G 1/4 - G 1/4					500	3610 261
		G 1/4 - G 1/2		400	3610 062		500	3610 262
 Elastic sealing for screwed plug form E		G 1/8	ED10x1 - G 1/8	630	NBR 3002 253	ED10x1 - G 1/8	630	FKM 3002 254
		G 1/4	ED14x1,5 - G 1/4	630	3002 142	ED14x1,5 - G 1/4	630	3002 255
		G 3/8	ED G 3/8	630	3002 256	ED G 3/8	630	3002 257
		G 1/2	ED G 1/2	500	3002 258	ED G 1/2	500	3002 259
 KDS sealing ring for swivel banjo couplings (.....KDS)		G 1/8	KDS10	250	3002 260	KDS10	250	3001 766
		G 1/4	KDS14	400	3002 261	KDS14	400	3001 765
		G 3/8	KDS16	400	3002 262	KDS16	400	3002 323
		G 1/2	KDS22	315	3002 263	KDS22	315	3002 324


Cutting ring unions as per DIN EN ISO 8434-1

Accessories • Hydraulic pipes • Hydraulic oil

Description	Pipe Ø	Union nut	Type	PN [bar]	Part no.	Description	Pipe Ø	Union nut	Type	PN [bar]	Part no.
Straight coupling 	6	M 12x1.5	E6L	250	9206007	Union nut 	6	M 12x1.5	m6L	250	9206001
	8	M 14x1.5	E8L	250	9208007		8	M 14x1.5	m8L	250	9208001
	10	M 16x1.5	E10L	250	9210007		10	M 16x1.5	m10L	250	9210002
	15	M 22x1.5	E15L	250	9215007		15	M 22x1.5	m15L	250	9215001
	8	M 16x1.5	E8S	630	9208106		8	M 16x1.5	m8S	630	9208100
	16	M 24x1.5	E16S	500	9216008		10	M 18x1.5	m10S	630	9210102
90° elbow coupling 	6	M 12x1.5	K6L	250	9206008	Cutting ring 	6		s6L	250	9206002
	8	M 14x1.5	K8L	250	9208008		8		s8L/S	250	9208101
	10	M 16x1.5	K10L	250	9210008		10		s10L/S	250	9210103
	15	M 22x1.5	K15L	250	9215008		15		s15L	250	9215002
	8	M 16x1.5	K8S	630	9208107		8		s8L/S	630	9208101
	10	M 18x1.5	K10S	630	9210112		10		s10L/S	630	9210103
Standpipe elbow with sealing cone 	8	M 14x1.5	KED8L	250	9208038	Blanking plug 	6		VB6S	630	9206023
	8	M 16x1.5	KED8S	630	9208036		8		VB8S	630	9208039
T-coupling 	6	M 12x1.5	Q6L	250	9206009		10		VB10S	630	9210024
	8	M 14x1.5	Q8L	250	9208009		15		VB15L	250	9215031
	10	M 16x1.5	Q10L	250	9210009		16		VB16S	500	9216016
	15	M 22x1.5	Q15L	250	9215009	Hydr. pipe galvanized as per EN 10305-1 	8x1			250	3128112
	8	M 16x1.5	Q8S	630	9208108		8x1.5			400	3128113
	10	M 18x1.5	Q10S	630	9210113		8x2			500	3128212
	16	M 24x1.5	Q16S	500	9216010		10x1			200	3128114
							15x1.5			200	3128119
Cross-type coupling 	6	M 12x1.5	KV6L	250	9206011	Hydraulic oil as per DIN 51524-2 (max. 120 °C) 					
	8	M 14x1.5	KV8L	250	9208010						
	10	M 16x1.5	KV10L	250	9210010						
	15	M 22x1.5	KV15L	250	9215010						
	8	M 16x1.5	KV8S	630	9208109						
	10	M 18x1.5	KV10S	630	9210114	Fire-resistant hydraulic liquids Oemeta HF-Du (max. 200 °C) on request					
Straight bulk head fitting 	6	M 12x1.5	R6L	250	9206026						
	8	M 14x1.5	R8L	250	9208023						
	10	M 16x1.6	R10L	250	9210117						
	15	M 22x1.5	R15L	250	9215022						
	8	M 16x1.5	R8S	630	9208117						
	10	M 18x1.5	R10S	630	9210119						
90° elbow bulk head fitting 	16	M 24x1.5	R16S	500	9216017						
	6	M 12x1.5	U6L	250	9206014	Check valve, poppet type 	6	M 12x1.5	RWD6L	250	9206012
	8	M 14x1.5	U8L	250	9208029		8	M 14x1.5	RWD8L	250	9208012
	10	M 16x1.5	U10L	250	9210110		10	M 16x1.5	RWD10L	250	9210012
	15	M 22x1.5	U15L	250	9215018		15	M 22x1.5	RWD15L	250	9215011
	8	M 16x1.5	U8S	630	9208118		8	M 16x1.5	RWD8S	400	9208111
	10	M 18x1.5	U10S	630	9210027		10	M 18x1.5	RWD10S	400	9210116
Check valve, poppet type 	16	M 24x1.5	U16S	500	9216020		16	M 24x1.5	RWD16S	400	9216012

Mounting torque • Pipe clamps

Mounting torques for tube male stud couplings and swivel banjo couplings



Fitting			Mounting torque [Nm]			
Series	Pipe OD	Thread	Screw plug with Knife edge	Sealing ring	Swivel banjo couplings Knife edge	KDS ring
L	6	G 1/8	18	18	18	18
L	8	G 1/4	35	35	45	40
L	10	G 1/4	35	35	45	40
L	15	G 1/2	140	90	120	90
S	8	G 1/4	55	55	45	40
S	10	G3/8	90	80	70	65
S	16	G 1/2	130	115	120	110

Body material: Steel lubricated
Aluminium -15%


Single pipe clamps

Material polyamide
Depth of clamp 30 mm
Fixing screws M6




1 clamp consists of two clamp segments

Clamp size I



Pipe Ø a [mm]	Part no.
8	3300892
10	3300893
12	3300895



Clamp size II



Pipe Ø a [mm]	Part no.
15	3300897
16	3300890

Twin clamp

1 clamp consists of two clamp segments

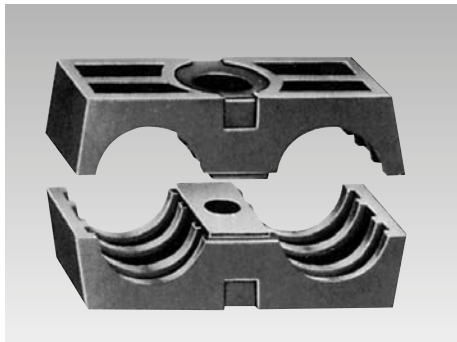


Pipe Ø a [mm]	Part no.
8	3300891
10	3300449


Plug-type connectors with FKM sealings for plates and piping strips (max. operating pressure 500 bar)

Short version for connections without space

Installation example

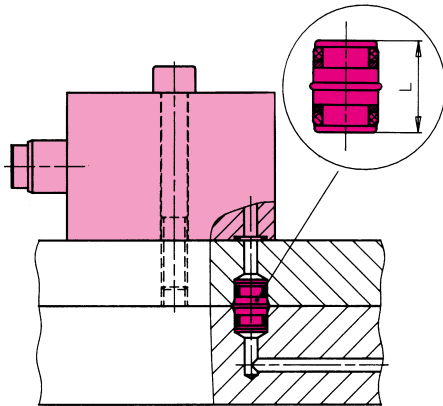

Installation dimensions short version




Note: max. mismatch of bore holes: 0.015 mm


ND	Ø D H7	L	T	Part no.
3	8	12	6	9210 145
5	10	14	7	9210 132

Long version for connections with space up to 5 mm

Installation example

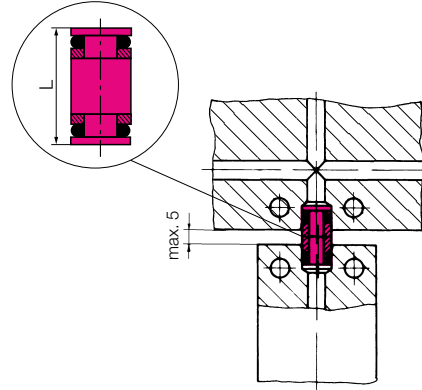

Installation dimensions long version


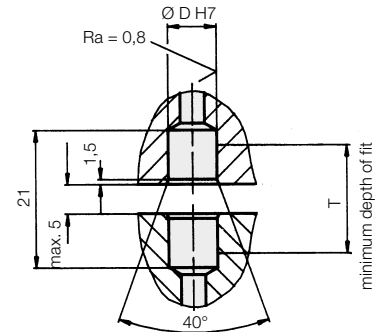


Note: max. mismatch of bore holes:
0,015 mm with gap 0 mm
0,1 mm with gap 5 mm

ND	Ø D H7	L	T	Part no.
5	10	19	19	9210 127

Screw plug with threaded sealing ring (max. operating pressure 500 bar)

G		G 1/8	G 1/4
s	[mm]	8.5	12
t	[mm]	8.5	12.5
SW	[mm]	4	6
Part no.		0361 986	0361 987
Spare O-ring		3001 748	3000 102



Porting details



Pressure gauge with sealing plug


Important note

Pressure gauges with screw plugs must not be used in coolant jets.

In this case, the pressure gauge has to be used with screw plug or closed housing.



Pressure gauge with screw plug

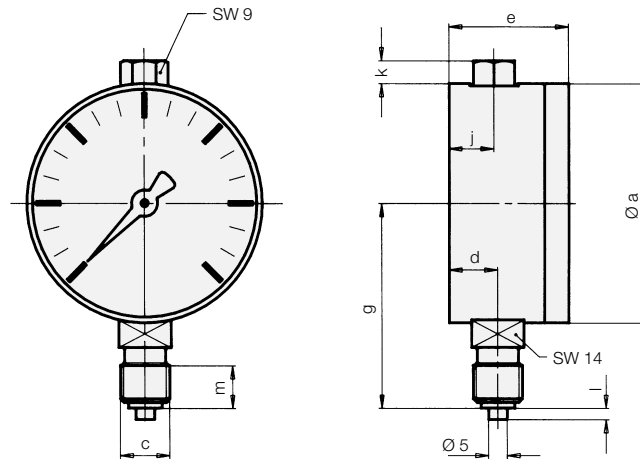


Pressure gauge with glycerine filling and sealing plug

Measuring range	Ø a	c	d	e	g ^{±1}	j	k	l	m	Part no.
0– 40 bar	68	G ¼	13	32	54	12	–	3	12	9820 000
0–100 bar	68	G ¼	13	32	54	12	–	3	12	9821 000
0– 250 bar without glycerine filling	68	G ¼	13	32	54	–	–	3	12	9810 000
0–250 bar	68	G ¼	13	32	54	12	–	3	12	9822 000
0–400 bar	68	G ¼	13	32	54	12	–	3	12	9823 000

Pressure gauge with glycerine filling and screw plug, wrench size SW 9 or closed housing


Measuring range	Ø a	c	d	e	g ^{±1}	j	k	l	m	Part no.
0–250 bar	63	G ¼	17.5	42	53	16	5	3	12	9822 005
0–400 bar	63	G ¼	17.5	42	53	16	5	3	12	9823 005
0–600 bar	63	G ¼	17.5	42	53	16	5	3	12	9846 000

Pressure gauge union with edge sealing ring

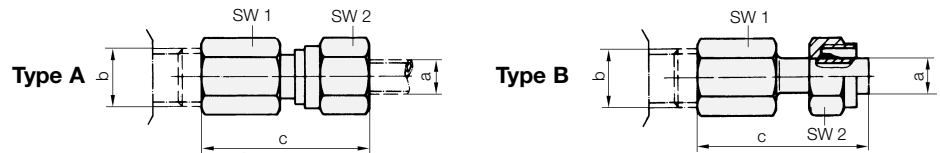

Type	Fitting	a	b	c	SW1	SW2	Part no.
A	0–250 bar	8	G ¼	37	17	17	9208 011
B	0–250 bar	8	G ¼	40	19	17	9208 042
A	0–500 bar	8	G ¼	42	19	19	9208 040
B	0–500 bar	8	G ¼	40	19	19	9208 041
A	0–500 bar	8	G ½	41	27	19	9208 110

90°-elbow

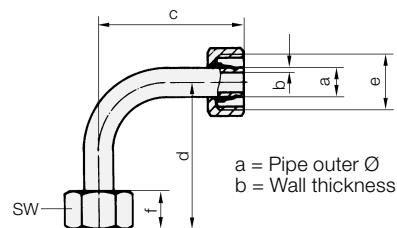

90°-elbow	a	b	c	d	e	f	SW	Part no.
0–250 bar	8	1	48	48	M 14 x 1.5	15	17	9811 011
0–500 bar	8	2	48	76	M 16 x 1.5	16	19	9811 012