


RE 10094/2023-03-16
Replaces: 2020-05-18

rexroth
A Bosch Company

External gear pump SILENCE PLUS AZPJ

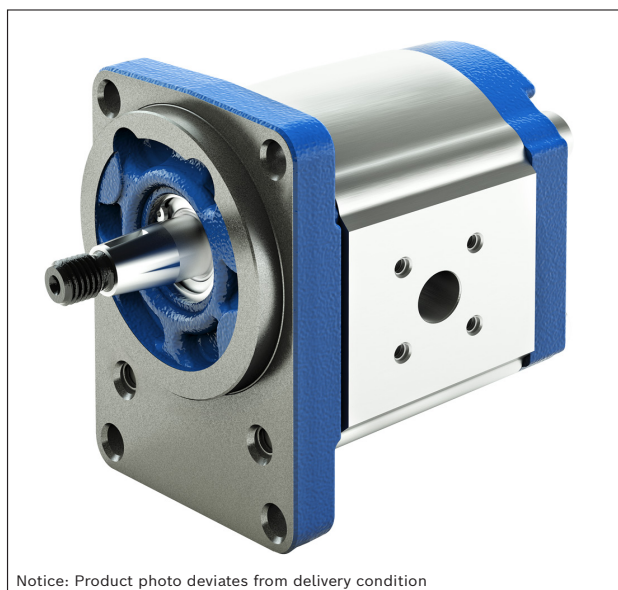

Notice: Product photo deviates from delivery condition

- ▶ Platform F
- ▶ Low noise fixed pump
- ▶ Nominal size 12 to 28
- ▶ Continuous pressure up to 250 bar
- ▶ Intermittent pressure up to 280 bar

Features

- ▶ Optimized pressure pulsation, reduces noise emissions and oscillations in the system
- ▶ Pleasant pitch due to low frequency
- ▶ Consistent high quality based on large-volume production
- ▶ Long service life
- ▶ Slide bearings for high loads
- ▶ Drive shafts according to ISO or SAE and customer-specific solutions
- ▶ Port connections: connection flanges or screw thread
- ▶ Combination of several pumps possible

Contents

Product description	2
Gear pumps with integrated valves	4
Type code	5
Technical data	9
Hydraulic fluid	11
Drive	12
Maximum transferable drive torques	14
Multiple gear pumps	15
Flow characteristic curves	16
Power diagrams	16
Noise charts	18
Drive shafts	20
Front covers	22
Port connections	23
Dimensions – Preferred program	24
Project planning information	30
Information	31
Accessories	32

RE 10094/2023-03-16, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2 AZPJ | External gear pump SILENCE PLUS Product description

Product description

General information

It is the central task of external gear pumps to convert mechanical energy (torque and speed) into hydraulic energy (flow and pressure). To reduce heat losses, Rexroth's external gear units offer very high efficiencies. They are realized by pressure-dependent gap sealing and highly precise production technology.

Rexroth external gear pumps are built in four frame sizes: Platform B, F, N and G. Within each platform different sizes can be realized by different gear widths. The pumps are available in the versions Standard, High-Performance, SILENCE und SILENCE PLUS. Further configuration variants are given by different flanges, ports, shafts, valve arrangements and multiple pump combinations.

With extremely low-noise SILENCE PLUS pumps, the intrinsic noise is reduced by 15 dB (A) on average as compared with standard external gear pumps and the flow pulsation is also decreased by 75%.

Pumping principle

Continuous tooth contact reduces operating noise: A non-involute rounded tooth profile, combined with helical gearing, forms the heart of the SILENCE PLUS. Thanks to permanent tooth contact, the hydraulic fluid is transported almost continuously and noiselessly. The possibility of noise developing from trapped oil between the tooth flanks is prevented in the first place.

A hydrostatic bearing ensures long service life: The high performance and long service life of the SILENCE PLUS is due to a Rexroth patented solution: Hydrostatic grooves provide wear-free compensation for the internal axial forces generated in the helical gearing – even at pressures up to 280 bar.


Construction

The external gear pump consists essentially of a pair of gear wheels supported in bearing bushings and the housing with a front cover and a rear cover.

The drive shaft protrudes from the front cover where it is usually sealed by the shaft seal. The bearing forces are absorbed by slide bearings. These bearings were designed for high pressures and have excellent emergency running properties, especially at low rotational speeds.

The gear wheels have 7 teeth. This keeps both flow pulsation and noise emission to a minimum. The sealing of the pressure chambers is achieved by forces depending on the working pressure. This ensures optimum efficiency. The working pressure generated in the gear chambers is transferred to the outside of the bearing bushings in specifically designed pressure fields in such a way that they are pressed against the gears and seal them up. The pressurized compression areas are limited by special seals. The seal in the area between the gear teeth and the housing is ensured by the smallest of gaps that are set depending on the pressure between the gear teeth and housing.

▼ Axial and radial sealing of gear chambers

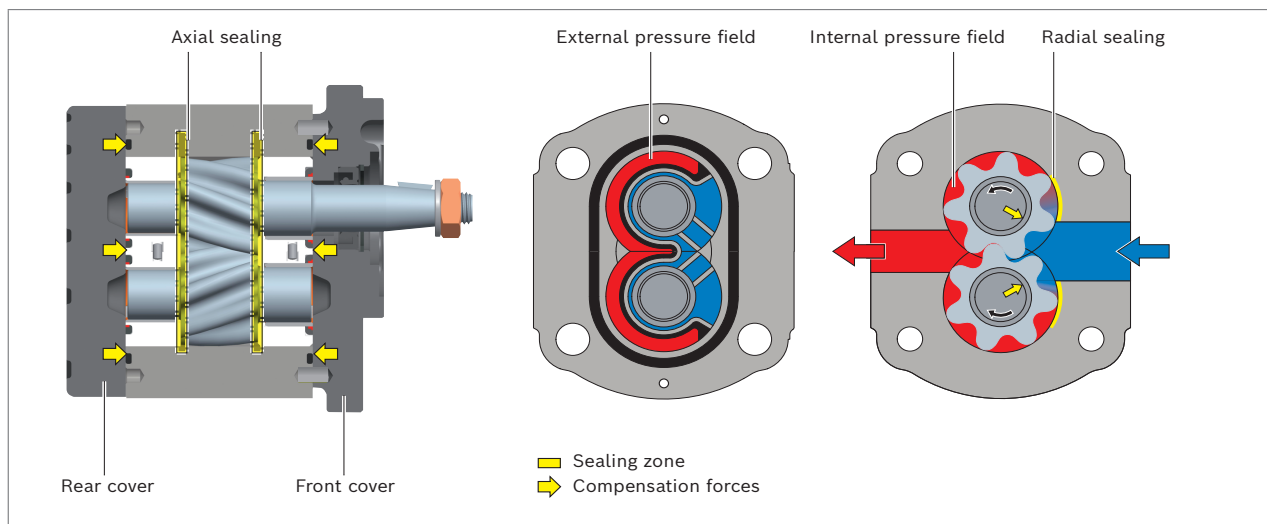


Bosch Rexroth AG, RE 10094/2023-03-16


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


▼ **Standard / High Performance**

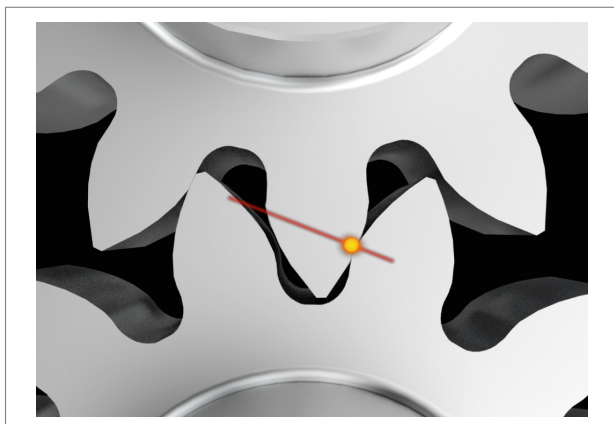


▼ **SILENCE PLUS**

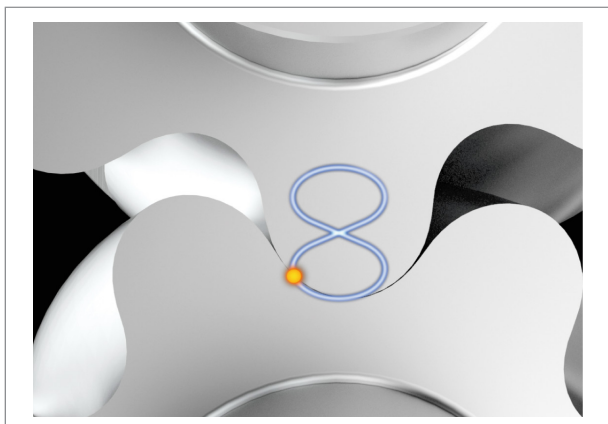


▼ **Flow pulsation**

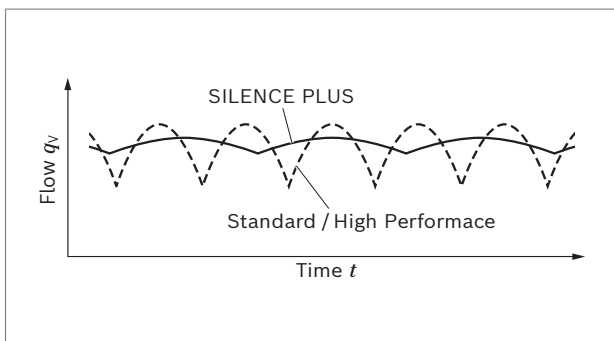

▼ **Hydrostatic bearing SILENCE PLUS**

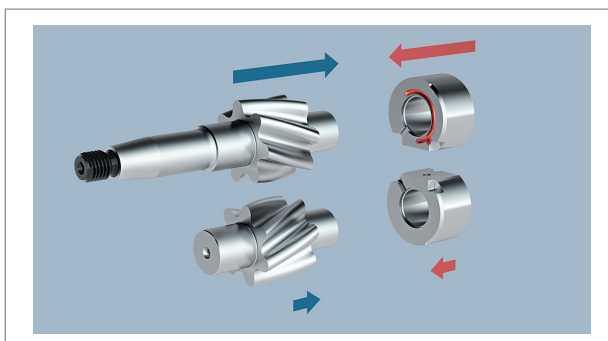

▼ **Principle design of external gear pump**

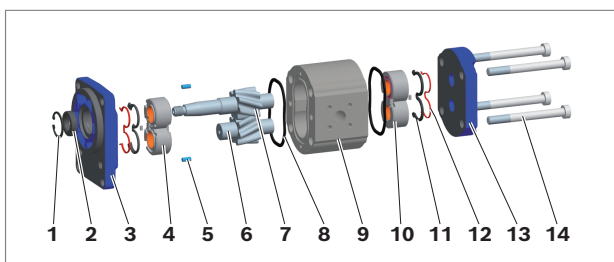

- | | |
|------------------|-----------------------|
| 1 Retaining ring | 8 Housing seal ring |
| 2 Shaft seal | 9 Pump housing |
| 3 Front cover | 10 Bearing bushing |
| 4 Slide bearings | 11 Axial field seal |
| 5 Centering pin | 12 Supporting element |
| 6 Gear wheel | 13 Rear cover |
| 7 Drive shaft | 14 Torx screws |

RE 10094/2023-03-16, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

4 **AZPJ** | External gear pump SILENCE PLUS Gear pumps with integrated valves

Gear pumps with integrated valves

In order to reduce piping complexity, a flow control valve or pressure-relief valve can be integrated in the cover of the gear pump. Such solutions are used, for instance, for the hydraulic oil supply of power steering systems. The pump delivers a constant flow or maximum pressure irrespective of the rotational speed. The residual flow is either returned internally to the suction port or distributed externally to other consumers.

Notice


In case of external gear pumps with integrated valves, the code of the port connection defines the code of the valve ports:

- ▶ For pumps with port connection 02, 07, 20, 30 and 50 the valve ports are metric
- ▶ For pumps with port connection 12 and 15 the valve ports are UNF threaded (ISO 11926-1)
- ▶ For pumps with port connection 01 the valve ports are pipe threaded (ISO 228-1) (BSP)
- ▶ Deviations are described by a special number.




Pressure relief valve, with external residual flow $p_1 = 5$ to 250 bar

T180XX (example)




Flow control valve, with external residual flow $q_{\text{const}} = 2$ to 30 l/min

EXXX12 (example)



Flow control valve with pressure relief valve, with external residual flow only $q_{\text{const}} = 2$ to 30 l/min; $p_1 = 5$ to 250 bar

V18009 (example)



External gear pump SILENCE PLUS | **AZPJ**
Type code

5

Type code

Type code single pump

01	02	03		04	05		06	07	08	09	10	11	12	13		14
AZ	P	J	-	2	2	-									-	

Product

01	External gear unit	AZ
----	--------------------	-----------

Function

02	Pump	P
----	------	----------

Model

03	SILENCE PLUS, platform F (12 ... 28 cm ³ /rev)	J
----	---	----------

Series

04	Bearing diameter 20 mm	2
----	------------------------	----------

Version

05	Zinc plated, high precision cover fixation ¹⁾	2
----	--	----------

Nominal size (NG)

06	Geometric displacement V_g [cm ³ /rev], see "Technical data"	012	014	016	019	022	025	028
----	---	------------	------------	------------	------------	------------	------------	------------

Direction of rotation



07	Viewed on drive shaft	clockwise	R
		counter-clockwise	L

Drive shaft

Typical front cover

08	Tapered keyed shaft	1 : 5	B, P, N	C
		1 : 5	A, G	S
		1 : 8	O	H
	Tang drive		M, T	N
	Splined shaft	SAE J744 16-4 9T	R, C	R
		SAE J744 19-4 11T, length 38 mm	R, C	P
		B17 × 14 acc. to DIN 5482	B, P, N	F
	Parallel keyed shaft	SAE J744 16-1, length 32 mm	R	Q
		SAE J744 19-1, length 32 mm	R	K
		dia. 18 mm	B	A



Front cover

09	Rectangular flange	spigot dia. 80 mm	B
		spigot dia. 36.47 mm (M8)	O
	2-bolt flange	SAE J744 82-2 (A) spigot dia. 82.55 mm	R
		SAE J744 101-2 (B) spigot dia. 101.6 mm	C
	2-bolt mounting	spigot dia. 52 mm, with O-ring	M
		spigot dia. 50 mm (option 1) 	N
		spigot dia. 50 mm (option 2) 	P
	4-bolt mounting	spigot dia. 52 mm, with O-ring	T
	Outrigger bearing	spigot dia. 80 mm (type 1)	A
		spigot dia. 80 mm (type 2)	G

¹⁾ Corrosion-protected version, details see "Technical data"

6 **AZPJ** | External gear pump SILENCE PLUS
Type code

01	02	03		04	05		06	07	08	09	10	11	12	13		14
AZ	P	J	-	2	2	-									-	

Port connection		012	014	016	019	022	025	028	
10	Pipe thread acc. to ISO 228-1	●	●	●	●	●	●	●	01
	UN-thread acc. to ISO 11926-1 / ASME B 1.1, O-ring	●	●	●	●	●	●	●	12
	Square flange (German version) 	●	●	●	●	●	●	●	20
	Square flange (Italian version) 	●	●	●	-	-	-	-	30

Sealing material		
11	NBR (nitrile rubber)	M
	FKM (fluorocarbon rubber)	P
	NBR (nitrile rubber), shaft seal in FKM (fluorocarbon rubber)	K

Rear cover		
12	Standard (cast iron)	B
	Pressure relief valve with external residual flow	T
	Flow control valve with external residual flow	E
	Flow control valve and pressure relief valve with external residual flow only	V

Valve settings		
13	Flow in l/min, 2-digit, e.g. 9 l/min	XXX09
	Cracking pressure in bar, 3-digit, e.g. 180 bar	180XX
	Cracking pressure in bar, 3-digit, e.g. 180 bar & flow in l/min, 2-digit, e.g. 9 l/min	18009

Non standard version		
14	Special version ¹⁾ (characteristics not covered by type code)	SXXXX

● = Available - = Not available

Notice

- ▶ Not all of the variants according to the type code are possible.
- ▶ Please select the desired pump with the help of the selection table (preferred types) or after consultation with Bosch Rexroth.
- ▶ Special options are available on request.

¹⁾ For more information about special version, please contact us.

External gear pump SILENCE PLUS | **AZPJ** 7
Type code

Type code multiple pump

01	02	03	04	05	06	07	08	09	10	11	12	13
AZ	P		-			-						-

Product

01	External gear unit	AZ
----	--------------------	-----------

Function

02	Pump	P
----	------	----------

Model¹⁾

03	Standard Performance	4.0 ... 25 cm ³ /rev	Data sheet 10090	W
	High Performance	1.0 ... 7.1 cm ³ /rev	Data sheet 10088	B
		4.0 ... 28 cm ³ /rev	Data sheet 10089	F
	SILENCE	4.0 ... 28 cm ³ /rev	Data sheet 10095	S
	SILENCE PLUS	12.0 ... 28 cm ³ /rev	Data sheet 10094	J

Series (according to data sheet of pump stage 1)

04	Bearing diameter 20 mm	2
----	------------------------	----------

Version (according to data sheet of pump stage 1)

05	Phosphated, pinned	1
	Corrosion-protected, pinned	2

Nominal size (NG)²⁾

06	In accordance with data sheet for the individual series	
----	---	--

Direction of rotation

07	Viewed on drive shaft	clockwise	R
		counter-clockwise	L

Drive shaft (according to pump stage1)

08	In accordance with data sheet of pump stage 1	
----	---	--

Front cover (according to pump stage1)

09	In accordance with data sheet of pump stage 1	
----	---	--

Port connection (per pump stage)³⁾

10	In accordance with data sheet for the individual series	
----	---	--

Sealing material

11	NBR (nitrile rubber)	M
	FKM (fluorocarbon rubber)	P
	NBR (nitrile rubber), shaft seal in FKM (fluorocarbon rubber)	K

Rear cover (according to last pump stage)

12	In accordance with data sheet of the last pump stage	
----	--	--

Non standard version

13	Special version (characteristics not covered by type code)	SXXXX
----	--	--------------

¹⁾ A letter is to be selected for each pump stage, e.g. triple pump AZPJ + AZPJ + AZPB: AZPJJB

²⁾ A numerical value is to be selected for each pump stage, e.g. triple pump **028/016/2.0**

³⁾ A numerical value is to be selected for each pump stage, e.g. triple pump **202020**

8 **AZPJ** | External gear pump SILENCE PLUS
Type code

Notice

- ▶ Not all of the variants according to the type code are possible.
- ▶ Please select the desired pump with the help of the selection table (preferred types) or after consultation with Bosch Rexroth.
- ▶ Special options are available on request.

Example triple pump:
AZPJ...028... + AZPJ...016... + AZPB...1.0...

01	02	03	04	05	06	07	08	09	10	11	12		
AZ	P	JJB	-	2	2	-	028/016/2.0	R	D	C	20202020	K	B

Technical data

Operating conditions

Nominal size				12	14	16	19	22	25	28	
Series				2x							
Displacement, geometric, per revolution		V_g	cm ³	12	14	16	19	22.5	25	28	
Pressure at suction port S ¹⁾		absolute	p_e	0.7 ... 3							
Maximum continuous pressure			p_1	bar	250	250	250	250	210	185	130
Maximum intermittent pressure ²⁾			p_2	bar	280	280	280	280	240	215	160
Maximum pressure peaks			p_3	bar	300	300	300	300	260	235	180
Minimum speed at	$v = 12 \text{ mm}^2/\text{s}$	$p < 100 \text{ bar}$	n_{\min}	rpm	500	500	500	500	500	500	500
		$p = 100 \dots 180 \text{ bar}$	n_{\min}	rpm	1000	800	800	800	800	800	800
		$p = 180 \text{ bar} \dots p_2$	n_{\min}	rpm	1200	1000	1000	1000	1000	1000	1000
	$v = 25 \text{ mm}^2/\text{s}$	at p_2	n_{\min}	rpm	600	500	500	500	500	500	500
Maximum speed			at p_2	n_{\max}	rpm	3500	3000	3000	3000	2800	2600

Rotary stiffness of drive shaft

Drive shaft			C	S	H	N	R	P	F	Q	K	A
Rotary stiffness	c	Nm/rad	246	352	287	312	251	370	292	268	383	349

General technical data

Weight	<i>m</i>	kg	See chapter “Dimensions”
Installation position			No restrictions
Mounting type			Flange or through-bolting with spigot
Port connections			See chapter “Port connections” on page 23
Direction of rotation, viewed on drive shaft			Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Drive shaft loading			Axial and radial forces only after consultation
Ambient temperature range	<i>t</i>	°C	-30 ... +80 with NBR seals (NBR = nitrile rubber)
			-20 ... +110 with FKM seals (FKM = fluorocarbon rubber)

Corrosion protection

Version 2 (galvanized, passivated):	Degree of corrosion and rust according to DIN EN ISO 9227	Test duration 96 h: no red rust
Unit with corrosion protection		


Notice

- Safety requirements pertaining to the whole systems are to be observed.
- Please contact us for applications with frequent load changes.

- ¹⁾ In the case of tandem pumps, the suction-side pressure difference between the individual pump stages must not exceed 0.5 bar.
- ²⁾ Limited service life with threaded ports (applicable for applications with $p_2 > 210 \text{ bar}$)

10 AZPJ | External gear pump SILENCE PLUS Technical data

▼ Pressure definition

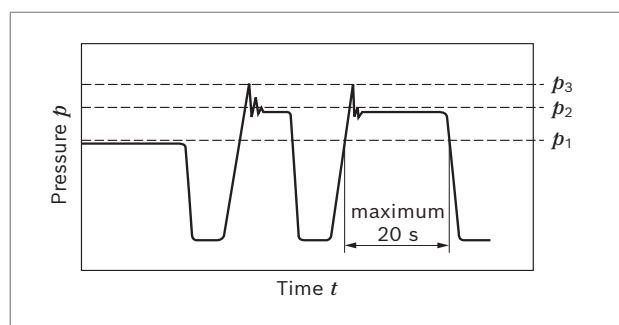


p_1 : Maximum continuous pressure
 p_2 : Maximum intermittent pressure
 p_3 : Maximum pressure peaks

Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

V_g Displacement per revolution [cm³]
 Δp Differential pressure [bar] ($\Delta p = p - p_e$)
 n Rotational speed [rpm]
 η_v Volumetric efficiency
 η_{hm} Hydraulic-mechanical efficiency
 η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

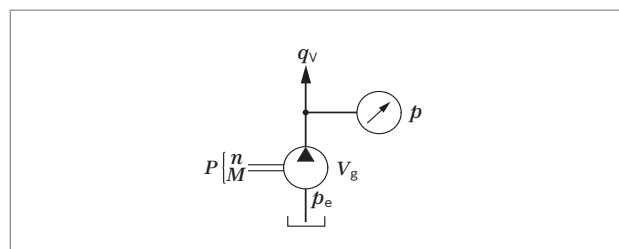


Notice

You can find diagrams for a rough calculation in chapter "Diagrams / Characteristic curves".

Direction of rotation

The dimensional drawings in the chapter Dimensions represent pumps for clockwise rotation. The position of the drive shaft and/or the position of suction and pressure port changes for counter-clockwise rotation.

▼ Direction of rotation, viewed on drive shaft

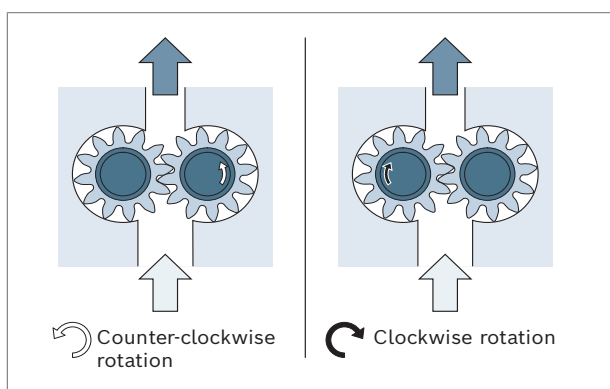

Hydraulic fluid

The external gear unit is designed for operation with HLP mineral oil according to DIN 51524, 1-3. Under higher load, however, Bosch Rexroth recommends at least HLP compliant with DIN 51524 Part 2.

See the following data sheet for application instructions and requirements for selecting hydraulic fluid, behavior during operation as well as disposal and environmental protection before you begin project planning:

- 90220: Hydraulic fluids based on mineral oils and related hydrocarbons

Other hydraulic fluids on request.

Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are provided in the following technical data sheet:


- 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

Selection of hydraulic fluid shall make sure that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} see "Selection diagram")

Viscosity and temperature of hydraulic fluids

Viscosity range	
Permissible in continuous operation	$v = 12 \dots 800 \text{ mm}^2/\text{s}$
Recommended in continuous operation	$v_{opt} = 20 \dots 100 \text{ mm}^2/\text{s}$
Permissible for cold start	$v_{max} \leq 2000 \text{ mm}^2/\text{s}$
Temperature range	
With NBR seals (NBR = nitrile rubber)	$t = -30 \text{ }^\circ\text{C} \dots +80 \text{ }^\circ\text{C}$
With FKM seals (FKM = fluorocarbon rubber)	$t = -20 \text{ }^\circ\text{C} \dots +110 \text{ }^\circ\text{C}$

▼ Selection diagram

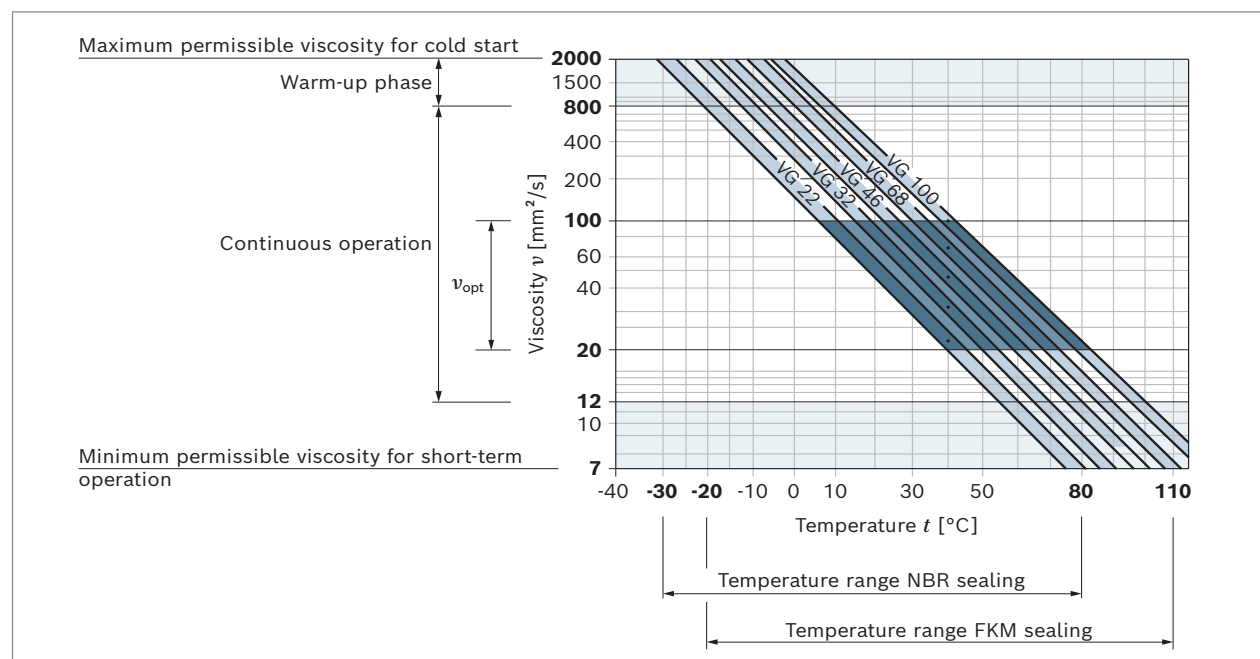


Observe the instructions for the filtration of the hydraulic fluid (see chapter "Project planning information").

12 AZPJ | External gear pump SILENCE PLUS Drive

Drive


1. Elastic couplings

- ▶ The coupling may not transfer any radial or axial forces to the pump.
- ▶ The radial runout deviation from the shaft to the spigot should not exceed 0.2 mm.
- ▶ See the coupling manufacturer's assembly instructions for shaft misalignment tolerances.

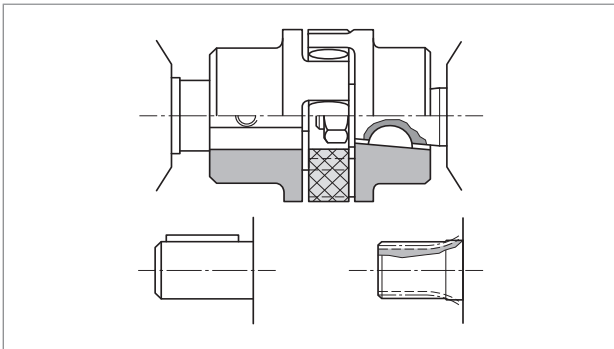

2. Coupling sleeve

- ▶ To be used for splined shaft profile according to DIN and SAE
- ▶ Attention: Make sure no radial or axial forces act on the pump drive shaft or coupling sleeve. The coupling sleeve should freely move in the axial direction.
- ▶ The distance between the pump drive shaft and the output shaft on the customer side should be 2+1 mm
- ▶ Reserve installation space for the retaining ring.
- ▶ Oil-bath or oil-mist lubrication required

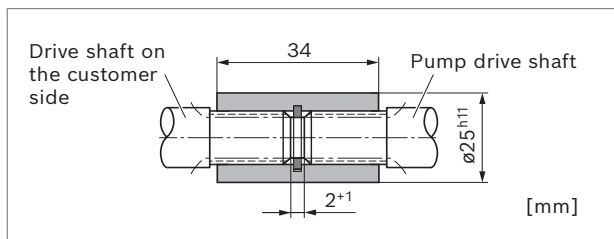


3. Tang drive coupling


- ▶ For attaching the pump directly to an electric motor or combustion engine, gearbox, etc.
- ▶ Pump drive shaft with special tang drive coupling and driver (3) (scope of delivery see offer drawing)
- ▶ No shaft seal
- ▶ Drive-side installation and sealing according to the following recommendations and dimensions

- ▶ Drive shaft on the customer side (1)
 - Case-hardened steel DIN 17210, e.g. 20MnCrS5 case-hardened 0.6 deep; HRC 60±3
 - Seal ring contact surface ground without rifling $R_t \leq 4 \mu\text{m}$
- ▶ Radial shaft seal ring on the customer side (2)
 - Provide with rubber cover (see DIN 3760, type AS, or double-lipped ring)
 - Provide installation edges with 15° chamfer or install shaft seal with protection sleeve

▼ Nominal sizes 12 ... 16

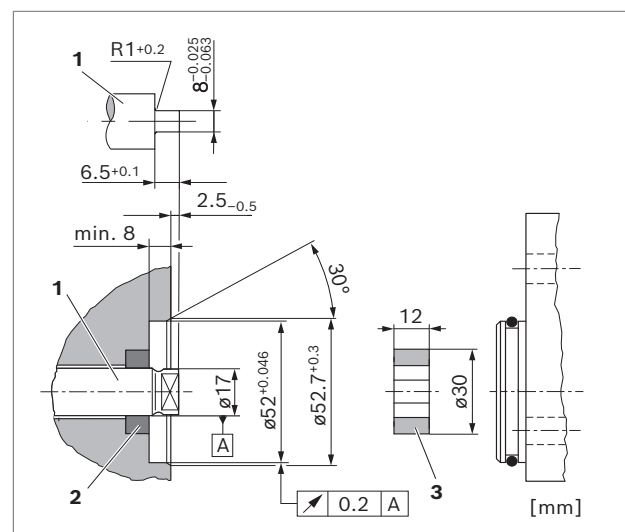


▼ Nominal sizes 19 ... 28

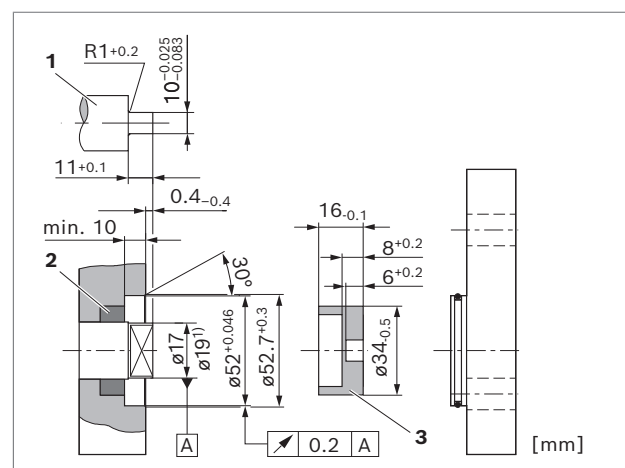

1) See offer drawing (maximum 34 mm)

4. V-belts and straight gear wheels or helical toothed gear drives without outrigger bearing


For V-belt or gear wheel drives, please contact us specifying the application and mounting conditions (dimensions a , d_m , d_w and angle α). For helical toothed gear drives, details of the helix angle β are also required.

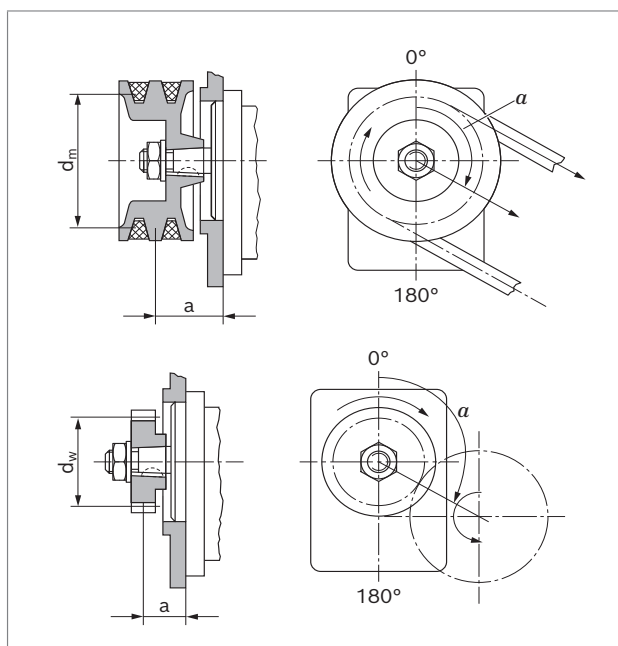


5. Outrigger bearing

Outrigger bearing are offered to eliminate possible problems when the pumps are driven by V-belts or gear wheels. The diagrams show the radial and axial load capacity in relation to a bearing service life of $L_H = 1000$ h.

▼ Front cover A (type 1)

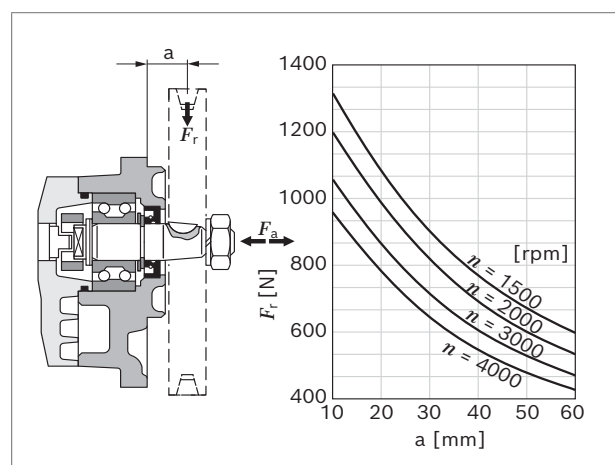

▼ Front cover G (type 2)

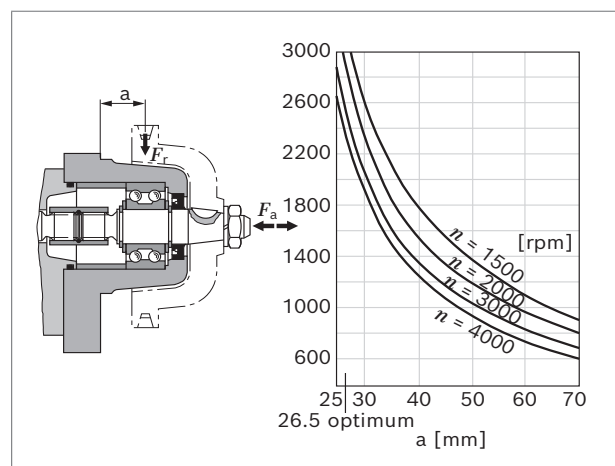

14 AZPJ | External gear pump SILENCE PLUS Maximum transferable drive torques

Maximum transferable drive torques

▼ Tapered keyed shafts

Drive shaft Code	Designation	M_{\max} Nm	Nominal size	$p_{2 \max}$ bar
C	1 : 5	155	12 ... 19	280
			22	240
			25	215
			28	160
H	1 : 8	160	12 ... 19	280
			22	240
			25	215
			28	160

▼ Tang drive

Drive shaft Code	Designation	M_{\max} Nm	Nominal size	$p_{2 \max}$ bar
N	Tang drive	65	12	280
			14	260
			16	230
		85	19	250
			22	210
			25	190
			28	160

▼ Splined shafts

Drive shaft Code	Designation	M_{\max} Nm	Nominal size	$p_{2 \max}$ bar
R	SAE J744 16-4 9T	110	12 ... 19	280
			22	240
			25	215
			28	160
P	SAE J744 19-4 11T, length 38 mm	180	12 ... 19	280
			22	240
			25	215
F	B17 x 14 acc. to DIN 5482	100	28	160
			22	240
			25	215

▼ Parallel keyed shafts

Drive shaft Code	Designation	M_{\max} Nm	Nominal size	$p_{2 \max}$ bar
Q	SAE J744 16-1, length 32 mm	55	12	250
			14	220
			16	190
			19	160
			22	140
			25	120
K	SAE J744 19-1, length 32 mm	140	28	110
			12 ... 19	280
			22	240
			25	215
A	dia. 18 mm	75	28	160
			12, 14	280
			16	260
			19	220
			22	190
			25	170

▼ With outrigger bearing

Drive shaft Code	Outrigger bearing Designation	M_{\max} Nm	Nominal size	$p_{2 \max}$ bar
S	Type 1 (A) (with tang drive coupling)	65	12	280
			14	260
			16	230
			19	190
			22	160
			25	140
	Type 1 (A) (with sleeve)	160	28	130
			12 ... 19	280
			22	240
			25	215
	Type 2 (G)		28	160
			12 ... 19	280
			22	240
			25	215

Multiple gear pumps

Gear pumps are well-suited to multiple arrangements, whereby the drive shaft of the first pump stage is extended to a second and possibly third pump stage. The shaft of the individual pump sections are normally connected via a driver or via a splined coupling (reinforced through drive). The individual pump stages are usually hydraulically isolated and have separate suction ports. On request a common suction port or separated but hydraulically connected suction ports are available. For the configuration of multiple pumps, Bosch Rexroth recommends arranging the pump stage with the largest displacement on the drive side.

Notice

Basically, the parameters of the single pumps apply, however certain restrictions need to be observed:

► Maximum rotational speed:


This is determined by the largest pump stage used.

► Pressures:

These are restricted by the maximum transmissible torques of the drive shaft, the through drive and the driver.

Addition of drive torques

Please note, that in multiple pump arrangements the drive torques of the individual pump stages will add up according to the following formula:




$$\frac{\Delta p_1 \times V_{g1} + \Delta p_2 \times V_{g2} + \Delta p_3 \times V_{g3}}{18 \times \pi} \leq M_{\max}^{1)} \quad \begin{matrix} \Delta p \text{ [bar]} \\ V_g \text{ [cm}^3\text{]} \end{matrix}$$

This may result in pressure restrictions for the respective pump stages.

¹⁾ M_{\max} : see table above "Maximum transferable drive torques"

Standard through drive (tang drive coupling)


For AZPJ pumps, the driver for the next pump stage can support loads up to $M_{\max} = 65 \text{ Nm}$. This may result in pressure limitations for subsequent pump stages. Subsequent pumps of a smaller series determine the maximum transmissible torque.

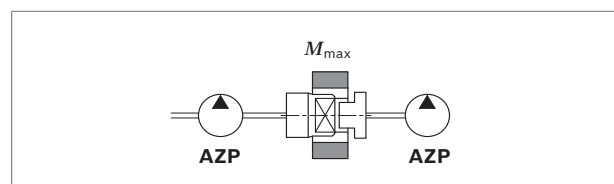

Following pump		M_{\max} [Nm]
Platform F	AZPW	52
	AZPF-1x	65
	AZPF-2x	85
	AZPS-1x	65
	AZPS-2x	85
	AZPJ	65
Platform B	AZPB-3x	25


Reinforced through drive

Reinforced through drives (for up to $M_{\max} = 160 \text{ Nm}$) are available for applications with higher torques/torsional vibrations. Design available on request.

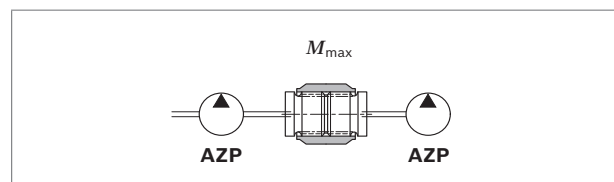

16 AZPJ | External gear pump SILENCE PLUS Flow characteristic curves

Flow characteristic curves

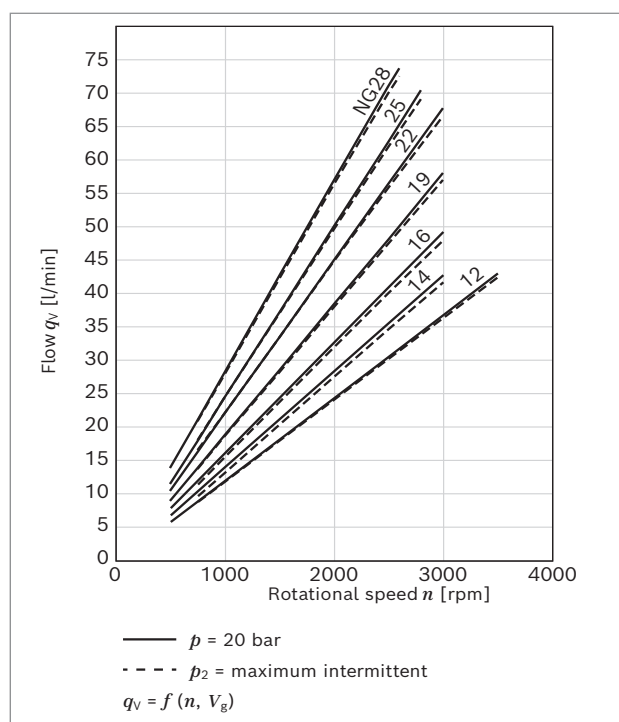


Notice


- Characteristic curves measured at $\nu = 32 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$

Power diagrams


▼ Nominal size 12

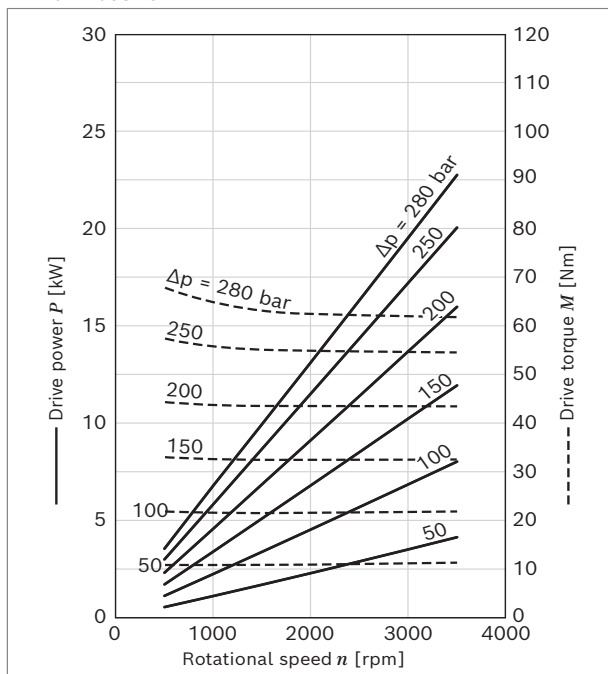


▼ Nominal size 14

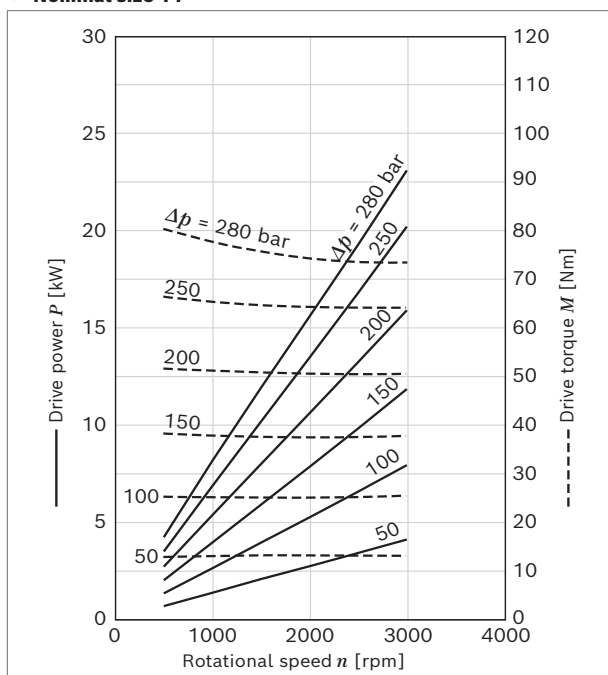


▼ **Nominal size 16**

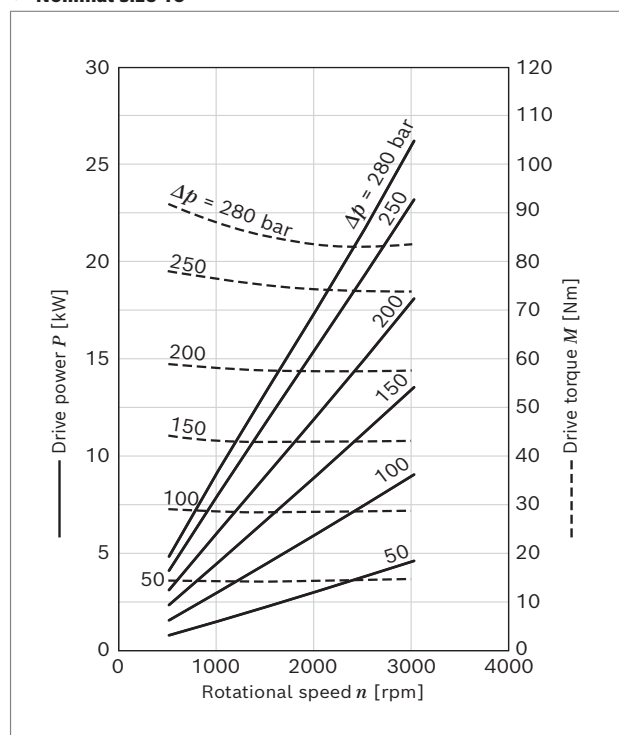


▼ **Nominal size 19**

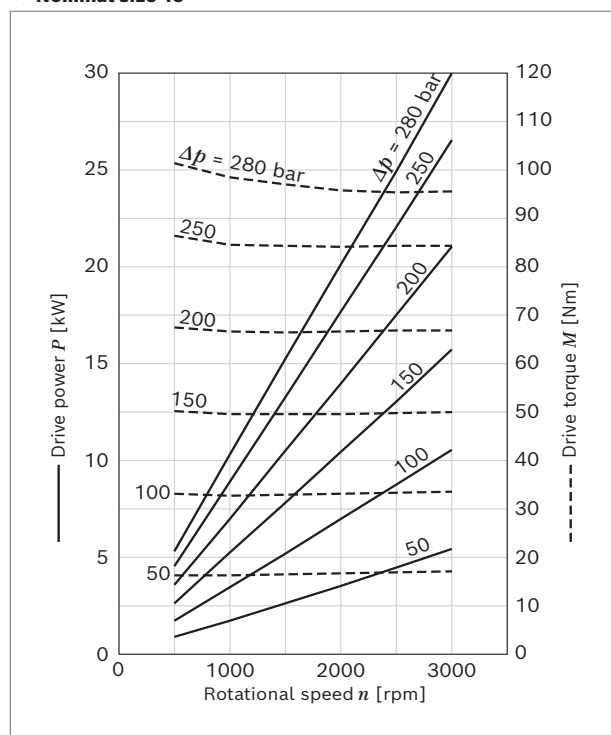

▼ **Nominal size 22**

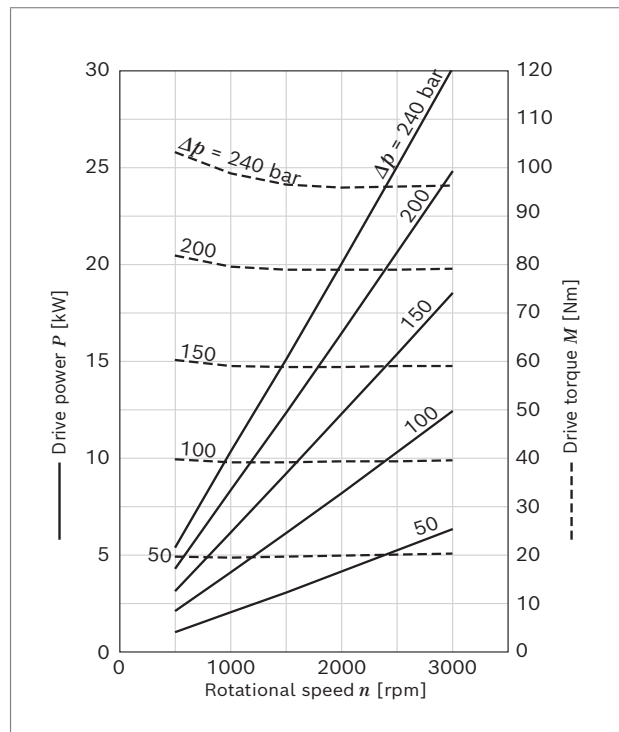


▼ **Nominal size 25**

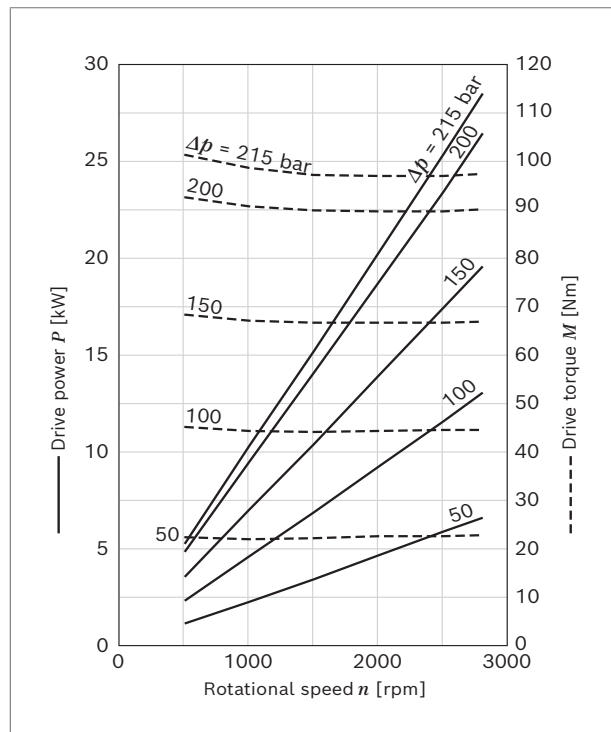

18 AZPJ | External gear pump SILENCE PLUS Noise charts

▼ Nominal size 28

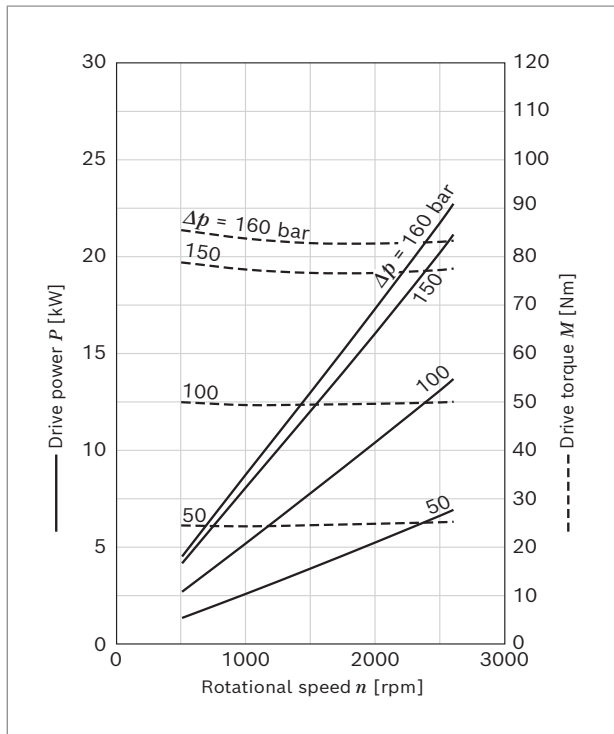

Noise charts

Apart from the low levels, the much lower frequency also contributes to the substantial noise benefits of the SILENCE PLUS compared with other pump designs. Noise levels dependent on the rotational speed, pressure range between 10 bar and pressure value p_2 (see chapter "Technical data").

These are typical characteristic values for the respective size. They describe the airborne sound emitted solely by the pump.


Ambient influences (installation site, piping, other system components) were not taken into account.

The values refer to one individual pump.


Notice

- Characteristic curves measured at $\nu = 32 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$.
- Sound pressure level calculated from noise measurements made in the low reflection measuring room according to DIN 45635, Part 26.
- Distance from measuring sensor to pump: 1 m.


▼ Nominal size 12

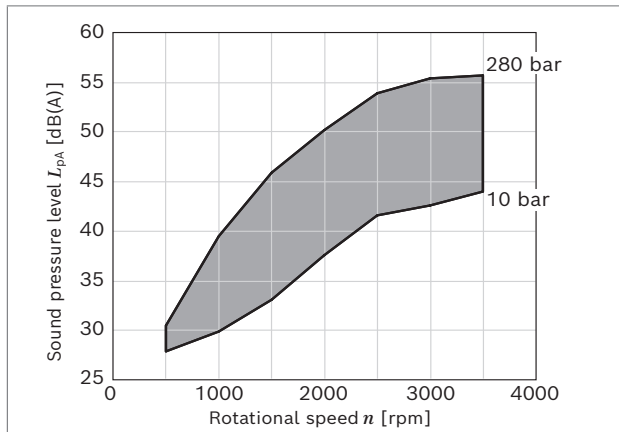


▼ **Nominal size 14**

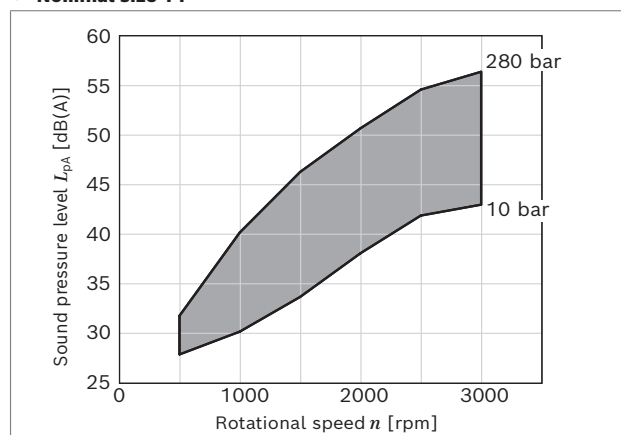


▼ **Nominal size 16**

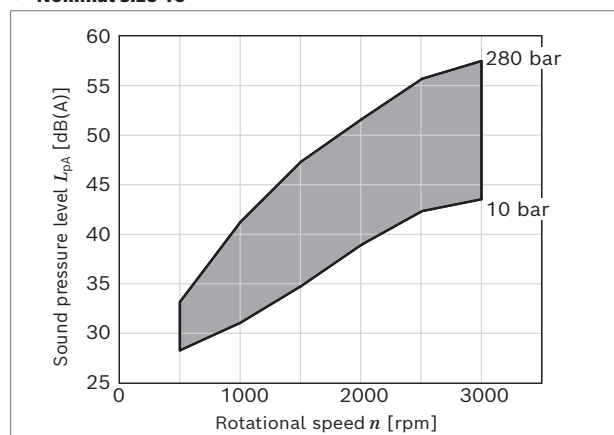


▼ **Nominal size 19**

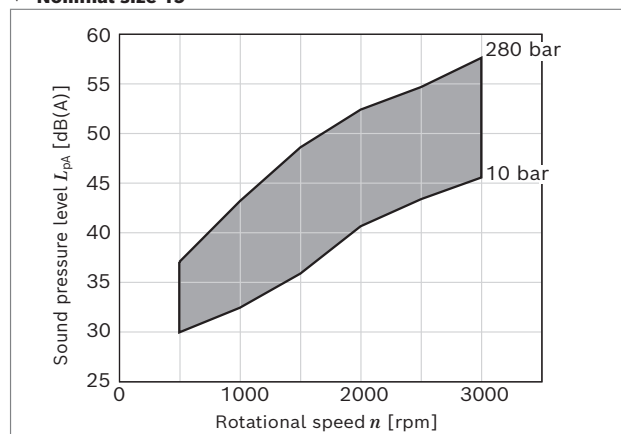


▼ **Nominal size 22**

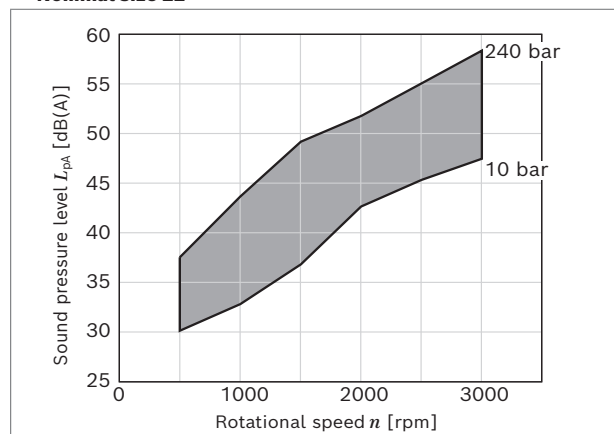

▼ **Nominal size 25**

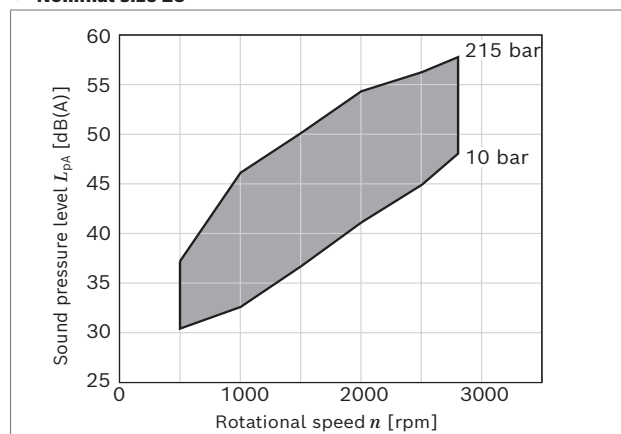

▼ **Nominal size 28**

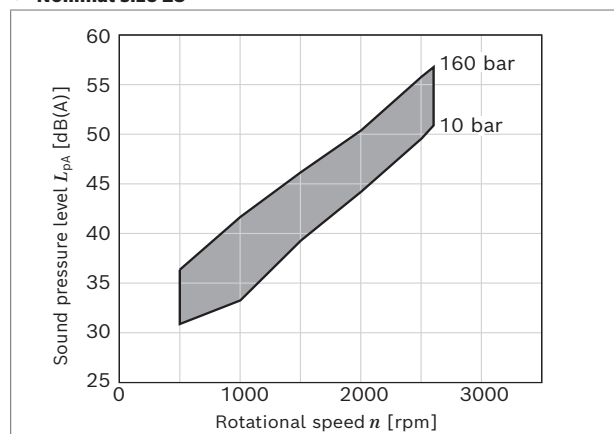


20 **AZPJ** | External gear pump SILENCE PLUS Drive shafts

Dimensions [mm]


Drive shafts

▼ Tapered keyed shaft 1:5 (for front cover B, P, N)

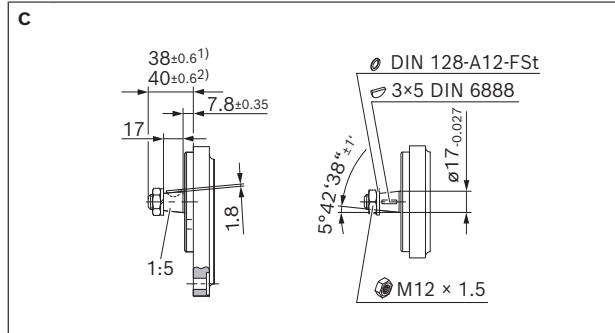


- 1) In combination with front cover B
2) In combination with front cover P and front cover N


▼ Tapered keyed shaft 1:5 (for front cover A, G)

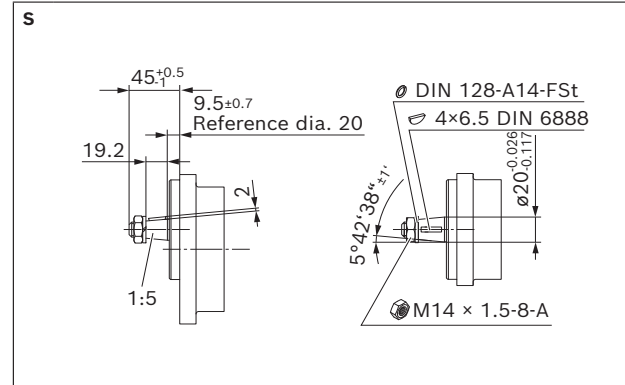


▼ Tapered keyed shaft 1:8

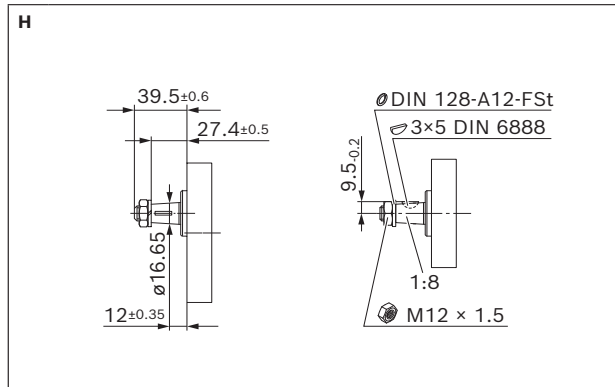


▼ Tang drive

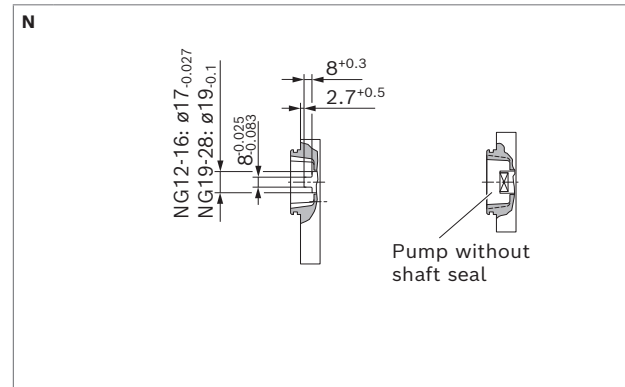

▼ Splined shaft SAE J744 16-4 9T

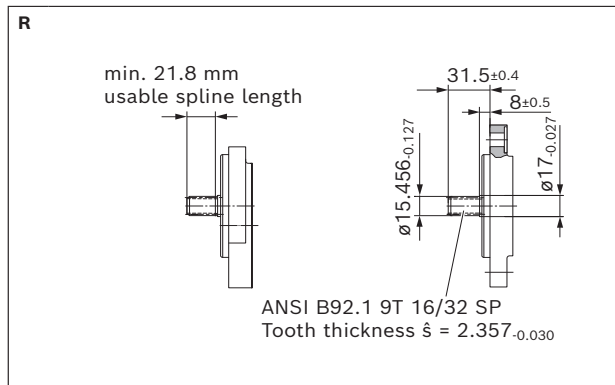

▼ Splined shaft SAE J744 19-4 11T, length 38 mm

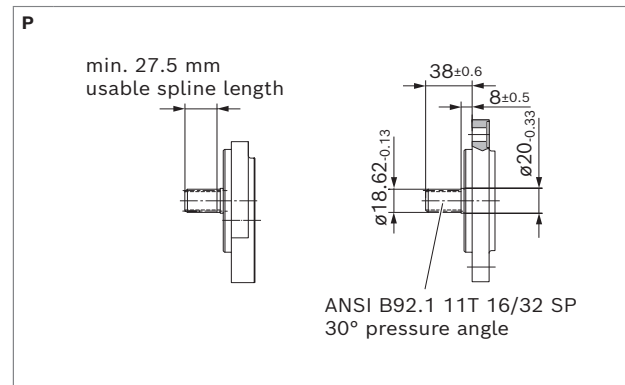


Dimensions [mm]

External gear pump SILENCE PLUS | **AZPJ**
Drive shafts

21


▼ **Splined shaft B17x14 acc. to DIN 5482**

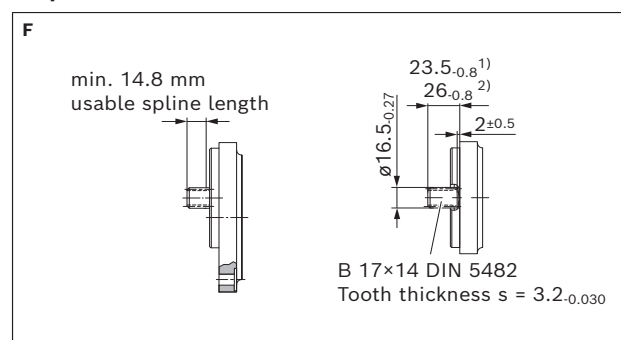


1) In combination with front cover B

2) In combination with front cover P and front cover N


▼ **Parallel keyed SAE J744 16-1, length 32 mm**

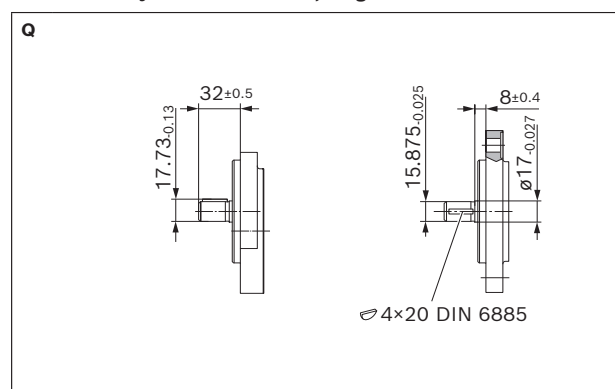

▼ **Parallel keyed SAE J744 19-1, length 32 mm**

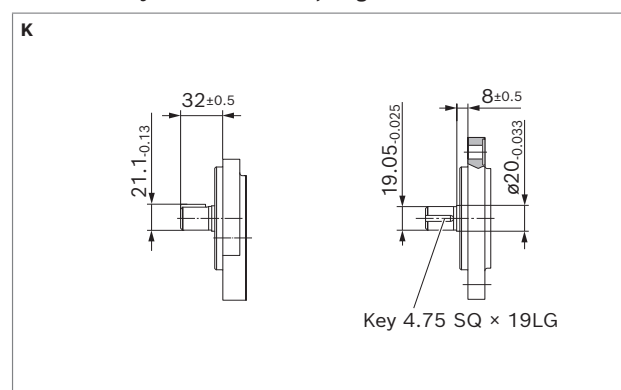

▼ **Parallel keyed dia. 18 mm**

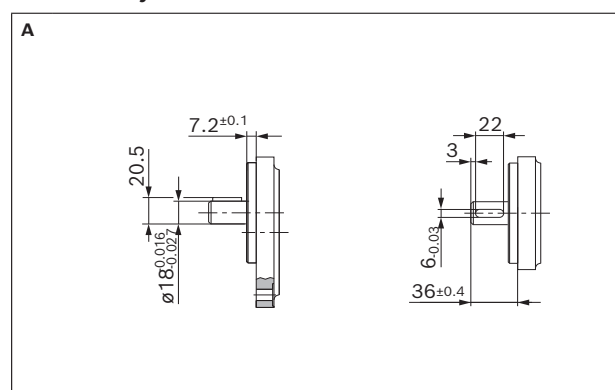

RE 10094/2023-03-16, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

22 **AZPJ** | External gear pump SILENCE PLUS
Front covers


Dimensions [mm]

Front covers


▼ Rectangular flange spigot dia. 80 mm

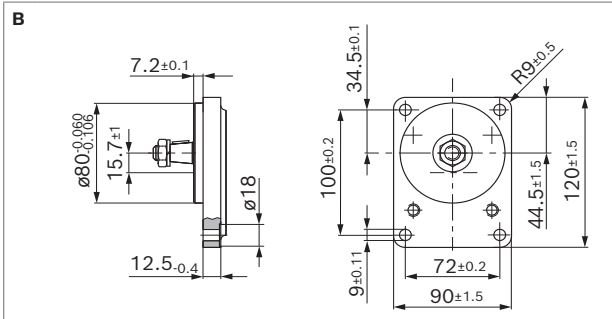


▼ Rectangular flange spigot dia. 36.47 mm (M8)

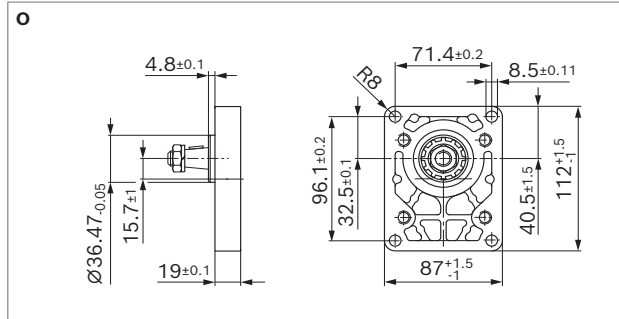


▼ 2-bolt flange SAE J744 82-2 (A) spigot dia. 82.55 mm

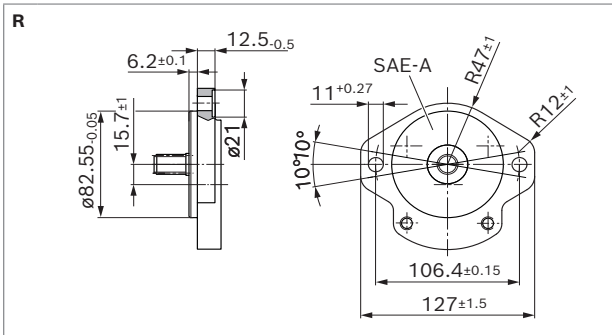


▼ 2-bolt flange SAE J744 101-2 (B) spigot dia. 101.6 mm

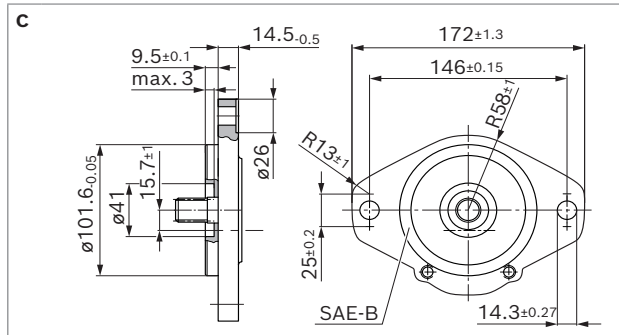


▼ 2-bolt mounting, spigot dia. 52 mm, with O-ring

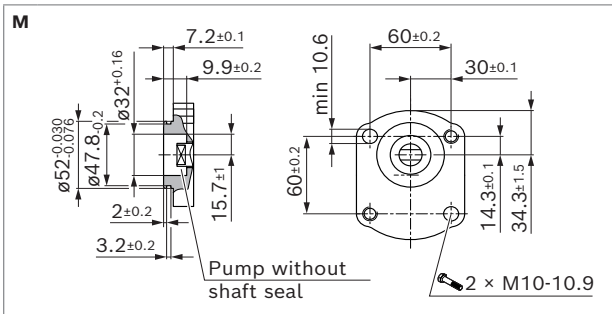


▼ 2-bolt mounting, spigot dia. 50 mm (option 1)

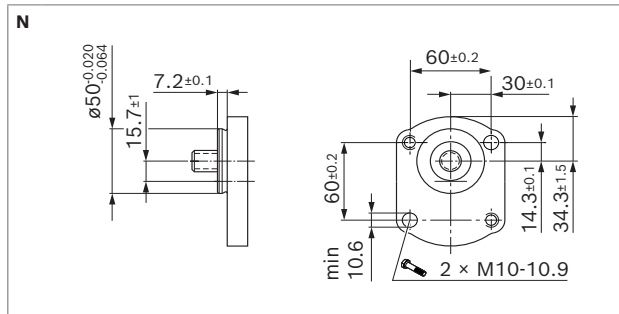

▼ 2-bolt mounting, spigot dia. 50 mm (option 2)

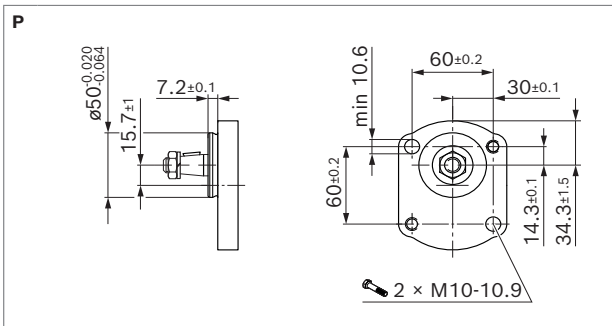

▼ 4-bolt mounting, spigot dia. 52 mm, with O-ring

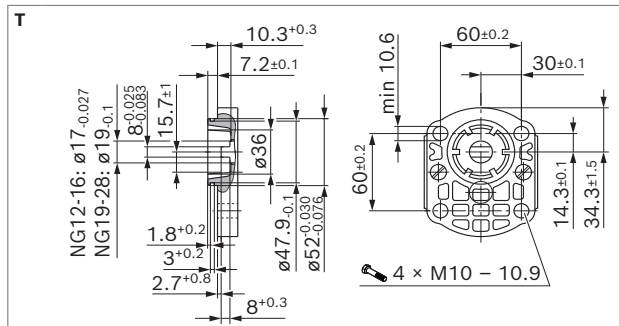


Bosch Rexroth AG, RE 10094/2023-03-16


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

▼ Outrigger bearing spigot dia. 80 mm (type 1)

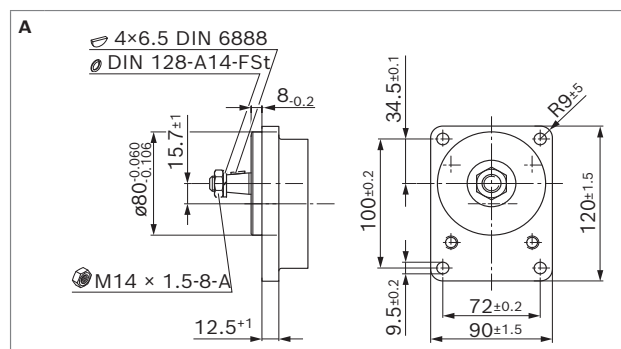


▼ Outrigger bearing spigot dia. 80 mm (type 2)

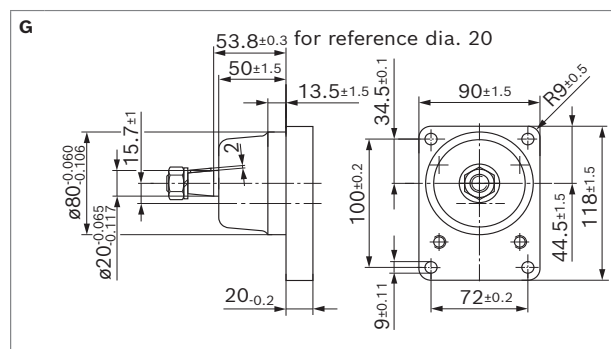


Port connections

▼ Pipe thread acc. to ISO 228-1¹⁾

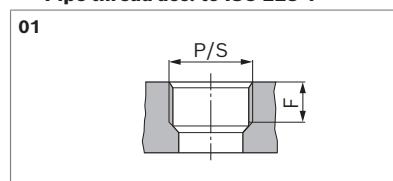


Nominal size	Pressure side		Suction side	
	P	F mm	S	F mm
12 ... 16	G 1/2	16	G 3/4	16
25 ... 28	G 3/4			

▼ UN-thread acc. to ISO 11926-1 / ASME B 1.1, O-ring¹⁾

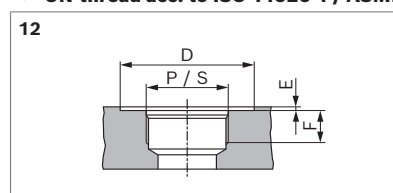


Nominal size	Pressure side				Suction side			
	P	D	E	F	S	D	E	F
		mm	mm	mm		mm	mm	mm
12 ... 16	7/8-14 UNF-2B	35	0.5	17	1 1/16-12 UN-2B	45	0.5	19
19 ... 22					7/8-14 UNF-2B	35		17
25 ... 28					1 1/16-12 UN-2B	45		19

▼ **Square flange (German version)**

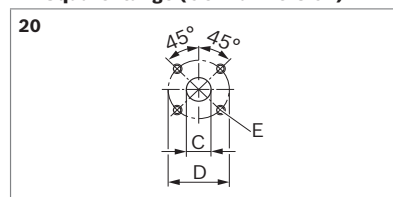

Nominal size	Pressure side			Suction side		
	C mm	D mm	E	C mm	D mm	E
12 ... 16	15	35	M6; 13 mm deep	20	40	M6; 13 mm deep
19				22	55	
22 ... 28				26		M8; 13 mm deep

▼ **Square flange (Italian version)**

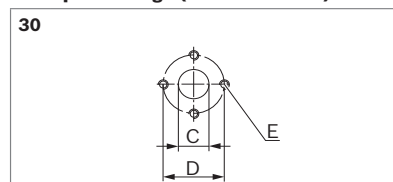

Nominal size	Pressure side			Suction side		
	C mm	D mm	E	C mm	D mm	E
12 ... 16	13.5	30.2	M6; 13 mm deep	20	39.7	M8; 13 mm deep

Notice

Depending on the design variant, the size of the threaded connections may differ from the sizes specified in the table. See information in the dimensional drawings.

1) Limited service life with threaded ports (applicable for applications with $p_2 > 210$ bar)

RE 10094/2023-03-16, Bosch Rexroth AG


24 **AZPJ** | External gear pump SILENCE PLUS
Dimensions – Preferred program

Dimensions [mm]

Dimensions – Preferred program

Tapered keyed shaft 1:5 with rectangular flange spigot dia. 80 mm

AZPJ-22- ... CB20MB

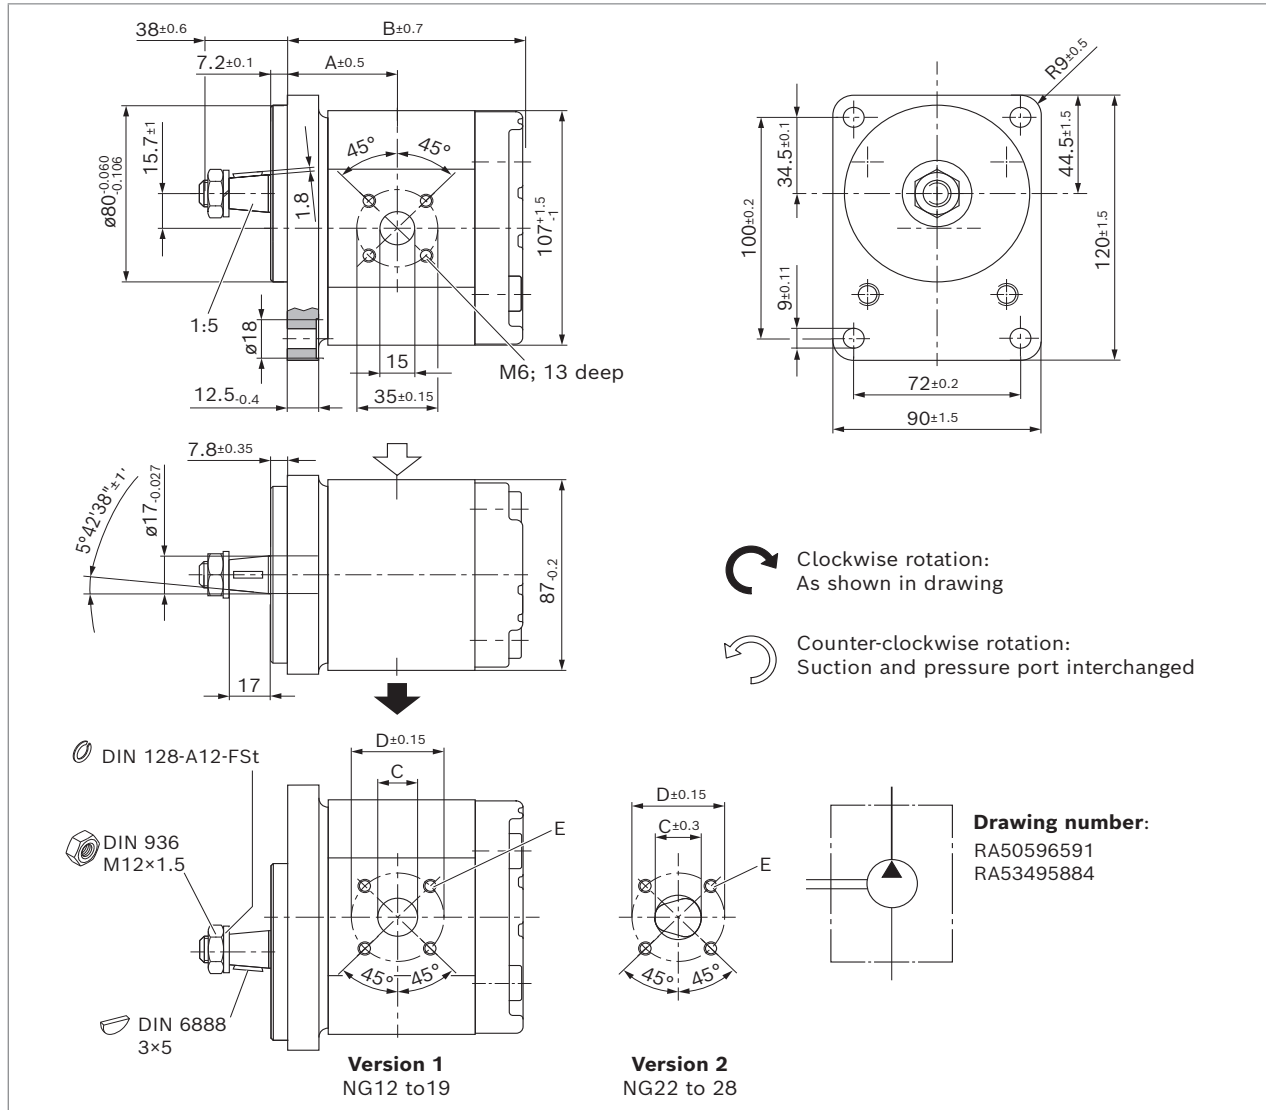

NG	Material number		Maximum intermittent pressure p_2	Maximum speed n_{max}	Weight m	Dimensions				
	Direction of rotation counter-clockwise	Direction of rotation clockwise				A	B	C	D	E
12	0 518 525 302	0 518 525 001	280	3500	3.9	46.5	96.3	20	40	M6; 13 mm deep
14	0 518 525 303	0 518 525 002	280	3000	4	47.5	99.5	20	40	
16	0 518 625 301	0 518 625 001	280	3000	4.1	47.5	102.9	20	40	
19	0 518 625 309	0 518 625 010	280	3000	4.5	57.9	107.9	22	55	
22	0 518 725 310	0 518 725 011	240	3000	4.6	60.6	113.3	26	55	M8; 13 mm deep
25	0 518 725 311	0 518 725 012	215	2800	4.8	64.8	117.5	26	55	
28	0 518 725 312	0 518 725 013	160	2600	4.9	69.6	122.3	26	55	

Bosch Rexroth AG, RE 10094/2023-03-16

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

External gear pump SILENCE PLUS | **AZPJ**
Dimensions – Preferred program

25

Splined shaft SAE J744 16-4 9T with 2-bolt flange SAE J744 82-2 (A) spigot dia. 82.55 mm

AZPJ-22- ... **RR20MB**

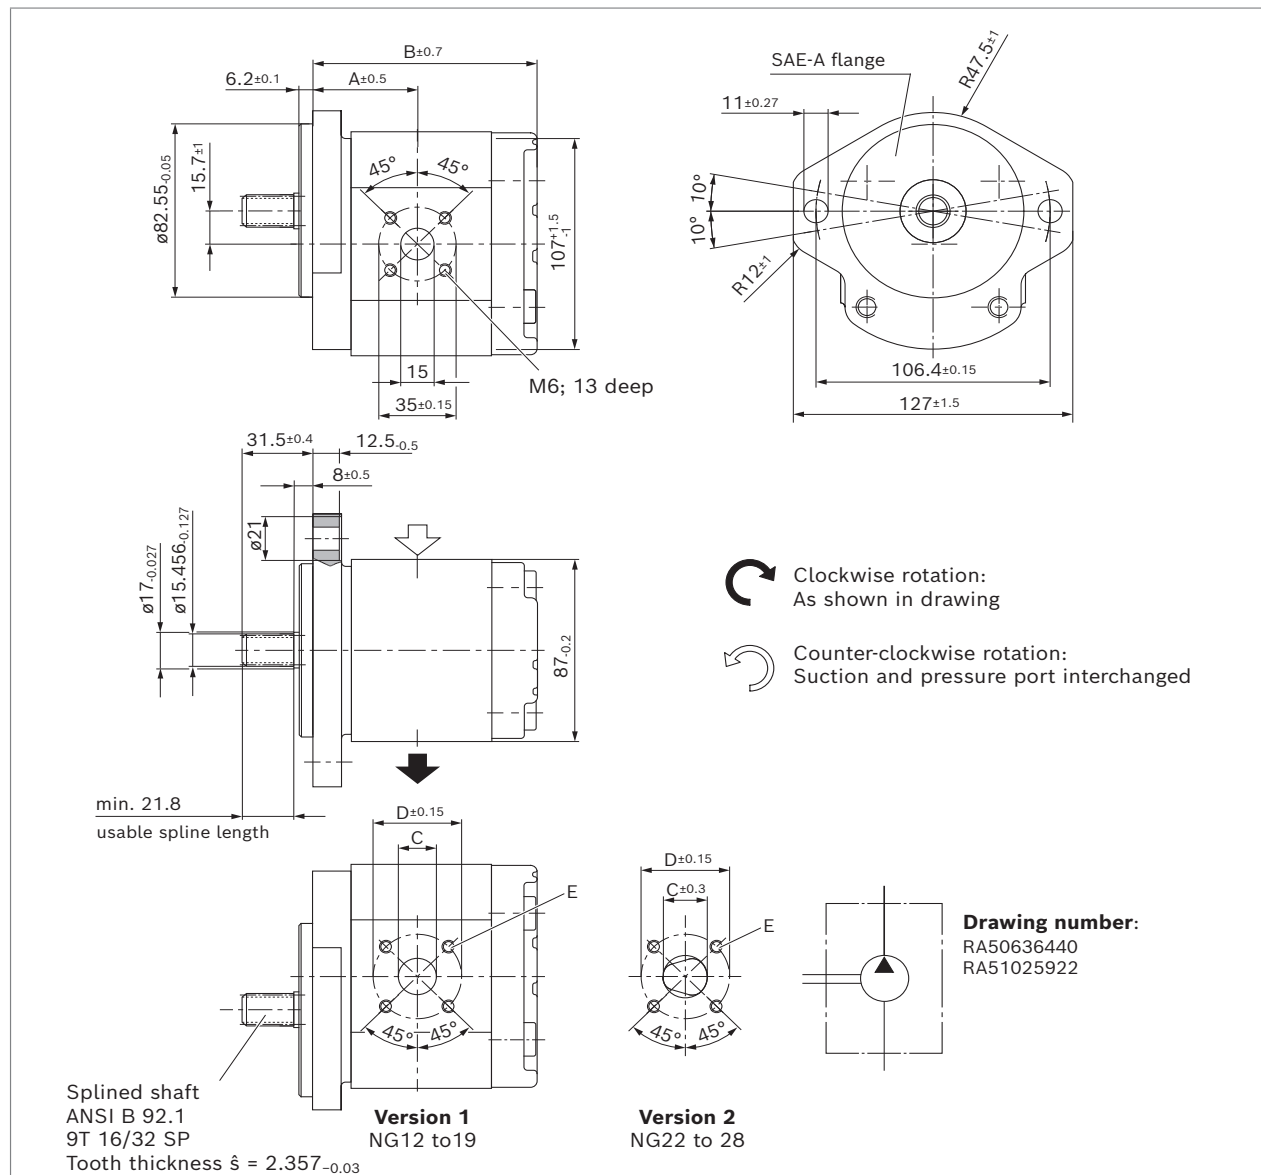


NG	Material number		Maximum intermittent pressure p_2	Maximum speed n_{\max}	Weight m	Dimensions				E
	Direction of rotation					A	B	C	D	
	counter-clockwise	clockwise								
12	0 518 525 306	0 518 525 005	280	3500	3.8	46.5	96.3	20	40	M6; 13 mm deep
14	0 518 525 307	0 518 525 006	280	3000	3.9	47.5	99.5	20	40	
16	0 518 625 303	0 518 625 003	280	3000	4	47.5	102.9	20	40	
19	0 518 625 306	0 518 625 007	280	3000	4.4	57.9	107.9	22	55	
22	0 518 725 301	0 518 725 002	240	3000	4.6	60.6	113.3	26	55	M8; 13 mm deep
25	0 518 725 302	0 518 725 003	215	2800	4.7	64.8	117.5	26	55	
28	0 518 725 303	0 518 725 004	160	2600	4.8	69.6	122.3	26	55	

RE 10094/2023-03-16, Bosch Rexroth AG

Tapered keyed shaft 1:8 with rectangular flange spigot dia. 36.47 mm

AZPJ-22- ... **HO30MB**

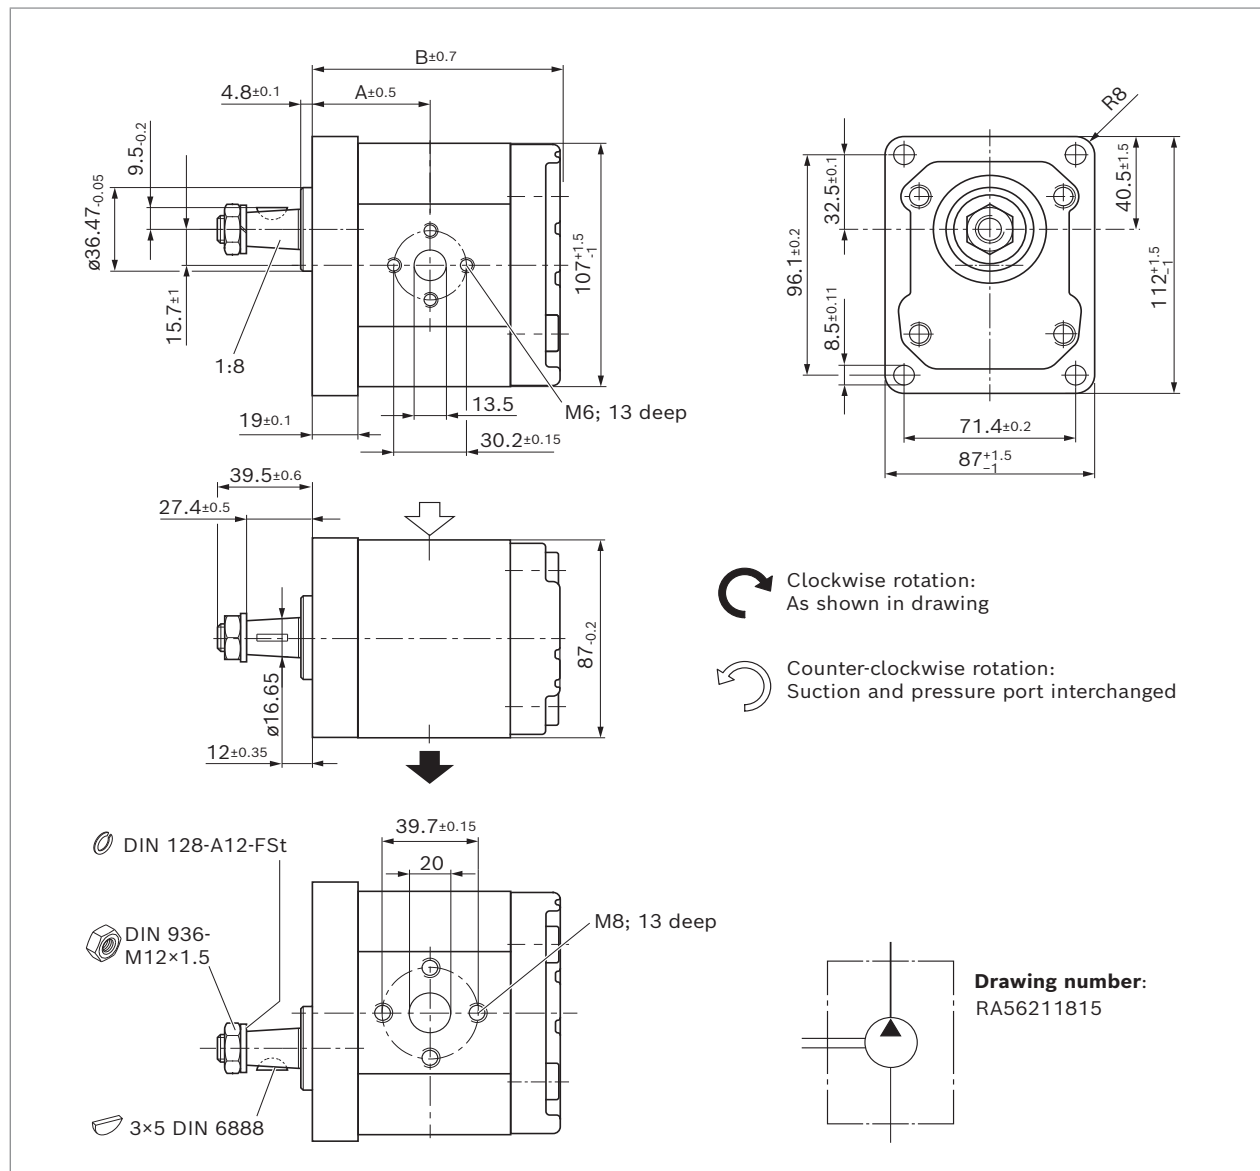


NG	Material number		Maximum intermittent pressure p_2	Maximum speed n_{\max}	Weight m	Dimensions	
	Direction of rotation					A	B
	counter-clockwise	clockwise					
12	0 518 525 308	0 518 525 007	280	3500	3.7	48	97.8
14	0 518 525 309	0 518 525 008	280	3000	2.8	49	101
16	0 518 625 304	0 518 625 004	280	3000	3.9	49	104.4

Dimensions [mm]

External gear pump SILENCE PLUS | **AZPJ** 27
Dimensions – Preferred program

Tapered keyed shaft 1:8 with rectangular flange spigot dia. 36.47 mm

AZPJ-22- ... HO20MB

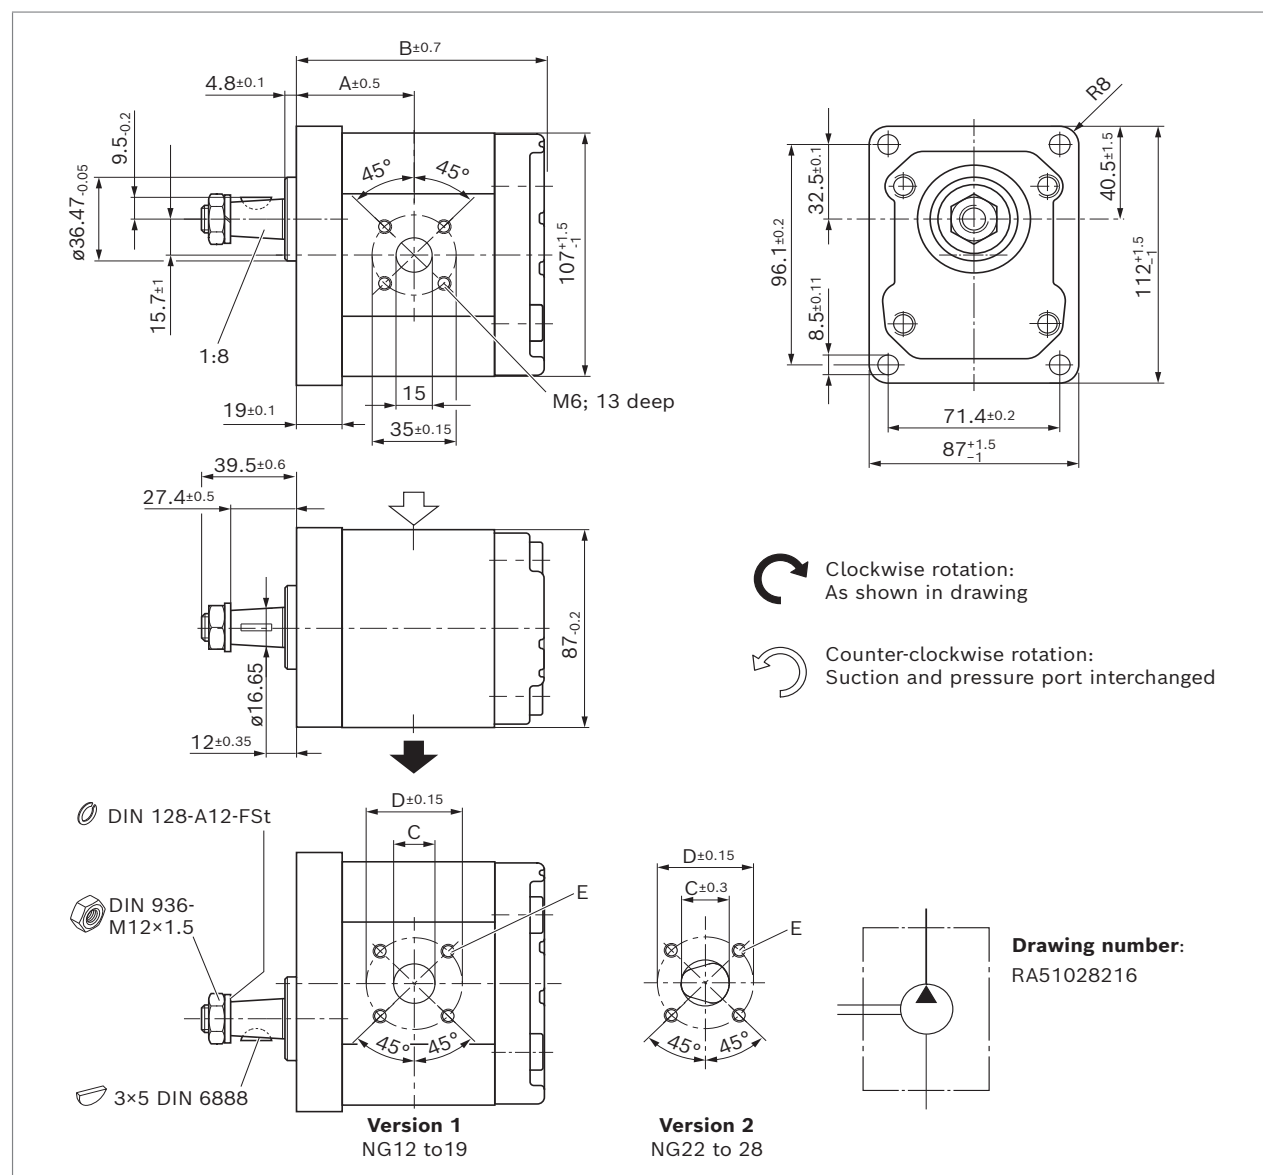

NG	Material number		Maximum intermittent pressure p_2	Maximum speed n_{\max}	Weight m	Dimensions				E
	Direction of rotation					A	B	C	D	
	counter-clockwise	clockwise								
19	0 518 625 307	0 518 625 008	280	3000	4.5	59.4	109.4	22	55	M8; 13 mm deep
22	0 518 725 304	0 518 725 005	240	3000	4.6	62.1	114.8	26	55	
25	0 518 725 305	0 518 725 006	215	2800	4.8	66.3	119	26	55	
28	0 518 725 306	0 518 725 007	160	2600	4.9	71.1	123.8	26	55	


RE 10094/2023-03-16, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Parallel keyed shaft dia. 18 with rectangular flange spigot dia. 80 mm

AZPJ-22- ... **AB20MB**

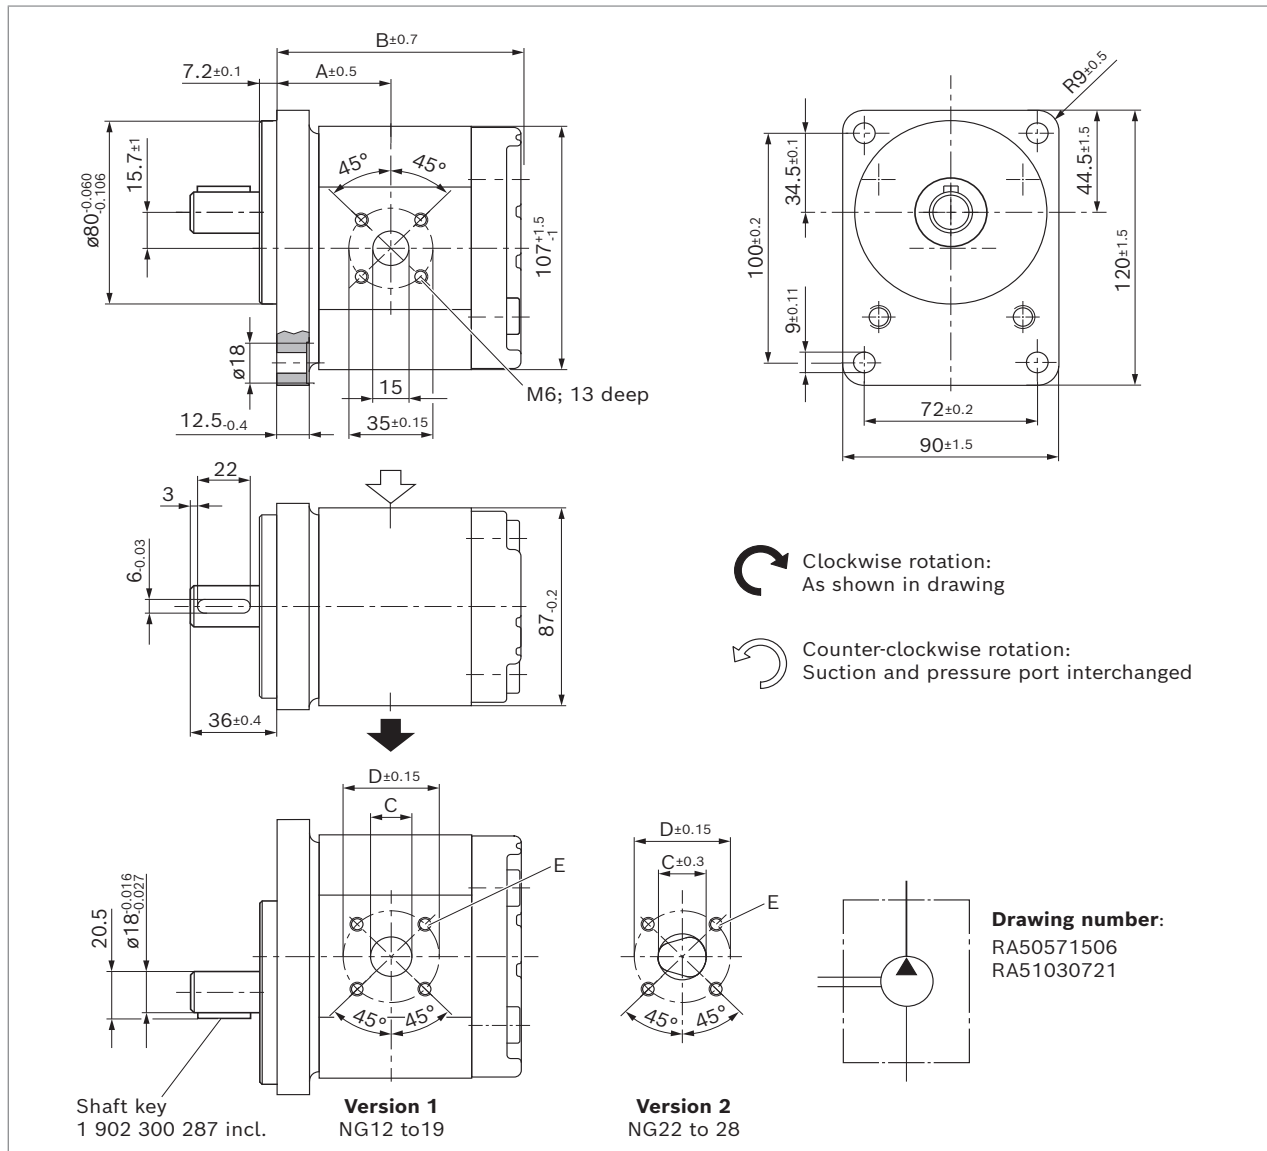

NG	Material number		Maximum intermittent pressure p_2	Maximum speed n_{\max}	Weight m kg	Dimensions				E
	Direction of rotation					A mm	B mm	C mm	D mm	
	counter-clockwise	clockwise								
12	0 518 525 304	0 518 525 003	280	3500	3.9	46.5	96.3	20	40	M6; 13 mm deep
14	0 518 525 305	0 518 525 004	280	3000	4	47.5	99.5	20	40	
16	0 518 625 302	0 518 625 002	270	3000	4.1	47.5	102.9	20	40	
19	0 518 625 308	0 518 625 009	230	3000	4.5	57.9	107.9	22	55	M8; 13 mm deep
22	0 518 725 307	0 518 725 008	190	3000	4.6	60.6	113.3	26	55	
25	0 518 725 308	0 518 725 009	170	2800	4.8	64.8	117.5	26	55	
28	0 518 725 309	0 518 725 010	150	2600	4.9	69.6	122.3	26	55	


Dimensions [mm]

External gear pump SILENCE PLUS | **AZPJ**
Dimensions – Preferred program

29

Tang drive with 4-bolt mounting spigot dia. 52 mm

AZPJ-22- ... **NT20MB**

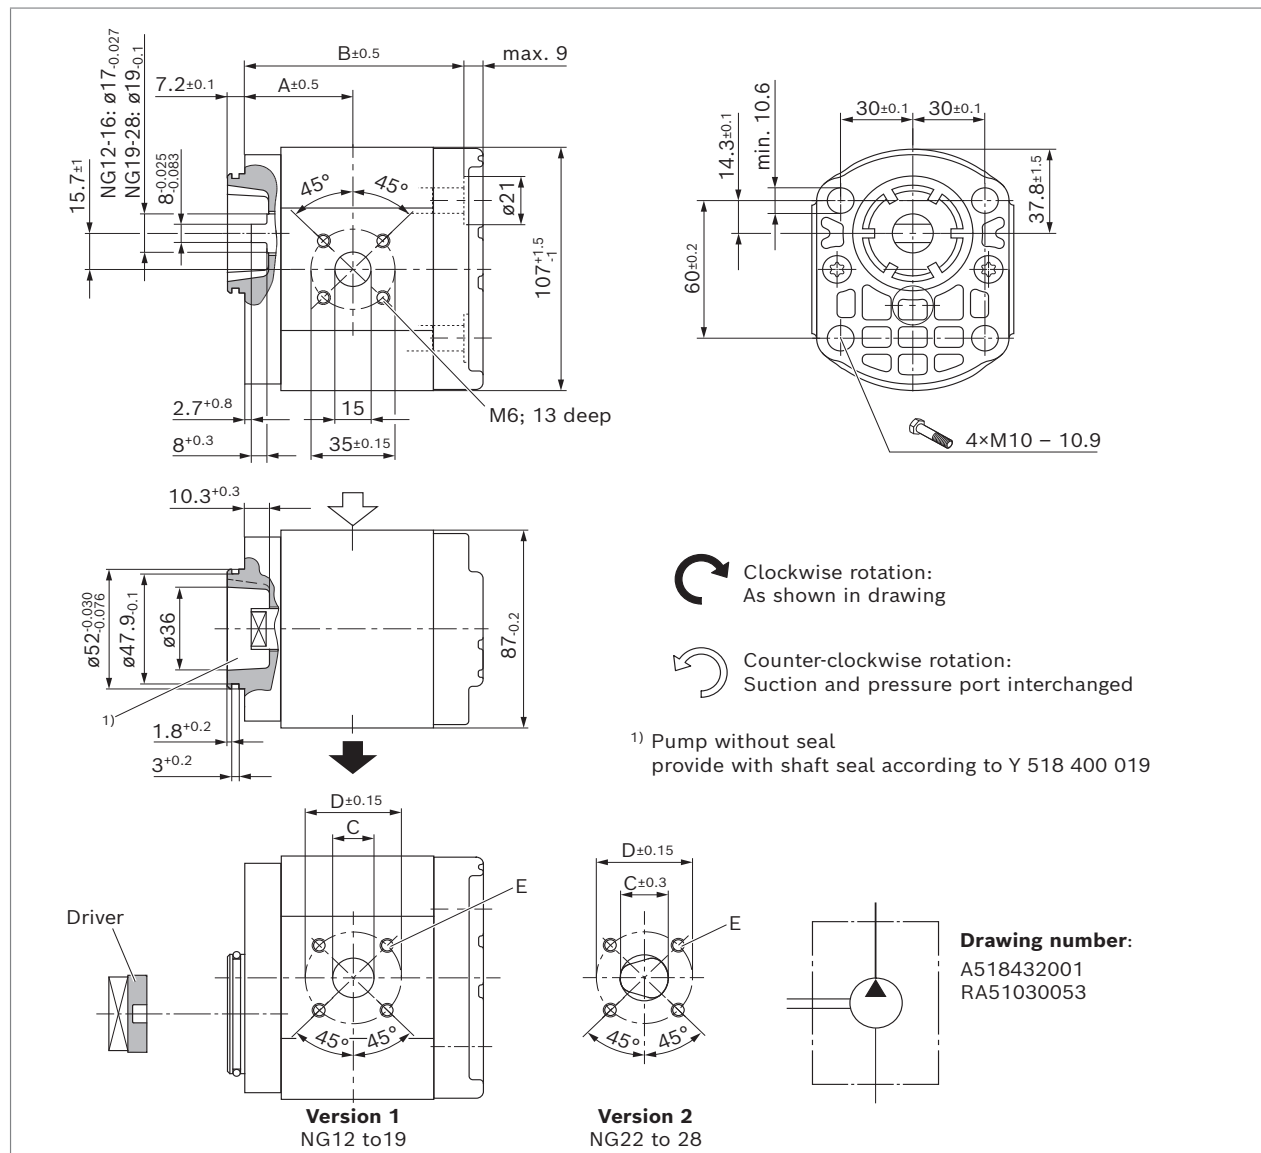

NG	Material number		Maximum intermittent pressure p_2 bar	Maximum speed n_{\max} rpm	Weight m kg	Dimensions				E
	Direction of rotation					A mm	B mm	C mm	D mm	
	counter-clockwise	clockwise								
12	0 518 515 301	0 518 515 001	280	3500	2.5	44	87.1	20	40	M6; 13 mm deep
14	0 518 515 302	0 518 515 002	280	3000	2.6	45	90.3	20	40	
16	0 518 615 301	0 518 615 001	280	3000	2.7	45	93.7	20	40	
19	0 518 615 303	0 518 615 003	250	3000	3	55.4	98.7	22	55	
22	0 518 715 301	0 518 715 001	215	3000	3.2	58.1	104.1	26	55	M8; 13 mm deep
25	0 518 715 302	0 518 715 002	190	2800	3.3	62.3	108.3	26	55	
28	0 518 715 303	0 518 715 003	160	2600	3.4	67.1	113.1	26	55	

RE 10094/2023-03-16, Bosch Rexroth AG

30 **AZPJ** | External gear pump SILENCE PLUS
Project planning information

Project planning information

Technical data

All mentioned technical data are dependent on manufacturing tolerances and are applicable for certain boundary conditions.

Note that certain deviations are therefore possible and that technical data may vary when certain boundary conditions (e.g., viscosity) change.

Pumps delivered by Bosch Rexroth are tested for function and performance.

The pump may only be operated with the permissible data (see chapter “Technical data”).

Characteristic curves

When dimensioning the gear pump, observe the maximum possible application data on the basis of the characteristic curves shown.

Application information

External gear units are not approved in on-highway vehicles for safety-relevant functions, as well as functions in the drive train, for steering, braking and level regulation. Classified as on-highway vehicles are e.g. vehicles such as motorbikes, private cars, trucks, vans, freight cars, buses and trailers. The European vehicle classes L (motorbikes), M (private cars), N (vehicles for transporting goods such as trucks and vans) and O (trailers and semi-trailers) serve as reference.

Notice

When used as an auxiliary steering pump, the vehicle manufacturer should make sure that the steering system continues to operate safely, even if the auxiliary steering pump fails (regulation similar to ECE R-79 can be referred).

Filtration of the hydraulic fluid

Since the majority of premature failures in gear pumps occur due to contaminated hydraulic fluid, filtration should maintain a cleanliness level of 20/18/15 as defined by ISO 4406. Thus contamination can be reduced to an acceptable degree in terms of particle size and concentration. Bosch Rexroth generally recommends full-flow filtration. The basic contamination of the hydraulic fluid filled in should not exceed class 20/18/15 as defined by ISO 4406. New fluids are often above this value. In such instances, a filling device with a special filter should be used. Bosch Rexroth is not liable for wear due to contamination. For hydraulic systems or devices with function-related, critical failure effects, such as steering and brake valves, the type of filtration selected must be adapted to the sensitivity of these devices.

Further information

Installation drawings and dimensions are valid at date of publication, subject to modifications.

Further information and notes on project planning can be found in the “General Operating Instructions for External Gear Units” (07012-B, chapter 5.5).

Information

AZ configurator

With our practical product selector, it will take you next to no time to find the right solution for your applications, no matter whether it is SILENCE PLUS or another external gear unit.

The selector guides you through a selection of features to all of the products available for order. By clicking on the order number, you can view and download the following product information: Data sheet, dimension sheet, operating conditions, and tightening torques.

You can order your selection directly via our online shop and at the same time benefit from an additional discount of 2%. And if you need something really quickly, simply use our fast delivery and preferred programs (GoTo). Then the goods will be sent within 10 working days.

You also have the possibility to easily and conveniently configure your individual external gear unit with our AZ configurator. All the necessary data that you need for the project planning of external gear units is requested by means of the menu navigation.

For an already existing configuration you receive as a result the order number, the type code, as well as further information. If your configuration does not lead to a product that is available for order, our online tools provide you with the possibility of sending a project request directly to Bosch Rexroth. We will then get in contact with you.

Link: www.boschrexroth.com/az-configurator



RE 10094/2023-03-16, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

32 **AZPJ** | External gear pump SILENCE PLUS
Accessories

Accessories

Straight flange, for square flange (German version) 20

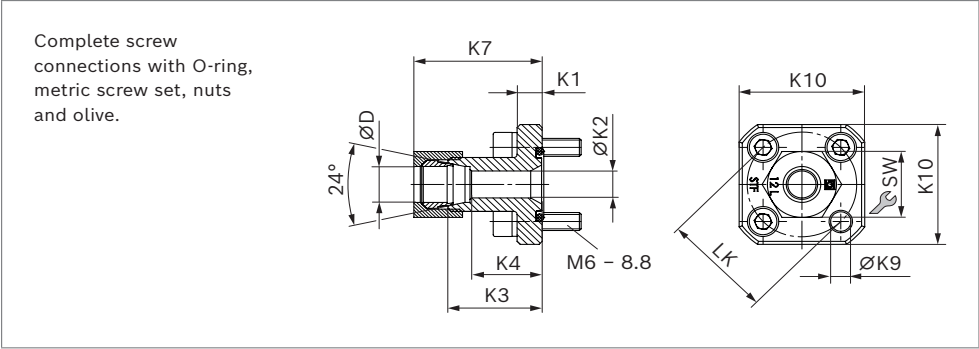


LK	D	Series ¹⁾	Material number	p _{max}	K1	K2	K3	K4	K7	K9	K10	SW	Screws	O-ring	Weight
mm	mm			bar	mm	mm	mm	mm	mm	mm	mm	mm	4 ×	NBR	kg
35	10	L	1 515 702 064	315	8	7	30	23	38	6.5	40	19	M6 × 22	20 × 2.5	0.13
35	12	L	1 515 702 065	315	8	9	30	23	38.5	6.5	40	22	M6 × 22	20 × 2.5	0.14
35	15	L	1 515 702 066	250	8	11	30	23	39	6.5	40	27	M6 × 22	20 × 2.5	0.15
40	15	L	1 515 702 067	100	8	11	35	28	44	6.5	40	27	M6 × 22	26 × 2.5	0.16
40	18	L	1 515 702 068	100	8	14	35	27.5	44	6.5	40	32	M6 × 22	26 × 2.5	0.17
40	22	L	1 515 702 069	100	8	18	35	27.5	45	6.5	40	36	M6 × 22	26 × 2.5	0.16
40	28	L	1 515 702 008	100	8	19	35	27.5	45	6.5	40	41	M6 × 22	26 × 2.5	0.18

¹⁾ See DIN EN ISO 8434-1

90° angle flange, for square flange (German version) 20

Complete screw connections with O-ring, metric screw set, nuts and olive.

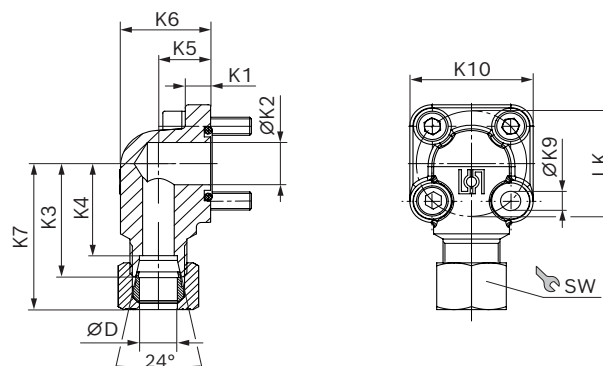


LK	D	Series ¹⁾	Material number	p _{max}	K1	K2	K3	K4	K5	K6	K7	K9	K10	SW	Screws		O-ring	Weight
mm	mm			bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	2 ×	2 ×	NBR	kg
35	10	L	1 515 702 070	315	8	14	37,5	30,5	16,5	28,5	45	6,4	39	19	M6 × 22	M6 × 35	20 × 2.5	0,18
35	12	L	1 515 702 071	315	8	14	37,5	30,5	16,5	28,5	46	6,4	39	22	M6 × 22	M6 × 35	20 × 2.5	0,19
35	15	L	1 515 702 072	250	8	14	37,5	30,5	16,5	28,5	46	6,4	39	27	M6 × 22	M6 × 35	20 × 2.5	0,2
35	16	S	1 515 702 002	315	8	15	38	29,5	20	33	49	6,4	39	30	M6 × 22	M6 × 40	20 × 2.5	0,25
35	18	L	1 545 702 006	250	8	15	37,5	30	20	33	47	6,4	39	32	M6 × 22	M6 × 40	20 × 2.5	0,22
35	20	S	1 515 702 017	315	8	15	45	34,5	25	38	57	6,4	39	36	M6 × 22	M6 × 45	20 × 2.5	0,3
40	15	L	1 515 702 073	100	9	20	38	31	22,5	38	47	6,4	42	27	M6 × 22	M6 × 22	26 × 2.5	0,26
40	18	L	1 515 702 074	100	9	20	38	30,5	22,5	38	47,5	6,4	42	32	M6 × 22	M6 × 22	26 × 2.5	0,27
40	20	S	1 515 702 011	250	9	20	40	29,5	22,5	37	52	6,4	42	36	M6 × 22	M6 × 45	26 × 2.5	0,26
40	22	L	1 515 702 075	100	9	20	38	30,5	22,5	38	48	6,4	42	36	M6 × 22	M6 × 22	26 × 2.5	0,27
40	28	L	1 515 702 010	100	9	20	40	32,5	28	44	50,5	6,4	42	41	M6 × 22	M6 × 50	26 × 2.5	0,37
40	35	L	1 515 702 018	100	9	20	41	30,5	34	53	53	6,4	42	50	M6 × 22	M6 × 60	26 × 2.5	0,41
55	20	S	1 515 702 004	250	13	18,2	45	34,5	24	38	57	8,4	58	36	M8 × 25	M8 × 50	32 × 2.5	0,62
55	30	S	1 545 719 006	250	12	26,5	49	38,5	32	51	63,5	8,4	58	50	M8 × 25	M8 × 50	32 × 2.5	0,63
55	35	L	1 515 702 005	100	12	26,5	49	38,5	32	52	61	8,4	58	50	M8 × 25	M8 × 60	32 × 2.5	0,77
55	42	L	1 515 702 019	100	12	26,5	49	38	40	64	61,5	8,4	58	60	M8 × 25	M8 × 70	32 × 2.5	1,04

¹⁾ See DIN EN ISO 8434-1

34 AZPJ | External gear pump SILENCE PLUS Accessories

90° angle flange, 3-hole, for square flange (Italian version) 30

Complete screw connections with O-ring, metric screw set, nuts and olive.

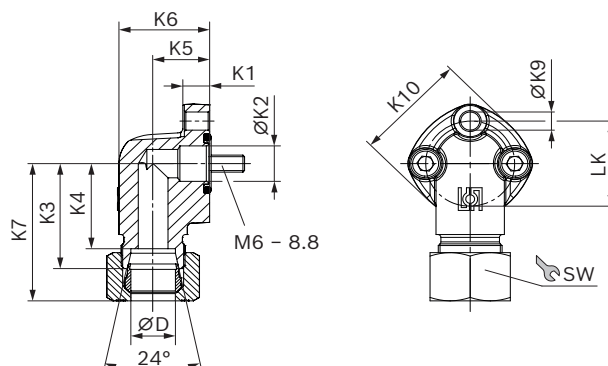

LK	D	Series ¹⁾	Material number	p_{max}	K1	K2	K3	K4	K5	K6	K7	K9	K10	SW	Screws	O-ring	Weight
mm	mm			bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	3 ×	NBR	kg
30	12	L	1 515 702 146	250	9	12.5	37	30	19	30.5	46	6.4	38	22	M6 × 25	16 × 2.5	0.18
30	15	L	1 515 702 147	250	9	12.5	37	30	19	30.5	45.5	6.4	38	27	M6 × 25	16 × 2.5	0.2
40	22	L	1 515 702 149	160	13.5	19	43	35.5	25	41	53	8.4	48	36	M8 × 30	24 × 2.5	0.4
40	28	L	1 515 702 150	160	13.5	19	43	35.5	25	41	53.5	8.4	48	41	M8 × 30	24 × 2.5	0.36