

2/2-way directional spool valve, direct-operated, with solenoid actuation KKDE.1



- ▶ Size 1
- ▶ Series A
- ▶ Maximum working pressure 350 bar
- ▶ Maximum flow 55 l/min

Features

- ▶ Direct-operated directional spool valve with solenoid actuation
- ▶ Mounting cavity R/T-13A
- ▶ Flow possible in both directions
- ▶ Very low flow resistances
- ▶ Positive overlap prevents switching shocks
- ▶ DC voltage solenoids switching in oil
- ▶ Rotatable solenoid coil
- ▶ With concealed auxiliary actuation

Contents

| | |
|---------------------------------|----|
| Type code | 2 |
| Preferred types | 3 |
| Available coils | 3 |
| Functional description | 4 |
| Technical data | 5 |
| Characteristic curves | 7 |
| Permissible working range | 8 |
| Dimensions | 9 |
| Mounting cavity | 10 |
| Available individual components | 11 |
| Related documentation | 12 |

2 **KKDE.1** | 2/2-way directional spool valve
Type code (valve without coil)1)

Type code (valve without coil)1)

| | | | | | | | | | |
|------|----|----|----|----|----|---|----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 | | 07 | 08 | 09 |
| KKDE | R | 1 | | A | / | H | | V | * |

| | | |
|----|---|-------------|
| 01 | Directional spool valve, direct-operated, electrically actuated | KKDE |
|----|---|-------------|

Maximum working pressure

| | | |
|----|---------|----------|
| 02 | 350 bar | R |
|----|---------|----------|

| | | |
|----|--------|----------|
| 03 | Size 1 | 1 |
|----|--------|----------|

Symbol – 2 main ports

| | | | |
|----|--|--|----------|
| 04 | | | N |
| | | | P |

| | | |
|----|----------|----------|
| 05 | Series A | A |
|----|----------|----------|

| | | |
|----|---------------------------------------|----------|
| 06 | Mounting cavity R/T-13A (see page 10) | H |
|----|---------------------------------------|----------|

Auxiliary actuation

| | | |
|----|--------------------------------------|-----------|
| 07 | Without auxiliary actuation | N0 |
| | With concealed auxiliary actuation2) | N9 |

Sealing material

| | | |
|----|---|----------|
| 08 | FKM (fluoroelastomer), other seals on request | V |
|----|---|----------|

| | | |
|----|-------------------------------|----------|
| 09 | Further details in plain text | * |
|----|-------------------------------|----------|

1) Complete valves with mounted coil on request.

2) Screwable auxiliary actuation "N10" optional
(Material no. R901051231, separate order)

Preferred types (valve without coil)¹⁾

▼ Without auxiliary actuation "N0"

| Symbol | Type | Material no. |
|----------|---------------|--------------|
| N | KKDER1NA/HN0V | R901069995 |
| P | KKDER1PA/HN0V | R901069996 |

▼ With concealed auxiliary actuation "N9"

| Symbol | Type | Material no. |
|----------|---------------|--------------|
| N | KKDER1NA/HN9V | R901069997 |
| P | KKDER1PA/HN9V | R901070000 |

Available coils (order separately)¹⁾

| Material number for coil with device connector ²⁾ | | | |
|--|-----------------------------------|-------------------------------------|----------------------------------|
| DC voltage ³⁾ | "K4" | "K40" | "C4" |
| | 03pol (2+PE) DIN EN 175301-803 | 02pol K40 DT 04-2PA, Fa. DEUTSCH | 02pol C4/Z30 AMP Junior Timer |
| 12 V | R900991678 | R900729189 | R900315818 |
| 24 V | R900991121 | R900729190 | R900315819 |

¹⁾ Complete valves with mounted coil on request.

²⁾ Plug-in connectors are not included in the scope of delivery and must be ordered separately, see data sheet 08006.


³⁾ Additional voltages available on request

Functional description


General

2/2-way directional spool valves are direct operated, pressure-compensated cartridge valves. They control start, stop and flow direction, and generally consist of a housing (1) including a movably mounted bush (2), the control spool (5) as well as a return spring (4).

▼ "N" symbol




▼ "P" symbol



Function

In non-actuated state, the control spool (5) is kept in the initial position by the return spring (4). The control spool (5) is actuated by DC voltage solenoids (3) switching in oil. The symbols are realized by different control spools (**N** or **P**). The main ports ① and ② can be permanently loaded with 350 bar working pressure and the flow can be directed in both directions (see symbols). The auxiliary actuation (6) enables switching of the valve without solenoid excitation. It is also available as a screwable version "**N10**" (7) (see page 2).

▼ Type KKDER1NA/HN9V

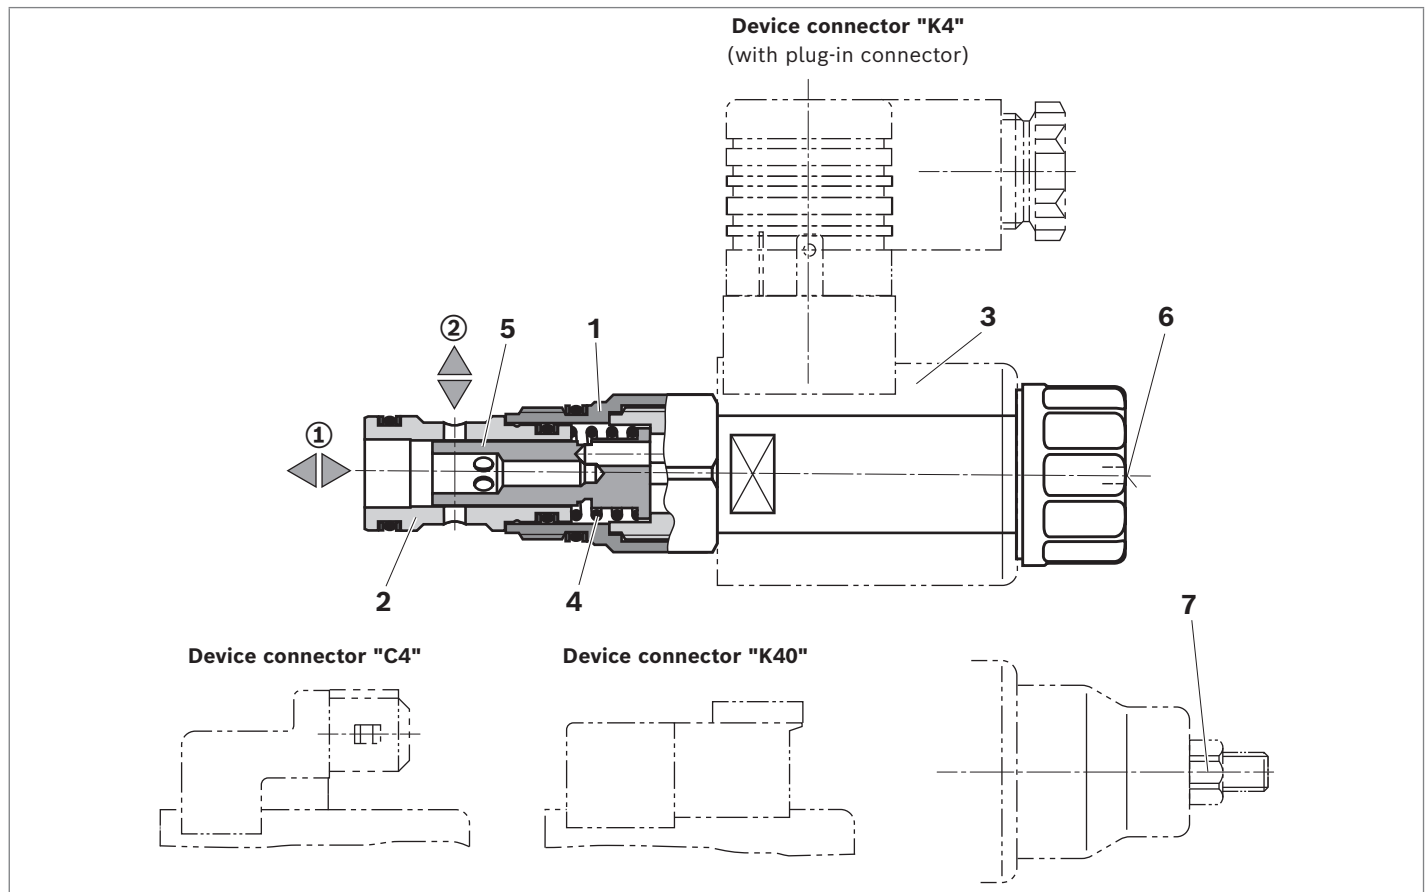

Technical data

| General | | | |
|---------------------------|-------|----|--------------|
| Weight | Valve | kg | 0.3 |
| | Coil | kg | 0.25 |
| Installation position | | | Any |
| Ambient temperature range | | °C | −40 ... +110 |

| Hydraulic | | | |
|---|-----------|-------|------------------------------|
| Maximum working pressure | Port ①, ② | bar | 350 |
| Maximum flow | | l/min | 55 |
| Hydraulic fluid | | | See table on page 6 |
| Hydraulic fluid temperature range | | °C | −40 ... +80 |
| Viscosity range | | mm²/s | 4 ... 500 |
| Maximum admissible degree of contamination of the hydraulic fluid Cleanliness level per ISO 4406 (c) | | | Level 20/18/15 ¹⁾ |
| Load cycles | | | 10 mil. (at 350 bar) |

| Electric | | | |
|---|-------------------------|------------|--|
| Voltage type | | | DC voltage |
| Supply voltage ²⁾ | | V | 12 DC; 24 DC |
| Voltage tolerance over ambient temperature | | | See characteristic curve on page 8 |
| Power consumption | | W | 22 |
| Duty cycle | | % | See characteristic curve on page 8 |
| Maximum coil temperature ³⁾ | | °C | 150 |
| Switching time according to ISO 6403 (Horizontal solenoid) | ON | ms | ≤80 |
| | OFF | ms | ≤50 |
| Maximum switching frequency | | Switches/h | 15000 |
| Type of protection according to ISO 20653 | Connector version "K4" | | IP6K5 ⁴⁾ |
| | Connector version "C4" | | IP6K6K ⁴⁾ |
| | | | IP6K9K ⁴⁾ (only with Rexroth type R901022127) |
| | Connector version "K40" | | IP6K7 and IP6K9K ⁴⁾ |

Notice

For applications outside these values, please consult us!

Notice

For the electrical connection, a protective earth (PE \perp) connection is mandatory based on the specification.

1) Cleanliness levels specified for the components must be maintained in the hydraulic systems. Effective filtration prevents malfunctions and simultaneously extends the service life of the components.
We recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.

2) Additional voltages available on request

3) Due to the occurring surface temperatures of the solenoid coils, the standards ISO 13732-1 and ISO 4413 must be observed!

4) With installed and locked plug-in connector. Plug-in connectors are not included in the scope of delivery and must be ordered separately, see data sheet 08006.

Hydraulic fluid

| Hydraulic fluid | | Classification | Suitable sealing materials | Standards | Data sheet |
|----------------------------|--------------------|----------------|----------------------------|-----------|------------|
| Mineral oils | | HL, HLP | FKM | DIN 51524 | 90220 |
| Environmentally acceptable | Insoluble in water | HEES | FKM | ISO 15380 | 90221 |
| | Soluble in water | HEPG | FKM | ISO 15380 | 90221 |


Notice

- ▶ Further information and details on using other hydraulic fluids are available in the above data sheets or on request.
- ▶ Restrictions are possible with the technical valve data (temperature, pressure range, service life, maintenance intervals, etc.)!
- ▶ The flash point of the hydraulic fluid used must be 40 K above the maximum solenoid surface temperature.
- ▶ **Environmentally acceptable:** If environmentally acceptable hydraulic fluids are used that are also zinc-solving, there may be an accumulation of zinc.

Characteristic curves


Δp - q_v characteristic curve

▼ Symbol N

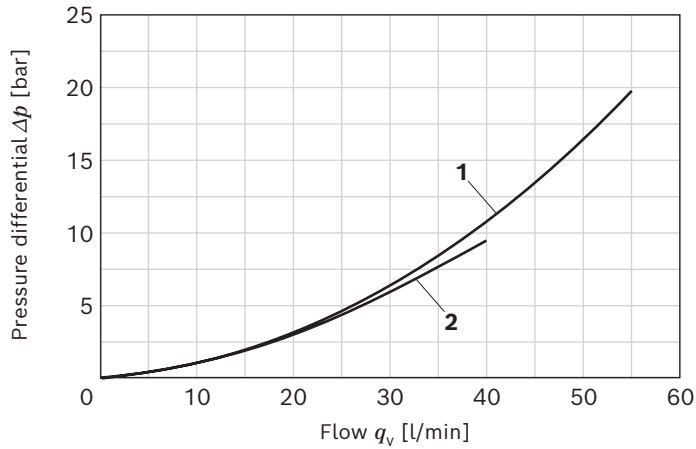

1 ② → ①
2 ① → ②


▼ Symbol P

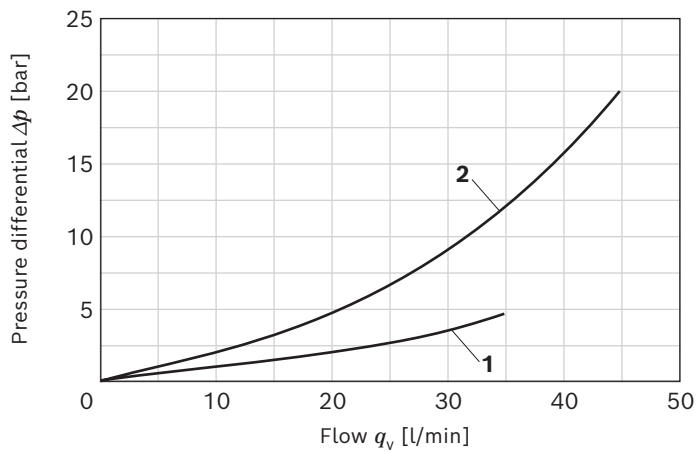

1 ② → ①
2 ① → ②


Performance limits

▼ Symbol N

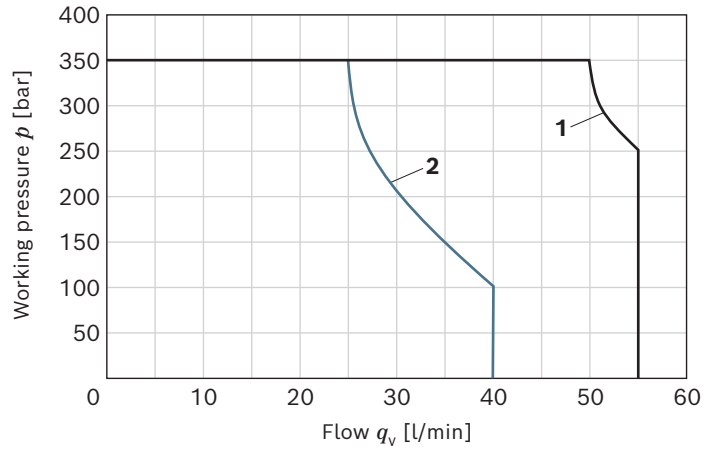

1 ② → ①
2 ① → ②

▼ Symbol P

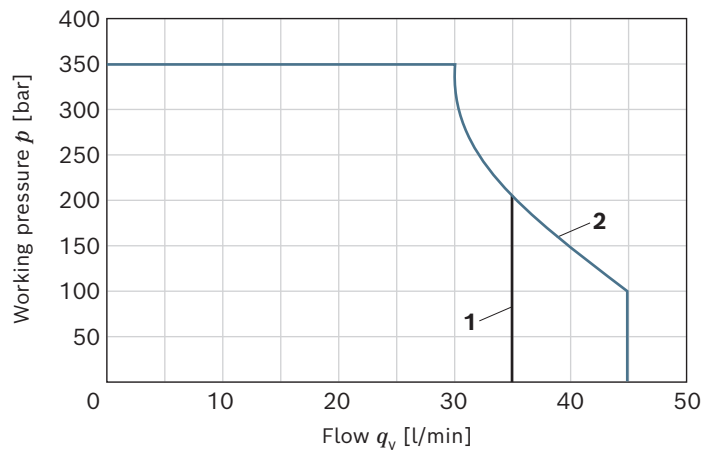


1 ② → ①
2 ① → ②


Notice

- The characteristic curves have been measured with HLP46, $\vartheta_{oil} = 40 \pm 5$ °C and 24 V coil.
- The performance limit was determined with solenoids at operating temperature and 10% undervoltage.

Permissible working range

▼ Voltage range and duty cycle depending on the ambient temperature

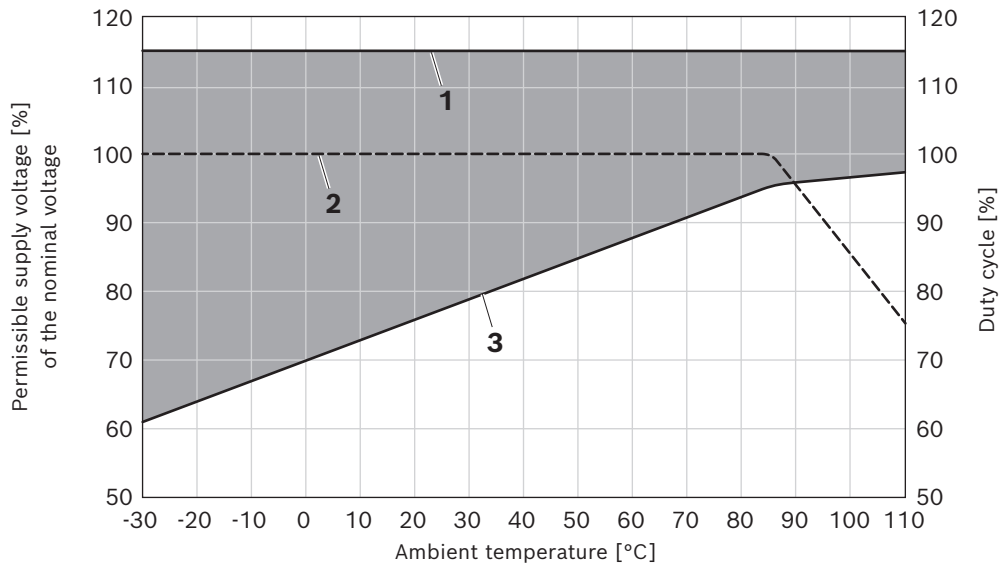

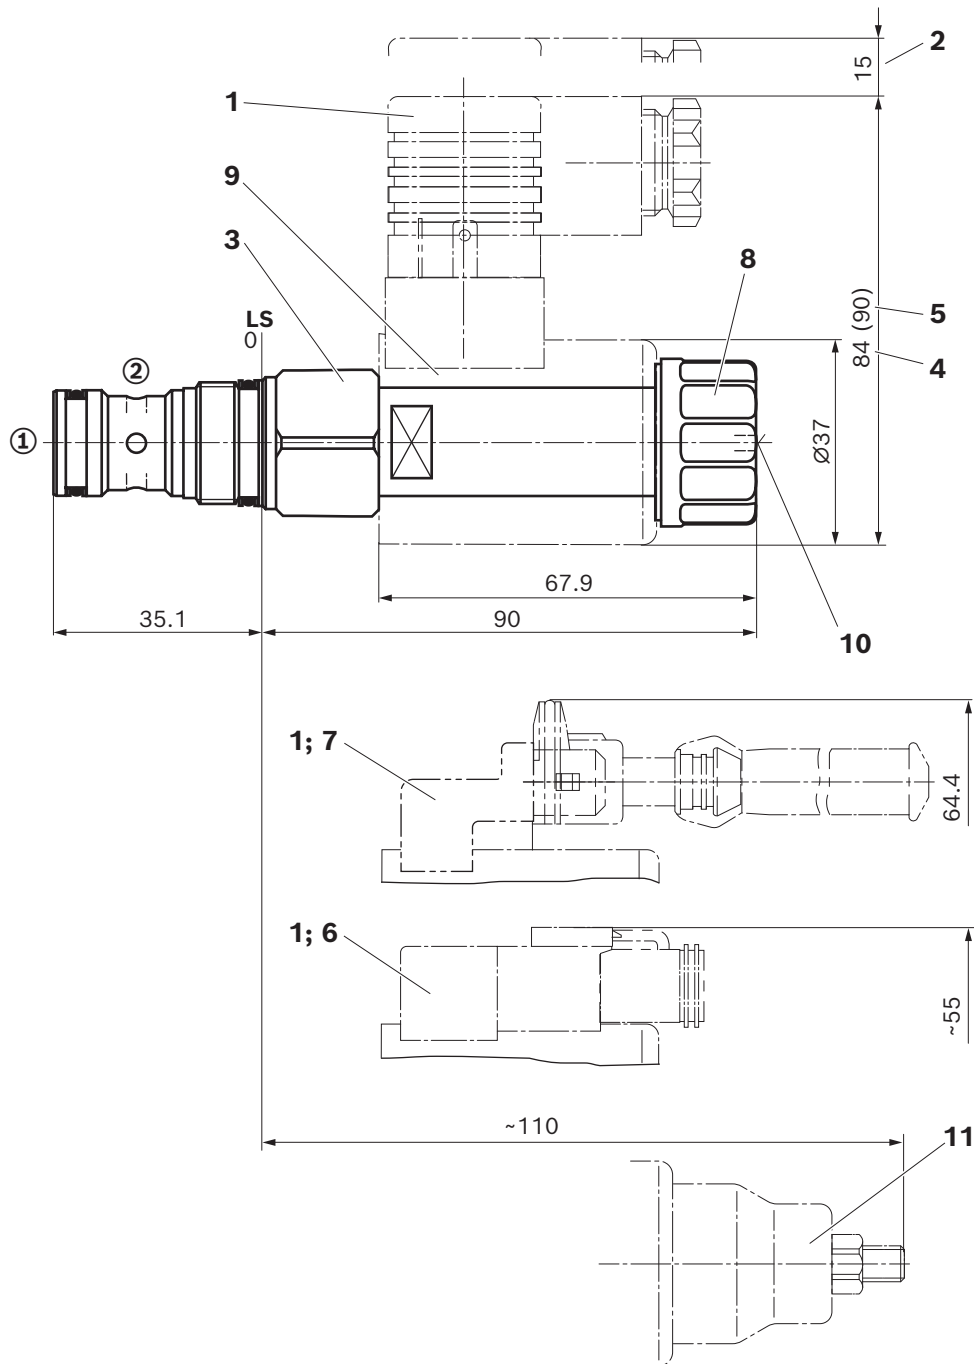Dimensions▼ **KKDE.1**

- 1 Plug-in connectors, separate order, see data sheet 08006
- 2 Space required to remove the plug-in connector
- 3 SW24, tightening torque $M_A = 45$ to 50 Nm
- 4 Dimensions for plug-in connector "K4", without wiring
- 5 Dimensions () for plug-in connector "K4", without wiring
- 6 Device connector "K40"
- 7 Device connector "C4"
- 8 Nut, tightening torque $M_A = 5+1$ Nm
- 9 Coil (order separately, see page 3)


- 10 Concealed auxiliary actuation "N9", optional
- 11 Screwable auxiliary actuation "N10"
(order separately, see page 2)

LS = location shoulder

① = main port 1

② = main port 2

▼ R/T-13A; 2 main ports; thread M20×1.5

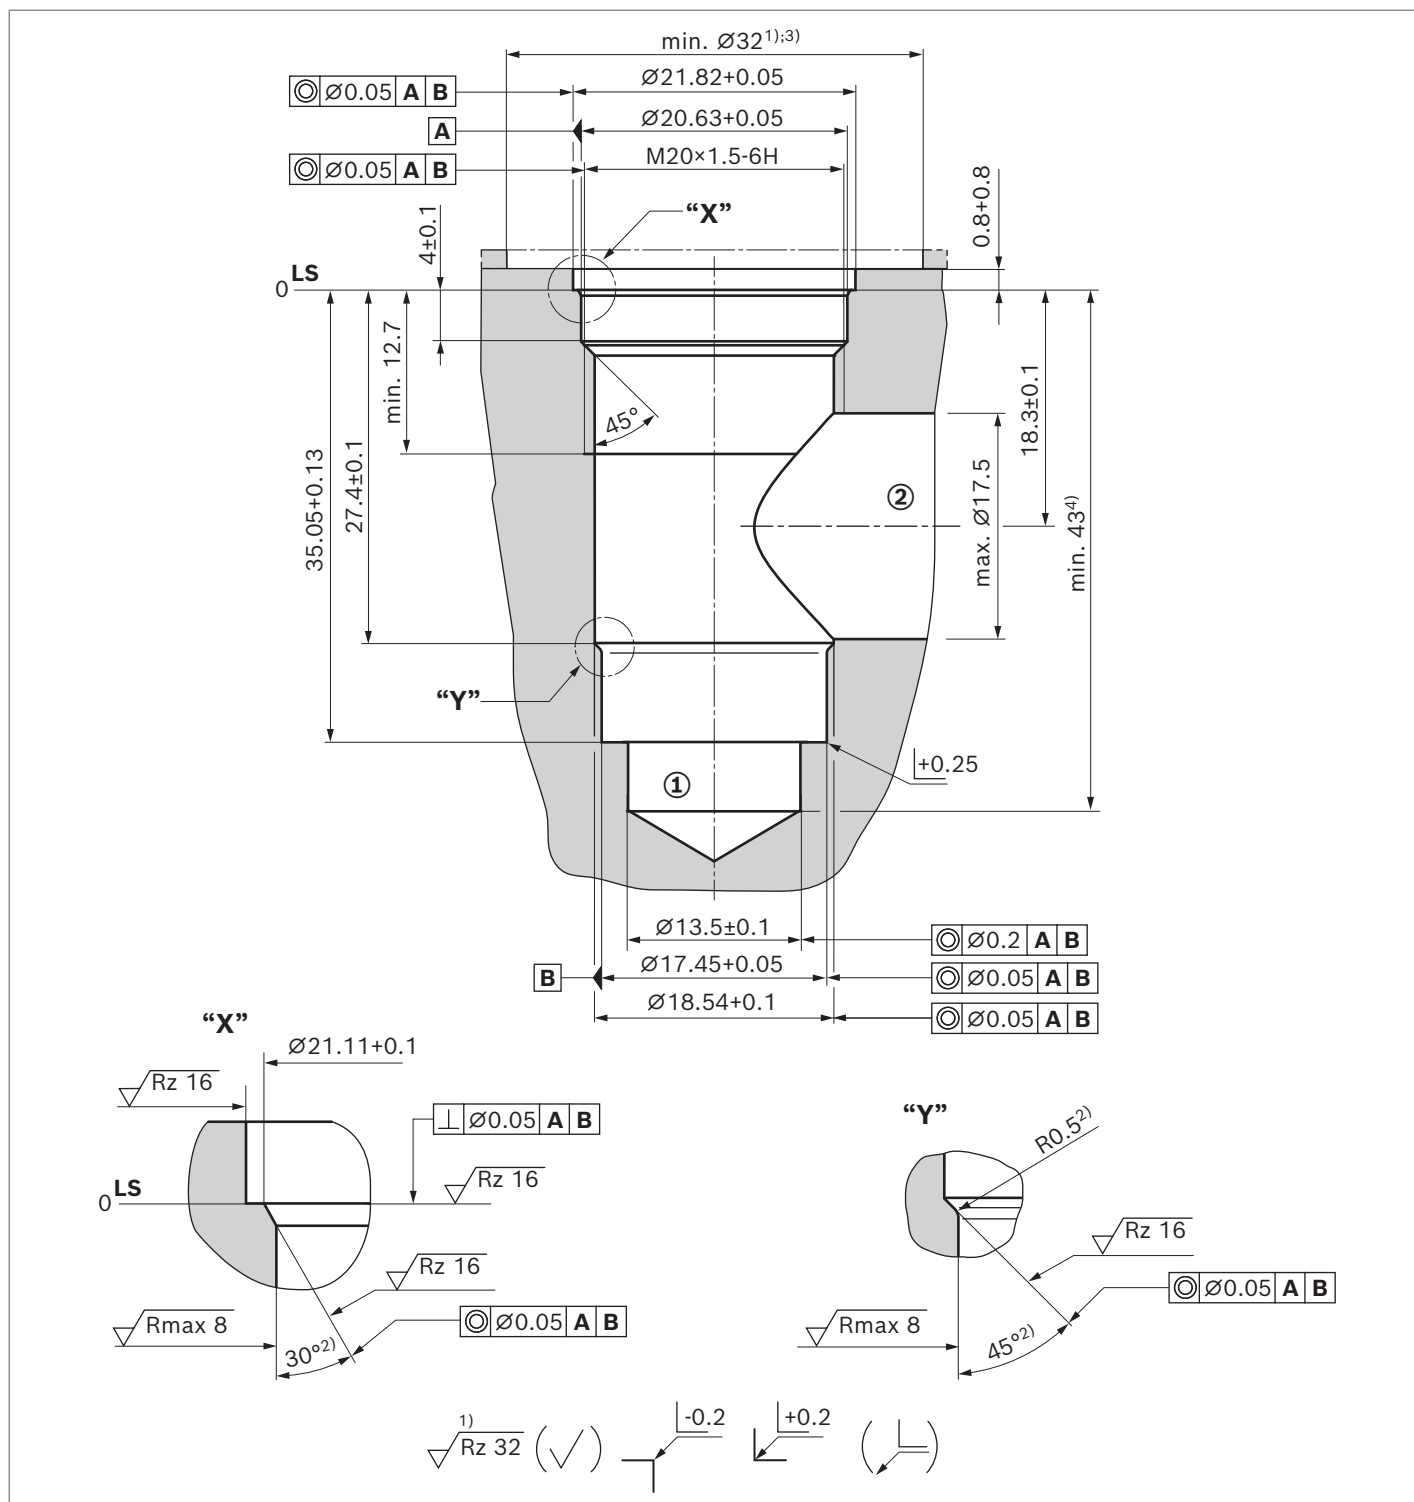

- 1) Deviating from T-13A
- 2) All seal ring insertion faces are rounded and free of burrs
- 3) At counterbore
- 4) Depth for movable parts


Tolerance for all angles $\pm 0.5^\circ$

LS = location shoulder

① = main port 1

② = main port 2

Available individual components

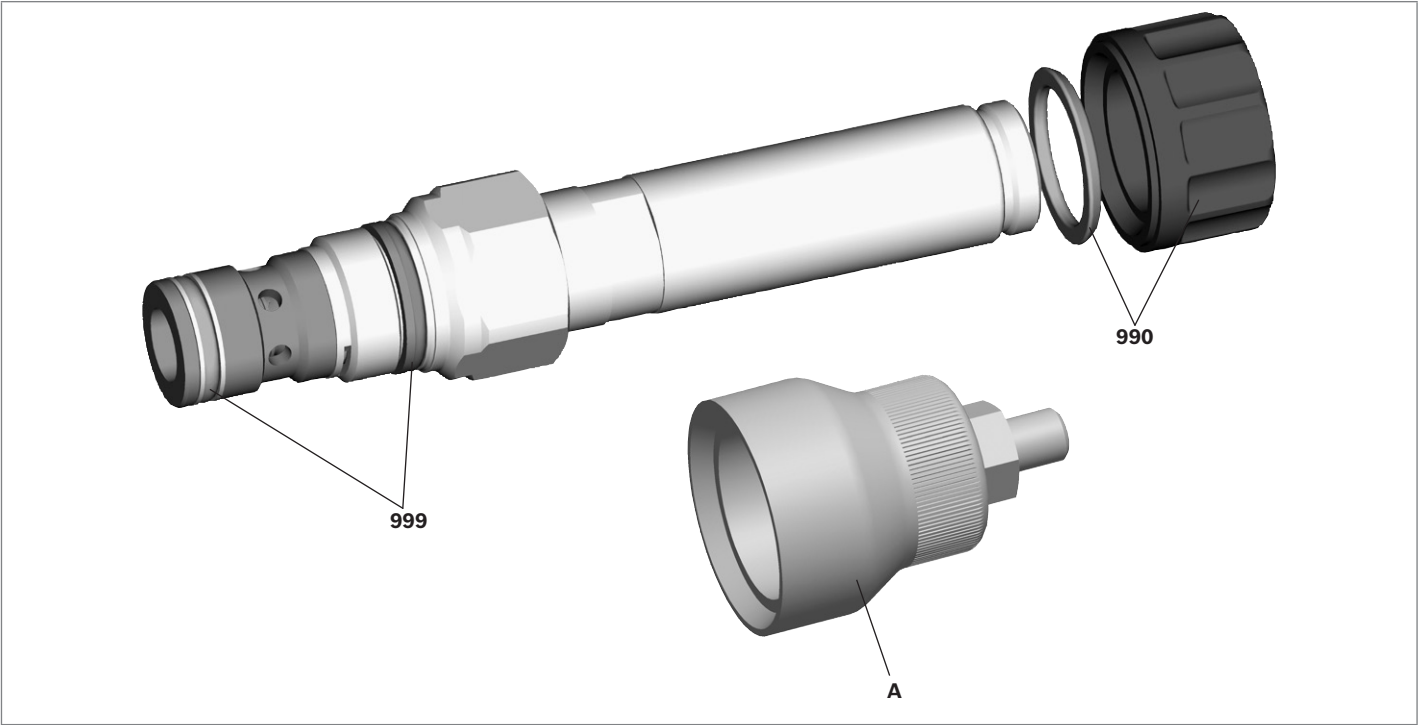

| Item | Denomination | DC voltage | | Material number |
|------|---|------------|------|-----------------|
| | Coil for single connection | K4 | 12 V | R900991678 |
| | | | 24 V | R900991121 |
| | | K40 | 12 V | R900729189 |
| | | | 24 V | R900729190 |
| | | C4 | 12 V | R900315818 |
| | | | 24 V | R900315819 |
| A | Auxiliary actuation "N10" ¹⁾ | | | R901051231 |
| 990 | Nut and seal ring for pole tube | | | R961012130 |
| 999 | Seal kit of the valve | | | R961003236 |

1) Only for ordering code "N9", see page 2