

3/2 directional spool valve direct operated with solenoid actuation

RE 18136-09/06.12 1/10
Replaces: 10.09

Type KKDE (high-performance)

Component size 8
Component series A
Maximum operating pressure 350 bar
Maximum flow 30 l/min



H7011

Table of contents

Content	Page
Features	1
Ordering code	2
Valve types	2
Available spools	2
Function, section, symbols	3
Technical data	4
Voltage tolerance against ambient temperature	5
Characteristic curves	5, 6
Performance limits	7
Unit dimensions	8
Mounting cavity	9
Available individual components	10

Features

- Pilot valve
- Mounting cavity R/T-9A
- Direct operated directional spool valve with solenoid actuation
- Free-flowing in both directions
- Wet-pin DC solenoids
- Rotatable solenoid coil
- With concealed manual override

Ordering code (Valve without coil) ¹⁾

KKDE		R	8		A / H		V	*	
Directional spool valve, direct operated, electrically operated (pilot valve)				Further details in the plain text					
Maximum operating pressure 350 bar		= R		V =					
Component size		= 8		Seal material					
3 main ports				FKM seals					
Symbols			= C			Attention!			
			= U			Observe compatibility of seals with hydraulic fluid used!			
			= G			without manual override			
					N0 =			with concealed manual override ⁴⁾	
					H =			High-performance and mounting cavity R/T-9A (see page 9)	
					A =			Component series	

Valve types (without coil) ¹⁾

Spool variant	without manual override "N0"		with concealed manual override "N9"	
	Type	Material no.	Type	Material no.
C	KKDER8CA/HN0V	R901070049	KKDER8CA/HN9V	R901070055
U	KKDER8UA/HN0V	R901070050	KKDER8UA/HN9V	R901070068
G	KKDER8GA/HN0V	R901070051	KKDER8GA/HN9V	R901070072

Available coils (separate order) ¹⁾

	Material no. for coil with connector ²⁾		
	"K4" 03pol (2+PE) DIN EN 175301-803	"K40" 02pol K40 DT 04-2PA, make. Deutsch	"C4" 02pol C4/Z30 AMP Junior Timer
Direct voltage DC ³⁾			
12 V	R900991678	R900729189	R900315818
24 V	R900991121	R900729190	R900315819

¹⁾ Complete valves with mounted coil upon request

²⁾ Mating connectors (separate order), see RE 08006

³⁾ Other voltages upon request

⁴⁾ Screwable manual override "N10" possible
(Material no. **R901051231**, separate order)

Function, section, symbols

General


The 3/2 directional spool valves are direct operated, pressure compensated cartridge valves. They control the start, stop and direction of a flow and basically comprise a housing (1), the control spool (2) and a return spring (4).

Function


In the de-energized condition, control spool (2) is held in the initial position by the return spring (4). Control spool (2) is actuated by wet-pin DC solenoids (3). The various symbols are realized by corresponding spools (C, U, and G). The main ports ①, ②, and ③ are suitable for a continuous load with an operating pressure of 350 bar and the flow can be directed into both directions (see symbols).

The manual override (5) allows for the switching of the valve without solenoid energization. It is also available in screwable version "N10" (6) (see page 2).


Symbol "C"



Symbol "U"




Symbol "G"





Version "K4"
(with mating connector)

Version "C4"



Version "K40"

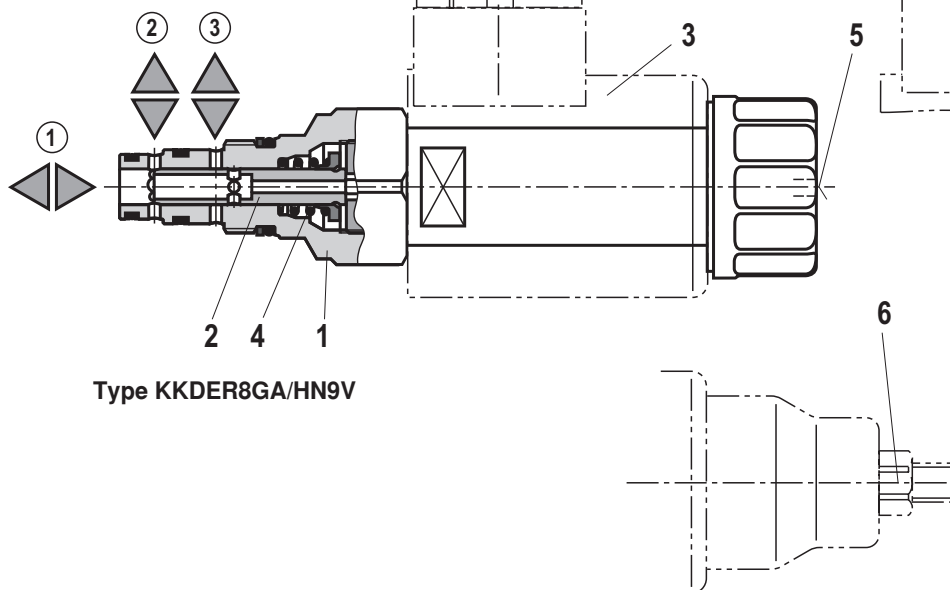

Technical data (For applications outside these parameters, please consult us!)**general**

Weight	– Valve	kg	0.3
	– Coil	kg	0.25
Installation position			Any
Ambient temperature range		°C	–40 to +110

hydraulic

Maximum operating pressure		bar	350 (at all ports)
Maximum flow		l/min	30
Hydraulic fluid			Mineral oil (HL, HLP) according to DIN 51524; quickly bio-degradable hydraulic fluids according to VDMA 24568 (see also RE 90221); HETG (rape seed oil); HEPG (polyglycols); HEES (synthetic esters); other hydraulic fluids upon request
Hydraulic fluid temperature range		°C	–40 to +80
Viscosity range		mm ² /s	4 to 500
Maximum permitted degree of contamination of the hydraulic fluid - cleanliness class according to ISO 4406 (c)			Class 20/18/15 ¹⁾
Load cycles			10 million (at 350 bar)

electrical

Voltage type			Direct voltage
Supply voltage ²⁾		V	12 DC; 24 DC
Voltage tolerance against ambient temperature			See characteristic curve page 5
Power consumption		W	22
Duty cycle		%	See characteristic curve page 5
Maximum coil temperature ³⁾		°C	150
Switching time according to ISO 6403 (solenoid horizontal)	– ON	ms	≤ 80
	– OFF	ms	≤ 50
Maximum switching frequency		cy/h	15000
Protection class according to VDE 0470-1 (DIN EN 60529) DIN 40050-9	– Version “K4”		IP 65 with mating connector mounted and locked
	– Version “C4”		IP 66 with mating connector mounted and locked
			IP 69K with Rexroth mating connector (Material no. R901022127)
	– Version “K40”		IP 69K with mating connector mounted and locked

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the service life of the components.


For the selection of filters, see data sheets RE 50070, RE 50076, RE 50081, RE 50086, RE 50087 and RE 50088.

²⁾ Other voltages upon request


³⁾ Due to the temperatures occurring at the surfaces of the solenoid coils, the standards ISO 13732-1 and EN 982 need to be adhered to!

At the electrical connection “K4”, the protective earthing conductor (PE $\frac{1}{2}$) has to be connected properly.



Voltage tolerance against ambient temperature; duty cycle

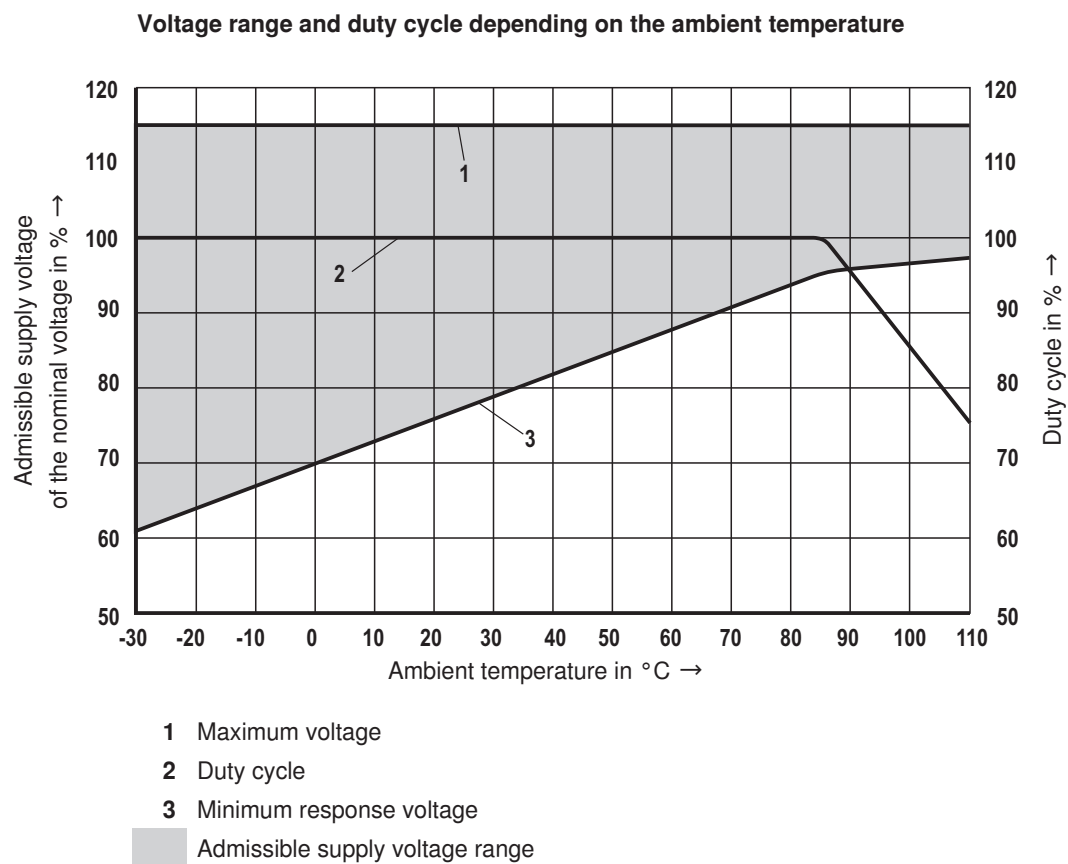


Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ and 24 V coil)

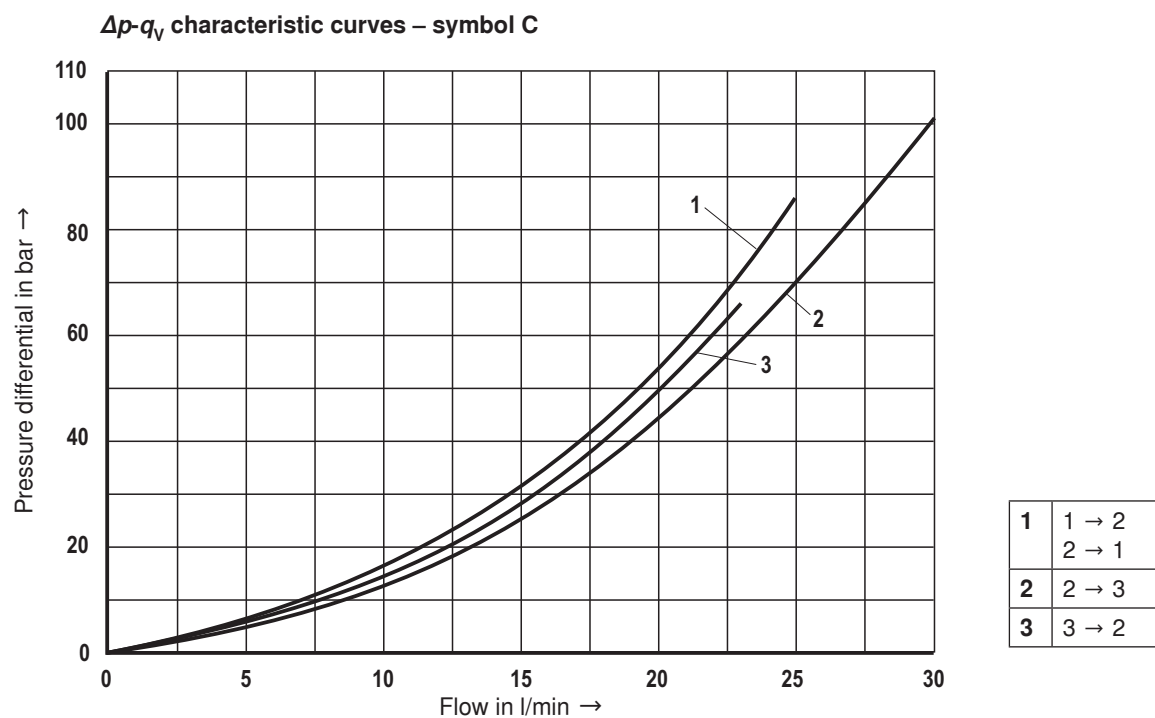


Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and 24 V coil)

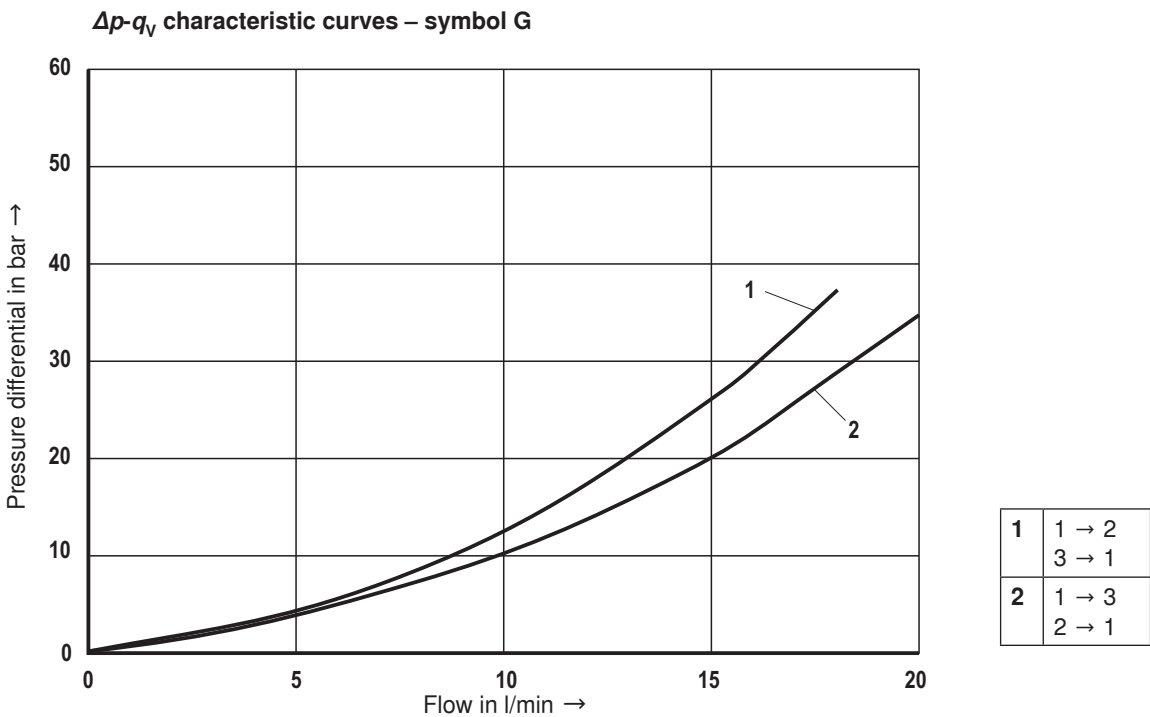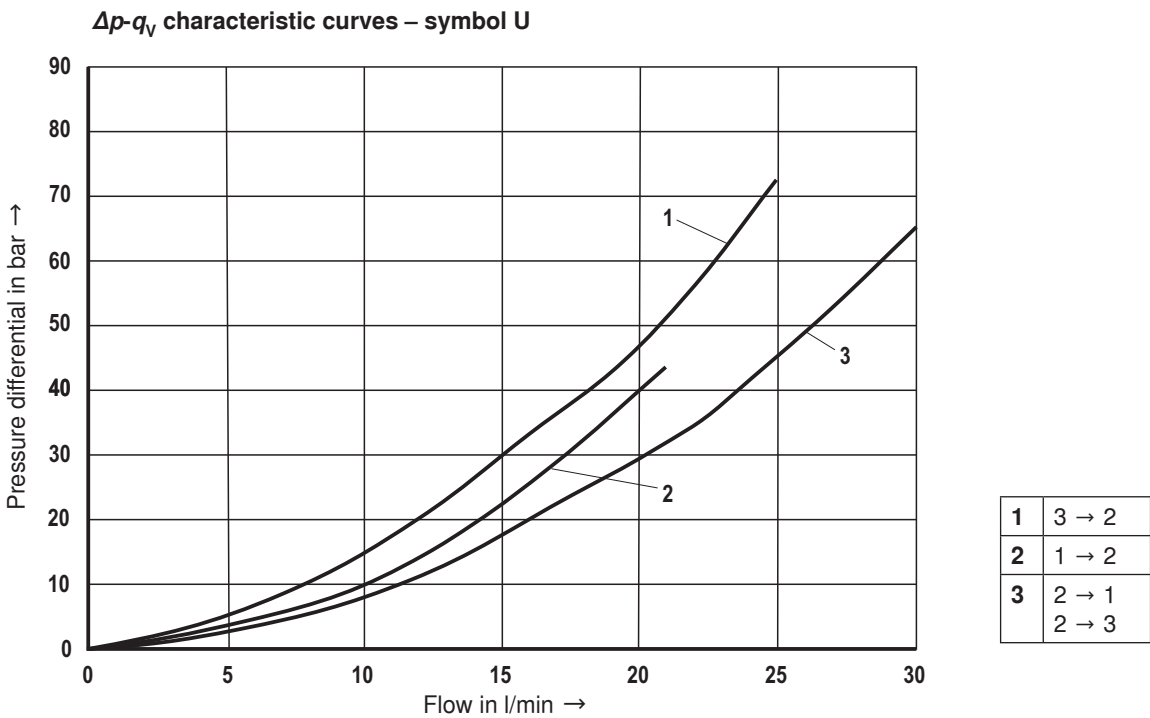


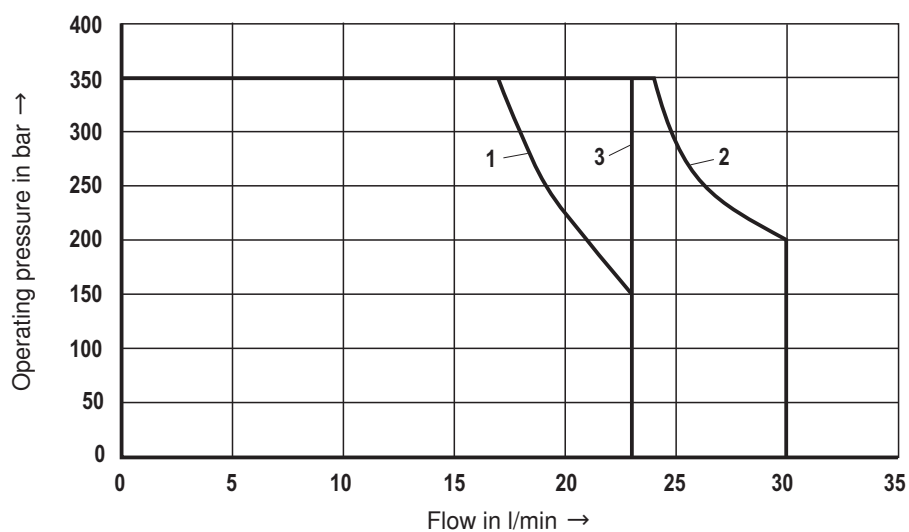Performance limits (measured with HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ and 24 V coil)
Symbol C

1	1 → 2 2 → 1
2	2 → 3
3	3 → 2

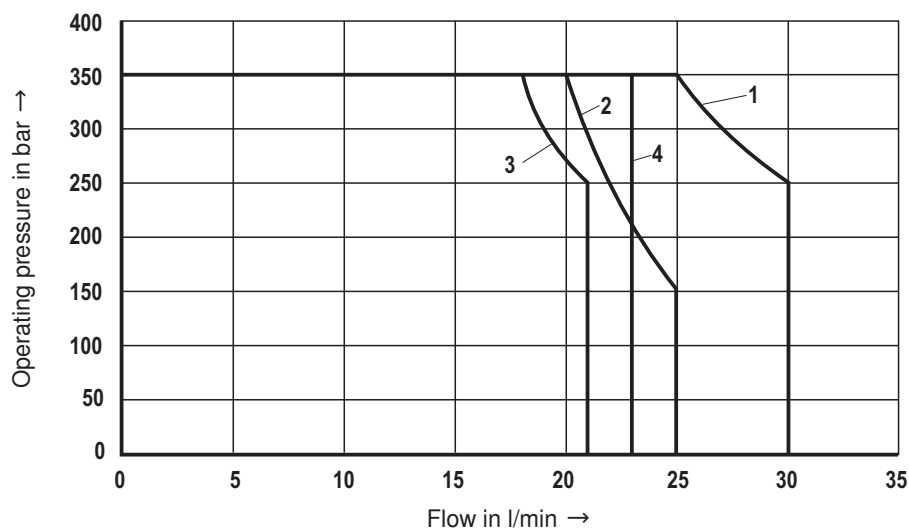
Symbol U

1	2 → 3
2	3 → 2
3	1 → 2
4	2 → 1

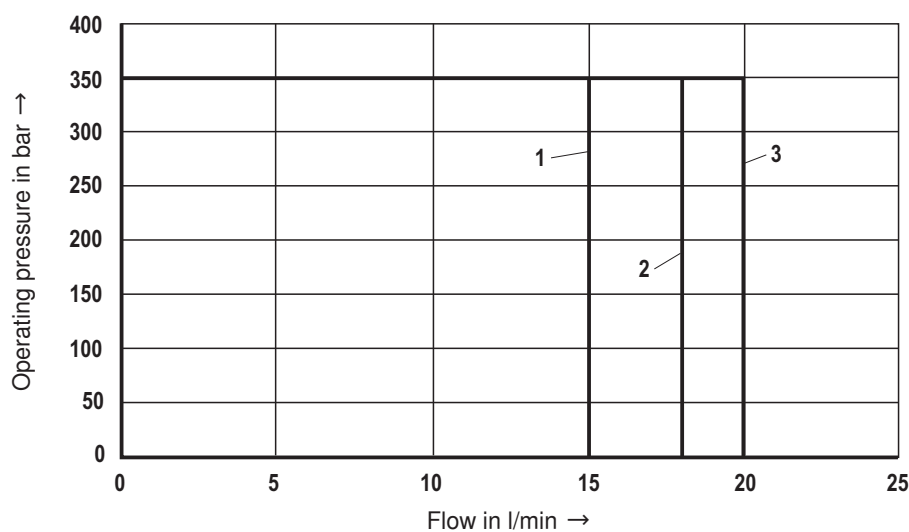Symbol G

1	1 → 2
2	1 → 3 3 → 1
3	2 → 1


Mounting cavity R/T-9A; 3 main ports; thread M1 x 1.5 (dimensions in mm)

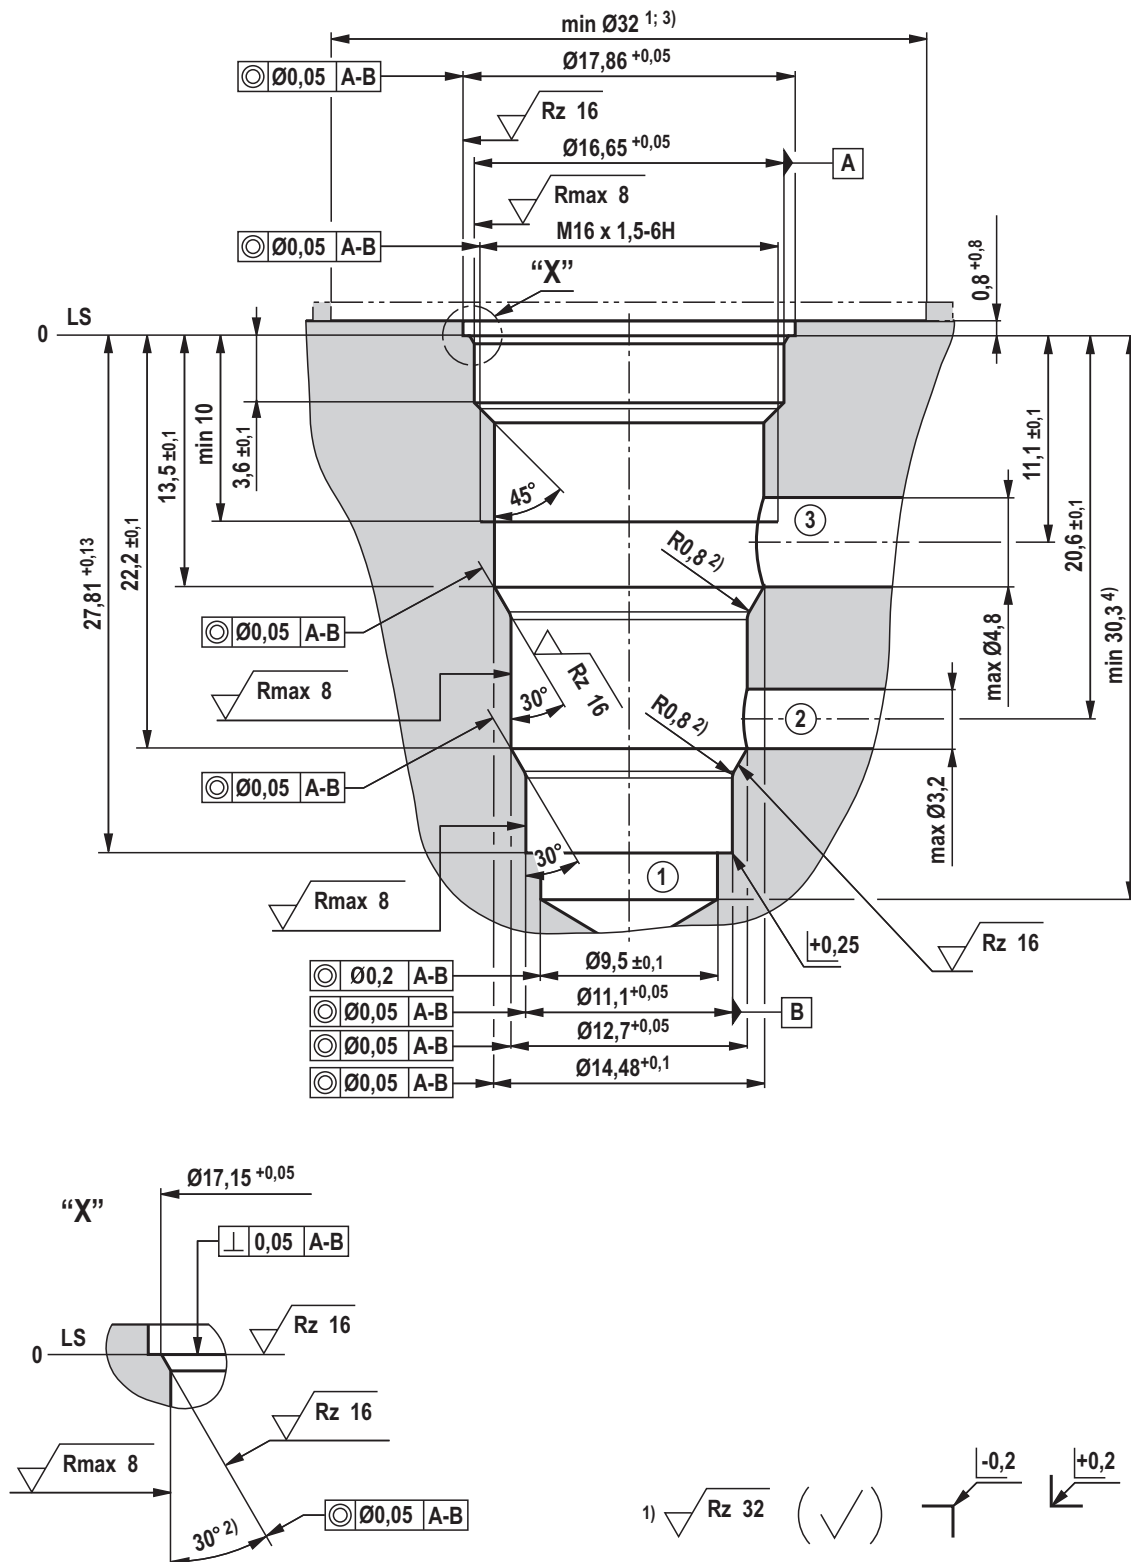

- 1) Differing from T-9A
- 2) All seal ring in section faces are rounded and free of burrs
- 3) with counterbore
- 4) Depth for moving parts

- ① = Main port 1
② = Main port 2
③ = Main port 3
LS = Location shoulder
Tolerance for all angles $\pm 0.5^\circ$

Available individual components

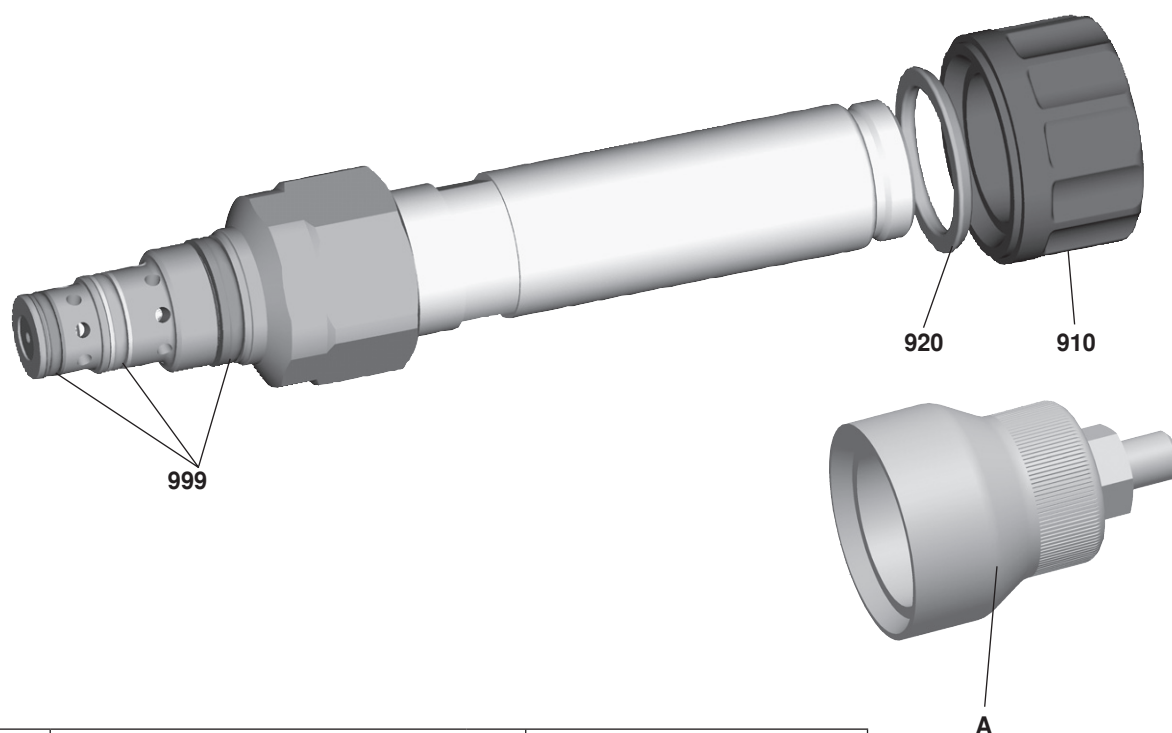

Item	Description	Material no.
910	Nut	R900991453
920	O-ring for pole tube	R900007769
999	Seal kit of the valve	R961003414
A	Manual override "N10" ¹⁾	R901051231

Coils, separate order, see page 2

¹⁾ Only with ordering code "N9", see page 2