

2/2 directional seat valve, direct-operated, with solenoid actuation KSDE.0



H7739

- ▶ Size 0
- ▶ Series A
- ▶ Maximum working pressure 350 bar
- ▶ Maximum flow 20 l/min

Features

- ▶ Direct operated directional seat valve with solenoid actuation, both sides tightly sealed
- ▶ Two different mounting cavities R/B or R/C
- ▶ Blocked connection leak-free, tightly sealed
- ▶ Secure switching, even in the case of long service lives
- ▶ DC voltage solenoids switching in oil
- ▶ Rotatable solenoid coil

Contents

Type code (valve without coil) ¹⁾	2
Preferred types (valve without coil) ¹⁾	3
Available coils (order separately)	3
Functional description	4
Technical data	5
Characteristic curves	7
Permissible working range	7
Dimensions	8
Mounting cavity	9
Available individual components	10
Related documentation	10

Type code (valve without coil)¹⁾

01	02	03	04	05	06	07	08	09
KSDE	R	0		A	/		V	*

Valve type



01	Directional seat valve, direct-operated, electrically actuated	KSDE
----	--	-------------

Maximum working pressure

02	350 bar	R
----	---------	----------

03	Size 0	0
----	--------	----------

Symbol – 2 main ports

04	Normally closed		N
	Normally open		P

05	Series A	A
----	----------	----------

06	Mounting cavity R/B (see page 9)	B
	Mounting cavity R/C (see page 9)	C

Auxiliary actuation

07	Without auxiliary actuation						N0
	With concealed auxiliary actuation						N9
	With screwable auxiliary actuation						N11
	Symbol N			Symbol P			
	N0	N9	N11	N0	N9	N11	
●	–	●	●	● ²⁾	–		

Sealing material

08	FKM (fluorocarbon rubber), other seals on request	V
----	---	----------

09	Further details in plain text	*
----	-------------------------------	----------

1) Complete valves with mounted coil on request.
2) Screwable auxiliary actuation "N10" (actuation through hexagon socket with lock nut) possible as a separate order, material no. R901051231; ordering code "N9"!

● = Available – = Not available

Preferred types (valve without coil)¹⁾

▼ Working pressure 350 bar

Symbol	Type	Material number
N	KSDE0NA/BN0V	R901252718
	KSDE0NA/CN0V	R901252717
P	KSDE0PA/BN0V	R901252713
	KSDE0PA/CN0V	R901252712

Available coils (order separately)

Material number for coil with device connector ²⁾			
DC voltage ³⁾	"K4"	"K40"	"C4"
	03pol (2+PE) DIN EN 175301-803	02pol K40 DT 04-2PA, Fa. DEUTSCH	02pol C4/Z30 AMP Junior Timer
12 V	R900991678	R900729189	R900315818
24 V	R900991121	R900729190	R900315819

¹⁾ Complete valves with mounted coil on request.

²⁾ Plug-in connectors are not included in the scope of delivery and must be ordered separately, see data sheet 08006.

³⁾ Additional voltages available on request.

Functional description

General

The 2/2 directional seat valves are direct operated, pressure-compensated cartridge valves. They essentially consist of a screw-in part (4) with valve seat (1), solenoid (5), closing element (3) and compression spring (2).

Function


The initial position of the valve (normally open "P" or normally closed "N") is determined by the position of the closing element (3) and the arrangement of the compression spring (2). Owing to the structural design, the 2/2 directional seat valves are always pressure-compensated with the actuating forces. The ports **P** and **A** can be loaded with 350 bar bar working pressure (see technical data, page 5).

In the case of symbol "**P**", the closing element (3) is pressed into the seat by the solenoids (5), in the case of symbol "**N**", it is pressed by the compression spring (2). The flow is blocked and leak-free.


The auxiliary actuation enables the switching of the valve without solenoid excitation. It is also available as a concealed version "**N9**" (6) or as a screwable version "**N11**" (7).

The screwable auxiliary actuation (7) must be screwed back into the initial position after actuation.


▼ Symbol "N" Normally closed



▼ Symbol "P" Normally open



▼ Sectional view KSDE0PA/BN0V

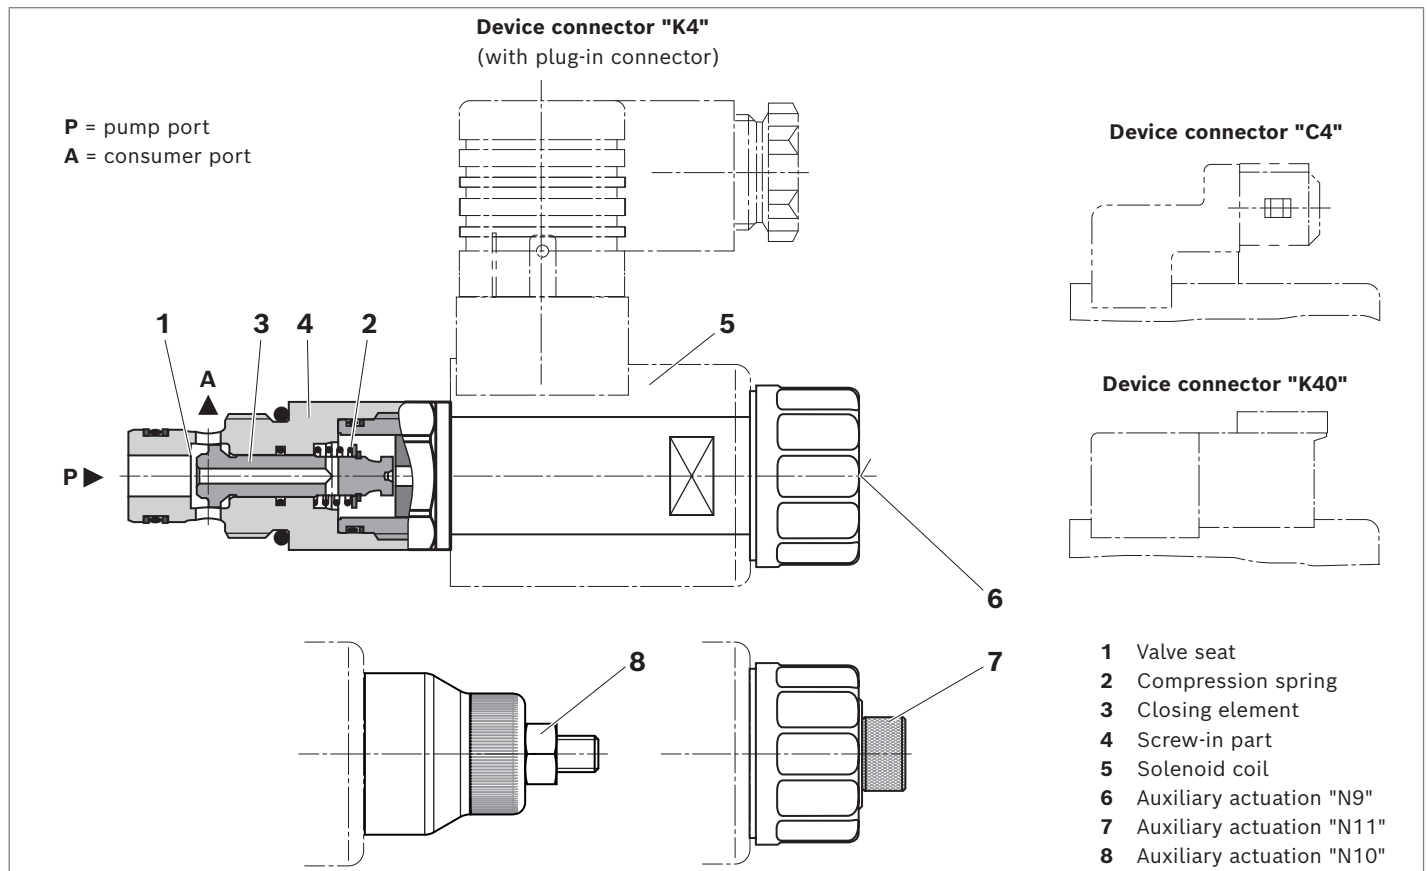

Technical data

General				
Weight (approx.)	Valve	kg	0.30	
	Solenoid coil	kg	0.25	
Installation position			Any	
Ambient temperature range		°C	−40 ... +110	
Hydraulic				
Maximum working pressure	Port P	p	bar	350
Maximum flow		q_v	l/min	20 (see performance limits on page 7)
Hydraulic fluid			See table on page 6	
Hydraulic fluid temperature range		ϑ	°C	−40 ... +80
Viscosity range	Minimum	ν	mm ² /s	5
	Optimum	ν	mm ² /s	10 ... 100
	Maximum	ν	mm ² /s	1000
Maximum admissible degree of contamination of hydraulic fluid, cleanliness level as per ISO 4406 (c)			Level 20/18/15 ¹⁾	
Load cycles			10 Mio.	
Electric				
Voltage type			DC voltage	
Supply voltage ²⁾		V	12 DC; 24 DC	
Voltage tolerance over ambient temperature			See characteristic curve on page 7	
Power consumption		W	22	
Duty cycle		%	See characteristic curve on page 7	
Maximum coil temperature ³⁾		°C	150	
Switching time according to ISO 6403 (Horizontal solenoid)	ON (P → A)	ms	≤95	
	OFF (A → P)	ms	≤95	
Maximum switching frequency		1/h	9000	
Type of protection according to ISO 20653	Connector version "K4"		IP6K5 ⁴⁾	
	Connector version "C4"		IP6K6K ⁴⁾	
			IP6K9K ⁴⁾ (only with Rexroth type R901022127)	
	Connector version "K40"		IP6K7 and IP6K9K ⁴⁾	

Notice

For applications outside these values, please consult us!

Notice

For the electrical connection, a protective earth (PE \perp) connection is mandatory based on the specification.

1) Cleanliness levels specified for the components must be maintained in the hydraulic systems. Effective filtration prevents malfunctions and simultaneously extends the service life of the components.
We recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.

2) Additional voltages available on request
3) Due to the occurring surface temperatures of the solenoid coils, the standards ISO 13732-1 and ISO 4413 must be observed!
4) With installed and locked plug-in connector. Plug-in connectors are not included in the scope of delivery and must be ordered separately, see data sheet 08006.

Hydraulic fluid


Hydraulic fluid		Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils		HL, HLP	FKM	DIN 51524	90220
Environmentally acceptable	Insoluble in water	HEES	FKM	ISO 15380	90221
	Soluble in water	HEPG	FKM	ISO 15380	90221

Notice


- ▶ Further information and details on using other hydraulic fluids are available in the above data sheets or on request.
- ▶ Restrictions are possible with the technical valve data (temperature, pressure range, service life, maintenance intervals, etc.)!
- ▶ The flash point of the hydraulic fluid used must be 40 K above the maximum solenoid surface temperature.
- ▶ **Environmentally acceptable:** If environmentally acceptable hydraulic fluids are used that are also zinc-dissolving, there may be an accumulation of zinc.

Characteristic curves

▼ Δp - q_V characteristic curve

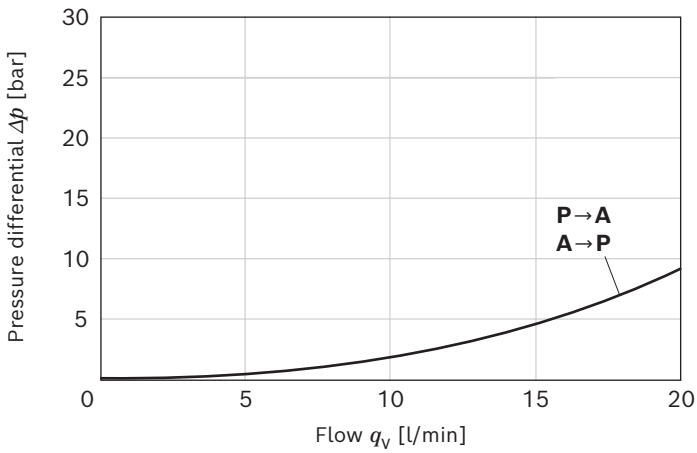

▼ Performance limit

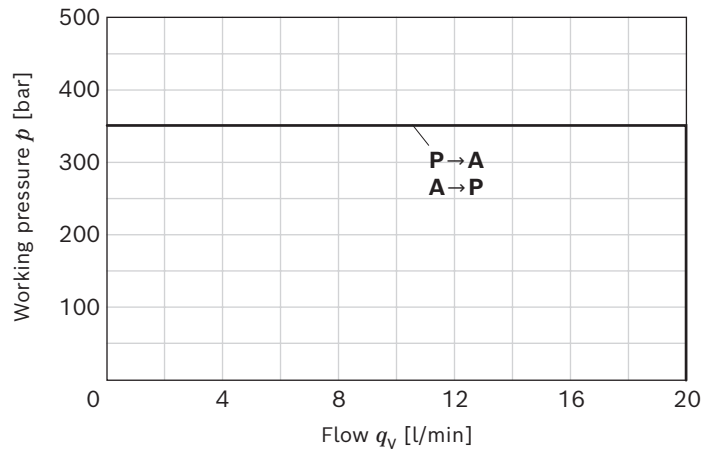


Notice


- ▶ The characteristic curves have been measured with HLP46, $\vartheta_{oil} = 40 \pm 5$ °C and 24 V coil.
- ▶ The performance limit was determined with solenoids at operating temperature and 10 % undervoltage.

Permissible working range

▼ Voltage range and duty cycle depending on the ambient temperature

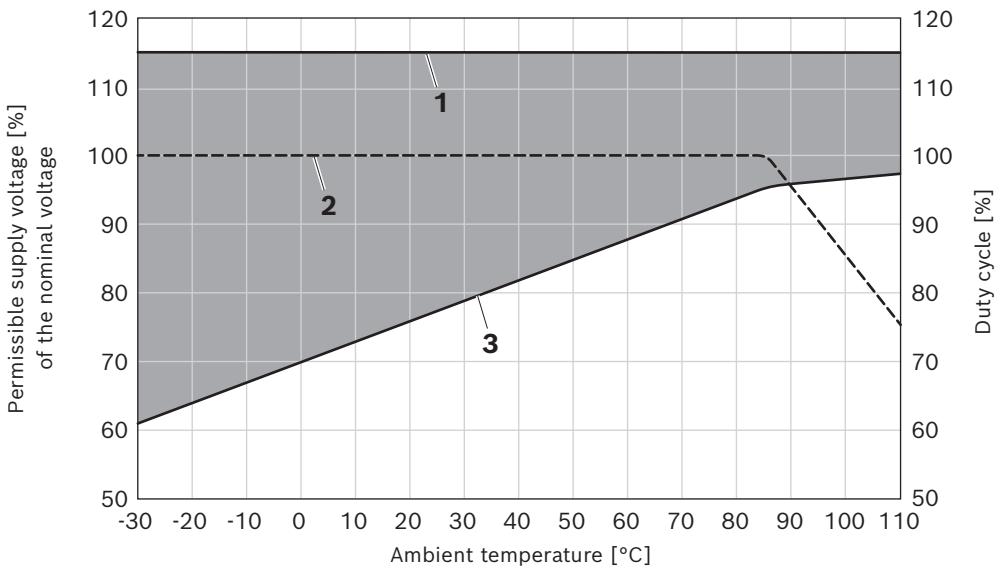


- 1 Maximum voltage
- 2 Duty cycle
- 3 Minimum response voltage

 = Permissible supply voltage range


Dimensions

▼ KSDE.0

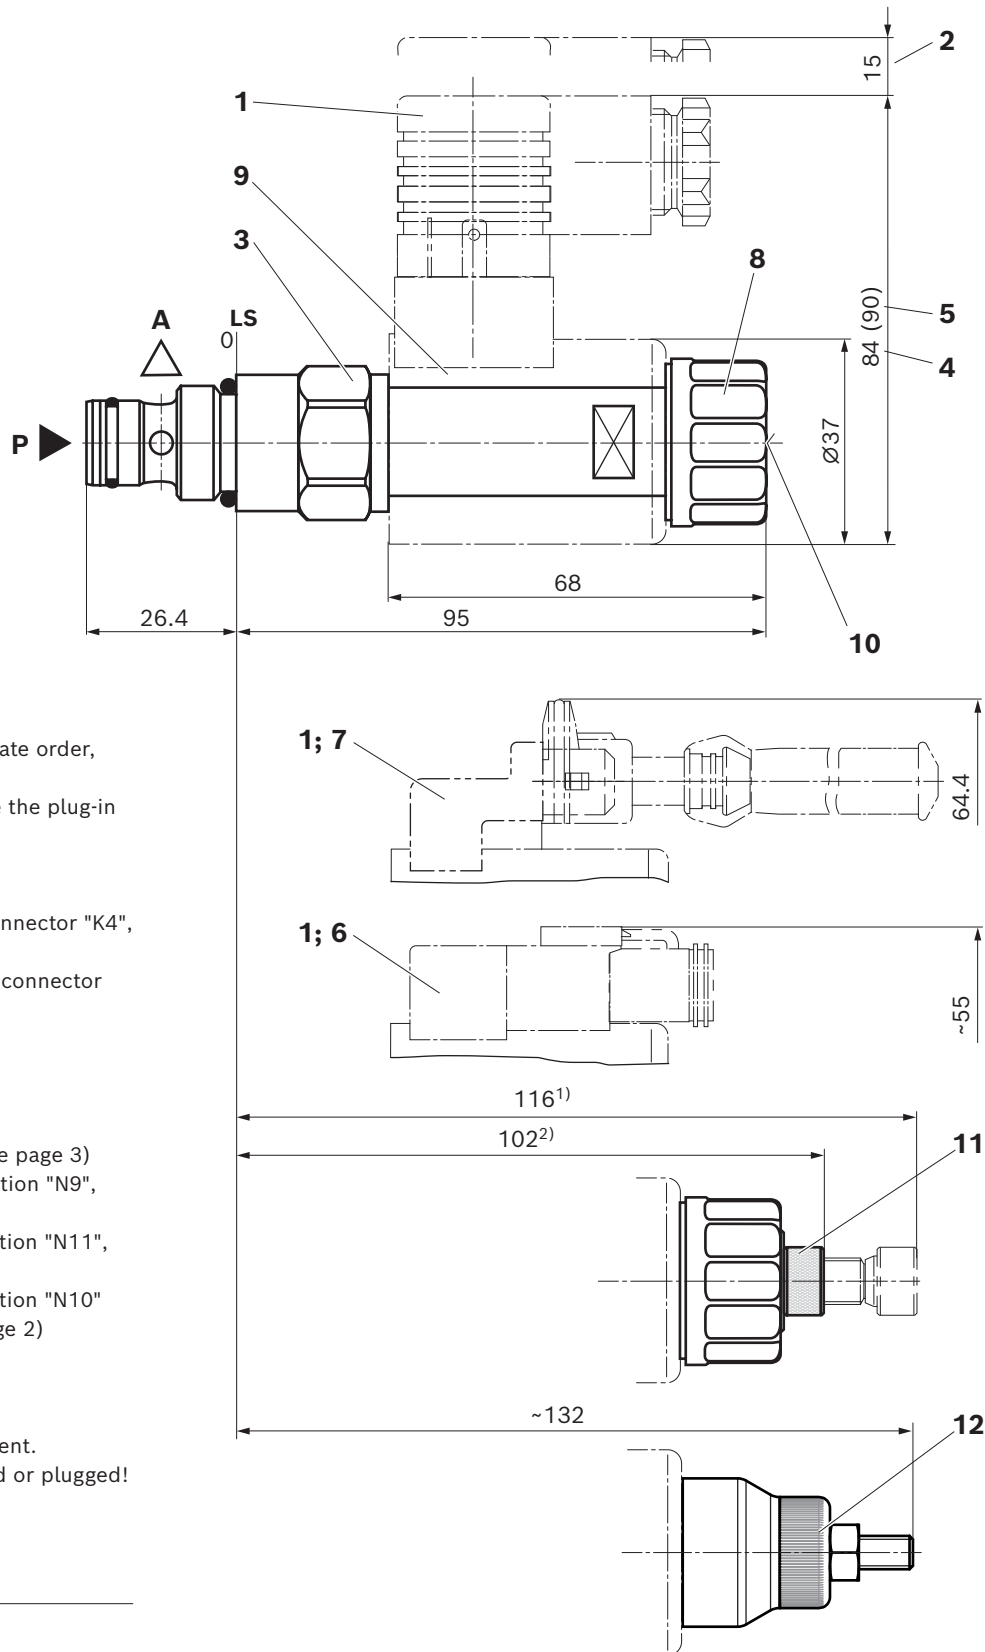


Mounting cavity

▼ **Version B – 2 main ports; thread M20×1.5**

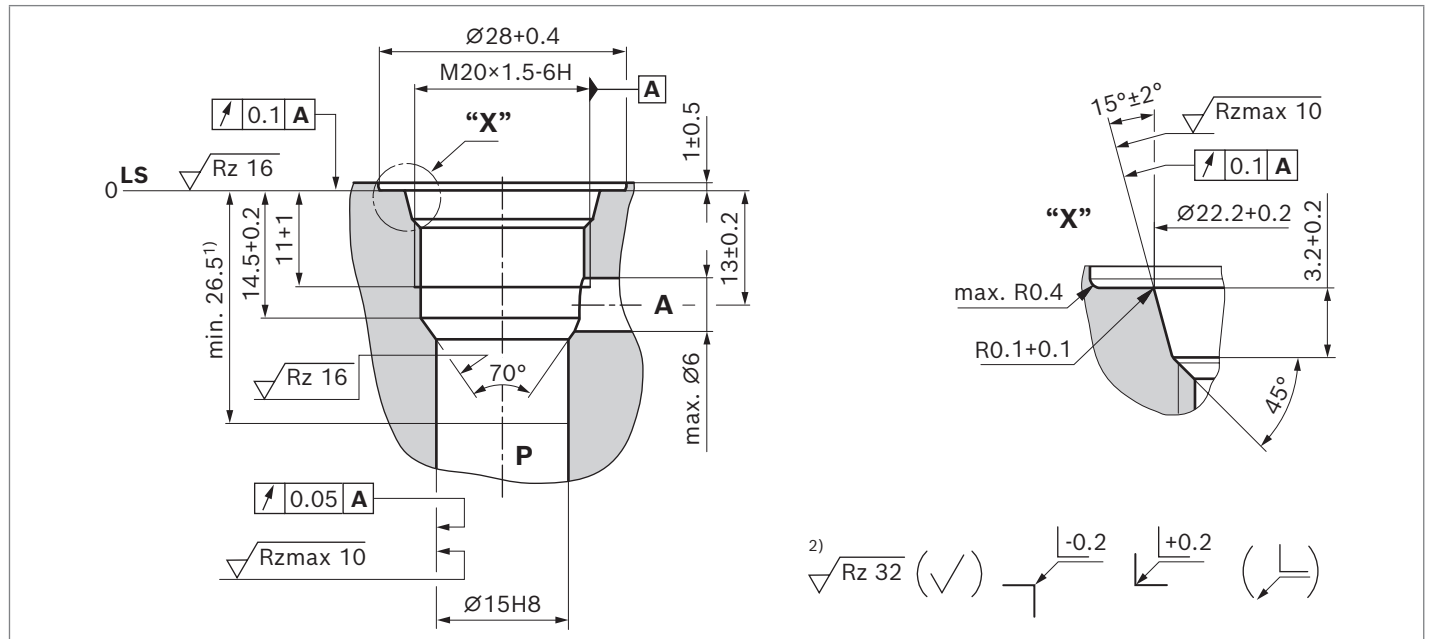

▼ **Version C – 2 main ports; thread M20×1.5**

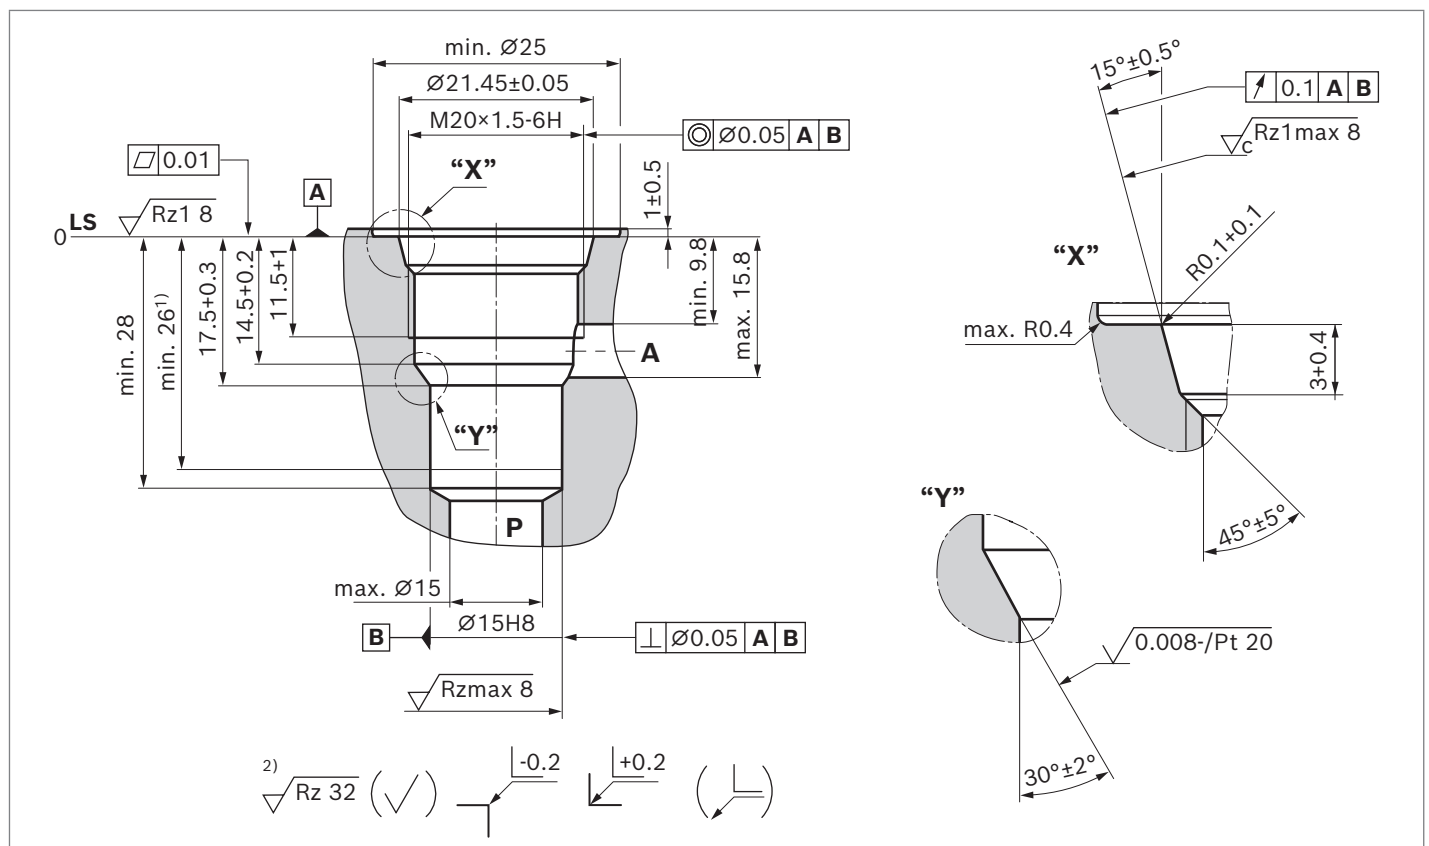


LS = location shoulder

All seal ring insertion faces are rounded and free of burrs
Tolerance for all angles $\pm 0.5^\circ$

- 1) Depth of fit
- 2) Visual inspection

Available individual components

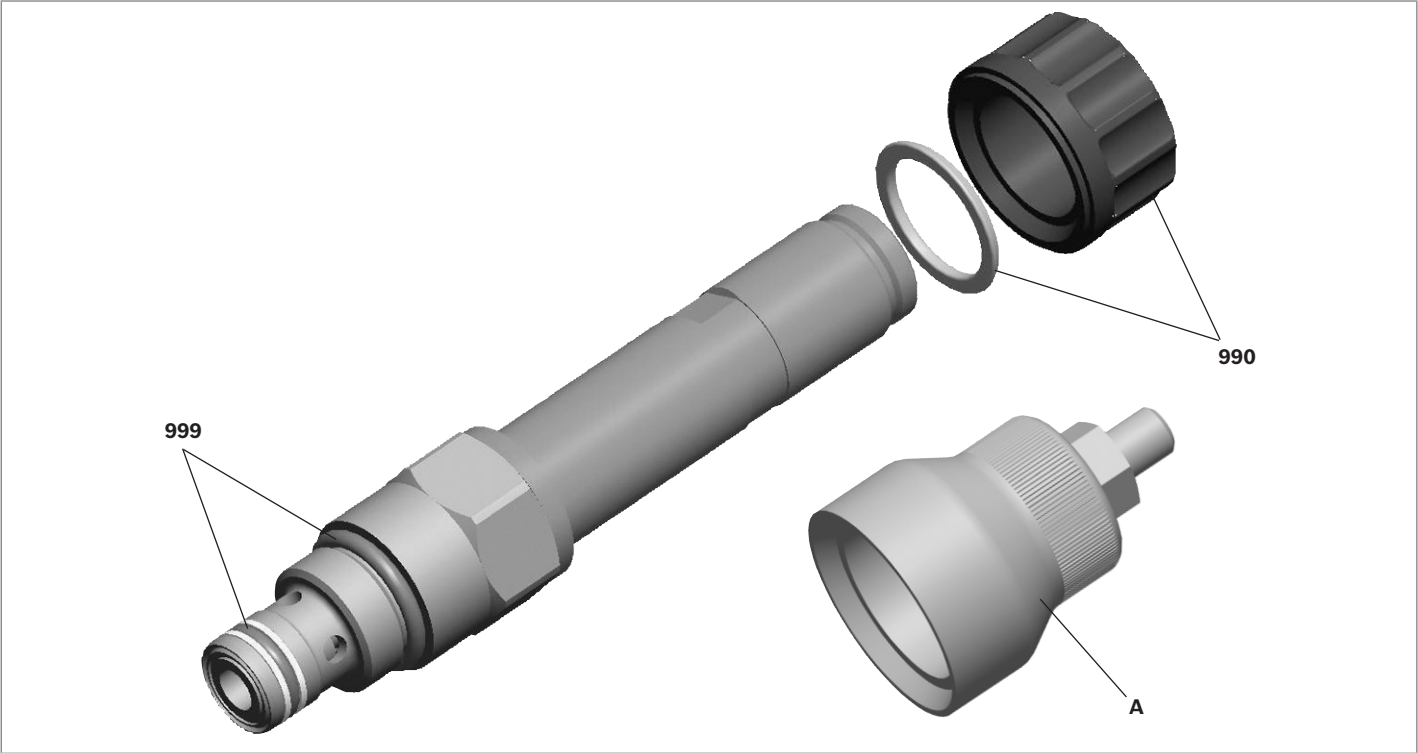

Item	Denomination		DC voltage	Material number
	Coil for single connection	K4	12 V	R900991678
			24 V	R900991121
		K40	12 V	R900729189
			24 V	R900729190
		C4	12 V	R900315818
			24 V	R900315819
A	Auxiliary actuation "N10" ¹⁾			R901051231
990	Nut and O-ring for pole tube			R961012130
999	Seal kit of the valve (version "B")			R961005311
	Seal kit of the valve (version "C")			R961005312

1) Only for ordering code "N9", see page 2

Related documentation

- ▶ Mineral oil-based hydraulic fluids

▶ Environmentally acceptable hydraulic fluids

▶ MTTF_D values
- Data sheet 90220

Data sheet 90221

Data sheet 90294