Edition: 2022-06 Replaces: 2020-12



Directional spool valves, direct operated, with solenoid actuation

Type WE



- ▶ Size 10
- Component series 5X
- ► Maximum operating pressure 350 bar
- Maximum flow: 160 l/min DC 120 l/min - AC



Features

| • | 4/3-, 4/2- or 3/2-way version |
|---|--|
| • | Porting pattern according to ISO 4401-05-04-0-05 |
| • | High-power solenoid, optionally rotatable by 90° |

- ▶ Electrical connection as individual or central connection
- ► Cartridge optionally equipped with PWM connector (fast switching amplifier, energy reduction)
- ► Manual override, optional
- ▶ CE conformity according to the Low-Voltage Directive 2014/35/EU for electrical voltages > 50 VAC or > 75 VDC
- ▶ Solenoid coil as approved component with UR marking, optional
- ▶ Approval according to CSA C22.2 no. 139-13, optional

Contents

| Features | 1 |
|------------------------------------|--------|
| Ordering code | 2 7 |
| Symbols | 8, 9 |
| Function, section | 10 |
| Technical data | 11 14 |
| Characteristic curves | 15, 16 |
| Performance limits | 17 22 |
| Dimensions | 23 28 |
| Electrical connections, assignment | 29, 30 |
| Accessories | 31 |
| Project planning information | 32 |
| Further information | 32 |

Ordering code

| 01 | 02 03 | 04 05 0 | 06 07 08 09 | 10 11 | 12 13 14 1 | 5 16 17 | |
|-------|-------------------|------------------------|------------------------|----------------------|---------------------|--------------------------|---------------------|
| | WE 10 | 5X / | E | / / | | * | |
| | | | | | | | |
| 01 | 3 main ports | | | | | | 3 |
| | 4 main ports | | | | | | 4 |
| 02 | Directional va | lve | | | | | WE |
| 03 | Size 10 | | | | | | 10 |
| 04 | Symbols; poss | sible version see pa | ge 8 and 9 | | | | |
| 05 | Component se | eries 50 59 (50 | 59: unchanged inst | allation and connec | tion dimensions) | | 5X |
| 06 | With spring re | | | | , | | no code |
| | | | ng (for quick switch | ing off) | | | D |
| | With remores | | ing their quiek switch | | | | 0 |
| | | g return with detent | t | | | | OF 1) |
| 07 | High-power w | et-pin solenoid with | detachable coil | | | | E |
| | | et pili sotellola with | detachable con | | | | |
| | rical voltages | | | | | | |
| 80 | | or ordering code, se | | | | | G |
| | | or ordering code, se | | 7) | | | W |
| | AC voltage, wi | th integrated rectifi | er (for ordering code | e, see page 7) | | | WR |
| Manı | ual override 2) (| | | | | | |
| 09 | Without manu | | | | | | no code |
| | | | nushroom button" (la | | | | N5 1; 3) |
| | | | button" (large), not | lockable | | | N6 1) |
| | | ed manual override a | | | | | N8 ^{1; 4)} |
| | with conceate | eu manuat overnue | (Standard) | | | | 143 |
| Corre | T | | availability, refer to | the table on page 3 |) | | |
| 10 | | ousing primed) | | | | | no code |
| | Improved corr | osion protection (24 | 40 h salt spray test a | according to EN ISO | 9227) | | J3 |
| Elect | rical connection | on | | | | | |
| 11 | Individual cor | nnection or central | connection | | | | |
| | For ordering o | ode see page 4 7 | , | | | | e.g. K4 |
| Swite | ching time incre | ease | | | | | |
| 12 | · - | hing time increase | | | | | no code |
| | With switchin | g time increase (onl | y with symbol ".73"; | not for version "D" | with reinforced com | npression spring; | A12 |
| | more informat | ion upon request) | | | | | |
| 13 | Without throt | tle insert (standard |) | | | | no code |
| | With throttle | insert (when the ad | missible valve perfo | rmance limit is exce | eded, refer to page | 17 and 22) ⁵⁾ | |
| | Port | | ı | ı | 1 | | |
| | | 0.8 | 1.0 | 1.2 | 2.0 | 3.0 | 4.0 |
| | Р | = B08 | = B10 | = B12 | = B20 | = B30 | = B40 |
| | А | = H08 | = H10 | = H12 | = H20 | = H30 | = H40 |
| | В | = R08 | = R10 | = R12 | = R20 | = R30 | = R40 |
| | A and B | = N08 | = N10 | = N12 | = N20 | = N30 | = N40 |
| | T 6) | = X08 | = X10 | = X12 | = X20 | = X30 | = X40 |

Ordering code

| | WF | 10 | | EV | 1 | Ī | - | | | | | , | | | | | | * |
|----|----|----|----|----|---|----|----|----|----|----|----|---|----|----|----|----|----|----|
| 01 | 02 | 03 | 04 | 05 | | 06 | 07 | 80 | 09 | 10 | 11 | | 12 | 13 | 14 | 15 | 16 | 17 |

Control spool play

| 14 | Standard (recommended) | no code |
|----|---|---------|
| | Minimum (selection for reduced leakage values; higher oil cleanliness required) | Т06 |
| | Increased (selection with high temperature difference hydraulic fluid/environment; leads to higher internal | T12 |
| | leakage values) | |

Seal material (observe compatibility of seals with hydraulic fluid used, see page 12)

| 15 | NBR seals | М |
|----|---|----|
| | FKM seals | V |
| | Recommended for operation with HFC hydraulic fluids | МН |
| | Low-temperature version (only with version "Without manual override") | MT |

| 16 | Standard | no code |
|----|--|---------|
| | Approval according to CSA C22.2 no. 139-13 | CSA |
| | Porting pattern according to ANSI B93.9 | AN 7) |
| | | |

- 17 Further details in the plain text *
- $^{1)}\,$ Only version "G..." and "W...R"
- 2) Operation of the manual override only possible up to 50 bar tank pressure. Avoid damage to the bore of the manual override. (Special tool for the operation, separate order, material no. R900024943). If the manual override is blocked, operation of the opposite solenoid is to be excluded. The manual override cannot be allocated a safety function.
- ³⁾ With tank pressures higher than 50 bar, it is not guaranteed that the valve remains in the position into which it was switched by the lockable manual override ("N5").
- 4) Protective cap must be removed prior to actuation.
- 5) Not with low-temperature version "MT".
- 6) When throttle inserts are used in channel T, the pressure in the working ports and in case of connection to the tank chambers must not exceed 210 bar.
- 7) With power supply to
 - ▶ solenoid "a", channel P is connected to A
 - ▶ solenoid "b", channel P is connected to B

Notice:

For directional spool valves NG10 with spool position monitoring, see data sheet 23352.

Available corrosion resistance

| | | | Ele | ctrical connec | tion | | | Manual override | | | |
|------|-------|-------|-------|----------------|--------|--------|---------|-----------------|----------|--|--|
| | | | | "DL", "DJL" | | | | | | | |
| | "G12" | "G24" | "G96" | "G110" | "G205" | "G220" | "W200R" | Without | "N8" | | |
| "J3" | 1 | 1 | 1 | 1 | 1 | 1 | 1 | ✓ | ✓ | | |

Ordering code: DC voltage - individual connection

Electrical connections and available voltages

(Special voltages available upon request)

| | | | | ı | ı | Elec | trica | l volt | ages | 1 | ı | ı | ing | ing |
|--|--|---------------|-------------|-------------|-------------|--------|--------|--------|--------|-------------|-------|-------------|--------------------------------------|----------------------------|
| | | | 12 V | 24 V | 26 V | 48 V | A 96 | 110 V | 125 V | 180 V | 205 V | 220 V | ıss according 60529 ¹⁾ | class according DE 0580 |
| | | code | | , I | I | 0 | rderii | ng co | de | 1 | | I | on cla | |
| Connector | | Ordering | G12 | G24 | G26 | G48 | 965 | G110 | G125 | G180 | G205 | G220 | Protection to DIN | Protection to V |
| Connector 3-pole (2 + PE) | ► Standard | К4 | 1 | 1 | - | 1 | 1 | 1 | 1 | √ 4) | 1 | √ 4) | IP65 | [2) |
| according to DIN EN 175301-803 | ► With potted-in plug base and sealing element | K4K 5) | √ 4) | √ 4) | √ 4) | - | - | - | - | - | - | - | IP65 | 2) |
| Connector, 4-pole, M12x1 according to DIN EN 61076-2-101 with suppressor diode, coding A | ► Pin assignment according to DESINA | K72L | _ | √ 4) | _ | _ | _ | _ | _ | _ | _ | - | IP65 | 3) |
| Connector 2-pole (Junior-Timer type) | ► Connector radial to the valve axis | C4Z | - | - | ✓ 4) | - | - | - | - | - | - | - | IP66 | 3) |
| Maximum admissible overv | oltages according to DIN EN 6 | 60664-1 (V | DE 01 | 10-1) | (ove | rvolta | ge ca | tegor | y II): | | | | | |
| Nominal voltage U _{Nom} | | in V | 12 | 24 | 26 | 48 | 96 | 110 | 125 | 180 | 205 | 220 | | |
| Rated current I _{Nom} | | in A | 3.44 | 1.61 | 1.51 | 0.86 | 0.44 | 0.38 | 0.33 | 0.26 | 0.21 | 0.19 | | |
| Maximum admissible switch according to VDE 0580 | n-off overvoltage | in V | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | | |
| Recommended interference 2 x nominal voltage | protection circuit with | in V | 24 | 48 | 52 | 96 | 192 | 220 | 250 | 360 | 410 | 440 | | |

- 1) Only with correctly mounted valve with a mating connector suitable for the protection class.
- 2) Protection class I with properly connected protective grounding conductor (PE) and valve mounting surface connected to the protective grounding conductor system.
- ³⁾ With protection class III, a protective extra-low voltage with safety transformer (PELV, SELV) is to be provided.
- 4) Solenoid coils without "Recognized component" according to UL 429
- 5) Recommended for mobile applications; with additional sealing between solenoid coil and pole tube.

Motice:

Solenoid valves induce voltage peaks during switch-off. In order to prevent electro-magnetic interference at the system and damage to the valve control, an interference protection circuit has to be provided on the system side. Alternatively, you can also select a connector with integrated interference protection circuit.

Ordering code: Direct voltage - central connection

Electrical connections and available voltages

(Special voltages available upon request)

| | | | | | Electrica | l voltage | es | | g | ng |
|--|--|-------------------|--------|-----------|----------------|------------|-------|-------|--------------------------------|---|
| | | e p | 12 V | 24 V | v 96 v | 110 V | 205 V | 220 V | class according EN 60529 ¹) | Protection class according to VDE 0580 |
| Connector | | Ordering code | G12 | G24 | Orderii 965 | G110 grand | G205 | G220 | Protection of to DIN E | Protection c to VI |
| Cable gland, terminal area 6 12 mm | ► With indicator light | DL 6) | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | 2) |
| Cable gland, threaded connection 1/2"-14 NPT | ► With indicator light | DAL | 1 | 1 | 1 | 1 | 1 | 1 | IP65 ⁷⁾ | 2) |
| Cable gland at the cover | ► With indicator light and cable bridge at the ground connection | DJL ⁶⁾ | - | 1 | 1 | 1 | _ | - | IP65 | 2) |
| Connector 7-pole (6 + PE) according to DIN EN 175201-804 | ► With indicator light | DK6L 8) | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | 2) |
| Connector according to ANSI/B93.55M-1981 (Brad Harrison Mini-Change) | ► With indicator light, 5-pole | DK25L 8) | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | 2) |
| Maximum admissible overvo | oltages according to DIN EN 60 | 664-1 (VDE | 0110-1 |) (overvo | ltage ca | tegory II | l): | | | |
| Nominal voltage U _{Nom} | | in V | 12 | 24 | 96 | 110 | 205 | 220 | | |
| Rated current I _{Nom} | | in A | 3.44 | 1.61 | 0.44 | 0.38 | 0.21 | 0.19 | | |
| Maximum admissible switch- according to VDE 0580 | off overvoltage | in V | 500 | 500 | 500 | 500 | 500 | 500 | | |
| Recommended interference p 2 x nominal voltage | protection circuit with | in V | 24 | 48 | 192 | 220 | 410 | 440 | | |

Only with correctly mounted valve with a mating connector suitable for the protection class or suitable conduit system.

Protection class I with properly connected protective grounding conductor (PE) and valve mounting surface connected to the protective grounding conductor system.

³⁾ With protection class III, a protective extra-low voltage with safety transformer (PELV, SELV) is to be provided.

⁶⁾ Possible with version "J3".

⁷⁾ Only with professionally designed connection with appropriate sealing to the central connection frame.

 $^{^{8)}}$ Connector pin assignment see page 30

Ordering code: Alternating voltage – individual connection

Electrical connections and available voltages

(Special voltages available upon request)

| (Special voltages available upo | - requesty | | 1 | 1 | 1 | | | | | | 1 | | 1 |
|---|---------------------|-----------|----------------|----------------|----------------|-------------|----------------------------|----------------|----------------|----------------|----------------|--------------------------------|--|
| | | | | | | _ Ele | ctrica | l volta ' | ges | ı | | \$ | \$ |
| | | 9 | 100 V 50/60 Hz | 100 V 50/60 Hz | 110 V 50/60 Hz | 120 V 60 Hz | 110 V 50 Hz 120 V 60 Hz | 200 V 50/60 Hz | 200 V 50/60 Hz | 230 V 50/60 Hz | 230 V 50/60 Hz | class according EN 60529 ¹) | Protection class according VDE 0580 |
| | | epoo | | | | Ord | ering (| code | | | | tion DIN | ie > |
| Connector | | Ordering | 965 | W100 | 965 | G110 | W120 | G180 | W200 | G205 | W230 | Protection DIN | Protect |
| Connector 3-pole (2 + PE) according to DIN EN 175301-803 | ► Standard | К4 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | ²⁾ |
| Rectifier required (see page 31) | | | 1 | _ | 1 | 1 | _ | 1 | _ | 1 | _ | | |
| Maximum admissible overvoltages | according to DIN EN | 60664-1 (| VDE 0 | 110-1) | (over | voltag | ge cate | gory l | I): | | | | |
| Nominal voltage $m{U}_{Nom}$ | | in V | 100 | 100 | 110 | 120 | 110 120 | 200 | 200 | 230 | 230 | | |
| Rated current I _{Nom} | ▶ 50 Hz | in A | 0.41 | 1.05 | 0.45 | - | 0.80 | 0.26 | 0.48 | 0.21 | 0.43 | | |
| | ▶ 60 Hz | in A | 0.41 | 0.78 | 0.45 | 0.37 | 0.65 | 0.26 | 0.36 | 0.21 | 0.32 | | |
| Lower rated current I_1 | ▶ 50 Hz | in A | _ | 1.21 | _ | _ | 0.92 | _ | 0.55 | _ | 0.50 | | |
| | ▶ 60 Hz | in A | _ | 0.9 | _ | _ | 0.75 | _ | 0.42 | _ | 0.37 | | |
| Upper rated current I_2 | ▶ 50 Hz | in A | _ | 1.92 | _ | _ | 1.20 | _ | 0.9 | _ | 0.90 | | |
| | ▶ 60 Hz | in A | _ | 1.2 | _ | _ | 1.20 | _ | 0.6 | _ | 0.60 | | |
| Maximum admissible switch-off over according to VDE 0580 | ervoltage | in V | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | | |
| Recommended interference protect 2 x nominal voltage | ion circuit with | in V | 200 | 200 | 220 | 240 | 240 | 400 | 400 | 460 | 460 | | |

- 1) Only with correctly mounted valve with a mating connector suitable for the protection class.
- Protection class I with properly connected protective grounding conductor (PE) and valve mounting surface connected to the protective grounding conductor system.

Motice:

- ➤ Solenoid valves induce voltage peaks during switch-off. In order to prevent electro-magnetic interference at the system and damage to the valve control, an interference protection circuit has to be provided on the system side. Alternatively, you can also select a connector with integrated interference protection circuit.
- ▶ Dependent on the rated current I_{Nom}, circuit breakers according to tripping characteristic "K" are to be provided. Within a time interval of 0.6s, the tripping current must be 8 to 10 times the nominal power supply.

 The required non-tripping current of the fuse must not fall below the "lower rated current" value I₁ (see table above). The maximum tripping current must not exceed the "upper rated current" value I₂ (see table above). The temperature dependence of the tripping behavior of the circuit breakers has to be observed according to the manufacturer's specifications.

Ordering code: Alternating voltage – central connection

Electrical connections and available voltages

(Special voltages available upon request)

| | | | | | | Ele | ctrica | l volta | ges | ı | 2 | 2 |
|--|--|---------------|----------------|----------------|----------------|-------------|-------------|----------------|----------------|----------------|--|---|
| | | qe | 100 V 50/60 Hz | 100 V 50/60 Hz | 110 V 50/60 Hz | 120 V 60 Hz | 120 V 60 Hz | 200 V 50/60 Hz | 200 V 50/60 Hz | 230 V 50/60 Hz | class according t EN 60529 ¹⁾ | Protection class according to VDF 0580 |
| | | 00 8 | | | | | Orderii | ng cod | e | 1 | tion | tion |
| Connector | | Ordering code | W100 | W100R | W110R | W120R | W120 | W200 | W200R | W230R | 4 Protection class according to 5 9 4 5 5 9 10 EN 60529 1) | Protec |
| | ► With indicator light | DL | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | 2) |
| Cable gland, terminal area 6 12 mm | ► With indicator light and interference protection circuit ³⁾ | DJL | 1 | 1 | 1 | _ | _ | 1 | 1 | _ | IP65 | 2) |
| Cable gland, threaded connection 1/2"-14 NPT | ► With indicator light | DAL | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | IP65 | [2) |
| Connector 7-pole (6 + PE) according to DIN EN 175201-804 | ► With indicator light | DK6L | - | 1 | 1 | 1 | - | - | 1 | 1 | IP65 | [2) |
| Connector according to ANSI/B93.55M-1981 (Brad Harrison Mini-Change) | ► With indicator light, 5-pole | DK25L | 1 | 1 | 1 | 1 | 1 | 1 | 1 | - | IP65 | [2) |
| Maximum admissible overvo | ltages according to DIN EN 60 | 664-1 (VDI | E 0110 | -1) (ov | ervolta | age cat | tegory | II): | | · | • | |
| Nominal voltage U _{Nom} | | in V | 100 | 100 | 110 | 120 | 120 | 200 | 200 | 230 | | |
| Rated current I _{Nom} | ▶ 50 Hz | in A | 1.05 | 1.05 | 0.45 | 0.37 | _ | 0.48 | 0.48 | 0.21 |] | |
| | ▶ 60 Hz | in A | 0.78 | 0.78 | 0.45 | 0.37 | 0.65 | 0.36 | 0.36 | 0.21 | | |
| Lower rated current I_1 | ▶ 50 Hz | in A | 1.21 | 1.21 | _ | _ | _ | 0.55 | 0.55 | _ | | |
| | ▶ 60 Hz | in A | 0.9 | 0.9 | _ | _ | 0.75 | 0.42 | 0.42 | _ | | |
| Upper rated current I_2 | ▶ 50 Hz | in A | 1.92 | 1.92 | - | _ | - | 0.9 | 0.9 | _ | | |
| | ▶ 60 Hz | in A | 1.2 | 1.2 | - | _ | 1.20 | 0.6 | 0.6 | - | | |
| Maximum admissible switch-caccording to VDE 0580 | off overvoltage | in V | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | | |
| Recommended interference p | rotection circuit with | in V | 200 | 200 | - | _ | 240 | 400 | 400 | _ | | |


- Only with correctly mounted valve with a mating connector suitable for the protection class or suitable conduit system.
- Protection class I with properly connected protective grounding conductor (PE) and valve mounting surface connected to the protective grounding conductor system.
- 3) Wire bridge between pin 2- and 4-.

2 x nominal voltage

Notice:

- ▶ Solenoid valves induce voltage peaks during switch-off. In order to prevent electro-magnetic interference at the system and damage to the valve control, an interference protection circuit has to be provided on the system side. For valves with integrated rectifier ("W...R"), no protection circuit on the system side is required. The rectifier in the valve completes this function.
- ▶ Dependent on the rated current I_{Nom}, circuit breakers according to tripping characteristic "K" are to be provided. Within a time interval of 0.6s, the tripping current must be 8 to 10 times the nominal power supply. The required non-tripping current of the fuse must not fall below the "lower rated current" value I₁ (see table above). The maximum tripping current must not exceed the "upper rated current" value I₂ (see table above). The temperature dependence of the tripping behavior of the circuit breakers has to be observed according to the manufacturer's specifications.


Symbols

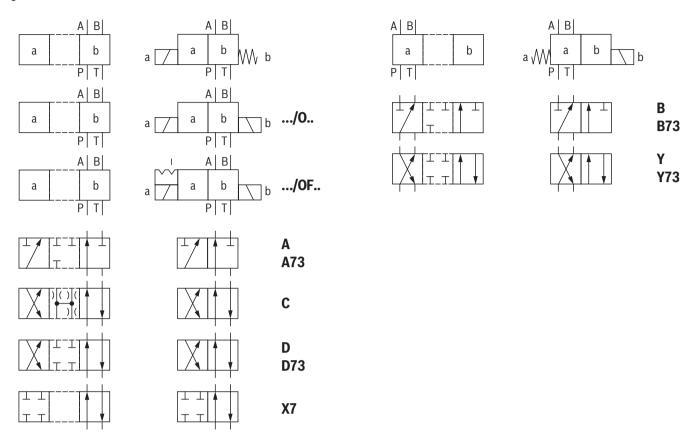

Motice:

Representation according to DIN ISO 1219-1. Hydraulic interim positions are shown by dashes.

Symbols

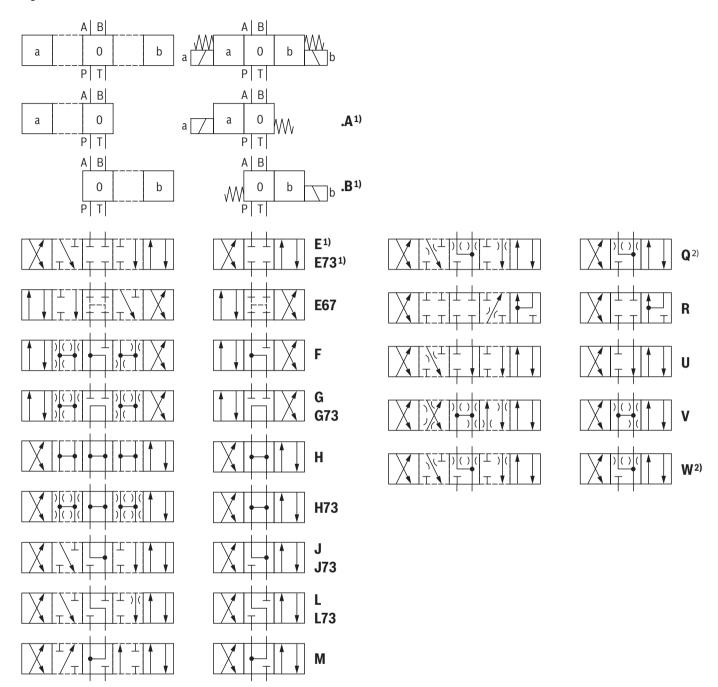

1) Example:

- ► Symbol E with spool position "a" ordering code ..EA..
- ► Symbol E with spool position "b" ordering code ..**EB**..
- 2) Flow cross-section see page 12.

Notice:

- ► Representation according to DIN ISO 1219-1. Hydraulic interim positions are shown by dashes.
- ▶ Other symbols upon request.

Function, section

The directional valves of type WE are solenoid-actuated directional spool valves that can be used as electro-hydraulic component. They control the start, stop and direction of a flow.

The directional valves basically consist of the housing (1), one or two electronic solenoids (2), the control spool (3), and the return springs (4). In the de-energized condition, the control spool (3) is held in the central position or in the initial position by the return springs (4) (except for version "O"). If the wet-pin electronic solenoid (2) is supplied with power, the control spool (3) moves out of its rest position into the required end position. In this way, the required direction of flow according to the selected symbol is released.

After the electronic solenoid (2) has been switched off, the control spool (3) is pushed back into its central position or into its initial position (except for valves with "OF" detent and valves without type "O" spring). A manual override (5) allows for the manual switching of the valve without solenoid energization.

For unobjectionable functioning, the hydraulic system has to be bled properly.

Without spring return "O" (only possible with symbols A, C and D)

This version is a directional valve with two spool positions and two electronic solenoids **without** detent. The valve without spring return at the control spool (3) has no defined basic position in the de-energized condition.

Without spring return with "OF" detent


(only possible with symbols A, C and D)


This version is a directional valve with two spool positions and two electronic solenoids **with** detent. The detents are used to fix the control spool (3) in the relevant spool position. During operation, continuous application of current to the electronic solenoid can thus be omitted which contributes to energy-efficient operation.

Version ".73...A12" (smooth switching behavior)
By means of structural design of the control spools and solenoids, switching shocks occurring when activating and deactivating the valves are significantly reduced.
The switching shocks, measured as acceleration values **a**, can be reduced by up to approx. 85% when compared to the standard valve depending on the design of the control spool (for this, see "Acceleration values" on page 14).

■ Notice:

Pressure peaks in the tank line to two or several valves can result in unintended movements of the control spool in the case of version with detent. We therefore recommend that separate return lines be provided or a check valve installed in the tank line. Due to the design principle, internal leakage is inherent to the valves, which may increase over the life cycle.

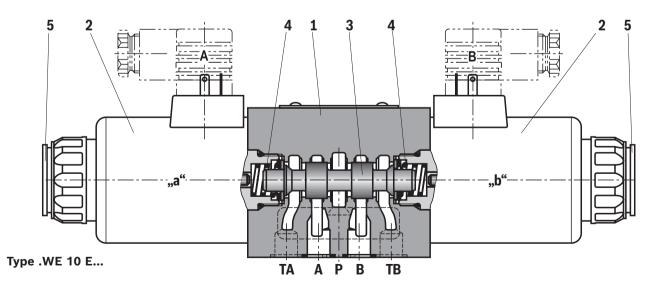



Throttle insert

The use of a throttle insert is required when, due to prevailing operating conditions, flows occur during the switching processes which exceed the performance limit of the valve.

(For applications outside these values, please consult us!)

| General | | | | | |
|------------------------------------|---|-------|---------------------------------|--------------------|--|
| Type of connection | | | Subplate mounting | | |
| Porting pattern | | | ISO 4401-05-04-0-05 | | |
| Weight | | | Individual connection | Central connection | |
| | ▶ Valve with one solenoid | kg | 3.9 | 4.0 | |
| | ► Valve with two solenoids | kg | 5.5 | 5.6 | |
| Installation position | | | any 1) | | |
| Ambient temperature | Ambient temperature ► NBR seals | | -20 +70 ²⁾ | | |
| range | ▶ FKM seals | °C | -15 +70 ²⁾ | | |
| | ► Version for HFC hydraulic fluid | °C | -20 +50 | | |
| | ► Low-temperature version ³⁾ | °C | -40 +50 | | |
| Storage temperature ran | ge | °C | +5 +40 | | |
| Protection class according | ng to EN 60529 | | see page 4 7 | | |
| Maximum surface tempe | rature ⁴⁾ | °C | 140 | | |
| MTTF _D values according | ▶ Version "G" | years | 300 2400 ⁵⁾ | | |
| to EN ISO 13849 | ▶ Version "W" | | 150 1200 ⁵⁾ | | |
| | ▶ Version "WR" | | 300 2400 ⁵⁾ | | |
| Conformity | ► CE according to EMC directive 2014/35/EU, tested according to | | EN 60204-1, classified as compo | onent | |

¹⁾ With suspended installation, higher sensitivity to contamination. Horizontal installation is recommended.

 $^{^{2)}}$ Maximum +50 °C for version "W..."

³⁾ For the use at low temperatures, see Project planning information on page 32.

⁴⁾ Due to the arising surface temperatures of the solenoid coils, the standards ISO 13732-1 and ISO 4413 are to be observed. The specified surface temperature in AC solenoids is valid for fault-free operation. In the error case (e.g. blocking of the control spool), the surface temperature may increase above 180 °C. Thus, the system must be checked for possible dangers considering the ignition temperature of the hydraulic fluid used. As protection, circuit breakers (see table page 4 ... 7) must be used, unless the creation of an ignitable atmosphere can be excluded in a different way. Thus, the surface temperature can – in the error case – be limited to maximally 220 °C. You have to use connection cables that have been approved of for a working temperature of more than 90 °C (individual connection) and/or 105 °C (central connection). Contact between the connection cable and the coil surfaces must be prevented.

⁵⁾ For further details, see data sheet 08012

(For applications outside these values, please consult us!)

| Hydraulic | | | |
|--|---|-----------------|-------------------------------------|
| Maximum operating | ► Ports A, B, P | bar | 350 |
| pressure 3) | ► Port T ⁶⁾ | | |
| | - Direct voltage DC | bar | 210 |
| | - Alternating voltage AC | bar | 160 |
| Hydraulic fluid | | | see table below |
| Hydraulic fluid temperature | ► NBR seals | °C | -20 +80 |
| range (at the valve | ► FKM seals | °C | -15 +80 |
| working ports) | ► HFC hydraulic fluid | °C | -20 +50 |
| | ► Low-temperature version ³⁾ | °C | -40 +50 |
| Viscosity range | | mm²/s | 2.8 500 |
| Maximum admissible degree hydraulic fluid; cleanliness c | of contamination of the lass according to ISO 4406 (c) | | Class 20/18/15 ⁷⁾ |
| Maximum flow | ► Direct voltage DC | l/min | 160 |
| | ► Alternating voltage AC | l/min | 120 |
| Flow cross-section | ► Symbol Q | mm ² | approx. 6% of nominal cross-section |
| (spool position 0) | ► Symbol W | mm ² | approx. 3% of nominal cross-section |

| Hydraulic fluid | | Classification | Suitable sealing materials | Standards | Data sheet | |
|-----------------|----------------------|---|----------------------------|-----------|----------------|--|
| Mineral oils | , | HL, HLP, HLPD, HVLP, HVLPD | NBR, FKM | DIN 51524 | 90220 | |
| Bio-degradable | ► Insoluble in water | HETG | FKM | 100 15200 | | |
| | | HEES | FKM | ISO 15380 | 90221 | |
| | ► Soluble in water | HEPG | FKM | ISO 15380 | | |
| Flame-resistant | ▶ Water-free | HFDU (glycol base) | FKM | | | |
| | | HFDU (ester base) | FKM | ISO 12922 | SO 12922 90222 | |
| | | HFDR | FKM | | | |
| | ► Containing water | HFC (Fuchs: Hydrotherm 46M, Fuchs Renosafe 500; Petrofer: Ultra Safe 620; Houghton: Safe 620; Union: Carbide HP5046) | NBR | ISO 12922 | 90223 | |

Important information on hydraulic fluids:

- ► For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us
- ► There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- ► The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- ▶ Bio-degradable and flame-resistant containing water: If components with galvanic zinc coating (e.g. version "J3" or "J5") or parts containing zinc are used, small amounts of dissolved zinc may get into the hydraulic system and cause accelerated aging of the hydraulic fluid. Zinc soap may form as a chemical reaction product, which may clog filters, nozzles and solenoid valves particularly in connection with local heat input.

► Flame-resistant - containing water:

- Due to increased cavitation tendency with HFC hydraulic fluids, the life cycle of the component may be reduced by up to 30% as compared to the use with mineral oil HLP. In order to reduce the cavitation effect, it is recommended - if possible specific to the installation - to back up the return flow pressure in ports T to approx. 20% of the pressure differential at the component.
- Dependent on the hydraulic fluid used, the maximum ambient and hydraulic fluid temperature must not exceed 50 °C. In order to reduce the heat input into the component, a maximum duty cycle of 50% in continuous operation has to be set for on/off valves (measuring time 300 s). If this is not possible due to the function, an energy-reducing control of these components is recommended, e.g. via a PWM plug-in amplifier.
- 6) With symbols A and B, port T must be used as leakage oil connection if the operating pressure exceeds the maximum admissible tank pressure.
- 7) The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components.

(For applications outside these values, please consult us!)

| Electrical | | | | | | | | | |
|-------------------------------|--------------|---------------------------|-----|---|--------|-------|--------|--------|-----------------------------------|
| Voltage type | | | | Direct voltage | | Alt | ernati | ng vol | tage 50/60 Hz |
| Supply voltage | ► Nomina | al value | V | see page 4 and 5 | 100 | 120 | 200 | 230 | With rectifier or version "WR" 8) |
| | ► Voltage | tolerance (nominal value) | % | ±10 | | | | | |
| Nominal power acco | ording to VD | DE 0580 | W | 40 9) | | | _ | | 40 |
| Holding power | | | VA | _ | | 9 | 0 | | - |
| Switch-on power | | | VA | - | | 5 | 50 | | - |
| Relative duty cycle | time accord | ing to VDE 0580 | | S1 (continuous oper | ation) | | | | |
| Switching time ¹⁰⁾ | ► ON | - Pressure change 5% | ms | 60 104 11; 12) | | 17 . | 20 | | 60 104 11; 12) |
| | | - Pressure change 95% | ms | 90 165 11; 12) | | 48 . | 57 | | 90 165 11; 12) |
| | ▶ OFF | - Pressure change 5% | ms | 12 50 | | 19 . | 26 | | 230 330 |
| | | - Pressure change 95% | ms | 48 104 | | 47 . | 77 | | 250 360 |
| Switching time according to | ► ON | | | 45 60 | | 13 . | 59 | | 45 60 |
| ISO 6403 ¹³⁾ | ► OFF | | | 20 30 | | 22 . | 82 | | 250 360 |
| Maximum switching | frequency | | 1/s | 4.2 | | : | 2 | | 2 |
| Protection class acc | cording to V | DE 0580 | | see page 4 7 | | | | | |
| Insulation class VD | E 0580 | | | F | Н | F | Н | Н | F |
| Electrical protection | n | | | Maximum admissible see page 4 7 Every AC solenoid me fuse with tripping ch | ust be | prote | cted i | ndivid | ually, using a suitabl |
| Protective groundin | g conductor | and screening | | The valve contact su equipotential bondir Connector pin assig see page 29 and 30 | ng. | | | | |

- 8) For single connection (version "G...") with customer-side rectifier and version "W...R":
 - ▶ Mating connectors with rectifier see page 31
 - ► Possible voltages see page 6 and 7
 - ► Rectifiers must comply with the relevant standards as well as the coil performance data.
 - ▶ With a central connection, the rectifier is on the board
- 9) Reduction of the nominal power by approx. 40% if a 24 V-coil with plug-in switching amplifier type VT-SSBA1-PWM-1X/V002/5 is used (separate order, material no. R901290194, see page 31 and data sheet 30362)
- 10) Measured with flow, 80% performance limit and horizontal installation position.
- $^{\rm 11)}$ Not with symbols A, B and .73.
- 12) Reduction of the switching time by approx. 50% if a 12 V-coil with plug-in switching amplifier type VT-SSBA1-PWM-1X/V001/5 is used (separate order, material no. R901265633, see page 31 and data sheet 30362)
- 13) Measured without flow

(For applications outside these values, please consult us!)

Motice:

- ► Any simultaneous actuation of 2 solenoids of one valve must be ruled out.
- ▶ Due to possible overload of the board, valves with central connection must not be operated with twice the voltage.
- ► If the standard environmental conditions according to EN 60204-1 cannot be provided, the valve must be especially protected!

► Energy saving

If directional valves with a nominal voltage of 24 V are used, a switching amplifier will reduce the continuous current considerably.


After a defined power supply time and the connected hydraulic switching of the valve, the system switches to pulse width modulation and the power is considerably reduced. This leads to a holding power under the power of a valve with 24 V supply voltage (see data sheet 30362).

► Fast switch-on

For accelerated switching on the solenoid side, valves with individual connection and a nominal voltage of 12 V or 24 V can be controlled with two times the voltage for a maximum of 100 ms (pulse width modulation see data sheet 30362). In this connection, the maximum admissible switching frequency is reduced to 3 1/s.

► Dampened switching

With valves of version "A12", damping of the switch-on and switch-off process is possible (smoothly switching). In this way, switching shocks in the system are considerably reduced.

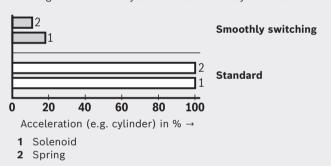



Electrical connections and **available voltages** see page 4 ... 7.

Characteristic curves

(measured with HLP46, θ_{oil} = 40 ±5 °C)

Δp - q_V characteristic curves

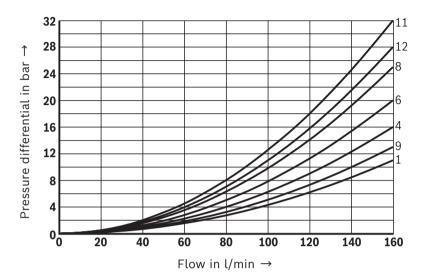

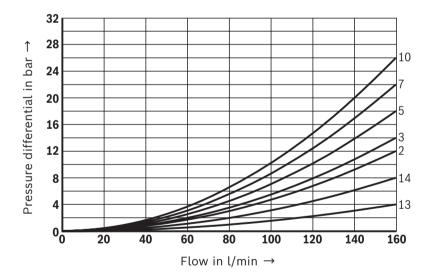

| | Direction of flow | | | | |
|--------|-------------------|-------|-------|-------|--|
| Symbol | P - A | P - B | A - T | B - T | |
| A; B | 5 | 5 | - | - | |
| С | 1 | 2 | 4 | 5 | |
| D | 2 | 2 | 4 | 5 | |
| E | 3 | 9 | 5 | 7 | |
| E67 | 4 | 4 | 12 | 11 | |
| F | 2 | 3 | 7 | 10 | |
| G | 4 | 4 | 11 | 11 | |
| Н | 1 | 1 | 7 | 7 | |
| J | 3 | 3 | 7 | 12 | |
| L | 3 | 3 | 7 | 7 | |
| M | 1 | 1 | 5 | 5 | |
| Q | 9 | 3 | 4 | 6 | |
| R | 4 | 7 | 4 | 11 | |
| U | 3 | 3 | 5 | 12 | |
| ٧ | 3 | 3 | 4 | 7 | |
| W | 9 | 3 | 4 | 5 | |
| Х7 | 2 | _ | _ | 6 | |
| Υ | 3 | 9 | 4 | 7 | |


Central position:

| | Direction of flow | | | | |
|--------|-------------------|-------|-------|-------|-------|
| Symbol | P - A | P - B | B - T | A - T | P - T |
| Н | 13 | 13 | 14 | 14 | 2 |


Characteristic curves

(measured with HLP46, **9**_{oil} = 40 ±5 °C)

Δp - q_V characteristic curves

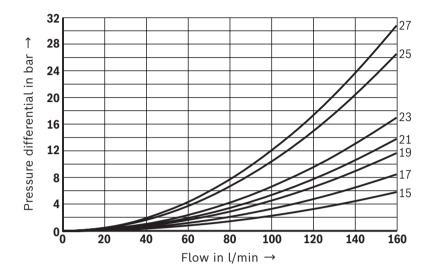

| | Direction of flow | | | | | |
|----------|-------------------|-------|-------|-------|--|--|
| Symbol | P – A | P - B | A – T | B – T | | |
| A73; B73 | 21 | 21 | _ | _ | | |
| D73 | 24 | 25 | 25 | 26 | | |
| E73 | 16 | 17 | 19 | 19 | | |
| G73 | 17 | 17 | 23 | 23 | | |
| H73 | 15 | 15 | 18 | 19 | | |
| J73 | 20 | 19 | 15 | 23 | | |
| L73 | 20 | 21 | 22 | 23 | | |
| Y73 | 25 | 25 | 25 | 27 | | |

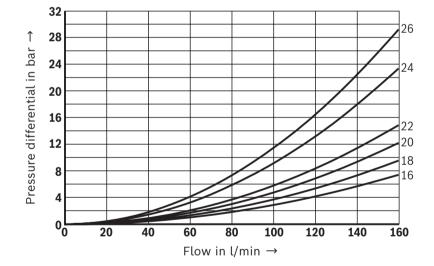


Performance limits: Version "G..." and "W...R" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)

Motice:


The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible performance limit may be considerably lower with only one direction of flow (e.g. from P to A while port B is blocked).

In such cases of use, please consult us.

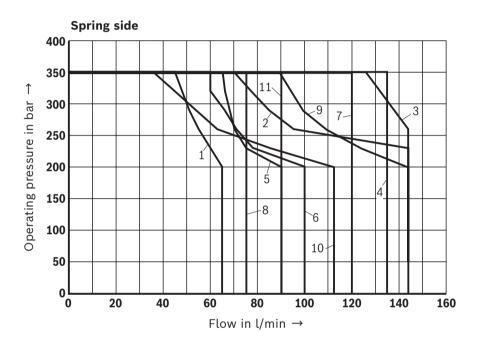

| Characteristic curve | Symbol |
|----------------------|--------|
| 1 | A73 |
| 2 | A/OF |
| 3 | D73/OF |
| 4 | E73 |
| 5 | F |
| 6 | G73 |
| 7 | Н |
| 8 | М |
| 9 | U |
| 10 | X7 |
| 11 | Y |

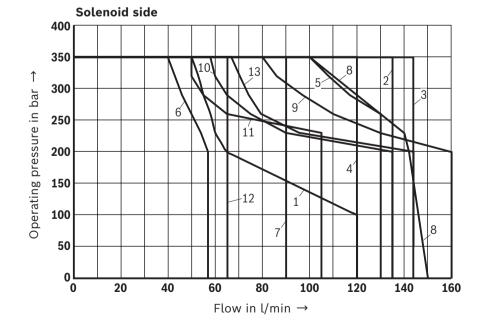

| Characteristic | Symbol |
|----------------|------------|
| curve | |
| 1 | A; B |
| 2 | C; D |
| 3 | C/OF; D/OF |
| 4 | Н |
| 5 | E |
| 6 | E67 |
| 7 | G |
| 8 | J |
| 9 | L |
| 10 | Q |
| 11 | R |
| 12 | V |
| 13 | W |


Performance limits: Version "G..." and "W...R" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)




The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible performance limit may be

considerably lower with only one direction of flow (e.g. from P to A while port B is blocked). In such cases of use, please consult us.

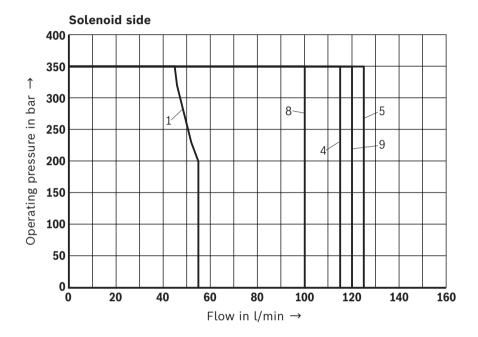

| Characteristic | Symbol |
|----------------|--------|
| curve | |
| 1 | B73 |
| 4 | E73A12 |
| 5 | H73A12 |
| 8 | L73 |
| 9 | Y73 |

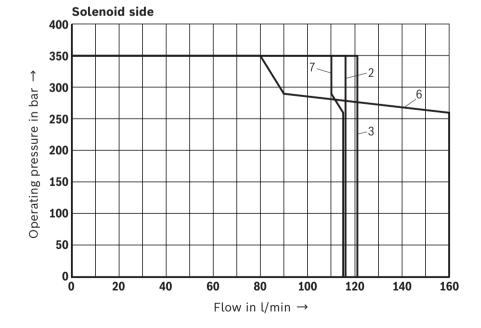

| Characteristic curve | Symbol |
|----------------------|--------|
| 2 | D73 |
| 3 | D73A12 |
| 6 | J73 |
| 7 | J73A12 |

Performance limits: Version "W120" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)


Motice:

The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).


Due to the flow forces acting within the valves, the admissible performance limit may be considerably

lower with only one direction of flow (e.g. from P to A while port B is blocked).

In such cases of use, please consult us.

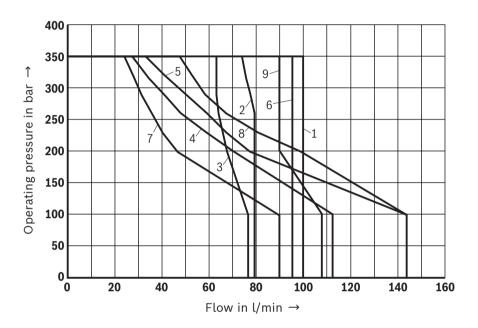

| Characteristic curve | Symbol |
|----------------------|--------|
| 1 | D |
| 2 | Е |
| 3 | G |
| 4 | J |
| 5 | А |
| 6 | С |
| 7 | L |
| 8 | Υ |

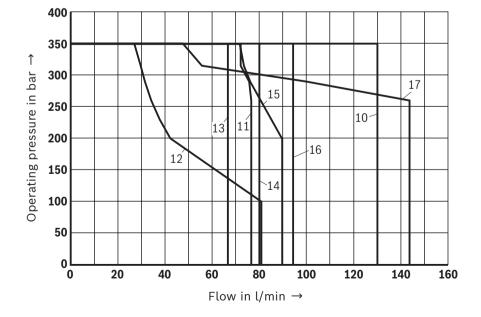

| Characteristic curve | Symbol |
|----------------------|--------|
| 10 | EA |
| 11 | EB |
| 12 | F |
| 13 | НА |
| 14 | H73 |
| 15 | М |
| 16 | Q |
| 17 | R |

Performance limits: Version "W120" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)


Motice:

The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible performance limit may be considerably

lower with only one direction of flow (e.g. from P to A while port B is blocked).

In such cases of use, please consult us.

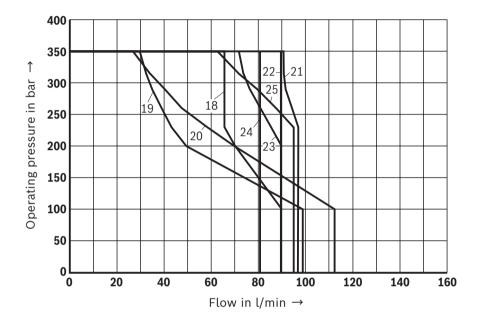

| Characteristic curve | Symbol |
|----------------------|--------|
| 18 | GA |
| 19 | G73 |
| 20 | YES |
| 21 | JB |
| 22 | LB |
| 23 | MA; MB |
| 24 | U |
| 25 | W |

Performance limits: Version "W100", "W200", "W230" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)


Motice:

The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).


Due to the flow forces acting within the valves, the admissible performance limit may be considerably

lower with only one direction of flow (e.g. from P to A while port B is blocked).

In such cases of use, please consult us.

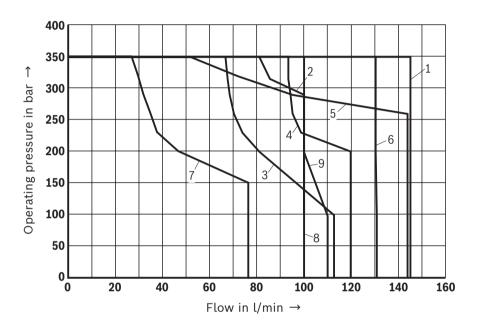

| Characteristic curve | Symbol |
|----------------------|--------|
| 1 | D |
| 2 | Е |
| 3 | G |
| 4 | J |
| 5 | А |
| 6 | С |
| 7 | L |
| 8 | Υ |

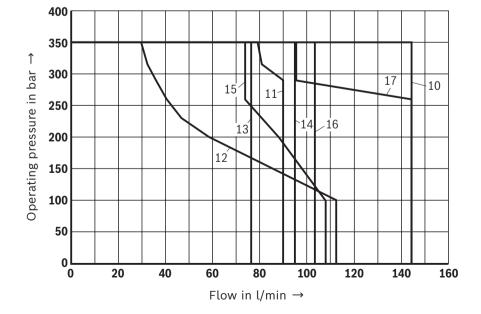

| Characteristic curve | Symbol |
|----------------------|--------|
| 10 | EA |
| 11 | EB |
| 12 | F |
| 13 | НА |
| 14 | H73 |
| 15 | М |
| 16 | Q |
| 17 | R |

Performance limits: Version "W100", "W200", "W230" (measured with HLP46, ϑ_{oil} = 40 ±5 °C)


Motice:

The specified performance limits are valid for operation with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible performance limit may be considerably


lower with only one direction of flow (e.g. from P to A while port B is blocked).

In such cases of use, please consult us.

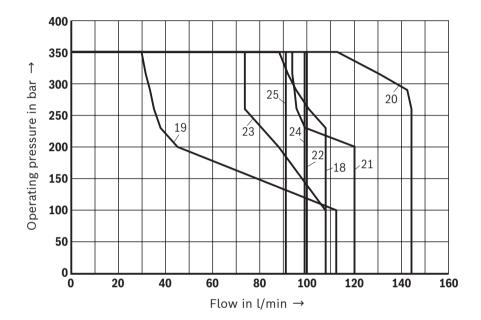

| Characteristic curve | Symbol |
|----------------------|--------|
| 18 | GA |
| 19 | G73 |
| 20 | YES |
| 21 | JB |
| 22 | LB |
| 23 | MA, MB |
| 24 | U |
| 25 | W |
| 25 | W |

Dimensions: DC voltage – individual connection (dimensions in mm)

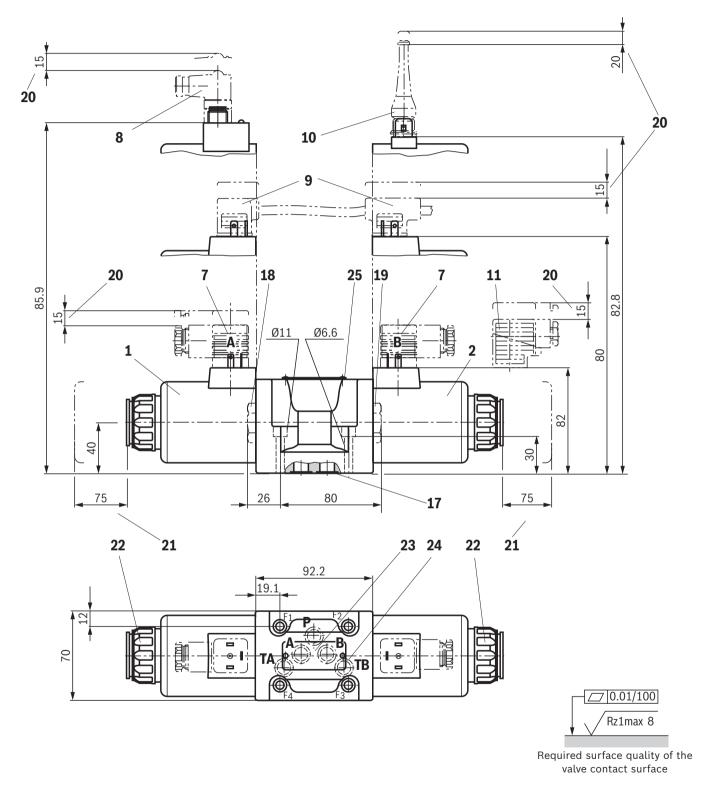


Motice:

- ► Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ► The dimensions are nominal dimensions which are subject to tolerances.

Dimensions for total length and manual overrides see page 25.


Item explanations, valve mounting screws and subplates see page 28.

Dimensions: Direct voltage – central connection (dimensions in mm)

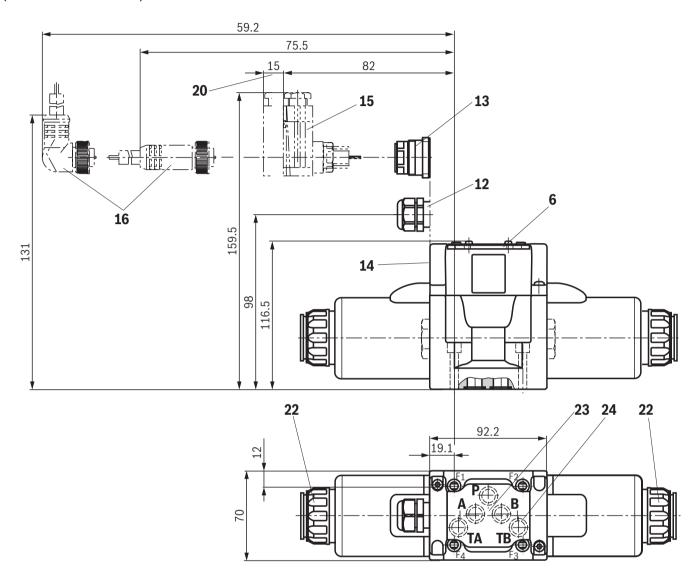

Dimensions for total length and manual overrides see page 25.


Item explanations, valve mounting screws and subplates see page 28.






The dimensions are nominal dimensions which are subject to tolerances.

Dimensions: DC voltage – manual overrides (dimensions in mm)

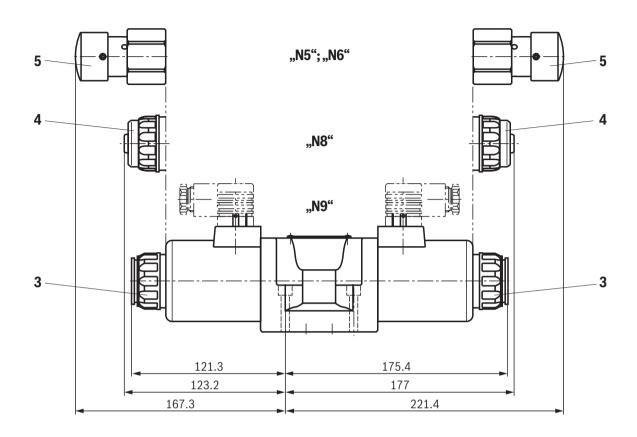


- 3 Without and with concealed manual override "N9" (standard)
- 4 With concealed manual override and protective cap "N8". (The protective cap must be removed prior to actuation.)
- 5 Lockable manual override "mushroom button" "N5" and "N6"




Motice:

The dimensions are nominal dimensions which are subject to tolerances.

Dimensions: Alternating voltage – individual connection (dimensions in mm)

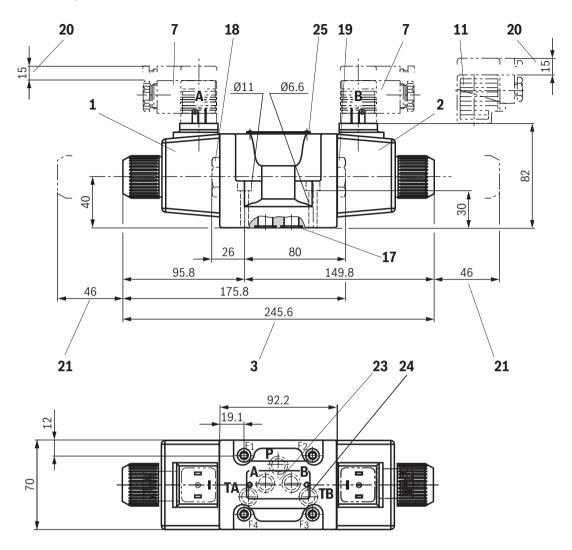




Motice:


- ▶ Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ► The dimensions are nominal dimensions which are subject to tolerances.

Item explanations, valve mounting screws and subplates see page 28.

Dimensions: Alternating voltage – central connection (dimensions in mm)

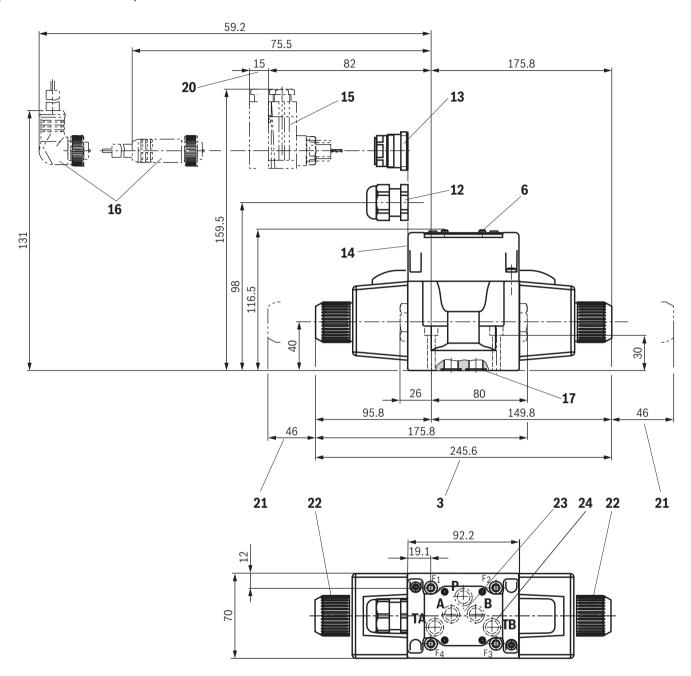

Item explanations, valve mounting screws and subplates see page 28.





The dimensions are nominal dimensions which are subject to tolerances.

Dimensions

- 1 Solenoid "a"
- 2 Solenoid "b"
- 3 Without and with concealed manual override "N9" (standard)
- 4 With concealed manual override and protective cap "N8". (The protective cap must be removed prior to actuation.)
- 5 Lockable manual override "mushroom button" "N5" and "N6"
- 6 Cover
 - **Notice:** The valve may only be operated with properly mounted cover.
- 7 Mating connector **without** circuitry for connector "K4" and "K4K" (separate order, see page 31 and data sheet 08006)
- **8** Mating connector angled with M12x1 plug-in connection and status LED for connector "K72L" (separate order, see page 31 and data sheet 08006)
- 9 Double mating connector without/with circuitry for connector "K4" (separate order, see page 31 and data sheet 08006)
- 10 Mating connector (AMP Junior Timer) with connector "C4Z" (separate order, see page 31 and data sheet 08006)
- 11 Mating connector with circuitry for connector "K4" (separate order, see page 31 and data sheet 08006)
- 12 "DL" and "DJL" cable gland

- 13 Central plug-in connection "DK6L" and "DK25L"
- 14 "DAL" cable gland
- **15** Mating connectors for valves with central connection with connector "DK6L" (separate order, see page 31 and data sheet 08006)
- 16 Mini-change connector, 5-pole for connector "DK25L" (separate order, material no. R900057631)
- 17 Identical seal rings for ports A, B, P, TA, TB
- 18 Plug screw for valves with one solenoid on B side
- 19 Plug screw for valves with one solenoid on A side
- 20 Space required to remove the mating connector/angled socket
- 21 Space required to remove the coil
- 22 Mounting nut, tightening torque $M_A = 14.5 \pm 1.5 \text{ Nm}$
- 23 Porting pattern according to ISO 4401-05-04-0-05
- **24** Connection TB can only be used in connection with separately produced tank bore in the block.
- 25 Nameplate

Subplates (separate order) with porting pattern according to ISO 4401-05-04-0-05 see data sheet 45100.

Valve mounting screws (separate order)

| Size | Quantity | Hexagon socket head cap screws | Material number |
|------|--|---|------------------------|
| 10 | 4 | ISO 4762 - M6 x 40 - 10.9-CM-Fe-ZnNi-5-Cn-T0-H-B | R913051533 |
| | Friction coefficient μ_{total} = 0.09 0.14; tightening torque M_A = 12.5 Nm ±10% or | | |
| | | | |
| | 4 | ISO 4762 - M6 x 40 - 10.9 | Not included in the |
| | | Friction coefficient μ_{total} = 0.12 0.17; tightening torque M_A = 15.5 Nm ±10% | Rexroth delivery range |
| | or | | |
| | 4 | 1/4-20 UNC x 1-1/2" ASTM-A574 | R978800710 |
| | | Friction coefficient μ_{total} = 0.12 0.17; tightening torque M_A = 19 Nm ±10% | |



In case of different friction coefficients, the tightening torques are to be adjusted accordingly.

Electrical connections, assignment – individual connection

Electrical connections and coil connection combinations

| Ordering code connector | _ | Top view | Circuit diagram | Pin | Connections, assignment |
|--|--------------------------|----------|-----------------|-----|---|
| Connector, 3-pole (2+PE) according to DIN EN 175301-803 (IP65) | K4, K4K ³⁾ | 1) | | 1 2 | Solenoid coil, polarity-independent |
| | | | | 4 | Connection for protective grounding conductor |
| Connector 4-pole according to | K72L | П | | 1 | Internal bridge |
| IEC 60947-5-2, M12x1 with | | | 2 | | |
| suppressor diode, only 24 V DC, integrated interference protection | | | | 3 | Solenoid coil GND |
| circuit and status LED | | | 2 3 1 | 4 | Solenoid coil 24 V DC supply voltage |
| | | | | 5 | without function |
| 2-pole connector, type AMP Junior-Timer, rotated by 90° relative to valve axis | C4Z | | | 2 | Solenoid coil, polarity-independent |

- 3) Coil with potted-in connector base and sealing element to valve housing (IP65)
- 4) M3, tightening torque maximum $M_{A \text{ max}} = 0.5 \text{ Nm}$

When establishing the electrical connection, the protective grounding conductor (PE (4)) must be connected correctly.

Motice:

- ▶ Electric lines must be routed in a strain-relieved manner.
- ► Cable and line entries are only suitable for permanently installed lines.
- ► Connectors are to be locked during operation. The plug-in connection is not suitable to be plugged in or disconnected under load.
- ▶ Protective grounding conductor cross-section equal to or greater than the line cross-section of the voltage supply.
- ► The valve mounting surface must be connected to the protective grounding conductor system.

Electrical connections, assignment – central connection

Electrical connections and coil connection combinations

| Ordering code connector | | Top view | Circuit diagram | Pin | Connections, assignment |
|--|--------|---|--|----------------------------|---|
| Cable gland at the cover, with indicator light (terminal area 6 12 mm) | DL | | Bo DC (2- 4-) (2) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4 | 1+ | Valve solenoid "a" ¹⁾ |
| with indicator light and cable bridge at the ground connection (terminal area 6 12 mm) Without mating connector; | DAL 3) | "b" — — — — — — — — — — — — — — — — — — — | (1+ 3+) AC | 3+ | Valve solenoid "b" ¹⁾ |
| threaded connection 1/2"-14 NPT, with indicator light | | ### 1± 2± 2± 2± 2± 2± 2± 2± 2± 2± 2± 2± 2± 2± | AC voltage | 4 | Connection for protective grounding conductor |
| Central plug-in connection at the cover, with indicator light (without mating connector) with connector according to DIN EN 175201-804 | DK6L | | ,a" (,b") (,b") | 1 2 3 4 5 6 | Valve solenoid "a" Valve solenoid "b" not used Connection for protective grounding conductor |
| Mini-change connector, 5-pole, with indicator light according to ANSI/B93.55M-1981 | DK25L | | (a) (3) (2) (5) (1) (b) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c | 1 5 2 4 | Valve solenoid "b" Valve solenoid "a" Connection for protective grounding conductor |

- 1) Core marking:
 - $+ \rightarrow red$
 - \rightarrow blue
- 2) Wire bridge with version "DJL"
- $^{3)}$ Cable gland according to conduit system with NPT thread; tightening torque $\textit{M}_{\rm A}$ = $5{\pm}0.5~\rm Nm$

When establishing the electrical connection, the protective grounding conductor (PE (4)) must be connected correctly.

See notes page 29.

Accessories (separate order)

Mating connectors and cable sets

| Pos. 1) | Designation | Version | Short designation | Material number | Data sheet |
|----------------|--|--|-------------------|--------------------|------------|
| 7, 11 | Mating connector; | Without circuitry, M16 x 1.5, 12 240 V, "a" | Z4 | R901017010 | 08006 |
| | for valves with "K4" connector, | Without circuitry, M16 x 1.5, 12 240 V, "b" | | R901017011 | |
| | 2-pole + PE, design A | Without circuitry, NPT 1/2", 12 240 V, "a" | | R900004823 | |
| | | Without circuitry, NPT 1/2", 12 240 V, "b" | | R900011039 | |
| | | With indicator light, M16 x 1.5, 12 240 V | Z5L | R901017022 | |
| | | With indicator light, NPT 1/2", 12 240 V | Z55L | R900057453 | |
| | | With rectifier, M16 x 1.5, 80 240 V | RZ5 | R901017025 | |
| | | With rectifier, NPT 1/2", 80 240 V | RZ55 | R900842566 | |
| | | With indicator light and Z-diode-suppressor, M16 x 1.5, 24 V | Z5L1 | R901017026 | |
| | | With indicator light and rectifier, M16 x 1.5, 80 240 V | RZ5L | R901017029 | |
| | | With indicator light and rectifier, NPT 1/2", 80 240 V | RZ55L | R900057455 | |
| 10 | Mating connectors; for directional valves with "C4" connector (AMP Junior-Timer) | 10 32 V, 5 A | 2P JUNIOR D2 2 | R901022127 | |
| | | 10 32 V, 5 A | 2P D1.2 JUNIOR | R900313533 | |
| 8 | Mating connectors; | M12 x 1, angled, PG 7 | 4PZ24 | R900779509 | |
| | for sensors and valves with "K24", "K35" and "K72" connectors, 4-pole | M12 x 1, angled, PG 7 | | R900082899 | |
| 9 | Cable sets; | 24 V, 4 A | Z60 | R901207825 | |
| | for valves with two solenoids | With indicator light, 24 V, 4 A | Z60L | R901207824 | |
| | (double mating connectors) and connector "M12 x 1" | With indicator light and Z-diode-suppressor, 24 V, 4 A | Z60L8 | R901207823 | |
| | | With free line end, 230 V, 4 A, 3 m | Z61 | R901207826 | 1 |
| | | With free line end, 230 V, 4 A, 5 m |] | R901207892 | 1 |
| 15 | Mating connectors; for valves with central connection with "DK6L" connector | 250 V, 10 A, PG 11 | 7PZ6 | R900002803 | |

¹⁾ See dimensions page 23 ... 26.

Energy savings and fast switching 2)

| Designation | Version | Material number | Data sheet |
|--------------------------------------|--|--------------------|------------|
| Type VT-SSBA1-PWM-1X/V00 1 /5 | As fast switching amplifier (switching time reduction by approx. 50%) 3) | R901265633 | 30362 |
| Type VT-SSBA1-PWM-1X/V00 2 /5 | For energy reduction (energy savings of approx. 40%) 4) | R901290194 | |

- Only with symbols C, D, E, E67, J, J2 and Y; not for version "D" with reinforced compression spring
- 3) Only for version "G12" and "K4/K4K"
- $^{\rm 4)}$ Only for version "G24" and "K4/K4K"

Use with PWM connector (data sheet 30362):

- ► Depending on the control spool, increasing the performance limit is possible.
- ▶ With version "G24" (energy saving), the coil temperature is reduced by \geq 30 °C for 100% duty cycle.

Project planning information

Temperature range and maximum operating pressure in case of use at low temperatures

| Port | Pressure | Temperature range in °C |
|------------|--|-------------------------|
| P, A, B, T | static 100 bar | -4035 |
| P, A, B | dynamically increasing from 100 bar to 350 bar in linear form as a function of the temperature | -3530 |
| T | dynamically increasing from 100 bar to 210 bar in linear form as a function of the temperature | -3530 |
| P, A, B, T | Maximum operating pressure | -30 +50 |

Further information

| • | Hydraulic valves for industrial applications | Data sheet 07600-B |
|---|--|--------------------|
| • | Subplates | Data sheet 45100 |
| • | Hydraulic fluids on mineral oil basis | Data sheet 90220 |
| • | Environmentally compatible hydraulic fluids | Data sheet 90221 |
| • | Flame-resistant, water-free hydraulic fluids | Data sheet 90222 |
| • | Flame-resistant hydraulic fluids – containing water (HFAE, HFAS, HFB, HFC) | Data sheet 90223 |
| • | Connector switching amplifier type VT-SSBA1 | Data sheet 30362 |
| • | Directional spool and seat valves with electrical actuation and M12x1 plug-in connection | Data sheet 08010 |
| • | Reliability characteristics according to EN ISO 13849 | Data sheet 08012 |
| • | CE declaration of conformity according to Low-Voltage Directive 2014/35/EU | upon requeST |
| | | |

► Information on available spare parts