5-chamber version

► Component series 5X

Size 10



Directional spool valves, direct operated, with solenoid actuation

RE 23352

Edition: 2015-09 Replaces: 2012-04

Type 5-.WE



CE

► Maximum flow 150 I/min [39.6 US gpm]

► Maximum operating pressure 420 bar [6091 psi]

c SN US

Features

- ▶ 4/3-, 4/2- or 3/2-way version
- ► Porting pattern according to ISO 4401-05-04-0-05 and NFPA T3.5.1 R2-2002 D05
- ► High-power solenoid, optionally rotatable by 90°
- ▶ Electrical connection as individual connection
- ► Cartridge optionally equipped with PWM connector (fast switching amplifier, energy reduction)
- ► Manual override, optional
- ► Spool position monitoring, optional
- ► CE conformity according to the Low-Voltage Directive 2006/95/EC for electrical voltages > 50 VAC or > 75 VDC
- ► Solenoid coil with UR approval UL 429
- ▶ Approval according to CSA C22.2 No. 139-10, optional

Contents

Features	1
Ordering codes	2 4
Symbols	5, 6
Function, section	7, 8
Technical data	9 11
Characteristic curves	12
Performance limits	13 15
Dimensions	16 18
Over-current fuse and switch-off voltage peaks	19
Electrical connections, assignment	19
Mating connectors	20
Project planning information	20
Additional information	21

Ordering codes

	5 - WE 10 - 5X / E / / / / / / / / / / / / / / / / /	=							
01	Standard version (Maximum operating pressure 350 bar)	no code							
	High-pressure version (Maximum operating pressure 420 bar)	Н							
02	5-chamber version	5							
03	3 main ports	3							
	4 main ports	4							
04	Directional valve	WE							
05	Size 10	10							
06									
	Symbols e.g. C, E, EA, EB, etc; possible version see page 5 and 6.								
07	Component series 50 59 (50 59: unchanged installation and connection dimensions)	5X							
poo	l return								
80	With spring return	no code							
	With reinforced compression spring (for quick switching off)	D							
	Without spring return	0							
	Without spring return with detent	OF							
09	High-power wet-pin solenoid with detachable coil	Е							
10	Direct voltage 12 V	G12							
	Direct voltage 24 V	G24							
	Direct voltage 26 V	G26							
	Direct voltage 48 V	G48							
	Direct voltage 96 V	G96							
	Direct voltage 110 V	G110							
	Direct voltage 125 V	G125							
	Direct voltage 180 V								
	Direct voltage 205 V	G205							
	Direct voltage 220 V								
	Connection to AC voltage mains via control with rectifier (see table page 3 and 20).								
	Electrical connections and available voltages see page 11								
11	Without manual override	no code							
	With concealed manual override (standard)	N9 1)							
	With concealed manual override and protective cap 3)	N8 1)							
	With lockable manual override "mushroom button" (large)	N5 1; 2)							
	With manual override "mushroom button" (large), not lockable	N6 1)							
orro	osion resistance (outside)								
12	None (valve housing primed)	no code							
	Improved corrosion protection (240 h salt spray test according to EN ISO 9227); (only version "K4K")	J3							
lect	rical connection ⁵⁾								
13	Individual connection								
	Without mating connector, with connector according to DIN EN 175301-803	K4 4)							
	Without mating connector, with connector according to DIN EN 175301-803 (coil with potted-in connector base and sealing element to valve housing (IP67); with version "J3" possible)	K4K ⁴⁾							
	Without mating connector, 4-pole with connector M12x1, integrated interference protection circuit, status LED according to IEC 60947-5-2	K72L 4; 5)							
	Without mating connector, with AMP Junior-Timer connector	C4Z 4)							

Ordering codes

	5	_		WE	10		_	5X	1		F					m	1					=		*
01	02		03	04	05	06		07		80	09	10	11	12	13	14		15	16	17	18		19	20

Spool position monitoring

.4 Without position switch	no code								
- Inductive position switch type QM									
Monitored spool position "a"	QMAG24								
Monitored spool position "b"	QMBG24								
Monitored spool position "0"	QM0G24								
- Inductive proximity sensor type QS									
Monitored spool position "a"	QSAG24W								
Monitored spool position "b"	QSBG24W								
Monitored spool position "0"	QS0G24W								
Monitored spool position "0" and "a"	QS0AG24W								
Monitored spool position "0" and "b"	QS0BG24W								
Monitored spool position "a" and "b"	QSABG24W								
For more information, see data sheet 24830	•								

Switching time increase

15	Without switching time increase	no code
	With throttle screw	С
	With orifice Ø 0.6 mm [0.024 inch]	A06
	With orifice Ø 0.8 mm [0.031 inch]	A08
	With orifice Ø 1.0 mm [0.039 inch]	A10

Throttle insert

Without throttle insert											
With throttle insert ^{6; 7)} :											
Port		Throttle Ø in mm [inch]									
	0.8 [0.031] 1.0 [0.039] 1.2										
Р	= B08	= B10	= B1	B12							
А	= H08	= H10	= H1	2							
В	= R08	= R10	= R1	2							
A and B	= N08	= N10	= N1	12							
T 8)	= X08	= X10	12								

- 1) The manual override cannot be allocated a safety function. The manual override units may only be used up to a tank pressure of 50 bar
- With tank pressures above 50 bar, it cannot be guaranteed that the valve remains in the position switched by the "N5" manual override.
- 3) Protective cap must be removed prior to actuation.
- 4) Mating connectors, separate order, see page 20 and data sheet 08006.
- 5) M12x1 plug-in connection see data sheet 08010.
- 6) When the admissible valve performance limits are exceeded, installation of throttle inserts is to be intended (performance limits see page 13).
- 7) Not with low-temperature version "MT".
- When throttle inserts are used in channel T, the pressure in the working ports and in case of connection to the tank chambers must not exceed 210 bar.

AC voltage mains (admissible voltage tolerance ±10 %)	Nominal voltage of the DC solenoid in case of operation with alternating voltage	Ordering code
100 V - 50/60 Hz	96 V	G96
110 V - 50/60 Hz	96 V	G96
200 V - 50/60 Hz	180 V	G180
230 V - 50/60 Hz	205 V	G205

Motice:

Conversion from AC voltage to DC voltage requires a mating connector with rectifier (separate order, material no. **R901017025**).

Ordering codes

01	02		03	04	05	06		07		80	09	10	11	12	13	14		15	16	17	18		19	20
	5	-		WE	10		_	5X	/		Ε						/					=		*

Control spool play


17	Standard	no code
	Minimum (to be selected in case of reduced leakage → higher level of oil cleanliness recommended)	T06
	Increased (to be selected in case of a hydraulic fluid/environment temperature difference > 25 K → increased internal leakage)	T12

Seal material

18	NBR seals	М				
	FKM seals	V				
	Seals for HFC hydraulic fluids	МН				
	Low-temperature version					
	Observe compatibility of seals with hydraulic fluid used! (Other seals upon request)					

19	Approval according to CSA C22.2 No. 139-10	CSA
	Porting pattern according to ANSI B93.9 (if solenoid "a" is energized, channel P is connected to A)	AN
20	Further details in the plain text	*


Symbols: 2 spool positions

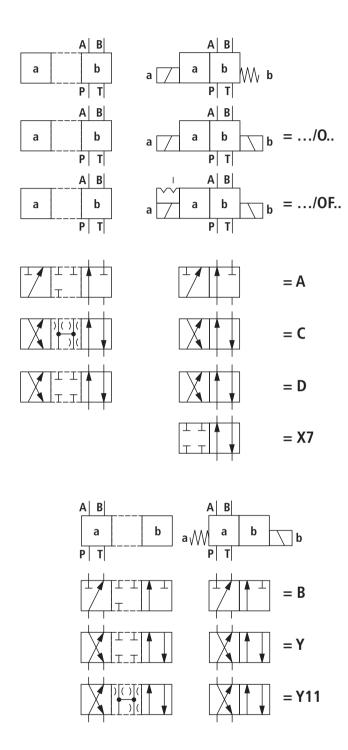

M Notices:

- ► Representation according to DIN ISO 1219-1. Hydraulic interim positions are shown by dashes.
- ▶ Other symbols upon request.

Symbols: 3 spool positions

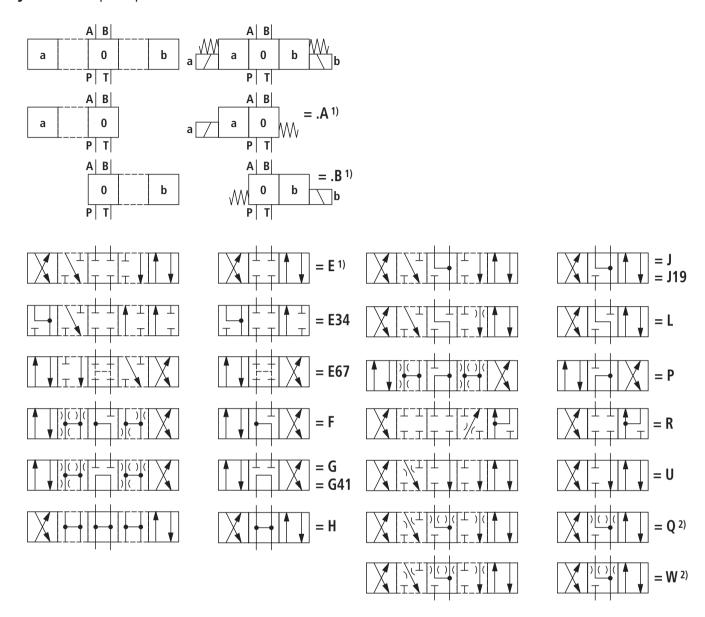

1) Example:

- ► Symbol E with spool position "a": ordering code ..**EA**..
- ► Symbol E with spool position "b": ordering code ..**EB**..
- $^{2)}$ For symbol Q and W, see "Flow cross-section" page 9

M Notices:

- ► Representation according to DIN ISO 1219-1. Hydraulic interim positions are shown by dashes.
- ▶ Other symbols upon request.

Function, section

The 5-chamber directional valve type 5-.WE is a solenoid-actuated directional spool valve with switching time increase. It controls the start, stop and direction of a flow. The directional valve basically consists of housing (1), one or two electronic solenoids (2), control spool (3), and the return springs (4).


In de-energized condition, the control spool (3) is held in the central position or in the initial position by the return springs (4) (except for valves without spring "O"). If the wet-pin electronic solenoid (2) is energized, the control spool (3) moves out of its rest position into the required end position. In this way, the required direction of flow according to the selected symbol is released.

After the electronic solenoid (2) has been switched off, the control spool (3) is pushed back into its central position or into its initial position (except for valves with "OF" detent and valves without type "O" spring).

A manual override (6) allows for the manual switching of the valve without solenoid energization.

To ensure proper functioning, make sure that the pressure chamber of the solenoid is filled with oil.


More functions see page 8.

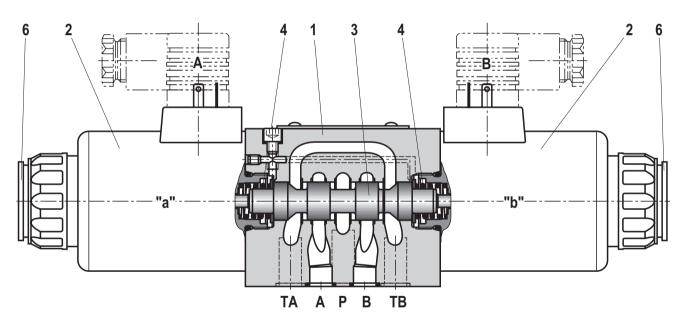

Type 5-4WE 10 ...

Throttle insert

Using a throttle insert (9) in channels P, A, B or T, the flow resistance at the valve can be increased. Its use is required when, due to prevailing operating conditions, flows occur during the switching processes, which exceed the performance limit of the valve.



Function, section

Without spring return "O" (only possible with symbols A, C and D)


This version is a directional valve with 2 spool positions and 2 electronic solenoids **without** detent. The valve without spring return at the control spool (3) has no defined basic position in the de-energized condition.

Without spring return with "OF" detent (only possible with symbols A, C and D)

This version is a directional valve with 2 spool positions and 2 electronic solenoids **with** detent. The detents are used to fix the control spool (3) in the relevant spool position. During operation, continuous application of current to the electronic solenoid can thus be omitted which contributes to energy-efficient operation.

M Notice:

Pressure peaks in the tank line to two or several valves can result in unintended movement of the control spool in the case of valves with detent! We therefore recommend that separate return lines be provided or a check valve installed in the tank line.

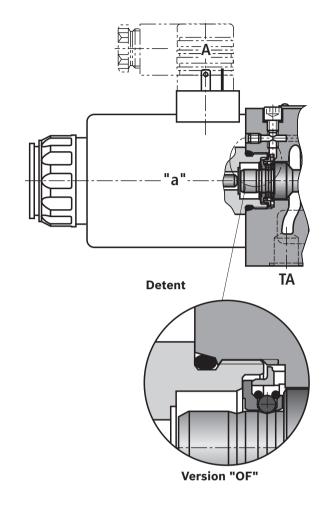


Switching time increase

With the 5-chamber directional valve type 5-.WE, the switching time can be delayed to 100 ms and more by means of a "C" throttle screw (7) or a selected "A0." orifice (8). In this connection, the switching time is pressure-, flow- and viscosity-dependent, specific to the installation. The switching time is influenced by means of a restriction (throttle or orifice) in the connection channel (5) between the two spring chambers in which the liquid volume is displaced from one spring chamber into the other in case of a switching process.


The T channels are separated from the spring chambers in order to achieve soft switching.

M Notice:


The adjustment spindle (10) may only be screwed out so that it protrudes from the nut by max. 3 mm.



Without throttle screw/ without orifice



With "A0." orifice



With "C" throttle screw

Technical data

(For applications outside these values, please consult us!)

general			
Weight	► Valve with one solenoid	kg [lbs]	3.9 [8.6]
	► Valve with two solenoids	kg [lbs]	5.5 [12.1]
Installation position	1		Any 1)
Ambient tempera- ture range	► Standard version	°C [°F]	-20 +70 [-4 +158] (NBR seals) -15 +70 [+5 +158] (FKM seals)
	► Version for HFC hydraulic fluid	°C [°F]	-20 +50 [-4 +122]
	► Low-temperature version ²⁾	°C [°F]	-40 +50 [-4 +122]
Storage temperatur	e range	°C [°F]	-20 +50 [-4 +122]
MTTF _d values according to EN ISO 13849 Years		300 (for further details see data sheet 08012)	

hydraulic					
Maximum operating pressure	► Port A, B, P	bar [psi]	350 [5076]; 420 [6091]		
$(\boldsymbol{\rho}_{P} > \boldsymbol{\rho}_{A}; \boldsymbol{\rho}_{B} > \boldsymbol{\rho}_{T})$	▶ Port T	bar [psi]	210 [3050] Tank pressure (standard)		
			With symbols A and B, port T must be used as leakage oil con-		
			nection if the operating pressure exceeds the maximum admissi-		
			ble tank pressure.		
Maximum flow I/min [US gpm]			150 [39.6]		
Flow cross-section	► Symbol Q	mm ²	Approx. 6 % of nominal cross-section		
(spool position 0)	► Symbol W	mm ²	Approx. 3 % of nominal cross-section		
Hydraulic fluid			See table below		
Hydraulic fluid temperature ran	ge	°C [°F]	-20 +80 [-4 +176] (NBR seals)		
(at the valve working ports)			-15 +80 [+5 +176] (FKM seals)		
			-20 +50 [-4 +122] (HFC hydraulic fluid)		
			-40 +50 [-4 +122] (Low-temperature version)		
Viscosity range mm²/s [SUS]		2.8 500 <i>[35 2320]</i>			
Maximum admissible degree of contamination of the hydraulic fluid			Class 20/18/15 3)		
cleanliness class according to I	SO 4406 (c)				

Hydraulic fluid		Classification	Suitable	Standards	Data sheet
			sealing materials		
Mineral oils		HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM	DIN 51524	90220
Bio-degradable	▶ insoluble in water	HETG	NBR, FKM	ISO 15380	90221
		HEES	FKM		
	▶ soluble in water	HEPG	FKM	ISO 15380	
Flame-resistant	▶ water-free	HFDU, HFDR	FKM	ISO 12922	90222
	► containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	NBR	ISO 12922	90223

Important information on hydraulic fluids:

- ▶ For more information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us!
- ▶ There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.)!
- ▶ The flash point of the hydraulic fluid used must be 40 K higher than the maximum solenoid surface temperature.

► Flame-resistant – containing water:

- Maximum pressure differential per control edge 50 bar
- Pressure pre-loading at the tank port > 20 % of the pressure differential, otherwise increased cavitation
- Life cycle as compared to operation with mineral oil HL, HLP 50 to 100 %
- ▶ Bio-degradable and flame-resistant: When using hydraulic fluids that are simultaneously zinc-solving, zinc may accumulate (700 mg zinc per pole tube).
- 1) With suspended installation, higher sensitivity to contamination. Horizontal installation is recommended.
- 2) In case of use at low temperatures, see project planning information on page 20.
- 3) The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components. Available filters can be found at www.boschrexroth.com/filter.

Technical data

(For applications outside these values, please consult us!)

electric								
Voltage type				Direct voltage	Alternating voltage			
Nominal voltage accord	_		V	12, 24, 26, 48, 96, 110, 125, only possible with rect 180, 205, 220				
Voltage tolerance (nom	inal voltage	e)	%	±10				
Nominal power accordi	ing to VDE	0580	W	40 5)				
Duty cycle			%	100 (S1 according to VDE 0580)				
Switching time 6)	► ON	Pressure change 5 %	ms	60 104 ^{7; 8)}				
		Pressure change 95 %	ms	90 165 ^{7; 8)}				
	▶ OFF	Pressure change 5 %	ms	12 50	230 330			
		Pressure change 95 %	ms	48 104	250 360			
Switching time ac-	► ON			45 60				
cording to ISO 6403 9)	► OFF			20 30	250 360			
Maximum switching fre	equency		1/h	15000	7200			
Protection class accord	ding to DIN	EN 60529		See page 11				
Protection class accord	ding to VDE	0580		See page 11				
Maximum surface temp	erature of	the coil ¹⁰⁾	°C [°F]	140 [284]				
Insulation class VDE 05	580			F				
Electrical protection				Every solenoid must be protected fuse with tripping characteristic must be installed on a surface that bonding.	s K (inductive loads). The valve			
Protective earthing conductor and screening			See connector pin assignment (CE-compliant installation) page 11					
			CE according to Low-Voltage Dir according to DIN EN 60204-1 (VDE0113-1): 20 DIN VDE 0580: 2000-07					

- 4) Mating connectors with rectifier see page 20.
 - ▶ Possible voltages see page 3.
 - ▶ Rectifiers must comply with the relevant standards as well as the coil performance data!
- 5) Reduction of the nominal power by approx. 40 % if a 24 V-coil with connector switching amplifier type VT-SSBA1-PWM-1X/V002/5 is used (separate order, material no. R901290194, see page 20 and data sheet 30362).
- 6) Measured with flow, 80 % performance limit, horizontal installation position and without switching time increase.
- 7) Not with symbols A and B.
- 8) Reduction of the switching time by approx. 50 % if a 12 V-coil with connector switching amplifier type VT-SSBA1-PWM-1X/V001/5 is used (separate order, material no. R901265633, see page 20 and data sheet 30362)
- 9) Measured without flow.
- ¹⁰⁾ Possible surface temperature > 50 °C, provide contact protection.





Notices:

- ▶ The solenoid coils must not be painted.
- ▶ Actuation of the manual override is only possible up to a tank pressure of approx. 50 bar [725 psi]. Avoid damage to the bore of the manual override! (Special tool for the operation, separate order, material no. R900024943). When the manual override is blocked, actuation of the opposite solenoid must be ruled out!
- ▶ The simultaneous actuation of 2 solenoids of one valve must be ruled out!
- ▶ Use cables that are approved for an working temperature above 105 °C [221 °F].
- ▶ When solenoid coils are switched off, voltage peaks result which may cause faults or damage in the connected control electronics. The user has to provide for a suitable circuit for limiting the voltage peaks. It must be noted that a diode switched in an antiparallel form extends the switching off time.
- ► Valves with individual connection and supply voltage 12 V or 24 V can be operated with twice the voltage for reducing the switching time. For this purpose, the voltage has to be reduced to the nominal valve voltage after 100 ms by means of pulse width modulation. The maximum admissible switching frequency is 5 1/s.
- ▶ If the standard environmental conditions according to VDE 0580 cannot be provided, the valve must be especially protected!

Technical data

(For applications outside these values, please consult us!)

Electrical connections and available voltages

				1	ı			volta		ı		ı	tion class accord- DIN EN 60529 11)	ection class ig to VDE 0580
	Connector ordering codes		G12	G24	G26	G48	965	G110	G125	G180	G205	G220	Protection ing to DIN	Protect according
	Without mating connector; connector according to DIN EN 175301-803	K4	1	1	-	1	1	-	1	1	1	/ 12)	IP65	ı
connection		K4K ¹³⁾	12)	/ 12)	1 2)	_	-	-	-	_	-	-	IP65, IP67	I
ilaivianai co	Without mating connector, 4-pole with connector M12x1 according to IEC 60947-5-2, integrated interference protection circuit and status LED	K72L	_	12)	_	_	_	_	_	_	_	-	IP65	14)
ם	Without mating connector; connector AMP Junior-Timer	C4Z	-	-	1 2)	-	-	-	-	-	-	-	IP66	14)

¹¹⁾ Only with correctly mounted valve with a mating connector suitable for the protection class.

- ¹³⁾ Possible with version "J3".
- 14) With protection class III, a protective extra-low voltage with isolation transformer (PELV, SELV) is to be provided.

When establishing the electrical connection, the protective earthing conductor (PE $\frac{1}{2}$) has to be connected correctly.




- ► For connector pin assignment see page 19 and data sheet 08006.
- ► The plug-in connectors used are not intended to be plugged in or disconnected during normal operation under load.
- ▶ Operation of the valves only admissible with appropriate and locked mating connector.

¹²⁾ Solenoid coils without "Recognized component" according to UL 429.

Characteristic curves

(measured with HLP46, ϑ_{oil} = 40 ± 5 °C [104 ± 9 °F])

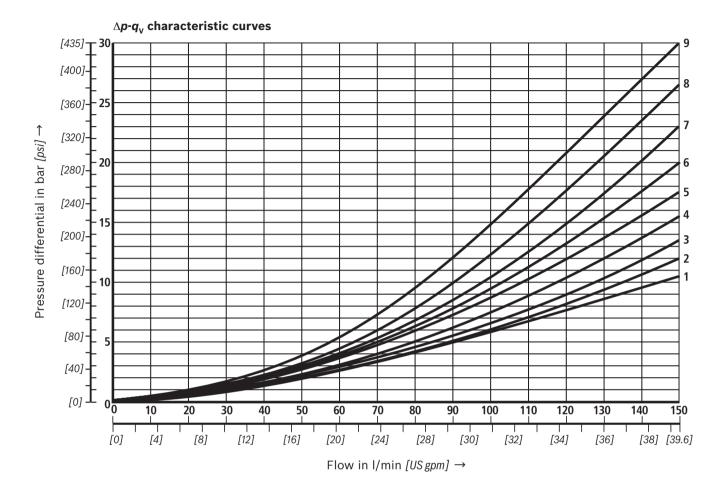

Symbol		Directio	n of flow			
	P - A	P – B	A - T	B - T		
Α	4	4	-	-		
В	4	4 5 -				
C, J, Q, Y	2	3	5	7		
D	2	2	5	7		
E	3	6	7			
E - "QS"	3	2	6	7		
E34	5	_	5	8		
E67	3	3 4		7		
Н	1	1	6	8		
J19	7	7 –		9		
L, Y11	3	3	5	7		
R	3 4		5	6		
U	2	2 5		7		
W	2	2	5 6			
X7	3	_	_	6		

Symbol	Direction of flow						
	P - A	P – B	B – T	P - T			
F	1	3	3	8	4		
G	4	5	6	8	7		
Н	1	1	6	8	7		
Р	3	1	5	6	5		

Characteristic curve for symbol G41 upon request.

Performance limits: 2 spool positions (measured with HLP46, $\vartheta_{oil} = 40 \pm 5$ °C [104 \pm 9 °F])

Motice:


The specified performance limits are valid for operation with two directions of flow (e. g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible switching power limits may be considerably


lower with only one direction of flow (e.g. from P to A while port B is blocked)!

In such cases of application, please consult us!

The switching power limit was established while the solenoids were at operating temperature, at 10 % undervoltage and without tank preloading.

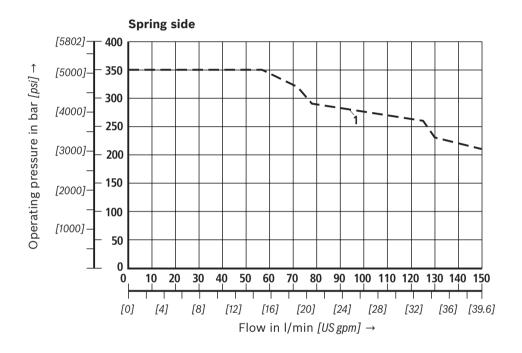

Characteristic curve	Symbol
1	В

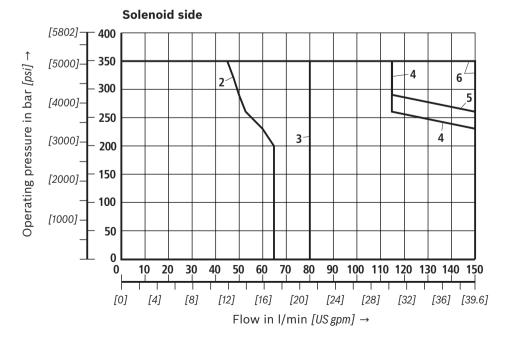

Characteristic curve	Symbol		
2	A, B		
3	C; Y11		
4	D		
5	Υ		
6	X7		

Performance limits: 3 spool positions (measured with HLP46, $\vartheta_{oil} = 40 \pm 5$ °C [104 \pm 9 °F])

Motice:


The specified performance limits are valid for operation with two directions of flow (e. g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible switching power limits may be considerably


lower with only one direction of flow (e.g. from P to A while port B is blocked)!

In such cases of application, please consult us!

The switching power limit was established while the solenoids were at operating temperature, at 10 % undervoltage and without tank preloading.

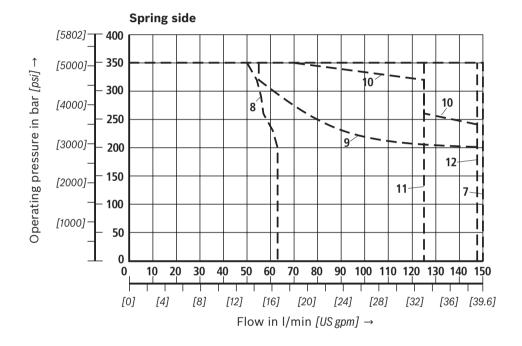

Characteristic curve	Symbol
7	E
8	F
9	G
10	Н
11	J; J19
12	L

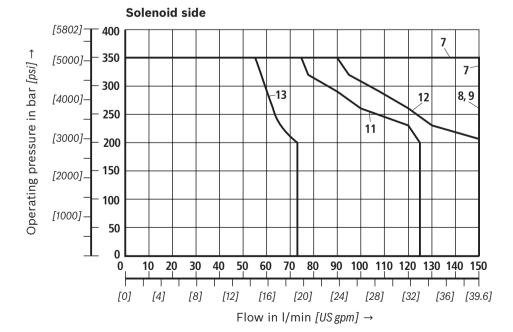

Characteristic curve	Symbol			
7	E			
8	F			
9	G			
11	J, J19			
12	L			
13	E34			
13	E34			

Characteristic curves for symbols G41 and P upon request.

Performance limits: 3 spool positions

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \degree C [104 \pm 9 \degree F]$)

Motice:


The specified performance limits are valid for operation with two directions of flow (e. g. from P to A and simultaneous return flow from B to T).

Due to the flow forces acting within the valves, the admissible switching power limits may be considerably

lower with only one direction of flow (e.g. from P to A while port B is blocked)!

In such cases of application, please consult us!


The switching power limit was established while the solenoids were at operating temperature, at 10 % undervoltage and without tank preloading.

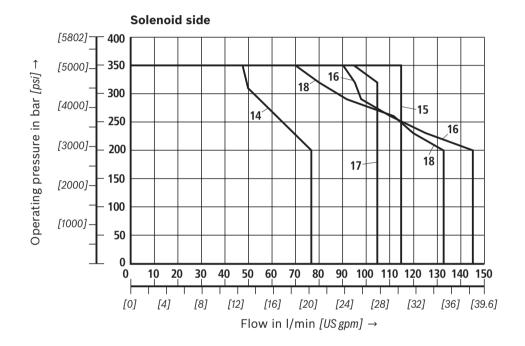

Characteristic curve	Symbol
14	E67
15	E - "QS"
16	U
17	R
18	W

Dimensions

(dimensions in mm)

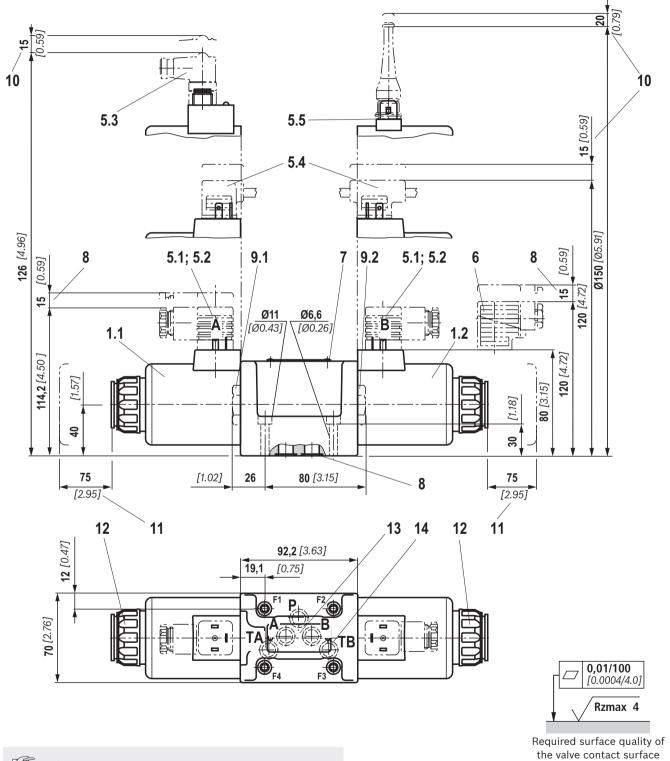



Motice:

- ▶ Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ▶ The dimensions are nominal dimensions which are subject to tolerances.

For item explanations, valve mounting screws and subplates, see page 18.

Dimensions: Manual override (dimensions in mm [inch])

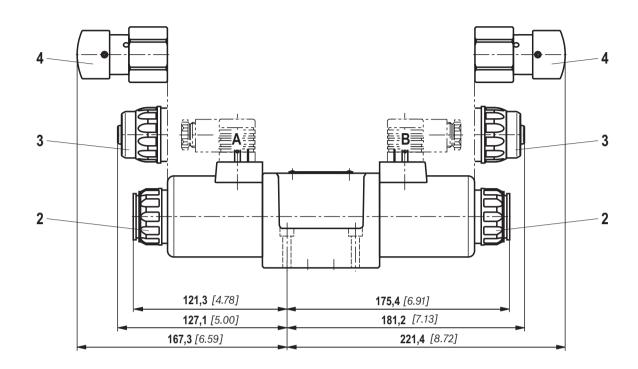



- 2 Version without and with concealed manual override "N9" (standard)
- 3 Version with concealed manual override and protective cap "N8". (The protective cap must be removed prior to actuation.)
- 4 Version with manual override "N5" and "N6"

For item explanations, valve mounting screws and subplates, see page 18.



The dimensions are nominal dimensions which are subject to tolerances.

Dimensions

- 1.1 Solenoid "a"
- 1.2 Solenoid "b"
 - 2 Version without and with concealed manual override "N9" (standard)
 - 3 Version with concealed manual override and protective cap "N8". (The protective cap must be removed prior to actuation.)
 - 4 Version with manual override "N5" and "N6"
- **5.1** Mating connector **without** circuitry for connector "K4" (separate order, see page 20 and data sheet 08006)
- **5.2** Mating connector **without** circuitry for connector "K4K" (separate order, see data sheet 08006)
- **5.3** Mating connector angled with M12x1 plug-in connection and status LED for connector "K72L" (separate order, see data sheet 08006)
- **5.4** Double valve mating connector **without/with** circuitry for connector "K4" (separate order, see data sheet 08006)
- 5.5 Mating connector (AMP Junior Timer) for connector "C4Z" (separate order, see data sheet 08006)
 - **6** Mating connector **with** circuitry for connector "K4" (separate order, see page 20 and data sheet 08006)
 - 7 Name plate
 - 8 Identical seal rings for ports A, B, P, TA, TB
- 9.1 Plug screw for valves with one solenoid on B side
- 9.2 Plug screw for valves with one solenoid on A side
- 10 Space required to remove the mating connector/ angled socket
- 11 Space required to remove the coil
- **12** Mounting nut, tightening torque $M_A = 14.5\pm1.5$ Nm $[10.69\pm1.1$ ft-lbs]
- **13** Porting pattern according to ISO 4401-05-04-0-05 and NFPA T3.5.1 R2-2002 D05
- 14 Connection TB can only be used in connection with separately produced bore

Subplates according to data sheet 45054 (separate order) G 66/01 (G3/8) G 67/01 (G1/2) G 534/01 (G3/4) G 66/12 (SAE-6; 9/16-18) ¹⁾ G 67/12 (SAE-8; 3/4-16) ¹⁾ G 534/12 (SAE-12; 1-1/16-12) ¹⁾ upon request

Valve mounting screws (separate order) 4 hexagon socket head cap screws, metric ISO 4762 - M6 x 40 - 10.9-flZn-240h-L (friction coefficient μ_{total} = 0.09 to 0.14); tightening torque M_A = 12.5 Nm $[9.2\,ft\text{-lbs}]$ ±10 %, material no. R913000058

4 hexagon socket head cap screws ISO 4762 - M6 x 40 - 10.9 (self procurement) (friction coefficient $\mu_{\rm total}$ = 0.12 to 0.17); tightening torque $M_{\rm A}$ = 15.5 Nm [11.4 ft-lbs] ±10 %,

4 hexagon socket head cap screws UNC 1/4-20 UNC x 1-1/2" ASTM-A574

(friction coefficient $\mu_{\rm total}$ = 0.19 to 0.24); tightening torque $\textit{M}_{\rm A}$ = 25 Nm [18.4 ft-lbs] ±15 % (friction coefficient $\mu_{\rm total}$ = 0.12 to 0.17); tightening torque $\textit{M}_{\rm A}$ = 19 Nm [14.0 ft-lbs] ±10 % material no. **R978800710**

With different friction coefficients, the tightening torques are to be adjusted accordingly!

Over-current fuse and switch-off voltage peaks

Maximum admissible overvoltages according to DIN EN 60664-1:2008-01 (VDE 0110-1) (overvoltage category II):

Electrical connection 1)	Nominal voltage	Rated current in A	Maximum admissible switch-off overvoltage in V ²⁾
K4, K4K	12	3.72	500
K4, K4K, K72L	24	1.74	500
K4, C4Z	26	1.70	500
K4	48	0.57	500
K4	96	0.47	500
K4	125	0.22	500
K4, C4Z	180	0.28	500
K4	205	0.22	500
K4	220	0.21	500

¹⁾ Interference protection circuit integrated

Notice:

When solenoid coils are switched off, voltage peaks result which may cause faults or damage in the connected control electronics. We therefore recommend limiting them to $2\ x$ nominal voltage by means of an interference protection circuit. It must be noted that a diode switched in an antiparallel form extends the switching off time.

Electrical connections, assignment

Electrical connections and coil connection combinations

Connector ordering codes		Top view	Circuit diagram	Pin	Connections, assignment
Connector, 3-pole (2+PE) according to DIN EN 175301-803 (IP65)	K4, K4K ³⁾	4)		2	Solenoid coil, polarity-independent
			□ ° 2	4	Earthing
Connector 4-pole according to IEC 60947-5-2, M12x1 with suppres-	K72L	П	+ + + + + + + + + + + + + + + + + + + +	1 2	Internal bridge
sor diode, only 24 V DC, integrated interference protection circuit and	I		1 04 - 05 0 - 05	3	Solenoid coil GND
status LED				4	Solenoid coil 24 V DC Supply voltage
				5	Without function
2-pole connector, type AMP Junior- Timer, rotated by 90° relative to valve axis	C4Z			2	Solenoid coil, polarity-independent

³⁾ Coil with potted-in connector base and sealing element to valve housing (IP67)


²⁾ To be ensured by user circuitry

⁴⁾ M3, tightening torque maximum $M_{A \text{ max}} = 0.5 \text{ Nm } [0.37 \text{ ft-lbs}]$

Mating connectors according to DIN EN 175301-803

For details a connectors, sheet 08006	see da	_				
	side			Material no. With indicator light and Zener		
	Valve			With indicator light	With rectifier	diode suppression circuit
Port	>	Color	Without circuitry	12 240 V	12 240 V	24 V
M16 x 1.5	а	gray	R901017010	-	_	-
IVI X 0.1VI	a/b	black	R901017011	R901017022	R901017025	R901017026
1/2" NPT (Pg16)	a	red/brown	R900004823	-	-	-
	a/b	black	R900011039	R900057453	R900842566	-

Energy savings and fast switching 1)

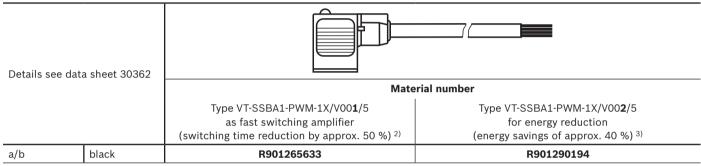

- 1) Only with J2 and X84; not for version "D"
- 2) Only available for "G12" and "K4/K4K" version
- $^{\rm 3)}$ Only available for "G24" and "K4/K4K" version

Cartridge with PWM connector according to data sheet 30362:

- ▶ Depending on the control spool, increasing the performance limit is possible.
- ► With version "G24" (energy saving), the coil temperature is reduced by ≥ 30 °C for 100 % duty cycle.

Project planning information

Temperature range and maximum operating pressure in case of use at low temperatures

Port	Pressure	Temperature range in °C [℉]		
– P, A, B, T	static 100 bar [1450 psi]	-4035 [-4031]		
– P, A, B	dynamic from 100 bar [1450 psi] to 350 bar [5076 psi] in linear form as a function of the temperature	-3530 [-3122]		
– T	dynamic from 100 bar [1450 psi] to 210 bar [3050 psi] in linear form as a function of the temperature	-3530 [-3122]		
– P, A, B, T	maximum operating pressure	-30 +50 [-22 122]		

Additional information

► Information on available spare parts

► Subplates	Data sheet 45054
► Hydraulic fluids on mineral oil basis	Data sheet 90220
► Environmentally compatible hydraulic fluids	Data sheet 90221
► Flame-resistant, water-free hydraulic fluids	Data sheet 90222
Connector switching amplifier type VT-SSBA1	Data sheet 30362
► Inductive position switch and proximity sensors (contactless)	Data sheet 24830
Mating connectors and cable sets for valves and sensors	Data sheet 08006
 Directional spool and seat valves with electrical actuation and M12x1 plug-in connection 	Data sheet 08010
► Reliability characteristics according to EN ISO 13849	Data sheet 08012
► Hydraulic valves for industrial applications	Data sheet 07600-B
 General product information on hydraulic products 	Data sheet 07008
Assembly, commissioning and maintenance of industrial valves	Data sheet 07300
► Selection of filters	