

RE 26076

Edition: 2019-09

Replaces: 04.07

rexroth
A Bosch Company

Pressure sequence valve, direct-operated

Type DZ 6 DP



K4297-9

- ▶ Size 6
- ▶ Component series 5X
- ▶ Maximum operating pressure 315 bar
- ▶ Maximum flow 60 l/min

Features

- ▶ For subplate mounting
- ▶ Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole)
- ▶ 5 pressure ratings
- ▶ 4 adjustment types, optionally:
 - Rotary knob
 - Grub screw with hexagon and protective cap
 - Lockable rotary knob with scale
 - Rotary knob with scale
- ▶ Check valve, optional

Contents

Features	1
Contents	1
Ordering codes	2
Symbols	2
Function, section	3
Technical data	4
Characteristic curves	5
Dimensions	6
Further information	7

RE 26076, edition: 2019-09, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2/8 **DZ 6 DP** | Pressure sequence valve

Ordering codes

01	02	03	04	05	06	07	08	09
DZ 6 DP		-	5X	/				*

01	Pressure sequence valve, size 6, direct-operated	DZ 6 DP
----	--	----------------

Adjustment type

02	Rotary knob	1
	Grub screw with hexagon and protective cap	2
	Lockable rotary knob with scale ¹⁾	3
	Rotary knob with scale	7

03	Component series 50 ... 59 (50 ... 59: unchanged installation and connection dimensions)	5X
----	--	-----------

Maximum sequencing pressure

04	25 bar	25
	75 bar	75
	150 bar	150
	210 bar	210
	315 bar	315 ²⁾

Pilot oil flow

05	Internal pilot oil supply, internal pilot oil return	no code
	External pilot oil supply, internal pilot oil return	X
	Internal pilot oil supply, external pilot oil return	Y
	External pilot oil supply, external pilot oil return	XY

06	With check valve	no code
	Without check valve	M

Seal material (observe compatibility of seals with hydraulic fluid used, see page 4)

07	NBR seals	no code
	FKM seals	V

08	Without locating hole	no code
	With locating hole	/60 ³⁾


09	Further details in the plain text	
----	-----------------------------------	--

¹⁾ H-key with material no. **R900008158** is included in the scope of delivery.

²⁾ Only with adjustment type "2" and without check valve

³⁾ Locking pin ISO 8752-3x8-St, material no. **R900005694** (separate order)

Symbols

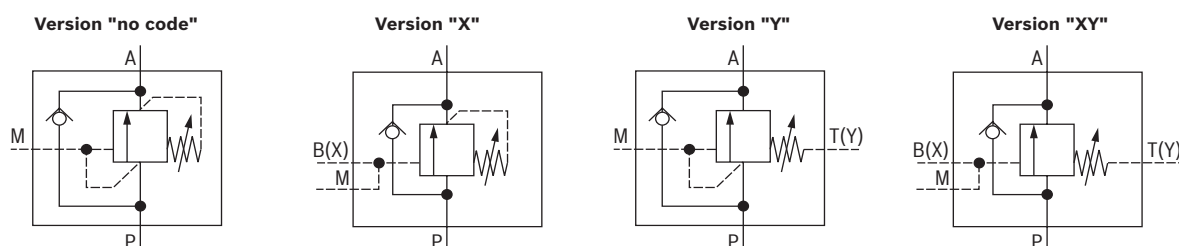

Bosch Rexroth AG, RE 26076, edition: 2019-09

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Function, section

Valve type DZ 6 DP is a direct-operated pressure sequence valve. It is used for the pressure-dependent connection of a second system. The sequencing pressure is set via the adjustment type (4).

The compression spring (3) holds the control spool (2) in the initial position, the valve is blocked. The pressure in channel P is applied via the control line (6) at the spool face of the control spool (2) opposite the compression spring (3).

If the pressure in channel P reaches the set value of the compression spring (3), the control spool (2) is moved to the left and the connection from P to A is opened. The system connected to channel A is connected without a pressure drop in channel P.



The control signal is received internally via the control line (6) from channel P or externally via port B (X). Depending on the use of the valve, pilot oil return is realized externally via port T (Y) or internally via A.

Notice:

With **internal** pilot oil return, the **set** cracking pressure is **increased** by the pressure in channel A.

A check valve (5) can be optionally installed for free hydraulic fluid return flow back from channel A to channel P.

A pressure gauge connection (1) enables control of the sequencing pressure at the valve.

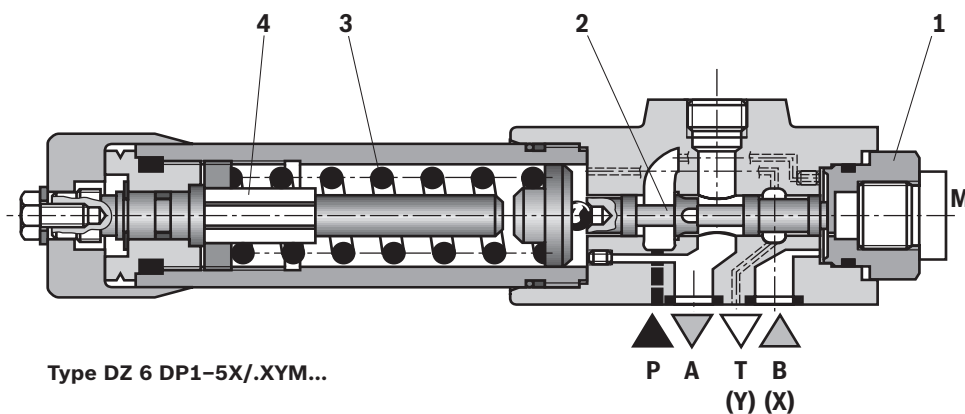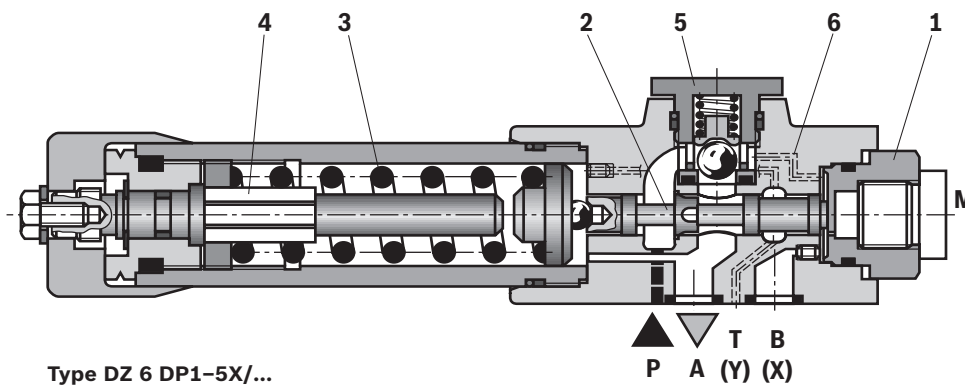

4/8 **DZ 6 DP** | Pressure sequence valve

Technical data

(For applications outside these values, please consult us!)

General		
Mass	kg	approx. 1.2
Installation position		any
Ambient temperature range	°C	-30 ... +80 (NBR seals) -20 ... +80 (FKM seals)

Hydraulic		
Maximum operating pressure	► Ports P, B (X)	bar 315
	► Port A	
	– External pilot oil return	bar 315
	– Internal pilot oil return	bar 160
	► Port T (Y)	bar 160
Maximum sequencing pressure (adjustable)	bar	25; 75; 150; 210; 315
Maximum flow	l/min	60
Hydraulic fluid		See table below
Hydraulic fluid temperature range	°C	-30 ... +80 (NBR seals) -20 ... +80 (FKM seals)
Viscosity range	mm ² /s	10 ... 800
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)		Class 20/18/15 ¹⁾

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP, HLPD, HVLP, HVLDP	NBR, FKM	DIN 51524	90220
Bio-degradable	► Insoluble in water	HETG	ISO 15380	90221
		HEES		
	► Soluble in water	HEPG	ISO 15380	
Flame-resistant	► Water-free	HFDU (glycol base)	ISO 12922	90222
		HFDU (ester base)		
		HFDR		
	► Containing water	HFC (Fuchs: Hydrotherm 46M, Renosafe 500; Petrofer: Ultra Safe 620; Hough-ton: Safe 620; Union: Carbide HP5046)	ISO 12922	90223



Important notices on hydraulic fluids:

- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- **Bio-degradable and flame-resistant – containing water:**
If components with galvanic zinc coating (e.g. version "J3" or "J5") or parts containing zinc are used, small amounts of dissolved zinc may get into the hydraulic system and cause accelerated aging of the hydraulic fluid. Zinc soap may form as a chemical reaction product, which may clog filters, nozzles and solenoid valves – particularly in connection with local heat input.



► Flame-resistant – containing water:

Due to increased cavitation tendency with HFC hydraulic fluids, the life cycle of the component may be reduced by up to 30% as compared to the use with mineral oil HLP. In order to reduce the cavitation effect, it is recommended - if possible specific to the installation - to back up the return flow pressure in ports T to approx. 20% of the pressure differential at the component.

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.
Available filters can be found at www.boschrexroth.com/filter.

Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

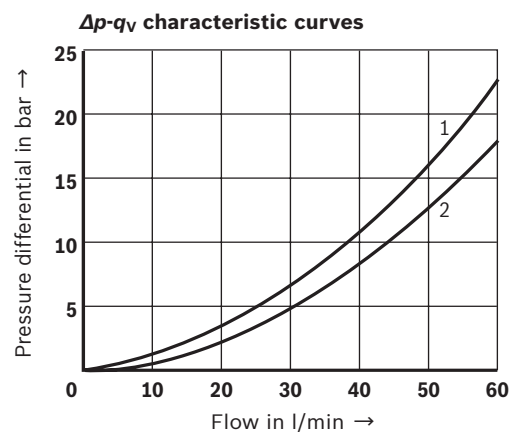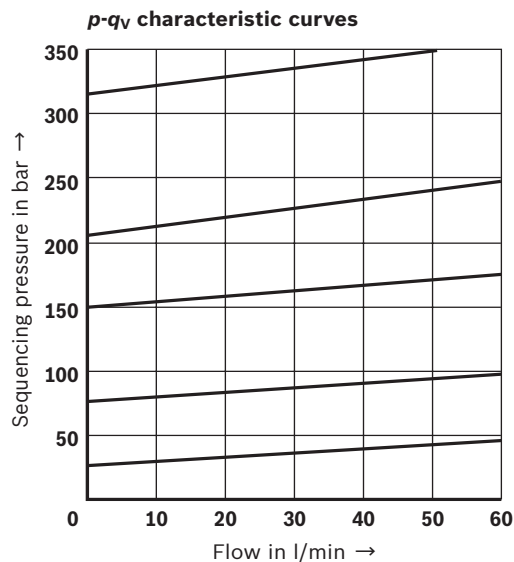

Notice:

The characteristic curves apply to the pressure at the valve output $p = 0$ bar across the entire flow range.

- 1 A to P, via check valve
- 2 P to A

Further information

- ▶ Subplates
- ▶ Hydraulic fluids on mineral oil basis
- ▶ Environmentally compatible hydraulic fluids
- ▶ Flame-resistant, water-free hydraulic fluids
- ▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)
- ▶ Hydraulic valves for industrial applications

- ▶ Selection of filters
- ▶ Information on available spare parts

Data sheet 45100
Data sheet 90220
Data sheet 90221
Data sheet 90222
Data sheet 90223
Operating instructions 07600-B