

The Drive & Control Company

Rexroth Bosch Group

Pressure reducing valve, pilot-operated

Type Z3DR RE 26874 Edition: 2016-10



▶ Size 10

- ► Component series 1X
- Maximum operating pressure 350 bar
- ► Flow 120 I/min

Features

- ► Sandwich plate valve
- ► Porting pattern according to ISO 4401-05-04-0-05 (standard version) or ISO 4401-05-05-0-05 (version "SO30")
- ▶ 4 pressure ratings, optional
- ▶ 2 adjustment types, optionally:
 - Spindle with internal hexagon and protective cap
 - Lockable rotary knob with scale
- ► Corrosion-protected design

Contents

Features	1
Contents	1
Ordering code	2
Symbols	3
Function, section	3
Technical data	4
Characteristic curves	5, 6
Dimensions	7, 8
Accessories	9
Further information	9



Ordering code

		03			 <u> </u>		80		09	 11	12	13
Z	3	DR	10	V		-	1X	/				

01	Sandwich plate valve	Z
02	3-way version	3
03	Pressure reducing valve	DR
04	Size 10	10
05	Pilot-operated	V

Pressure reduction

06	In channel P①	Р
	In channel A②	A 1)
	In channel B@	B 1)

Adjustment type

07	Spindle with internal hexagon and protective cap ("J3" version without protective cap)	2
	Lockable rotary knob with scale ²⁾	3
08	Component series 10 19 (10 19: unchanged installation and connection dimensions)	1X

Pressure rating

09	Set pressure up to 50 bar	50
	Set pressure up to 100 bar	100
	Set pressure up to 200 bar	200
	Set pressure up to 315 bar	315

Pressure measuring port G1/4

10	Without pressure measuring port	no code				
	With pressure measuring port (secondary pressure)	MS				

Corrosion resistance

11	None	no code
	Improved corrosion protection (240 h salt spray test according to EN ISO 9227); (only version "2")	J3

Seal material

Seai	ear material					
12	NBR seals	no code				
	FKM seals	V				
	Observe compatibility of seals with hydraulic fluid used					

Pilot oil duct

13	None	no code
	Via channel X and Y	SO30

1) Available from 03/2017.

 H-key with material no. R900008158 is included in the scope of delivery.

Notes:

- For valve types for use in potentially explosive areas, refer to data sheet 07011.
- ► Preferred types and standard units are specified in the EPS (standard price list).


3/10




Pressure reducing valve | Z3DR

Symbols (1) = component side, 2) = plate side)


Version "P...MS..SO30"



Version "B...MS..SO30"



Version "A...MS..SO30"



Notice:

- ► Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ► Version "MS" is shown. With the standard version, port M is
- ► Version "SO30" is shown. The standard version does not have ports X and Y.

Function, section


Valves of type Z3DR are pilot-operated 3-way pressure reducing valves with pressure limitation of the actuator in sandwich plate design. They serve for reduction and control of the system pressure.

The valves basically consist of pilot control valve (1) and housing (2) including main stage. The secondary pressure is set via the adjustment type (3).

Rexroth pilot-operated pressure reducing valves feature high stability and low hysteresis.

Version "MS" enables measurement and monitoring of the set secondary pressure via a pressure load cell at the measuring port (4) (refer to page 7 and 8).

If the secondary pressure at actuator port P(0) (A2, B2) further exceeds the set value, the third line to tank port TA (TB) is opened by the valve. In this way, the actuator channel is protected against inadmissible pressure rise.

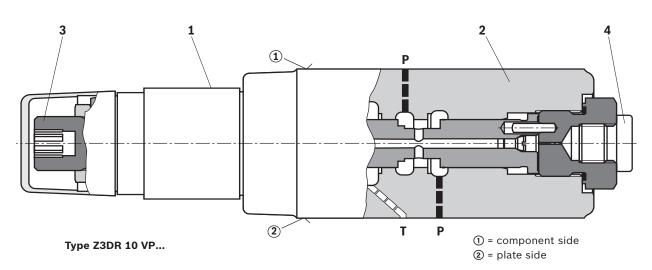



Technical data

(For applications outside these parameters, please consult us!)

general			
Weight	► Version "2"	kg	2.7
	► Version "3"	kg	2.8
Installation position			Any
Ambient temperature range °C		-20 +80	
MTTF _d values according to EN ISO 13849 Years		75 (for further details see data sheet 08012)	

hydraulic			
Maximum operating pressure	► Port A, B, P	bar	350
Return flow pressure	▶ Port T	bar	160 (ideally depressurized to the tank) 1)
Maximum set pressure	▶ Version "50"	bar	50
	▶ Version "100"	bar	100
	▶ Version "200"	bar	200
	▶ Version "315"	bar	315
Minimum adjustable seco	ndary pressure	bar	12
Maximum flow		I/min	120 (recommended)
Hydraulic fluid			See table below
Hydraulic fluid temperatu	re range	°C	-20 +80
Viscosity range		mm²/s	10 500 (preferably 50 120)
Maximum admissible degr cleanliness class accordin	ree of contamination of the g to ISO 4406 (c)	hydraulic fluid	Class 20/18/15 ²⁾

Hydraulic fluid		Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils		HL, HLP	NBR, FKM	DIN 51524	90220
Bio-degradable ³⁾	► Insoluble in water	HETG	FKM	ISO 15380	90221
		HEES	FKM		
	► Soluble in water	HEPG	FKM	ISO 15380	
Flame-resistant	► Water-free	HFDU (glycol base)	FKM	ISO 12922	90222
		HFDU (ester base) 3)	FKM		
	► Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	NBR	ISO 12922	90223

Important information on hydraulic fluids:

- ► For more information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- ► There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- ► The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- ► Flame-resistant containing water:
 - Maximum pressure differential (operating/secondary pressure)
 210 bar, otherwise, increased cavitation erosion
 - Life cycle as compared to operation with mineral oil HL, HLP 30 \dots 100%
 - Maximum hydraulic fluid temperature 60 °C
- ▶ Bio-degradable and flame-resistant: If this hydraulic fluid is used, small amounts of dissolved zinc may get into the hydraulic system.

- 1) Counter pressure adds to the set pressure.
- 2) The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.
 - Available filters can be found at www.boschrexroth.com/filter.
- 3) Not recommended for corrosion-protected version "J3"





Pressure reducing valve | **Z3DR** 5/10

Characteristic curves

(measured with HLP46, ϑ_{oil} = 40 ±5 °C)

p-q_V characteristic curves

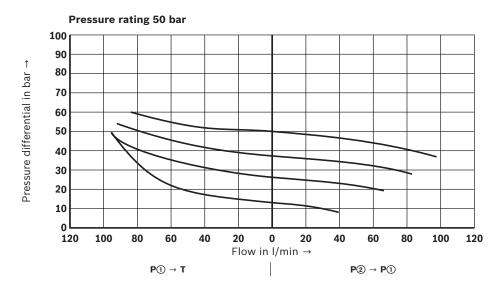

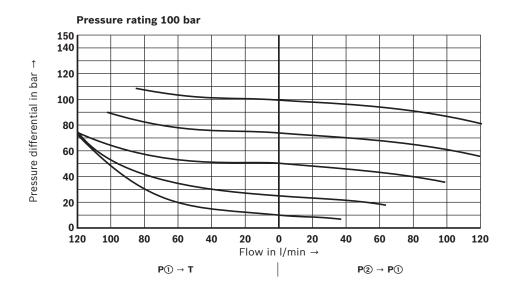






Characteristic curves

(measured with HLP46, ϑ_{oil} = 40 ±5 °C)

p-q_V characteristic curves

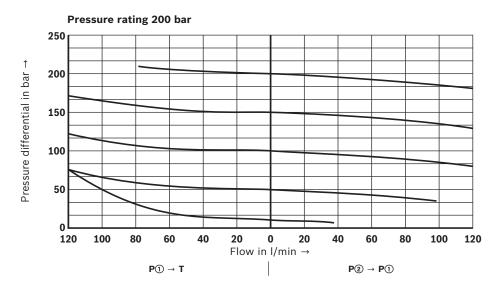

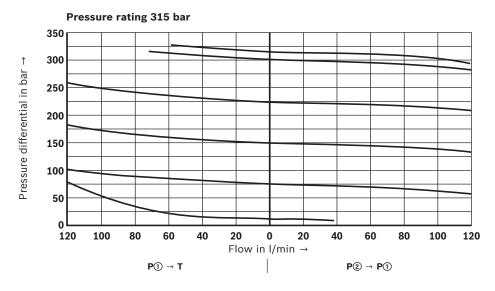

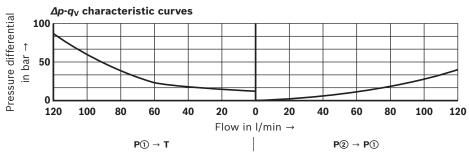



7/10



Pressure reducing valve | **Z3DR**

Dimensions: Version "P" and "A" (dimensions in mm)

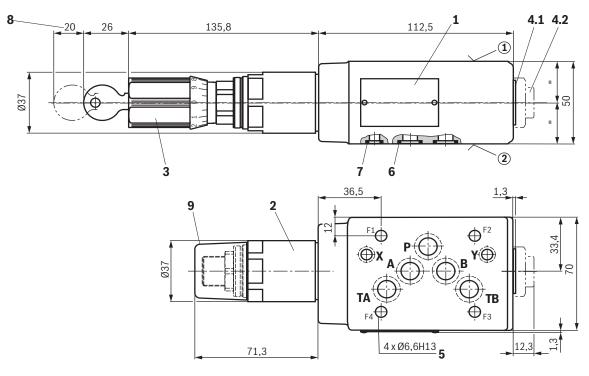



Required surface quality of the valve contact surface

- ① component side Porting pattern according to ISO 4401-05-04-0-05 (standard version) or ISO 4401-05-05-0-05 ("SO30" version)
- 2 plate side Porting pattern according to ISO 4401-05-04-0-05 (standard version) or ISO 4401-05-05-0-05 ("SO30" version)
- 1 Name plate
- 2 Adjustment type "2" (spindle with SW8 internal hexagon and SW24 lock nut)
- 3 Adjustment type "3"
- 4.1 Without measuring port (standard)
- **4.2** Measuring port (version "MS"); when loosening the plug screw (SW6 internal hexagon, tightening torque M_A = 30 Nm ±10 %), hold the SW27 reducing piece in place
 - 5 Valve mounting bores
 - 6 Identical seal rings for ports A, B, P, T (plate side)
 - 7 Identical seal rings for ports X and Y (plate side)
- 8 Space required to remove the key
- 9 Protective cap (not included with version "J3")


Valve mounting screws (separate order)
4 hexagon socket head cap screws ISO 4762 - M6 - 10.9


M Notes:

- ► Length and tightening torque of the valve mounting screws must be calculated according to the components mounted under and over the sandwich plate valve.
- ► Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ► The dimensions are nominal dimensions which are subject to tolerances.
- ► Version "SO30" is shown. The standard version does not have ports X and Y.



Dimensions: Version "B" (dimensions in mm)

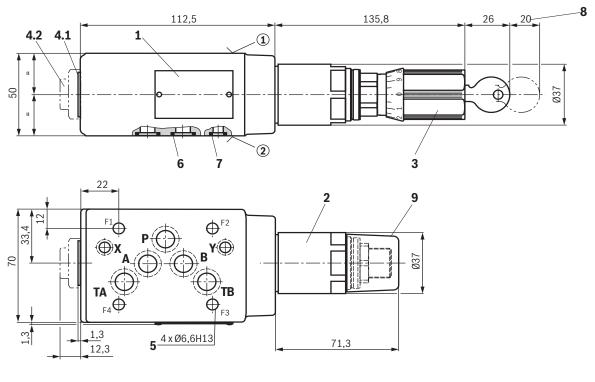



Required surface quality of the valve contact surface

- ① component side Porting pattern according to ISO 4401-05-04-0-05 (standard version) or ISO 4401-05-05-0-05 ("SO30" version)
- ② plate side Porting pattern according to ISO 4401-05-04-0-05 (standard version) or ISO 4401-05-05-0-05 ("SO30" version)
- 1 Name plate
- 2 Adjustment type "2" (spindle with SW8 internal hexagon and SW24 lock nut)
- 3 Adjustment type "3"
- **4.1** Without measuring port (standard)
- 4.2 Measuring port (version "MS"); when loosening the plug screw (SW6 internal hexagon, tightening torque \textit{M}_{A} = 30 Nm ±10 %), hold the SW27 reducing piece in place
 - 5 Valve mounting bores
- 6 Identical seal rings for ports A, B, P, T (plate side)
- 7 Identical seal rings for ports X and Y (plate side)
- 8 Space required to remove the key
- 9 Protective cap (not included with version "J3")

Valve mounting screws (separate order)
4 hexagon socket head cap screws ISO 4762 - M6 - 10.9

M Notes:

- ► Length and tightening torque of the valve mounting screws must be calculated according to the components mounted under and over the sandwich plate valve.
- ► Deviating from ISO 4401, port T is called TA and port T1 is called TB in this data sheet.
- ► The dimensions are nominal dimensions which are subject to tolerances.
- ► Version "SO30" is shown. The standard version does not have ports X and Y.



Pressure reducing valve | **Z3DR** 9/10

Operating instructions 07600-B

Data sheet 07011

Accessories (separate order)

Denomination	Material no.
Protective cap	R900135501

Further information

▶ Subplates
 ▶ Hydraulic fluids on mineral oil basis
 ▶ Environmentally compatible hydraulic fluids
 ▶ Flame-resistant, water-free hydraulic fluids
 ▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)
 ▶ Data sheet 90223
 ▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)

► Hydraulic valves for industrial applications

▶ Use of non-electrical hydraulic components in an explosive environment (ATEX)

► Selection of the filters

► Information on available spare parts