

# Pressure relief valve with DC motor operation, pilot operated

**RE 29139/06.07**  
Replaces: 01 .00

1/12

## Type DBG

Size 8 to 32  
Component series 1X  
Maximum operating pressure 315 bar  
Maximum flow 600 l/min



tb0094

## Table of contents

Content	Seite
Features	1
Ordering code	2
Symbols	2
Function, section	3
Technical data	4, 5
Electrical connection	6
Circuit example: Valve with limit switch	6
Characteristic curves	6, 7
Unit dimensions	8 to 12

## Features

- Operation by DC motor with reducing gear
- For subplate mounting:
  - Porting pattern to ISO 6264-AR-06-2-A (size 10),
  - ISO 6264-AS-08-2-A (size 25),
  - ISO 6264-AT-10-2-A (size 32)
- For threaded connection
- For block installation
- 5 pressure ratings
- With actual value potentiometer or limit switch
- Self-locking in the event of a power failure (system pressure constant on variant with limit switch)

Further information:

Subplates according to RE 45064

### Ordering code

DBG				-1X/				*
Pressure relief valve with DC motor operation								Further details in clear text
Pilot operated valve (complete)	= No code							E1 = Limit switch
Pilot valve <b>without</b> main spool insert (do <b>not</b> enter valve size)	= C							P2 = Actual value potentiometer
Pilot valve <b>with</b> main spool insert (enter valve size 30)	= C							<b>Seal material</b>
Separate pilot valve as remote control valve (do <b>not</b> enter valve size)	= T							NBR seals
								FKM seals
								(other seals on request)
								<b>⚠ Attention!</b>
								Observe compatibility of seals with hydraulic fluid used!
								<b>Pilot oil flow</b>
								No code = Internal pilot oil supply / drain
								X = External pilot oil supply
								Internal pilot oil drain
								Y = Internal pilot oil supply
								External pilot oil drain
								XY = External pilot oil supply / drain
								<b>Pressure rating, max</b>
								50 = Set pressure up to 50 bar
								100 = Set pressure up to 100 bar
								200 = Set pressure up to 200 bar
								315 = Set pressure up to 315 bar
								400 = (DBGT only) Set pressure up to 400 bar
								1X = Component series 10 to 19 (10 to 19: unchanged installation and connection dimensions)

## Symbols

<p>DBG <math>\overset{C}{\underset{T}{\square}}</math> -1X/..</p>	<p>DBG C-1X/..Y..</p>	<p>DBG..-1X/.. DBG..G-1X/..</p>
<p>DBG..-1X/..X.. DBG..G-1X/..X..</p>	<p>DBG..-1X/..Y.. DBG C 30-1X/.. DBG..G-1X/..Y..</p>	<p>DBG..-1X/..XY.. DBG..G-1X/..XY..</p>

## Function, section

Pressure control valves of type DBG are pilot operated pressure relief valves.

They are used to limit a system pressure.

The pressure relief valves of this series basically consist of a pilot valve with electric motor as pressure adjustment element and a main valve with main spool insert.

The system pressure is adjusted by means of a DC motor (16) with reducing gear (17). The output shaft of reducing gear (17) rotates cam (14), which changes the tension of spring (8) via spring plate (15) and thus causes a change in pressure.

The pressure present in channel A acts on main spool (1.1). At the same time, the pressure is applied via pilot ports (4) and (5), which are fitted with orifices (2.1, 2.2) and (3), to the spring-loaded side of main spool (1.1) and to pilot poppet (6) in pilot valve (7).

When the system pressure rises above the value set on spring (8), pilot poppet (6) opens. The signal required for this is provided internally – on type DBG..-1X/.. via pilot lines (12) and (4) from channel A; or externally – on type DBG..-1X/..X (XY) via port (13) and pilot line (4). Pilot oil now flows through orifice (2.1), pilot line (4), orifice (2.2) and pilot poppet (6) into the spring chamber, from which it is fed to the tank either internally – on type DBG..-1X/.. via pilot line (10), or externally – on type DBG..-1X/..Y (XY) via pilot line (11).

In the closing direction, compression spring (1.2) acts on main spool (1.1), i.e. a pressure differential occurs between the "A" side and the spring-loaded side of main spool (1.1). The pilot oil flow is determined by the cross-section of orifices (2.1, 2.2) and the pressure differential across main spool (1.1). When the pressure in "A" has risen by the pressure differential across main spool (1.1) when compared with the cracking pressure of pilot poppet (6), main spool (1.1) opens the connection from "A" to "B".

The oil now flows from channel "A" to channel "B" while maintaining the set operating pressure.

Actual value potentiometer (18) feeds back the position of cam (14).

Optionally, electrical limit switches can be installed instead of actual value potentiometer (18) for limiting the min. and max. pressure.


For the variant with limit switch, the min. adjustment time for the pressure range from  $p_{\min}$  to  $p_{\max}$  is 12 seconds. The adjustment time of 12 seconds allows gradual reaching of the required pressure in the inching mode.

For the variant with actual value potentiometer the min. adjustment time for the pressure range from  $p_{\min}$  to  $p_{\max}$  is 0.65 seconds.

In conjunction with the associated amplifier type VT-VRM1-1 a program control can be realised.

With the help of 2 additional pressure switches, the min. and max. pressures can be limited.

With the variant with limit switch, the pressure setting on the valve is maintained in the event of a power failure (cable break, fuse failure, short-circuit, etc.).

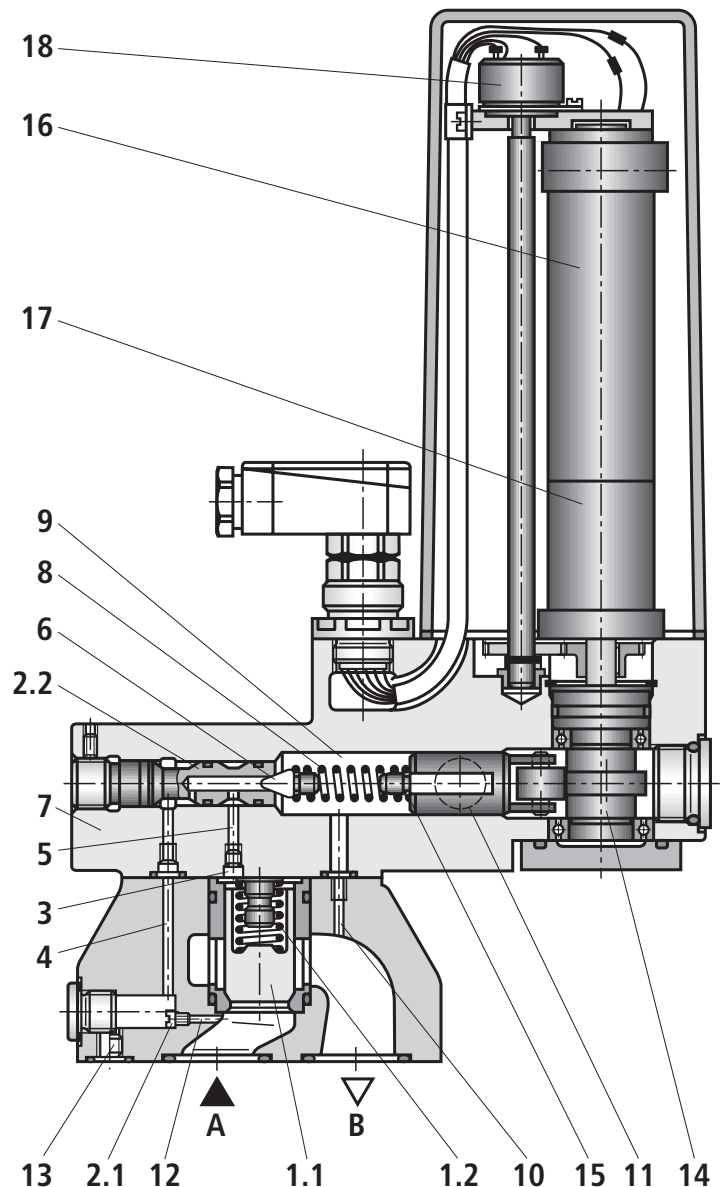

**Technical data** (for applications outside these parameters, please consult us!)**General**

Size				8	10	16	20	25	32
Weight	– Subplate mounting	DBG...	kg	–	7.4	–	–	8.1	9.4
	– Threaded connection	DBG..G	kg	8.5	8.5	8.5	8.3	9.8	9.5
	– Block installation	DBGC 30..	kg	5.4					
	– Pilot valve without main spool insert	DBGC...	kg	5.1					
	– Remote control valve	DBGT	kg	5.1					
Installation position				Optional					
Ambient temperature range				°C –20 to +50					

**Hydraulic**

Maximum operating pressure	– Ports A, X	bar	315						
	– Port B	bar	10 (with internal pilot oil drain)						
			315 (with external pilot oil drain)						
Max. backpressure	– Port Y	bar	10						
Max. set pressure		bar	50; 100; 200; 315; 400 <sup>1)</sup>						
Min. set pressure			Depending on $q_v$ (see Characteristic curves on pages 6 and 7)						
Maximum flow	– Subplate mounting	l/min	–	200	–	–	400	600	
	– Threaded connection	l/min	100	200	200	400	400	600	
	– DBGT	l/min	12						
Pilot oil flow		l/min	1						
Hydraulic fluid			Mineral oil (HL, HLP) to DIN 51524 <sup>2)</sup> ; fast bio-degradable hydraulic fluids to VDMT 24568 (see also RE 90221); HETG (rape seed oil) <sup>2)</sup> ; HEPG (polyglycols) <sup>3)</sup> ; HEES (synthetic esters) <sup>3)</sup> ; other hydraulic fluids on request						
Hydraulic fluid temperature range			–20 to +70						
Viscosity range			2.8 to 380						
Permissible max. degree of contamination of the hydraulic fluid - cleanliness class to ISO 4406 (c)			Class 20/18/15 <sup>4)</sup>						

**Electrical, drive motor**

Type of voltage	DC voltage		
Supply voltage	V–	24	
Rated power	– With limit switch	W	18
	– With actual value potentiometer	W	24
Electrical connection	Mating connector DIN 43651, 6-pin + PE		
Type of protection to EN 60529	IP 65 with mating connector mounted and locked		

<sup>1)</sup> Pressure rating of 400 bar only with variant DBGT<sup>2)</sup> Suitable for NBR **and** FKM seals<sup>3)</sup> Suitable **only** for FKM seals<sup>4)</sup> The cleanliness classes specified for components must be adhered to in hydraulic systems.

Effective filtration prevents malfunction and, at the same time, prolongs the service life of components.  
For the selection of filters, see data sheets RE 50070, RE 50076, RE 50081, RE 50086 and RE 50088.

**Technical data** (for applications outside these parameters, please consult us!)**Adjustment with limit switch in the inching mode: Ordering code "E1"**

Adjustment time, $p_{\min}$ to $p_{\max}$		s	12				
Limit switch variant:	– Micro-switch		30 V; 2 A DC				
	– Electric load		250 V; 5 A AC				
Pressure lag:	– Pressure rating	bar	50	100	200	315	400
	– Without short-circuit bridge	bar	1	2.5	5	7.5	10
	– With short-circuit bridge	bar	0.5	1	1.5	2	2.5

**Adjustment with actual value potentiometer for cam position feedback function: Ordering code "P2"**

Adjustment time, $p_{\min}$ to $p_{\max}$	s	0.65				
Potentiometer	– Resistance	kΩ	5			
	– Power	W	1.75			

**Adjustment hysteresis: Start-up pressure – deviation > 10 bar from nominal pressure**

	– Pressure rating	bar	50	100	200	315	400
	– Hysteresis	bar	< 0.5	< 1	< 2.5	< 4	< 5


**Adjustment hysteresis: Start-up pressure – deviation > 20 bar from nominal pressure**

	– Pressure rating	bar	50	100	200	315	400
	– Hysteresis	bar	< 0.3	< 0.5	< 1	< 1.5	< 2
Repeatability		bar	< 0.5	< 1	< 1.3	< 1.7	< 2


**Amplifier**

Electrical amplifier	VT-VRM1-1, component series 1X – see RE 30405-D					
----------------------	---	--	--	--	--	--

## Electrical connection

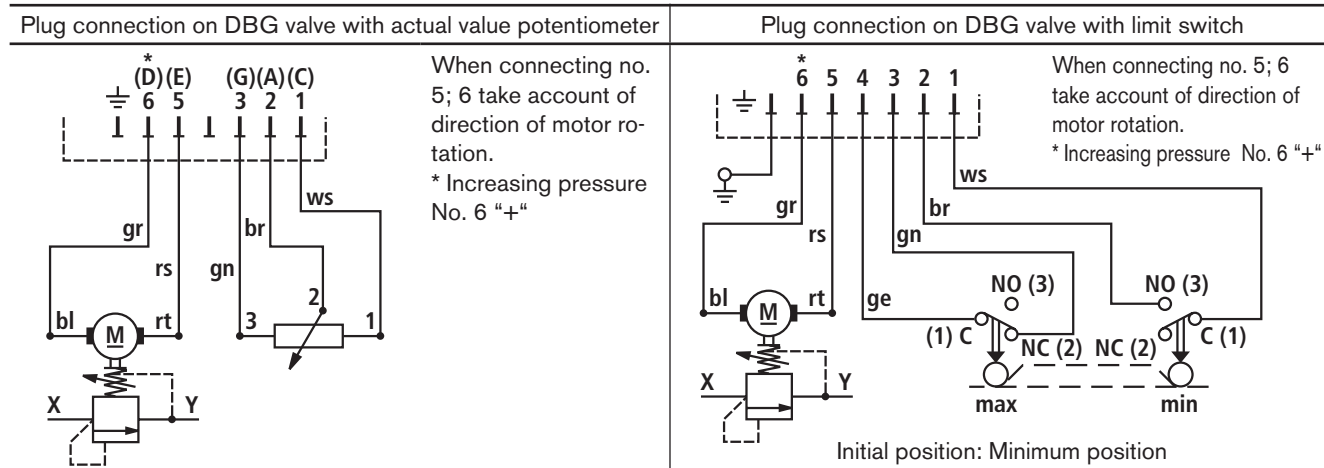



## Circuit example: DBG valve with limit switch

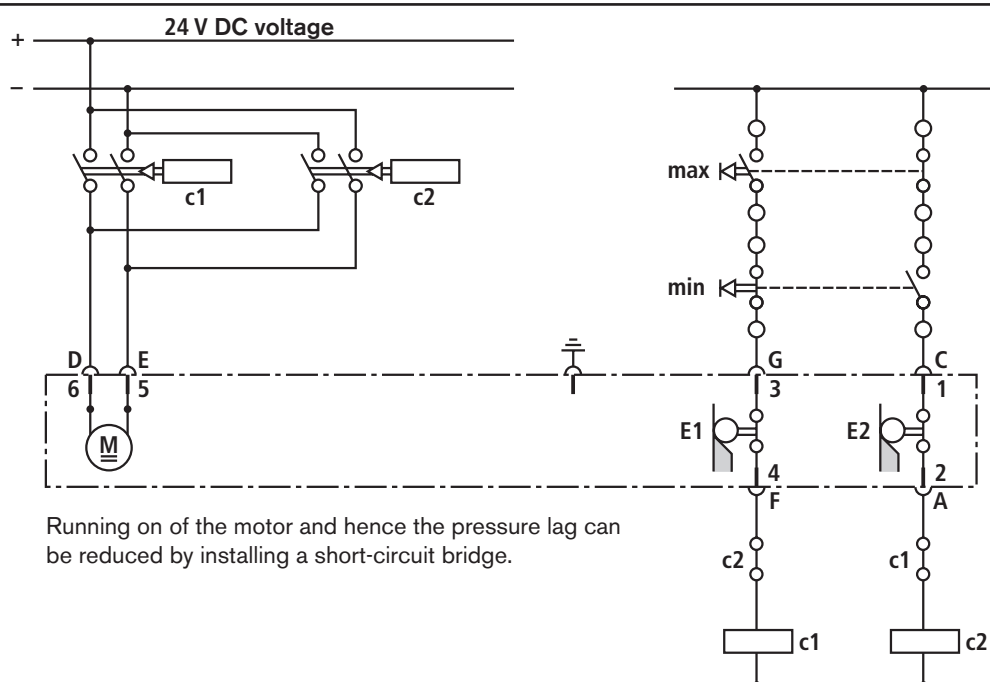

## Characteristic curves (measured at $v = 36 \text{ mm}^2/\text{s}$ and $\vartheta_{\text{oil}} = 50 \text{ }^\circ\text{C}$ )







The characteristic curves were measured with external, pressureless pilot oil drain. With internal pilot oil drain, the inlet

pressure increases by the output pressure present in port B.

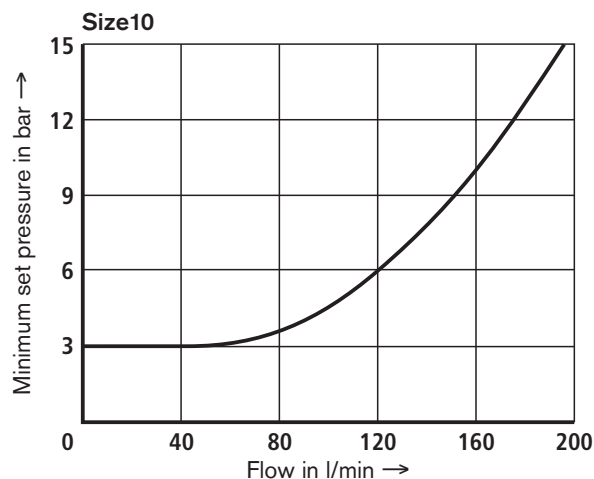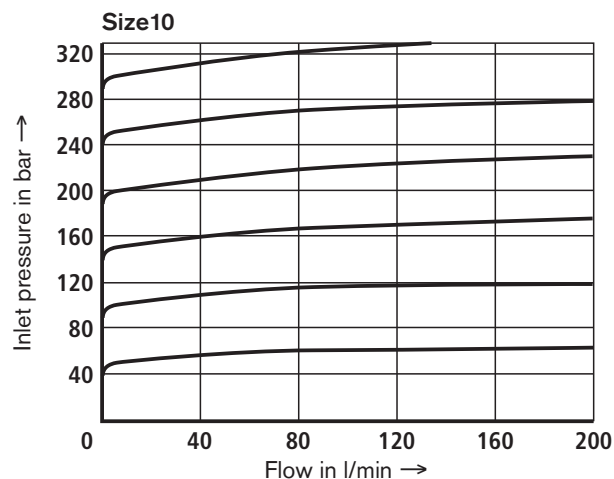


## Characteristic curves (measured at $v = 36 \text{ mm}^2/\text{s}$ and $\vartheta_{\text{oil}} = 50 \text{ }^\circ\text{C}$ )

The characteristic curves were measured with external, pressureless pilot oil drain. With internal pilot oil drain, the inlet pressure increases by the outlet pressure present in port B.

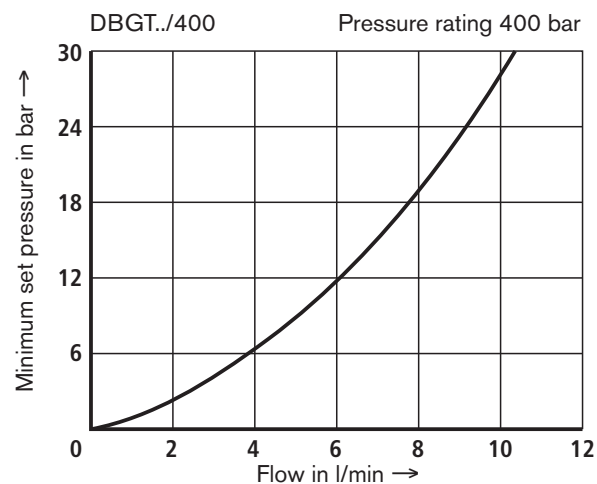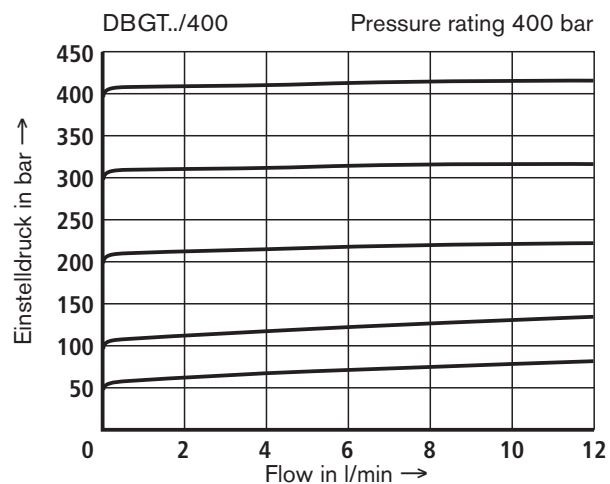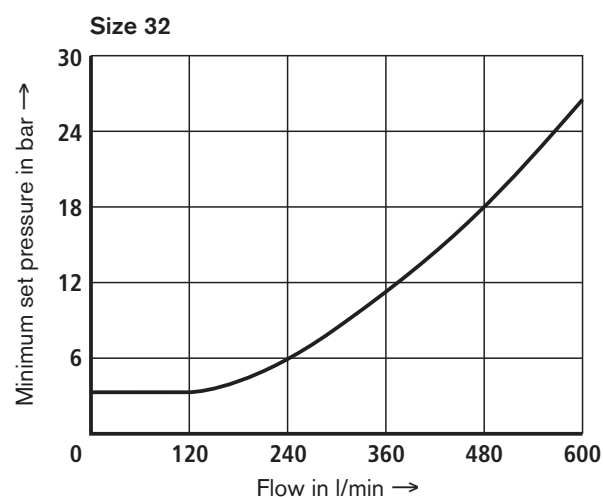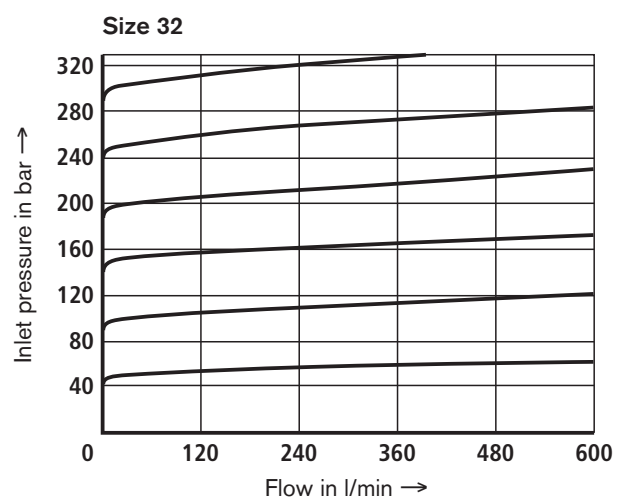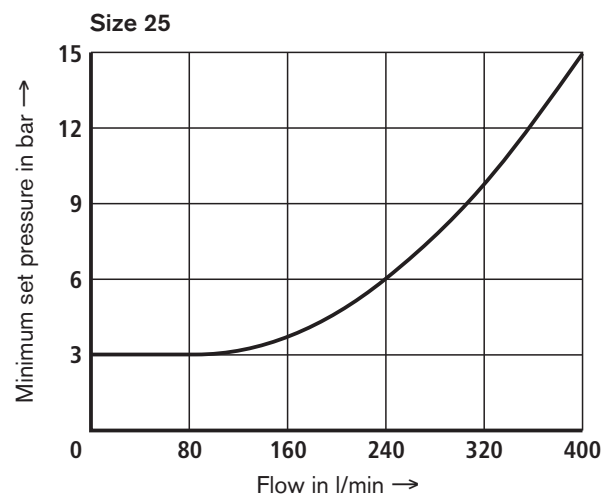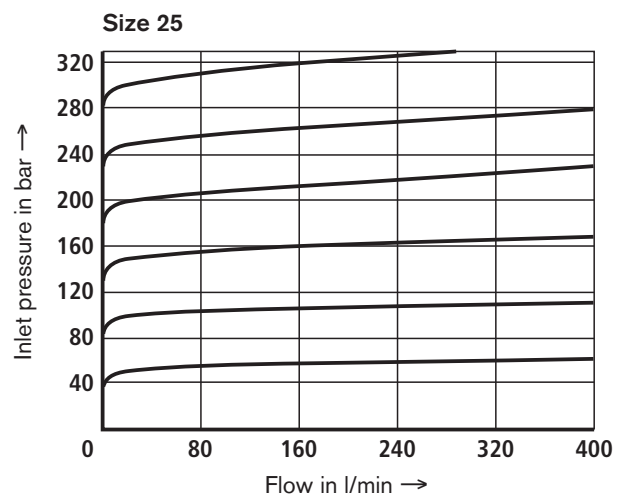

## Unit dimensions: Subplate mounting (dimensions in mm)

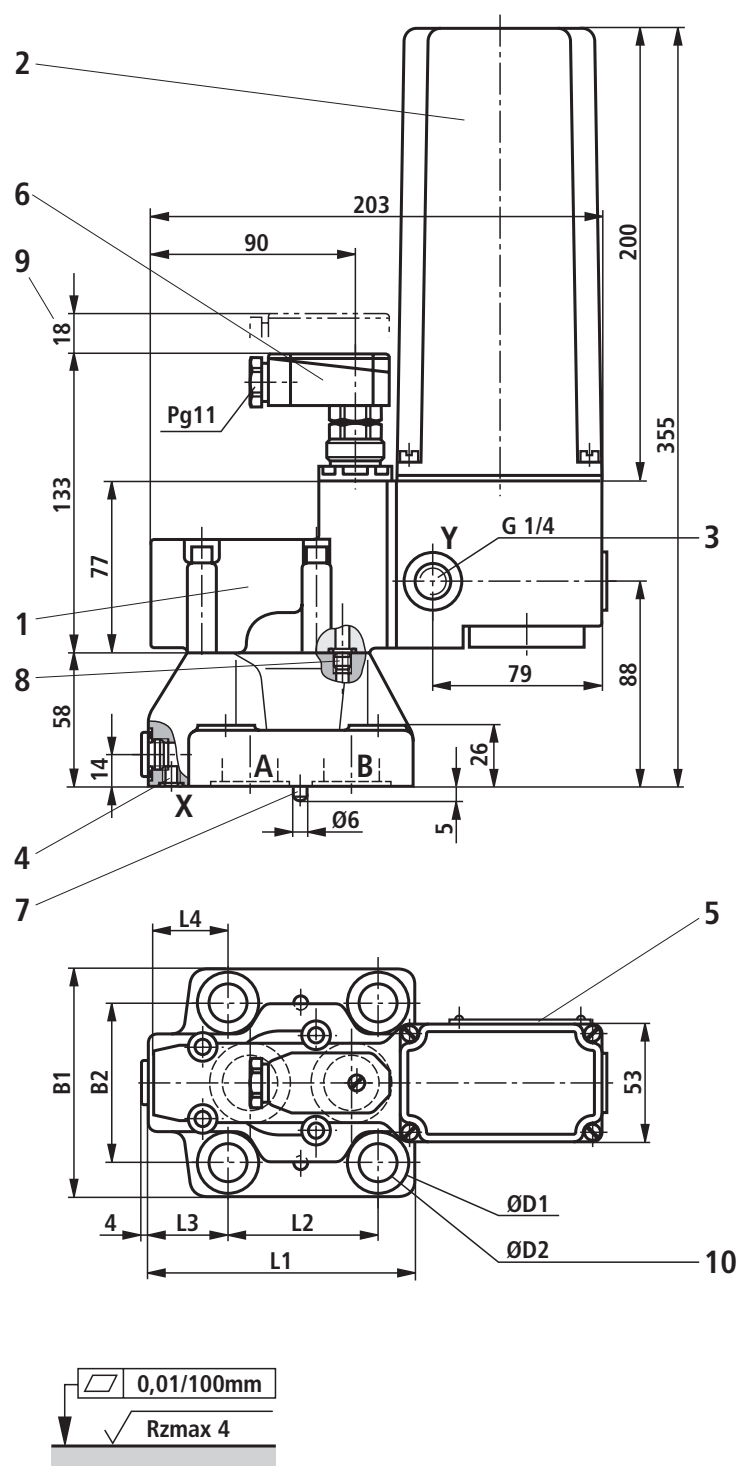

- 1 Pilot valve
- 2 DC motor
- 3 Port "Y"  
for external pilot oil drain
- 4 Port "X"  
for external pilot oil supply
- 5 Nameplate
- 6 Mating connector (included in scope of supply)
- 7 Locating pin
- 8 Not required with internal pilot oil drain
- 9 Space required to remove mating connector
- 10 Valve mounting bore

**Subplates** to data sheet RE 45064  
(separate order)

- Size 10                      G 545/01 (G3/8)  
                                    G 546/01 (G1/2)
- Size 25                    G 408/01 (G3/4)  
                                    G 409/01 (G1)
- Size 32                    G 410/01 (G1 1/4)  
                                    G 411/01 (G1 1/2)

**Valve fixing screws** (separate order)

For strength reasons, only the following valve fixing screws may be used:

- Size 10  
**4 hexagon socket head cap screws ISO 4762**  
– M12 x 50 - 10.9-fZn-240h-L to VDA 235-101  
Friction coefficient  $\mu_{\text{total}} = 0.09$  to 0.14,  
tightening torque  $M_T = 75 \text{ Nm} \pm 10\%$ ,  
Material no. **R913000283**
- Size 25  
**4 hexagon socket head cap screws ISO 4762**  
– M16 x 50 - 10.9-fZn-240h-L to VDA 235-101  
Friction coefficient  $\mu_{\text{total}} = 0.09$  to 0.14,  
tightening torque  $M_T = 185 \text{ Nm} \pm 10\%$ ,  
Material no. **R913000378**
- Size 32  
**4 hexagon socket head cap screws ISO 4762**  
– M18 x 50 - 10.9-fZn-240h-L to VDA 235-101  
Friction coefficient  $\mu_{\text{total}} = 0.09$  to 0.14,  
tightening torque  $M_T = 248 \text{ Nm} \pm 10\%$ ,  
Material no. **R900002245**


The tightening torques given are guidelines when screws of the specified friction coefficients and a torque wrench (tolerance  $\pm 10\%$ ) are used.

Required surface quality of  
valve mounting face

**Tolerances according to:**  
– General tolerances ISO 2768-mK


Size	B1	B2	ØD1	ØD2	L1	L2	L3	L4	O-ring - port X	O-ring - ports A, B
10	78	54	20	14	90	54	23.5	37	9.25 x 1.78	17.12 x 2.62
25	100	69.8	26	18	117	66.7	34	34	9.25 x 1.78	28.17 x 3.53
32	115	82.5	30	20	148	89	41.5	31.5	9.25 x 1.78	34.52 x 3.53

**Unit dimensions:** Threaded connection (dimensions in mm)

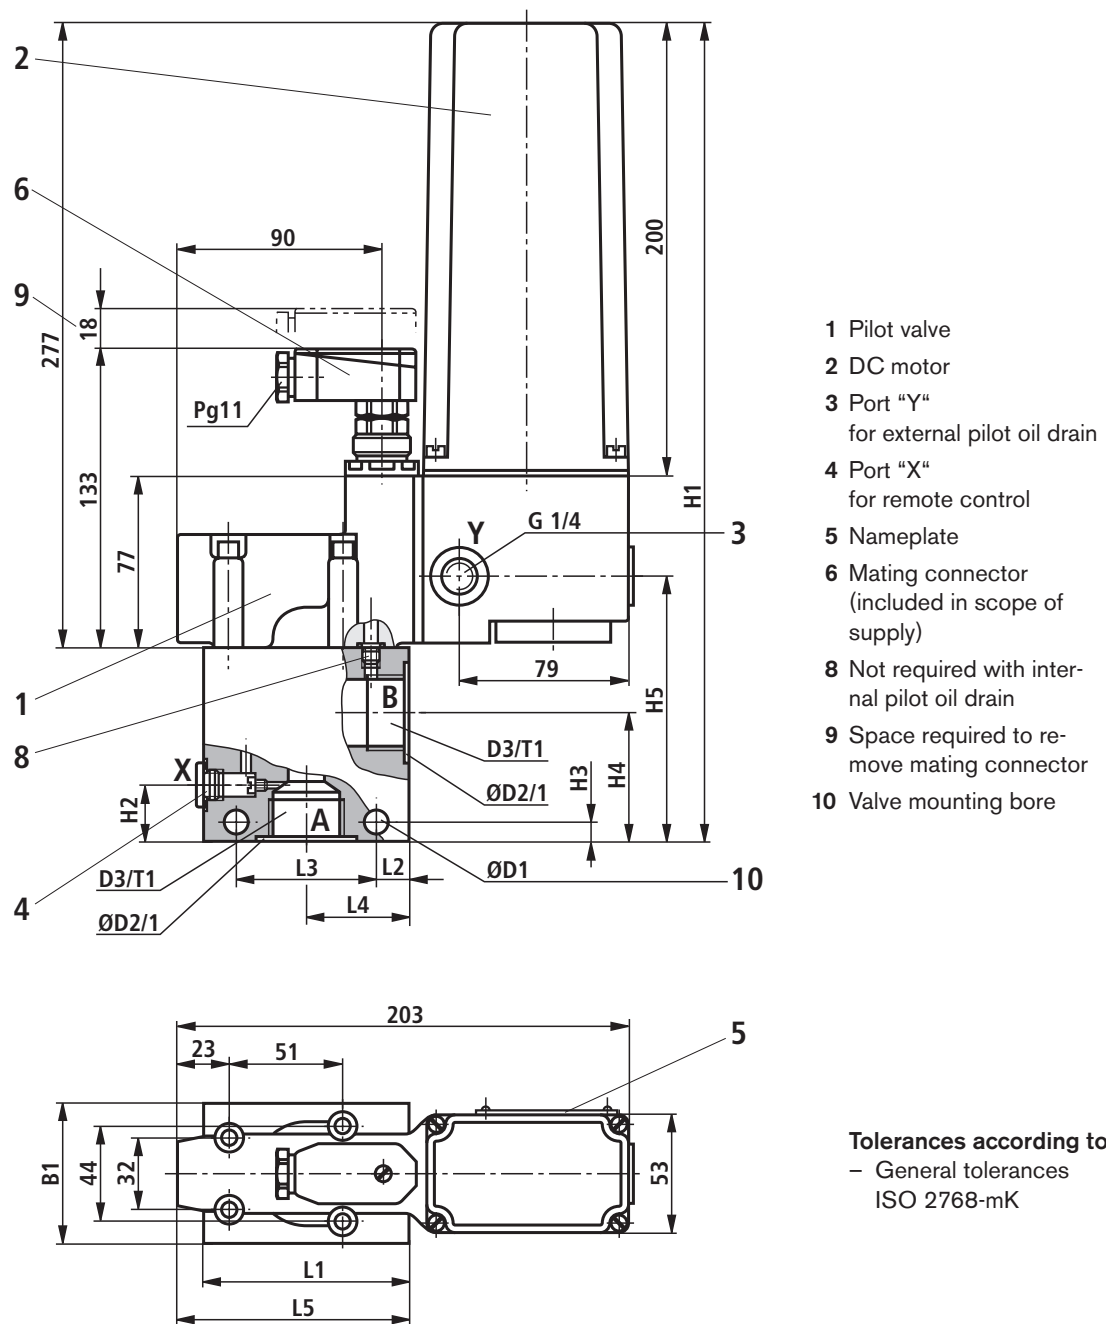

Size	B1	ØD1	ØD2	D3	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	T1
8	63	9	28	G3/8	362	27	10	62	115	85	14	62	45	100	12
10			34	G1/2											14
16			42	G3/4											16
20			47	G1				57	18						
25	70	11	56	G1 1/4	375	42	13	66	128	100	18	72	54	109	20
32			61	G1 1/2											22

## Unit dimensions: Block installation (dimensions in mm)

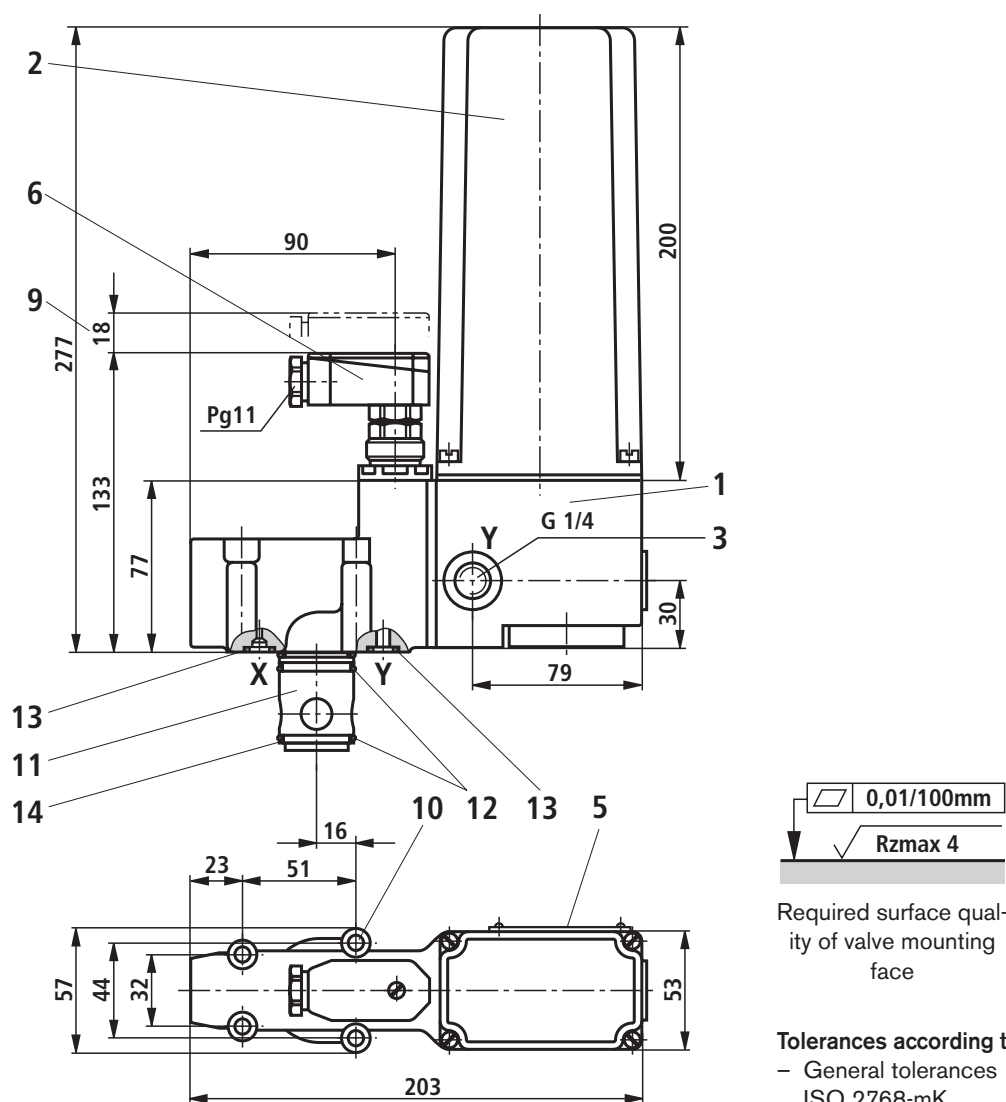

- 1 Pilot valve
- 2 DC motor
- 3 Port "Y" for external pilot oil drain
- 5 Nameplate
- 6 Mating connector (included in scope of supply)
- 9 Space required to remove mating connector
- 10 Valve mounting bores
- 11 Main spool insert
- 12 O-ring 27.3 x 2.4
- 13 O-ring 9.25 x 1.78
- 14 Back-up ring 32/28.4 x 0.8

### Valve fixing screws (separate order)

For strength reasons, only the following valve fixing screws may be used:

- Size 10, 32


**4 hexagon socket head cap screws ISO 4762 - M8 x 50  
- 10.9-flZn-240h-L to VDA 235-101**

Friction coefficient  $\mu_{\text{total}} = 0.09$  to  $0.14$ ,  
tightening torque  $M_T = 31 \text{ Nm} \pm 10\%$ ,  
Material no. **R913000543**

The tightening torques given are guidelines when screws of the specified friction coefficients and a torque wrench (tolerance  $\pm 10\%$ ) are used.

## Unit dimensions: Block installation (dimensions in mm)

### Mounting cavity

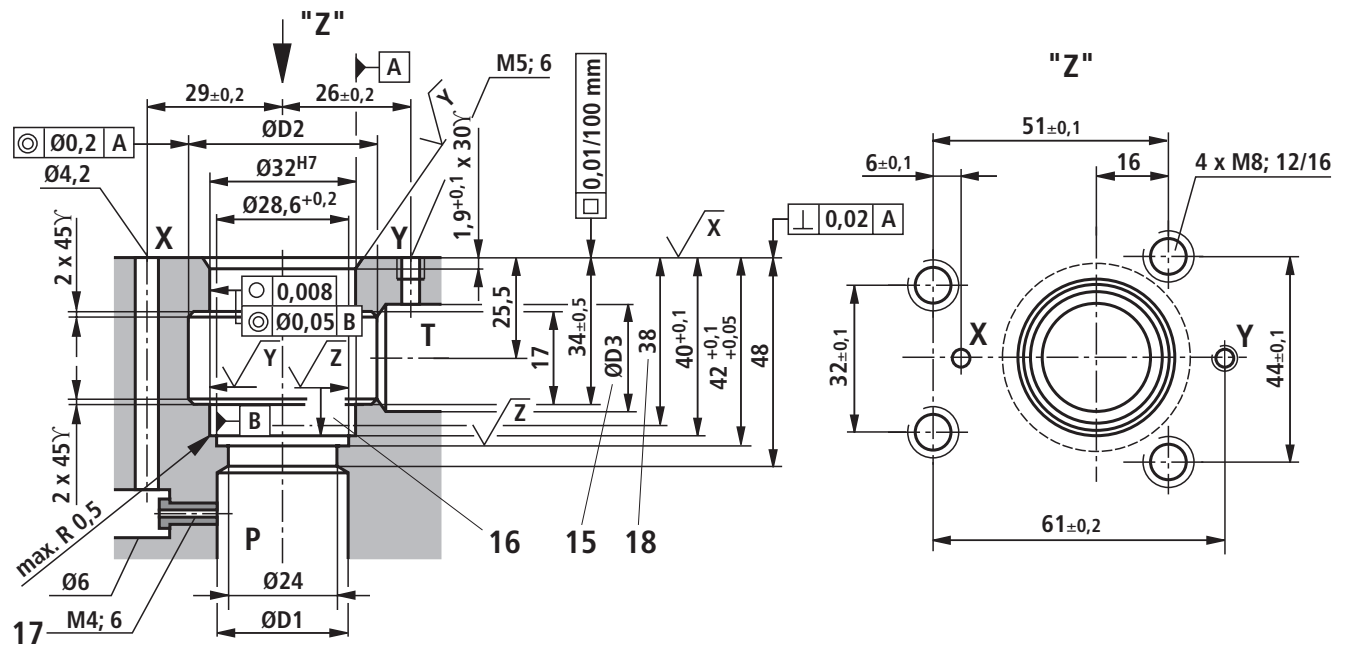

### Tolerances according to:

– General tolerances ISO 2768-mK

$$\sqrt{X} = \sqrt{Rz_{\max} 4}$$

$$\sqrt{Y} = \sqrt{Rz_{\max} 8}$$

$$\sqrt{Z} = \sqrt{Rz 16}$$


Size	ØD1	ØD2	ØD3
10	10	40	10
32	32	45	32

**15** Bore ØD3 can intersect ØD2 at any point. However, care must be taken that connection bore X and the mounting bore are not damaged.

**16** The back-up ring and the O-ring must be inserted in this bore before the main spool is installed.

**17** Mounting kit includes orifice and main spool insert

**18** Depth of fit

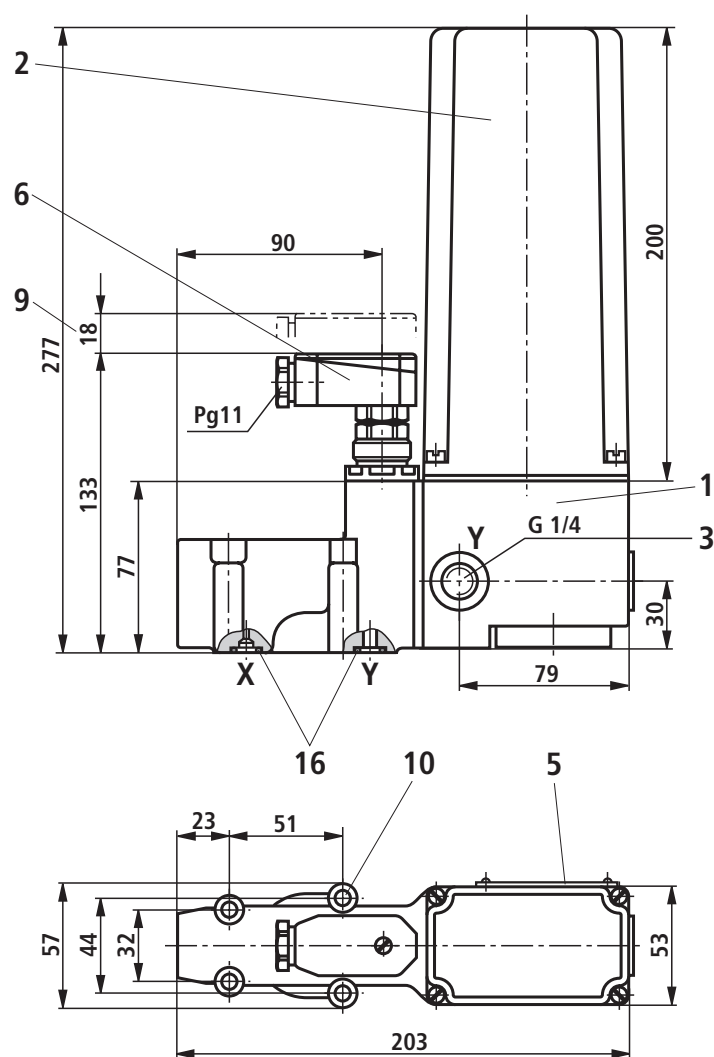**Unit dimensions:** As remote control valve type DBGT (dimensions in mm)

- 1 Pilot valve
- 2 DC motor
- 3 Port "Y" for external pilot oil drain
- 5 Nameplate
- 6 Mating connector (included in scope of supply)
- 9 Space required to remove mating connector
- 10 Valve mounting bores
- 16 O-ring 9.25 x 1,78

**Subplates** to data sheet RE 45064

(separate order)

G 51/01 (G1/4)

#### Valve fixing screws

(separate order)

For strength reasons, only the following valve fixing screws may be used:

#### 4 hexagon socket head cap screws ISO 4762


- M8 x 50 - 10.9-fZn-240h-L to VDA 235-101

Friction coefficient  $\mu_{\text{total}} = 0.09$  to  $0.14$ ,

Tightening torque  $M_t = 31 \text{ Nm} \pm 10\%$ ,

Material no. **R913000543**

The tightening torques given are guidelines when screws of the specified friction coefficients and a torque wrench (tolerance  $\pm 10\%$ ) are used.



Required surface quality of  
valve mounting face

#### Tolerances according to:

- General tolerances ISO 2768-mK