


# Proportional pressure relief valve, pilot operated, with on-board elec- tronics (OBE) and position feedback

RE 29159/07.05

1/10

## Type DBEBE6X

Nominal size 6  
Unit series 1X  
Maximum working pressure P 315 bar, T 250 bar  
Maximum flow rate 40 l/min

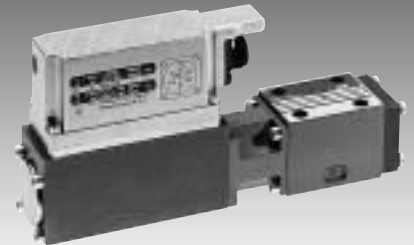

## List of Contents

Contents	Page
Features	1
Ordering data	2
Preferred types, symbol	2
Function, sectional diagram	3
Technical data	4 to 6
On-board trigger electronics	7 and 8
Characteristic curves	9
Unit dimensions	10

## Features

- Pilot operated valves with position feedback and on-board electronics for limiting system pressure (pilot oil internal only)
- Adjustable through the position of the armature against the compression spring
- Position-controlled, minimal hysteresis <1%, rapid response times, see Technical Data
- Pressure limitation to a safe level even with faulty electronics (solenoid current  $I > I_{max}$ )
- For subplate attachment, mounting hole configuration to ISO 4401-03-02-0-94. Subplates as per catalog sheet RE 45053 (order separately)
- Plug-in connector to DIN 43563-AM6, see catalog sheet RE 08008 (order separately)
- Data for the on-board trigger electronics
  - Complies with CE, EMC directives EN 61000-6-2: 2002-08 and EN 61000-6-3: 2002-08
  - $U_B = 24 V_{nom} DC$
  - Electrical connection 6P+PE
  - Signal actuation
    - Standard 0...+10 V (A1)
    - Version 4...20 mA (F1)
  - Valve curve calibrated at the factory

Ordering data

DBEB	E	6	X-1X/	G24	K31		M	*
------	---	---	-------	-----	-----	--	---	---

Proportional pressure relief valve with inductive position transducer on the cone

With on-board electronics = E

Nominal size = 6

Mounting hole configuration to ISO 4401-03-02-0-94 = X

Unit series 10 to 19 (10 to 19: installation and connection dimensions unchanged) = 1X

**Max. pressure stage**

up to 80 bar = 80

up to 180 bar = 180

up to 315 bar = 315

Voltage supply of trigger electronics 24 V DC = G24

Further information in plain text

M = NBR seals, suitable for mineral oils (HL, HLP) to DIN 51524

**Interface for trigger electronics**

A1 = Setpoint input 0...+10 V

F1 = Setpoint input 4...20 mA


K31 = **Electrical connection**  
**without** plug-in connector, with unit plug to DIN 43563-AM6  
Order plug-in connector separately

Preferred types

Type .....A1 (0...+10 V)	Material Number	Type .....F1 (4...20 mA)	Material Number
DBEBE6X-1X/80G24K31A1M	0 811 402 078	DBEBE6X-1X/80G24K31F1M	0 811 402 084
DBEBE6X-1X/180G24K31A1M	0 811 402 077	DBEBE6X-1X/180G24K31F1M	0 811 402 079
DBEBE6X-1X/315G24K31A1M	0 811 402 076		

Symbol

For on-board electronics




## Function, sectional diagram

### General

Type DBEBE6X proportional pressure relief valves are pilot valves that are used to limit system pressure. The valves are actuated by means of a position-controlled proportional solenoid with on-board electronics.

With these valves, rapid response times with low hysteresis can be achieved.




### Basic principle

To adjust the system pressure, a setpoint is set in the trigger electronics. Based on this setpoint, the electronics control the position-controlled solenoid.



The proportional solenoid maintains its position against a spring force, which is proportionate to the system pressure. The pilot stage is supplied with pilot oil through a bore hole at  $<0.6 \text{ l/min}$ . The " $p_{\max}$ " pressure stage is determined by the cone and seating bore configuration.

### Pressure limitation for maximum safety

If a fault occurs in the electronics, so that the solenoid current ( $I_{\max}$ ) would exceed its specified level in an uncontrolled manner, the pressure cannot rise above the level determined by the maximum spring force.

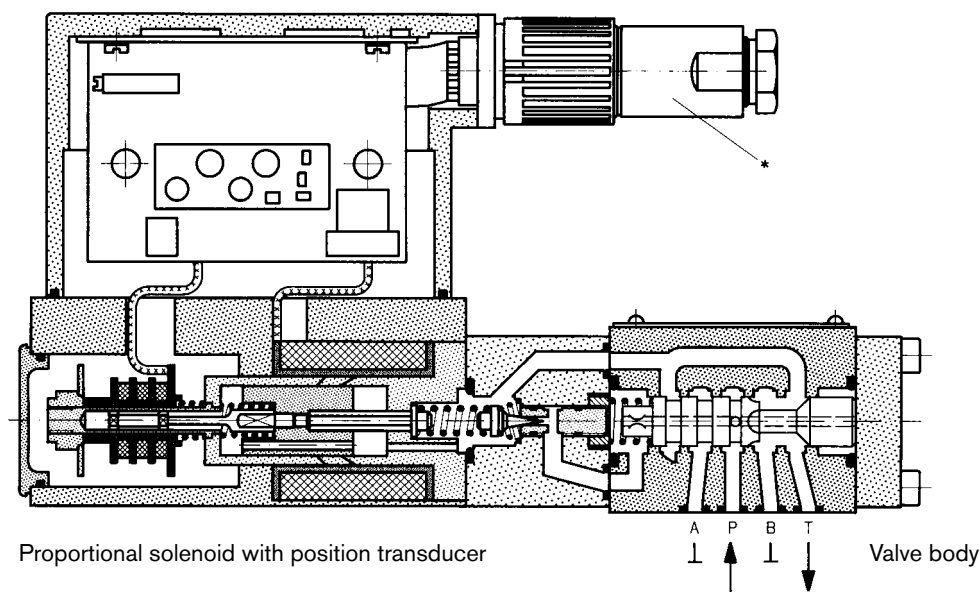

### Accessories

Type			Material Number
(4 x)  ISO 4762-M5x30-10.9	Cheese-head bolts		2 910 151 166
* 	Plug-in connectors 6P+PE, see also RE 08008	KS	1 834 482 022
		KS	1 834 482 026
		MS	1 834 482 023
		MS	1 834 482 024
		KS 90°	1 834 484 252

### Testing and service equipment

Test box type VT-PE-TB3, see RE 30065

Measuring adapter 6P+PE type VT-PA-2, see RE 30068


## Technical data

General		
Construction	Pilot stage	Poppet valve
	Main stage	Spool valve
Actuation	Proportional solenoid with position control and OBE	
Connection type	Subplate, mounting hole configuration NG6 (ISO 4401-03-02-0-94)	
Mounting position	Optional	
Ambient temperature range	°C	-20...+50
Weight	kg	3.4
Vibration resistance, test condition	Max. 25 g, shaken in 3 dimensions (24 h)	

## Hydraulic (measured with HLP 46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ )

Pressure fluid		Hydraulic oil to DIN 51524...535, other fluids after prior consultation		
Viscosity range	recommended mm <sup>2</sup> /s	20...100		
	max. permitted mm <sup>2</sup> /s	10...800		
Pressure fluid temperature range		°C	−20...+70	
Maximum permitted degree of contamination of pressure fluid Purity class to ISO 4406 (c)		Class 18/16/13 <sup>1)</sup>		
Direction of flow		See symbol		
Max. set pressure (at $Q = 1$ l/min)	bar	80	180	315
Minimum pressure (at $Q = 1$ l/min)	bar	7	8	10
Max. mechanical pressure limitation level, e.g. when solenoid current $I > I_{\max}$	bar	<90	<190	<325
Max. working pressure		bar	Port P: 315	
Max. pressure		bar	Port T: 250	
Pilot oil flow		l/min	approx. 0.6	
Max. flow		l/min	40	

## Static/Dynamic


Hysteresis	%	≤ 1		
Manufacturing tolerance	%	≤ ±5		
Response time	100 % signal change	ms	70	Response time at: Q = 10 l/min (values depend on the dead volume)
	10 % signal change	ms	15	
Thermal drift	<1 % at ΔT = 40 °C			
Conformity	<div> EN 61000-6-2: 2002-08 EN 61000-6-3: 2002-08</div>			

<sup>1)</sup> The purity classes stated for the components must be complied with in hydraulic systems.  
Effective filtration prevents problems and also extends the service life of components.  
For a selection of filters, see catalog sheets RE 50070, RE 50076 and RE 50081.


## Technical data

<b>Electrical</b> , trigger electronics integrated in valve		
Cyclic duration factor	%	100
Degree of protection		IP 65 to DIN 40050 and IEC 14434/5
Connection		Plug-in connector 6P+PE, DIN 43563
Supply voltage		24 V DC <sub>nom</sub>
Terminal A:		Min. 21 V DC/max. 40 V DC
Terminal B: 0 V		Ripple max. 2 V DC
Power consumption		Solenoid $\square$ 45 mm = 40 VA max.
External fuse		2.5 A <sub>F</sub>
Input, "standard" version	A1	Differential amplifier, $R_i = 100 \text{ k}\Omega$
Terminal D: $U_E$		0...+10 V
Terminal E:		0 V
Input, "mA signal" version	F1	Burden, $R_{sh} = 200 \Omega$
Terminal D: $I_{D-E}$		4...20 mA
Terminal E: $I_{D-E}$		Current loop $I_{D-E}$ feedback
Max. voltage to differential inputs over 0 V		$D \rightarrow B \}$ max. 18 V DC $E \rightarrow B \}$
Test signal, "standard" version	A1	LVDT
Terminal F: $U_{\text{Test}}$		0...+10 V
Terminal C:		Reference 0 V
Test signal, "mA signal" version	F1	LVDT signal 4...20 mA at external load 200...500 $\Omega$ max.
Terminal F: $I_{F-C}$		4...20 mA output
Terminal C: $I_{F-C}$		Current loop $I_{F-C}$ feedback
Safety earth conductor and shield		See pin assignment (installation in conformity with CE)
Recommended cable		See pin assignment up to 20 m 7 x 0.75 mm <sup>2</sup> up to 40 m 7 x 1 mm <sup>2</sup>
Calibration		Calibrated at the factory, see valve curve

### Version A1: Standard

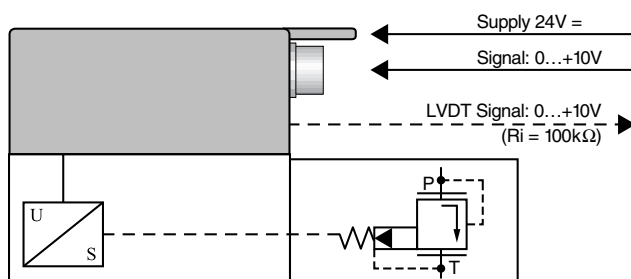


### Version F1: mA signal

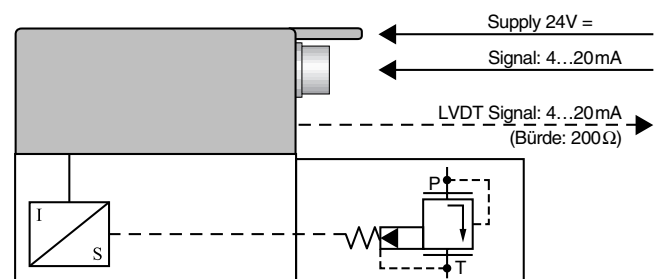

## Connection

For electrical data, see page 5 and  
Operating Instructions 1 819 929 083

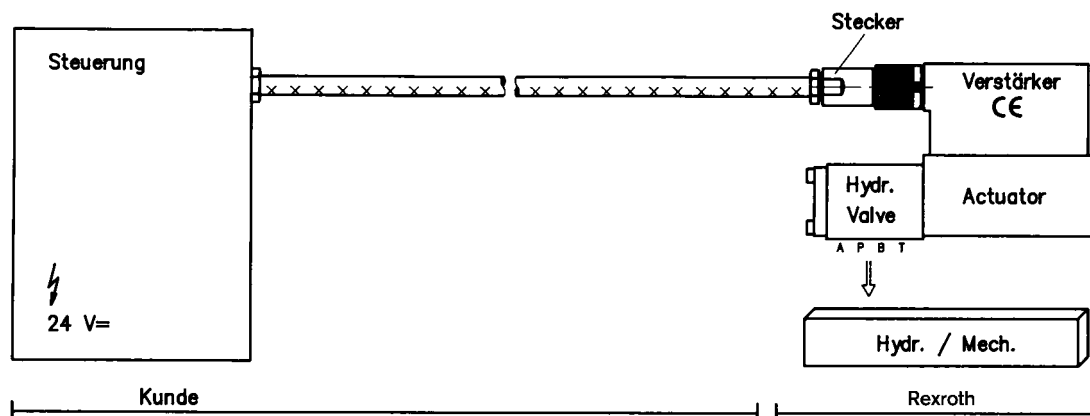

### Technical notes for the cable

- Version:**
- Multi-wire cable
  - Extra-finely stranded wire to VDE 0295, Class 6
  - Safety earth conductor, green/yellow
  - Cu braided shield
- Type:**
- e.g. Ölflex-FD 855 CP (from Lappkabel company)
- No. of wires:**
- Determined by type of valve, plug type and signal assignment
- Cable Ø:**
- 0.75 mm<sup>2</sup> up to 20 m long
  - 1.0 mm<sup>2</sup> up to 40 m long
- Outside Ø:**
- 9.4...11.8 mm – Pg11
  - 12.7...13.5 mm – Pg16

### Important

Power supply 24 V DC nom,  
if voltage drops below 18 V DC, rapid shutdown resembling  
“Enable OFF” takes place internally.

In addition, with the “mA signal” version:

$I_{D-E} \geq 3 \text{ mA}$  – valve is active

$I_{D-E} \leq 2 \text{ mA}$  – valve is deactivated.


Electrical signals emitted via the trigger electronics (e.g. actual values) must not be used to shut down safety-relevant machine functions!

(See also European Standard, “Technical Safety Requirements for Fluid-Powered Systems and Components – Hydraulics”, EN 982).

## On-board trigger electronics

### Circuit diagram/pin assignment


Version A1:  $U_{D-E}$  0...+10 V

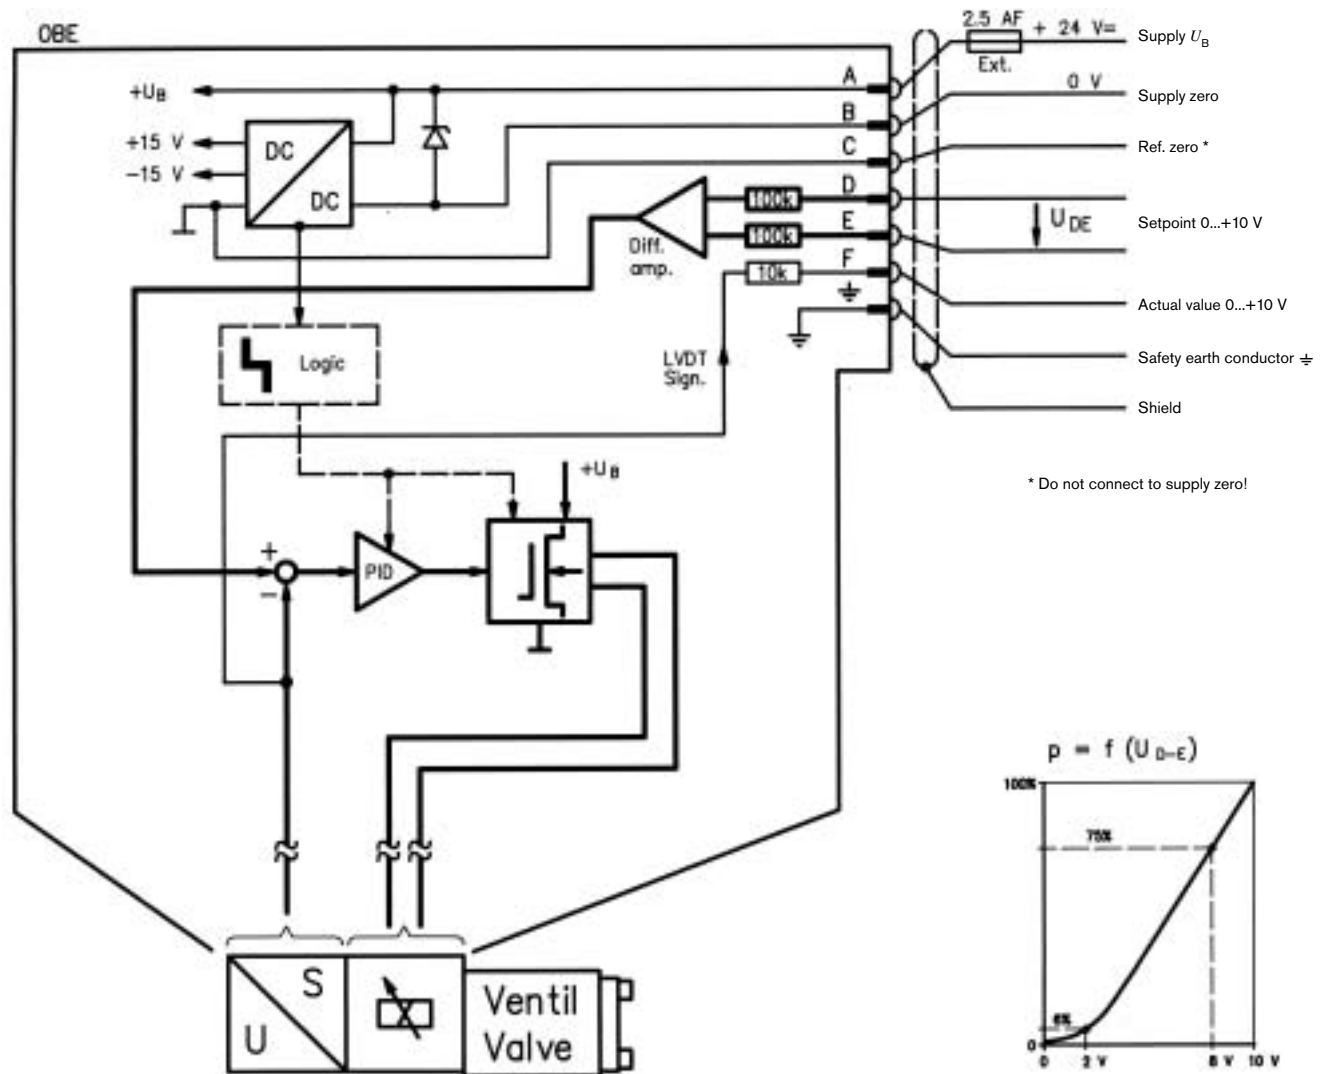

### Pin assignment


Version A1:  $U_{D-E}$  0...+10 V

( $R_i = 100 \text{ k}\Omega$ )

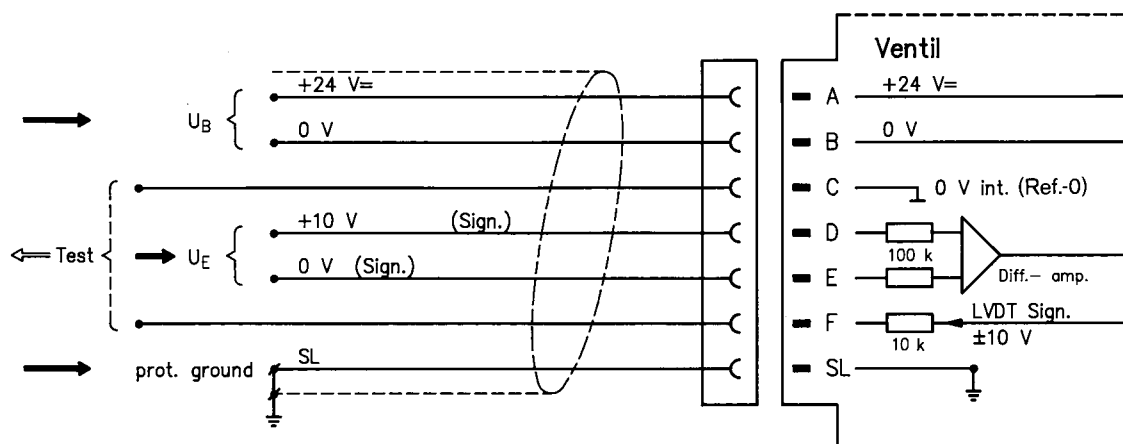


## On-board trigger electronics

### Circuit diagram/pin assignment

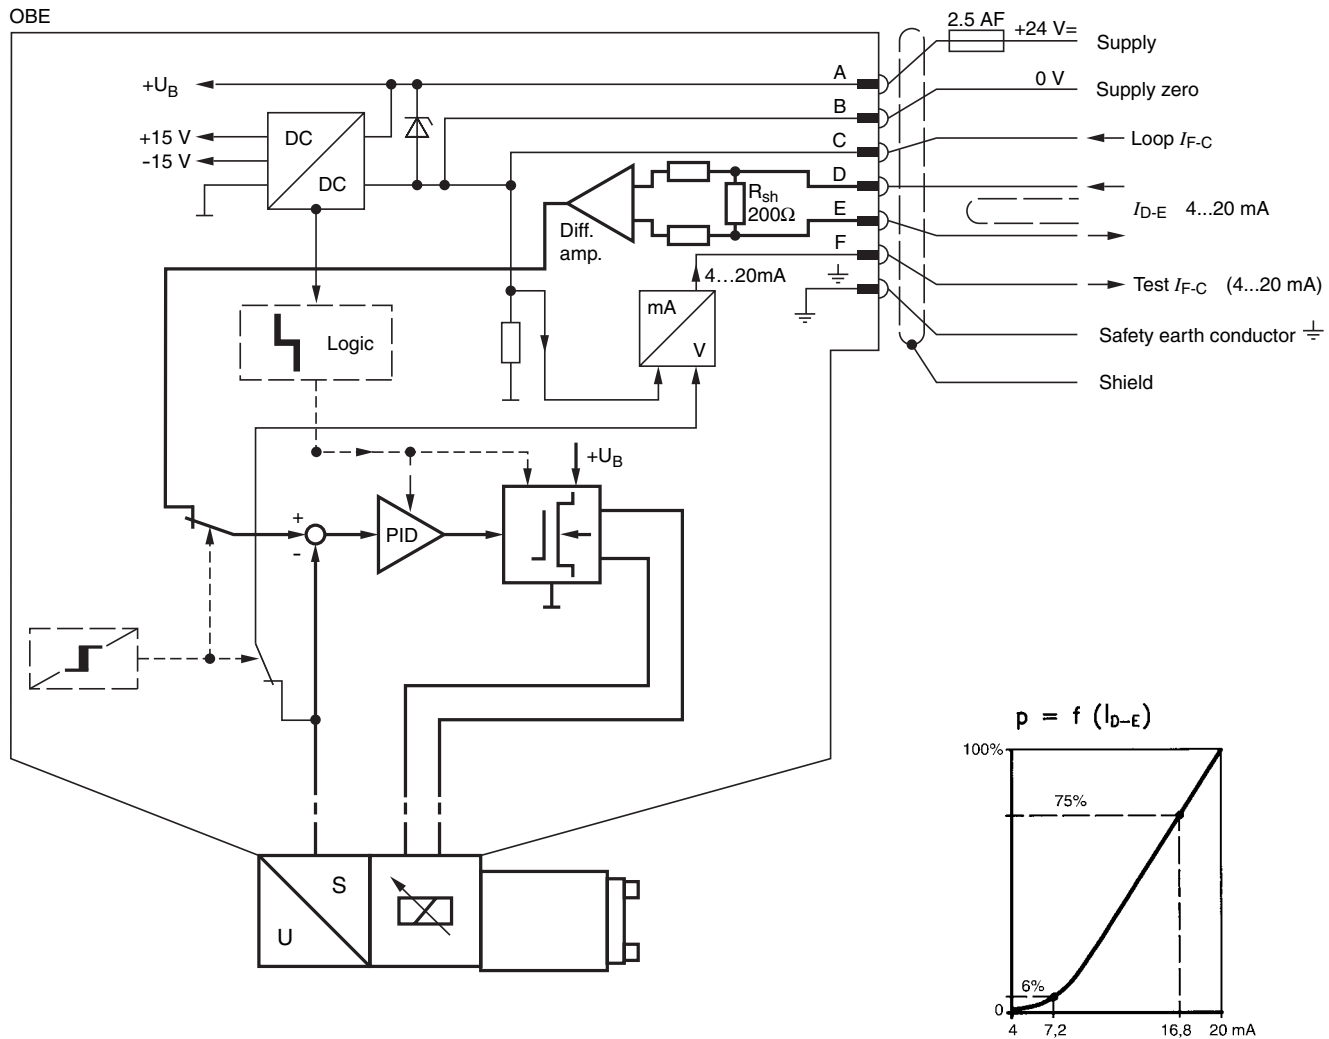Version F1:  $I_{D-E}$  4...20 mA


### Pin assignment 6P+PE

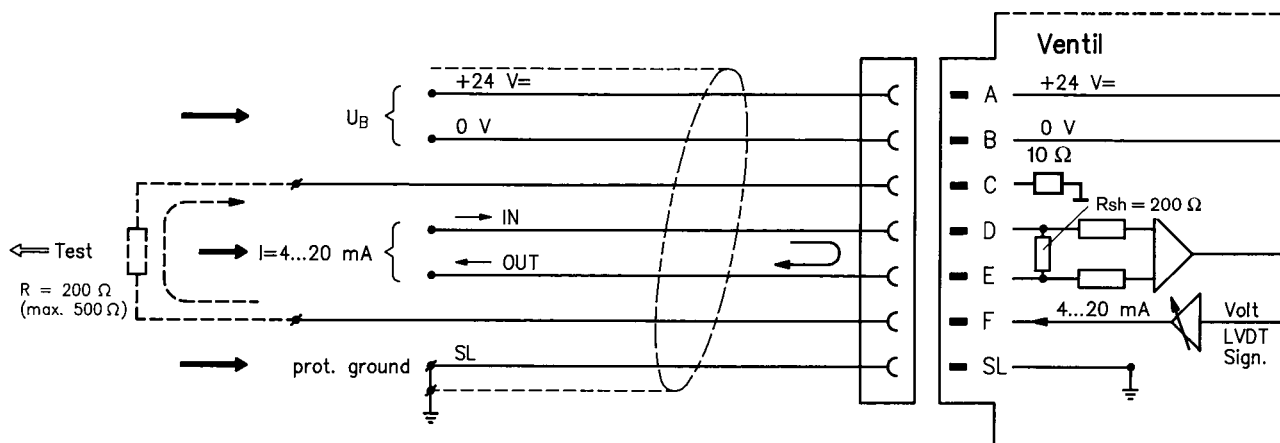Version F1:  $I_{D-E}$  4...20 mA $(R_{sh} = 200 \text{ k}\Omega)$ 



## Characteristic curves (measured with HLP 46, $\vartheta_{\text{oil}} = 40^\circ\text{C} \pm 5^\circ\text{C}$ )

Pressure in port P as a function of the setpoint

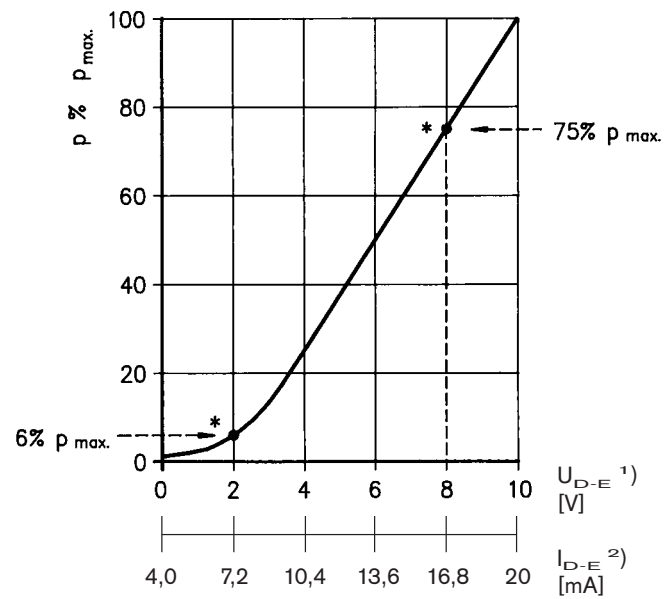


\* Factory setting at  $Q = 1 \text{ l/min}$   
 $\pm 5\%$  manufacturing tolerance


1) Version:  $U_{D-E} = 0 \dots +10 \text{ V}$

2) Version:  $I_{D-E} = 4 \dots 20 \text{ mA}$


Pressure in port P proportionate to the maximum flow rate of the main stage

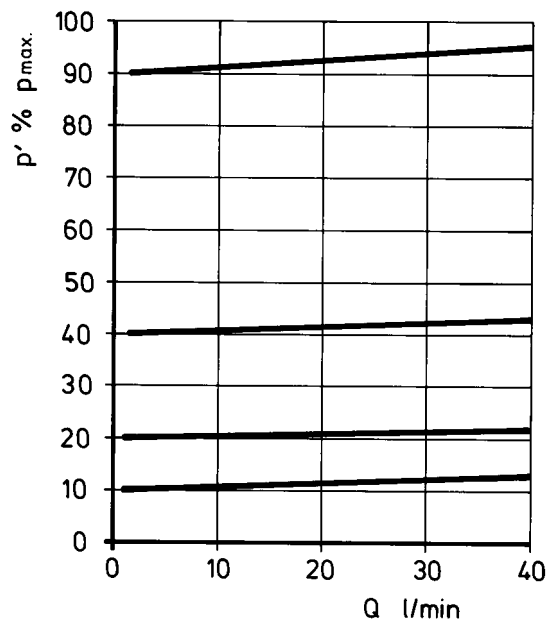

Set pressure  
 $p' = f(Q_{P-T})$




Unit dimensions (nominal dimensions in mm)

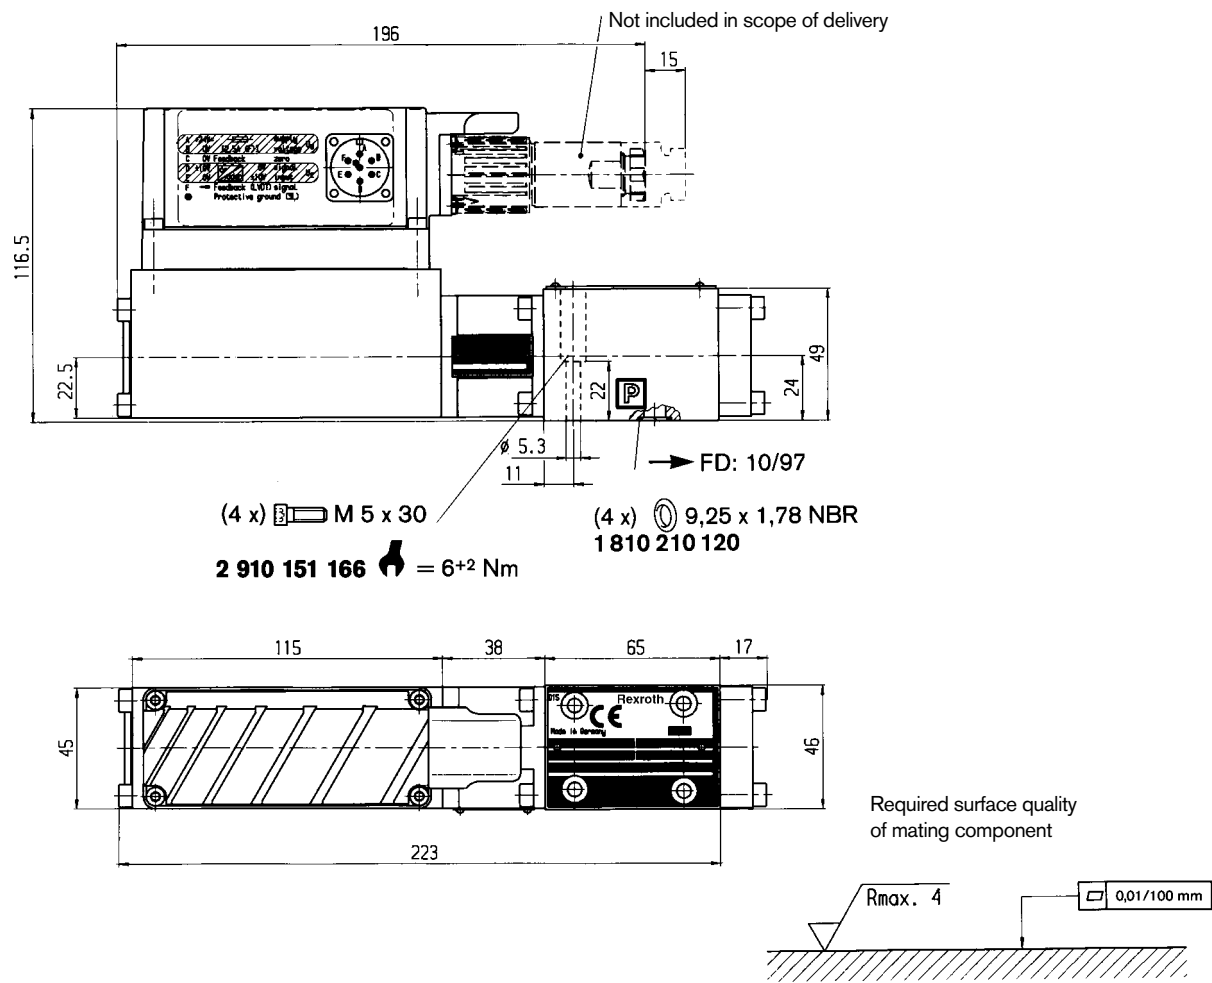

Mounting hole configuration: NG6 (ISO 4401-03-02-0-94)  
For subplates see catalog sheet RE 45053

- 1) Deviates from standard
- 2) Thread depth:
  - Ferrous metal 1.5 x Ø
  - Non-ferrous 2 x Ø



	P	A	T	B	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>
⊗	21.5	12.5	21.5	30.2	0	40.5	40.5	0
⊙	25.9	15.5	5.1	15.5	0	-0.75	31.75	31
∅	8 <sup>1)</sup>	8 <sup>1)</sup>	8 <sup>1)</sup>	8 <sup>1)</sup>	M5 <sup>2)</sup>	M5 <sup>2)</sup>	M5 <sup>2)</sup>	M5 <sup>2)</sup>