

The Drive & Control Company

Rexroth
Bosch Group


Proportional flow control valve

Type 2FRE

RE 29188

Edition: 2016-05

Replaces: 02.07

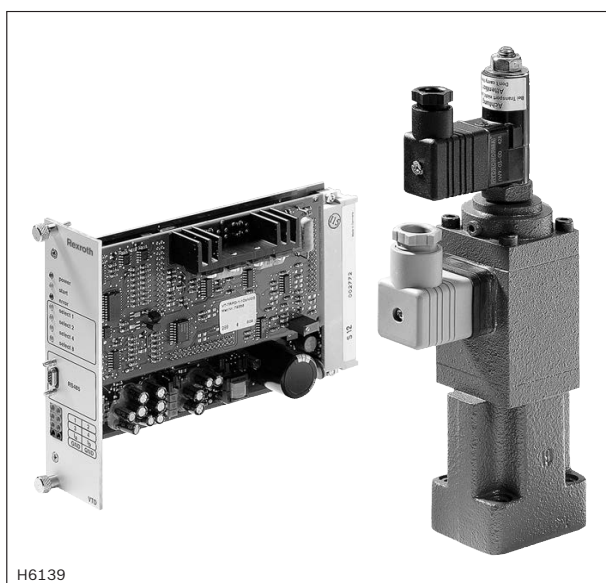

- ▶ Size 6
- ▶ Component series 2X
- ▶ Maximum operating pressure 210 bar
- ▶ Maximum flow 25 l/min

Features

- ▶ 2-way version
- ▶ Valve with pressure compensator for pressure-compensated flow control
- ▶ Actuation via proportional solenoid
- ▶ For subplate mounting
- ▶ Porting pattern according to ISO 4401-03-02-0-05
- ▶ With electrical position control for the metering orifice
- ▶ Axially movable position transducer coil, therefore an easy zero point calibration of the metering orifice is possible without having to interfere with the control electronics (electrical-hydraulic)
- ▶ Low manufacturing tolerance of the valve and electric amplifier VT-VRPA1-150-1X (analog) and amplifier module VT-MRPA1-150-1X (analog), optional
- ▶ Flow control in both directions by means of rectifier sandwich plate

Contents

Features	1
Ordering code	2, 3
Symbols	3
Function, section	4, 5
Technical data	6, 7
Characteristic curves	8, 9
Dimensions	10, 11
Electrical connections and assignment	11
Mating connectors	12
Further information	12

RE 29188, edition 2016-05, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2/12 **2FRE** | Proportional flow control valve

Ordering code: Proportional flow control valve

01	02	03		04		05	06	07	08	09
2FRE	6		-	2X	/		K4		V	*

01	Proportional flow control valve, 2-way version	2FRE
02	Size 6	6
03	With external closing of the pressure compensator (suppression of the start-up jump)	A
	Without external closing of the pressure compensator	B
04	Component series 20 ... 29 (20 ... 29: unchanged installation and connection dimensions)	2X

Rated flow A → B / flow characteristic

05	- Linear	
	Up to 1 l/min	1L
	Up to 2 l/min	2L
	Up to 8 l/min	8L
	- Progressive	
	Up to 3 l/min	3Q
	Up to 6 l/min	6Q
	Up to 10 l/min	10Q
	Up to 16 l/min	16Q
	Up to 25 l/min	25Q
	- Progressive with rapid traverse	
	Fine control range up to 2 l/min	2QE


Electrical connection

06	Individual connection	
	Without mating connector; connector DIN EN 175301-803-A (proportional solenoid) and GSA20 (position transducer)	K4 ¹⁾
07	With check valve	R
	Without check valve	M

Seal material

08	FKM seals	V
	Observe compatibility of seals with hydraulic fluid used. (Other seals upon request)	
09	Further details in the plain text	

¹⁾ Mating connectors, separate order, see page 12 and data sheet 08006.

 **Notice:** Preferred types and standard units are contained in the EPS (standard price list).

Ordering code: Rectifier sandwich plate

01	02	03	04	05
Z4S	6	-	1X	/ V *

Material no. R900489356

01	Rectifier sandwich plate	Z4S
02	Size 6	6
03	Component series 10 ... 19 (10 ... 19: unchanged installation and connection dimensions)	1X

Seal material

08	FKM seals Observe compatibility of seals with hydraulic fluid used. (Other seals upon request)	V
09	Further details in the plain text	


Notice:
Rectifier sandwich plate **impossible** with proportional flow control valve, version "A" (with external closing of the pressure compensator).

Symbols (① = component side, ② = plate side)

Proportional flow control valve (simplified, detailed)

	Version "B...MV"	Version "B...RV"	Version "A...MV"	Version "A...RV"
simplified				
detailed				

Rectifier sandwich plate

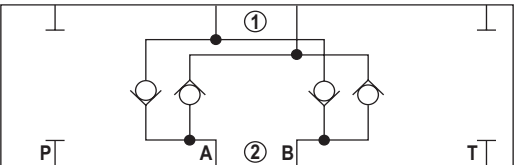

4/12 **2FRE** | Proportional flow control valve

Function, section

Proportional flow control valves of the 2FRE ... type comprise a 2-way function. They are capable of controlling a flow indicated by the electrical command value in a pressure- and temperature-compensated manner. The set-up basically consists of a housing (1), proportional solenoid with inductive position transducer (2), metering orifice (3), pressure compensator (4) as well as check valve (5), optional.

Proportional flow control valve, version "B...RV" (without external closing, **with** check valve)


The flow setting is determined by the indication (0 ... 100%) at the command value potentiometer. Via the amplifier as well as the proportional solenoid, the indicated command value has an effect on the adjustment of the metering orifice (3). The position of the metering orifice (3) is recorded by the inductive position transducer.

Any existing variations from the command value are corrected by the position control. The pressure compensator (4) keeps the pressure drop at the metering orifice (3) at a constant value at all times. Thus, the flow is load-compensated. The low temperature drift is the result of the favorable design of the metering orifice.

With a command value of 0%, the metering orifice is closed. In the event of a power failure or cable break at the inductive position transducer, the metering orifice closes.

From the command value 0%, a smooth start-up is possible. Via two ramps in the electric amplifier, the metering orifice can be opened and closed with delay. Via the check valve (5), a free return flow from B to A is possible.

With an additional rectifier sandwich plate of the Z4S 6 type under the proportional flow control valve, the supply and return flow from the actuator can be regulated.

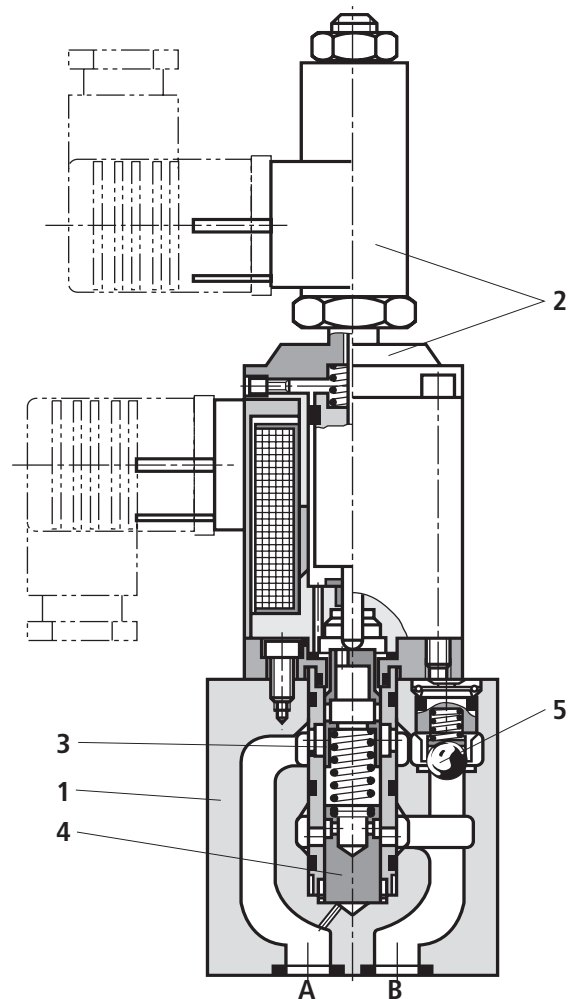



Type 2FRE 6 B-2X/.K4RV

Function, section

Proportional flow control valve, version "A...MV"
(with external closing, without check valve)

In principle, the function of this valve corresponds to the function of version "B...RV".

For the start-up jump suppression with open metering orifice (3) (command value > 0%), a closing of the pressure compensator (4) is provided via port P (6). The internal connection between port A and the pressure compensator (4) is abandoned. Via the external port P (6), the pressure in P upstream to the directional valve (8) has an impact on the pressure compensator (4) and keeps the latter in its closed position against the spring force (7). If the directional valve (8) is switched from P to B, the pressure compensator (4) moves from the closed position into the control position and the start-up jump is thus prevented.

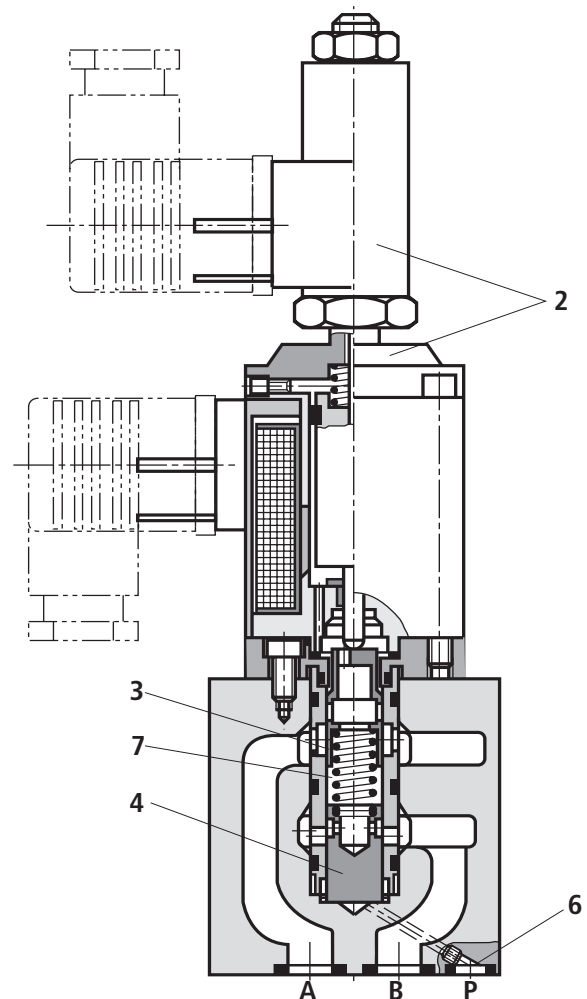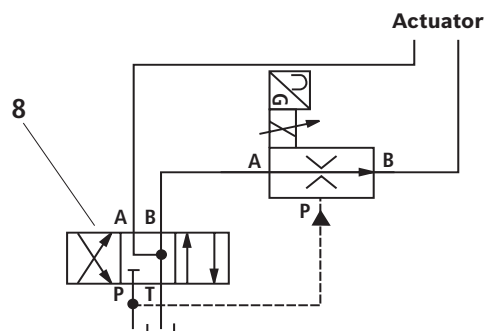

Type 2FRE 6 A-2X/.K4MV

6/12 **2FRE** | Proportional flow control valve

Technical data

(For applications outside these values, please consult us!)

general			
Weight	► Proportional flow control valve	kg	1.8
	► Rectifier sandwich plate	kg	0.9
Installation position			Any
Storage temperature range		°C	–20 ... +80
Ambient temperature range		°C	–20 ... +50

hydraulic – Proportional flow control valve ¹⁾													
Maximum operating pressure			► Port A	bar	210								
Version					1L	2L	8L	3Q	6Q	10Q	16Q	25Q	2QE
Maximum flow volume				l/min	1	2	8	3	6	10	16	25	25
Minimum flow		► 100 bar	cm ³ /min	25	25	50	15	25	50	70	100	15	
		► 210 bar	cm ³ /min	25	25	50	25	25	50	70	100	25	
Maximum leakage flow, $\Delta p_{A \rightarrow B}$ with a command value of 0% ²⁾		► 50 bar	cm ³ /min	4	4	6	4	4	6	7	10	4	
		► 100 bar	cm ³ /min	5	5	8	5	5	8	10	15	5	
		► 210 bar	cm ³ /min	7	7	12	7	7	12	15	22	7	
Minimum pressure differential				bar	6 ... 10								
Pressure differential with free return flow B → A					See characteristic curve, page 9								
Pressure/flow-dependence of input/output pressure					See characteristic curve, page 9								
Temperature dependence					See characteristic curve, page 9								
Temperature drift, hydraulic and electric													
Hydraulic fluid					See table, page 7								
Maximum admissible degree of contamination of the hydraulic fluid					Class 20/18/15 ³⁾								
Cleanliness class according to ISO 4406 (c)													
Hydraulic fluid temperature range				°C	–20 ... +80								
Viscosity range				mm ² /s	15 ... 380								
Hysteresis				%	< ±1 of q_{Vmax}								
Repetition accuracy				%	< 1 of q_{Vmax}								
Manufacturing tolerance	► Valve, type 2FRE 6			≤ ±3% with command value 33% ≤ ±5% with command value 100%									
		► Amplifier VT-VRPA1-150 (analog)		The amplifier is to be adapted to the valve ⁴⁾									
		► Amplifier module VT-MRPA1-150 (analog)		The amplifier is to be adapted to the valve ⁴⁾									

Hydraulic – Rectifier sandwich plate		
Maximum operating pressure	bar	210
Cracking pressure	bar	0.7
Rated flow	l/min	25

¹⁾ Measured with HLP46 and with $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$

²⁾ Measured with $v = 41 \text{ mm}^2/\text{s}$ and $\vartheta = 50^\circ\text{C}$

³⁾ The cleanliness classes stated for the components need to be maintained in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.

Available filters can be found at www.boschrexroth.com/filter.

⁴⁾ Due to tolerances of the oscillator frequency (supply of the position transducer), amplifiers comprise manufacturing tolerances.
In new systems or when replacing the amplifier, an adaptation of the amplifier setting may be necessary.

Technical data

(For applications outside these values, please consult us!)

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP	FKM	DIN 51524	90220
Flame-resistant ► Water-free	HFDU (glycol base)	FKM	ISO 12922	90222



Important notices on hydraulic fluids:

► For more information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.

- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum solenoid surface temperature.

electrical – Proportional solenoid				
Voltage type		Direct voltage		
Coil resistance	► Cold value at 20°C	Ω	5.4	
	► Maximum hot value	Ω	8.2	
Duty cycle		%	100	
Maximum current per solenoid		A	1.5	
Electrical connection		Connector according to DIN EN 175301-803-A ⁵⁾		
Protection class according to EN 60529 ⁶⁾		IP 65 with mating connector mounted and locked		
electrical – Inductive position transducer				
Coil resistance (total resistance of the coils between PIN) at 20°C (see page 11)		1 and 2	2 and earthing	Earthing and 1
		31.5	45.5	31.5
Electrical connection		Connector GSA20 ⁵⁾		
Protection class according to EN 60529 ⁶⁾		IP 65 with mating connector mounted and locked		
Inductivity		mH	6 ... 8	
Oscillator frequency		kHz	2.5	
Electrical position measurement system		Differential throttle		
Nominal stroke		mm	3.5	
Control electronics (separate order)				
Related amplifier in euro-card format		Type VT-VRPA1-150-1X (analog) according to data sheet 30118		
Related amplifier module		Type VT-MRPA1-150-1X (analog) according to data sheet 30221		

⁵⁾ Mating connector, separate order, see page 12.

⁶⁾ Due to the arising surface temperatures of the solenoid coils, the standards ISO 13732-1 and ISO 4413 are to be observed.


8/12 **2FRE** | Proportional flow control valve

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5^\circ\text{C}$)

Dependency of the flow from the command value voltage


(Flow control of A → B); $p_{nom} = 50 \text{ bar}$

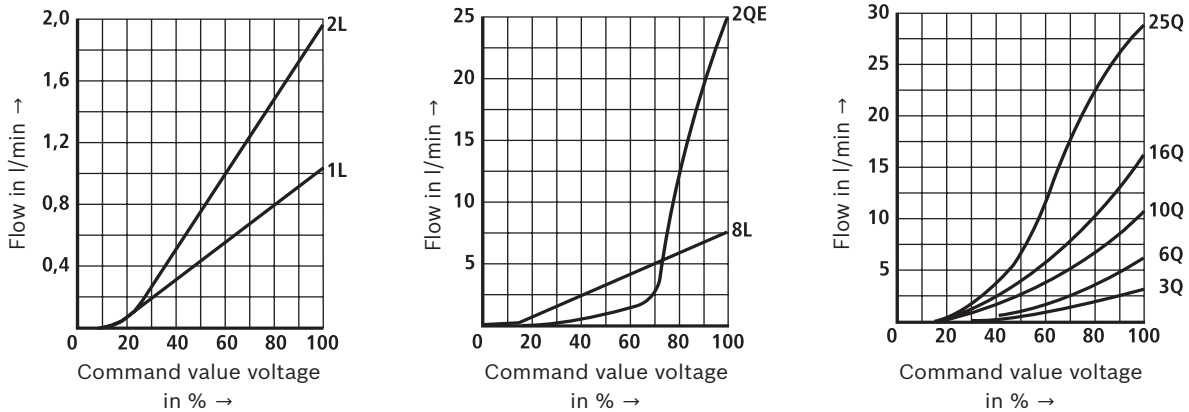

Transition function with stepped command value modification; $p_{nom} = 100 \text{ bar}$; version "25Q"

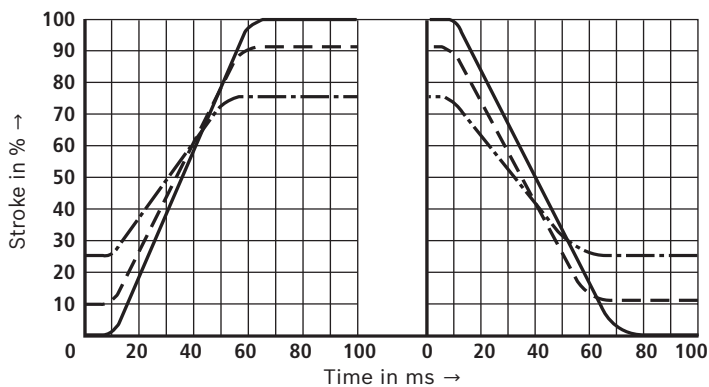

Frequency response characteristic curves; $p_{nom} = 100 \text{ bar}$; version "25Q"

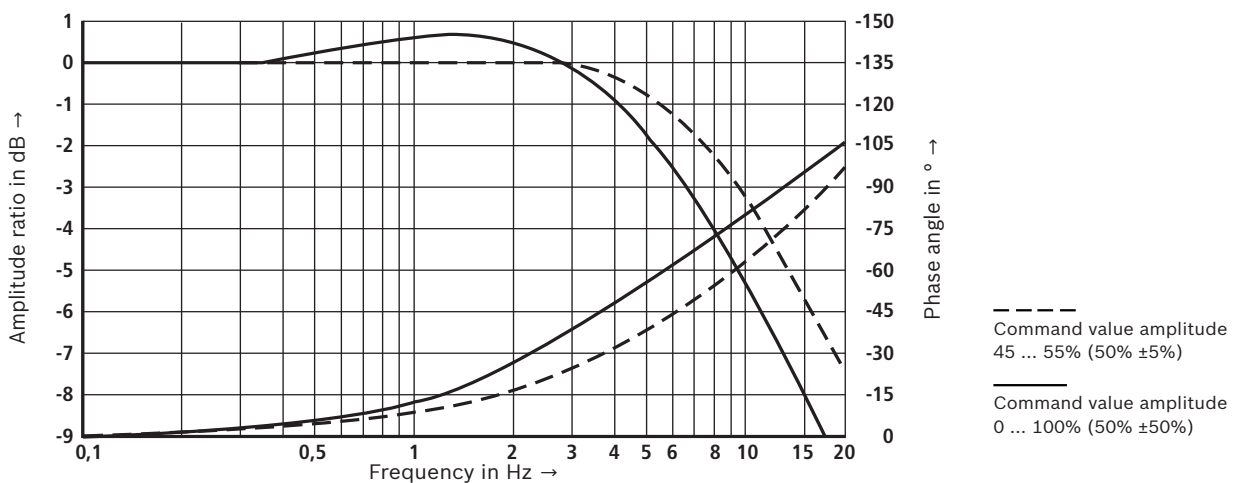

Bosch Rexroth AG, RE 29188, edition: 2016-05



Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5^\circ\text{C}$)


Proportional flow control valve

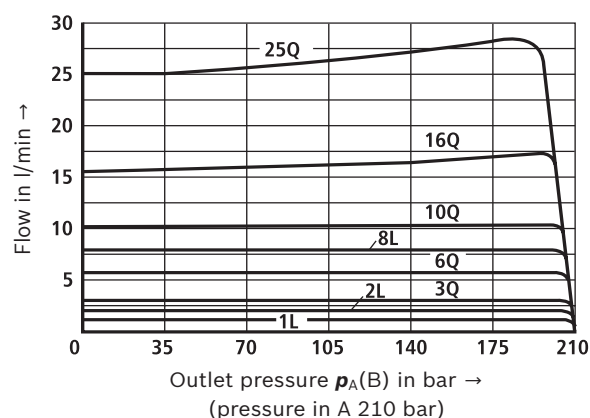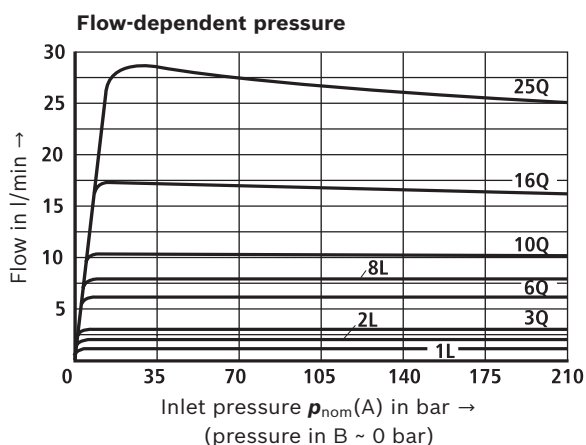


Temperature dependence (version "25Q" – greatest variation) at $\Delta p = 30$ bar

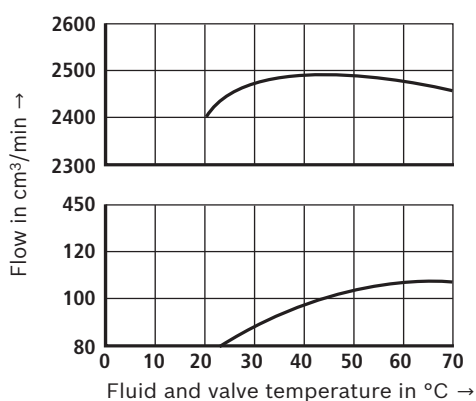

Pressure differential via check valve B \rightarrow A orifice closed

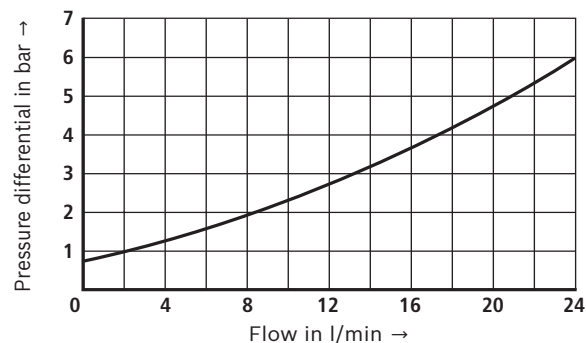


Rectifier sandwich plate

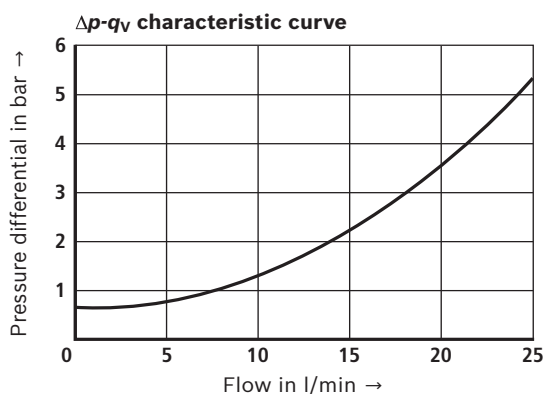

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions: Rectifier sandwich plate (dimensions in mm)

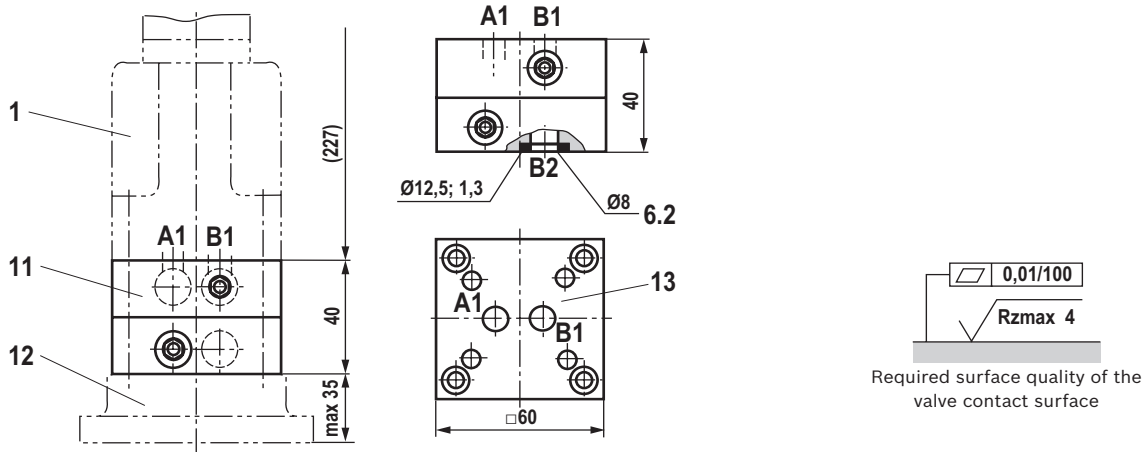

- 1 Valve housing
- 2 Proportional solenoid with inductive position transducer
- 3.1 Mating connector for proportional solenoid, separate order, see page 12
- 3.2 Mating connector for position transducer, separate order, see page 12
- 4 Space required for removing the mating connector
- 5 Name plate
- 6.1 Same seal rings for ports A, B, P and blind counterbore
- 6.2 Same seal rings for ports A2 and B2
- 7 Port A
- 8 Port B
- 9 Blind counterbore Ø12.6 mm
- 10 Machined valve contact surface, porting pattern according to ISO 4401-03-02-0-05
- 11 Rectifier sandwich plate
- 12 Subplate
- 13 Valve contact surface for proportional flow control valve, type 2FRE...

Subplates (separate order) with porting pattern according to ISO 4401-03-02-0-05, see data sheet 45100.

Valve mounting screws (separate order)

The following valve mounting screws are recommended:

► Proportional flow control valve

– 4 hexagon socket head cap screws

ISO 4762 - M5 x 30 - 10.9-fzZn240h-L

(friction coefficient 0.09 ... 0.14 according to VDA 235-101)

tightening torque $M_A = 7 \text{ Nm} \pm 10\%$,

material no. **R913048086**

– 4 hexagon socket head cap screws ISO 4762 - M5 x 30 - 10.9

(friction coefficient 0.08 ... 0.16 according to VDI 2230 – black)

tightening torque $M_A = 8.1 \text{ Nm} \pm 10\%$,

material no. **2910150205**

► Rectifier sandwich plate

– 4 tie rods M5 x 70

material no. **R901318602**

– 4 hexagon nuts ISO 4032 - M5 - 10-CM-FE-ZN-5-AN-T0-H-B

(friction coefficient 0.08 ... 0.16 according to VDI 2230 – black)

tightening torque $M_A = 8.1 \text{ Nm} \pm 10\%$,

material no. **R913016628**




Notices:


- Rectifier sandwich plate **impossible** with proportional flow control valve, version "A" (with external closing of the pressure compensator).
- The dimensions are nominal dimensions which are subject to tolerances.

Electrical connections and assignment

Connection at the connector



Connection at mating connector



RE 29188, edition: 2016-05, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


12/12 **2FRE** | Proportional flow control valve

Mating connectors (separate order)

Mating connector according to DIN EN 175301-803-A,
material no. **R901017011** (plastic version),
see data sheet 08006

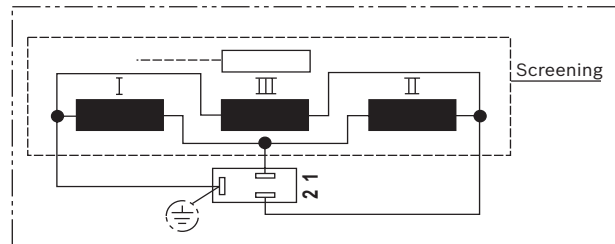

Mating connector GM209N (Pg 9),
material no. **R900013674** (plastic version)

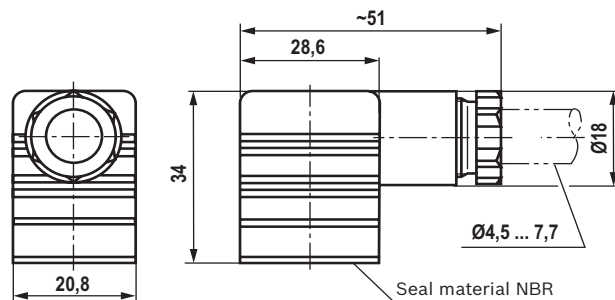

Further information

- ▶ Analog amplifiers
- ▶ Valve amplifier for proportional valves with electrical position feedback
- ▶ Subplates
- ▶ Hydraulic fluids on mineral oil basis
- ▶ Flame-resistant, water-free hydraulic fluids
- ▶ Hydraulic valves for industrial applications
- ▶ Selection of the filters
- ▶ Information on available spare parts

Data sheet 30118
Data sheet 30221
Data sheet 45100
Data sheet 90220
Data sheet 90222
Operating instructions 07600-B

Bosch Rexroth AG, RE 29188, edition: 2016-05

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK