

RE 29583-XH

Edition: 2019-10

Replaces: 04.16, 29583-XH-100 /102 / 104

RA80392244_AA



Directional servo valve, with mechanical position feedback

Type 4WS2EM ...XH



- ▶ Size 10
- ► Component series 5X
- ▶ Maximum operating pressure 315 bar
- ► Maximum flow 180 l/min



ATEX units

For potentially explosive atmospheres



Information on explosion protection:

- ► Area of application in accordance with the Explosion Protection Directive 2014/34/EU: II 1G
- ➤ Type of protection valve: Ex ia h IIC T4 Ga according to EN ISO 80079-36 and EN IEC 60079-0 / EN 60079-11

Features

- ▶ 4 or 3-way version
- ► For intended use in potentially explosive atmospheres of zone 0
- ► Subplate mounting
- ▶ Porting pattern according to 4401-05-05-0-05
- ► Dry control motor, no contamination of the solenoid gaps by the hydraulic fluid
- ▶ Wear-free control spool return element
- External control electronics in modular design, additional safety barrier
- ► Control spool with flow force compensation
- ► Control sleeve centrically fixed, thus low susceptibility to temperature and pressure
- ► Pressure chambers at the control sleeve with gap seal, no wear of seal ring

Contents

Features	1
Ordering code	2, 3
Symbols	3
Function, section	4
Technical data	5 7
Electrical connection	7
Characteristic curves	8 12
Dimensions	13
Flushing plate	14
Accessories	14
Further information	15

Notice: The documentation version with which the product was supplied is valid.



Ordering code

01	02	03		04		05	06	07	80	09	10	11	12	13	14
4WS2E	М	10	_	5X	/		В	11	хн			K31		V	

Directional servo valve, 4-way version, 2-stage, electrically operated	4WS2E
ontrol spool return	
02 Mechanical	М
03 Size 10	10
O4 Component series 50 59 (50 59: unchanged installation and connection dimensions)	5X
ated flow	
05 5 l/min	5
10 l/min	10
20 l/min	20
30 l/min	30
45 l/min	45
60 l/min	60
75 l/min	75
90 l/min	90
06 Control sleeve exchangeable	В
07 Valve for external control electronics; coil no. 11 (30 mA/85 Ω per coil)	11
xplosion protection	
08 "Intrinsically safe" for device group II	ХН
For details, see information on the explosion protection page 7	
ilot oil supply	
09 External pilot oil supply, external pilot oil return	-
Internal pilot oil supply, external pilot oil return	E
Internal pilot oil supply, internal pilot oil return	ET
External pilot oil supply, internal pilot oil return	Т
ılet pressure range	
10 10 210 bar	210
10 315 bar	315
lectrical connection	
11 Without mating connector; connector DIN EN 175201-804	K31 1)
ontrol spool overlap ²⁾	
12 0 0.5% negative	E
0 0.5% positive	D
3 5% positive	С
eal material (observe compatibility of seals with hydraulic fluid used, see page 6)	
13 FKM seals	V



Directional servo valve | **4WS2EM ...XH** 3/16

Ordering code


01	02	03		04		05	06	07	80	09	10	11	12	13	14
4WS2E	M	10	-	5X	/		В	11	ХН			K31		V	

Special versions


14	Without control (de-energized condition), channels $P \rightarrow B$ and $A \rightarrow T$ are open 10% of the nominal quantity.	-100
	Without control (de-energized condition), channels $P \to A$ and $B \to T$ are open 10% of the nominal quantity.	-102
	3-way version; Channel B is set to half the operating pressure without command value control (0 mA).	-104


- 1) Mating connector, separate order, see page 14.
- $^{\rm 2)}\,$ The control spool overlap is specified in % of the control spool stroke.

Symbols





Special version "-100"






Special version "-102"





Special version "-104"





■ Notice:

Representation according to DIN ISO 1219-1.



Function, section

Valves of type 4WS2EM are electrically operated, 2-stage directional servo valves. They are mainly used to control position, force, pressure or velocity.

The valves basically comprise of an electro-mechanical converter (torque motor) (1), a hydraulic amplifier (nozzle flapper plate principle) (2) and a control spool (3) in a sleeve (2ndstage) which is connected with the torque motor via a mechanical feedback.

An electrical input signal at the coils (4) of the torque motor generates a force by means of a permanent magnet which acts on the armature (5), and in connection with a torque tube (6) results in a torque. This causes the flapper plate (7) which is connected to the torque tube (6) via a bolt to move from the central position between the two control nozzles (8), and a pressure differential is created across the front sides of the control spool (3). This pressure differential results in the control spool (3) changing its position, which results in the pressure port being connected to one actuator port and, at the same time, the other actuator port being connected to the return flow port.


The control spool (3) is connected to the flapper plate or the torque motor by means of a bending spring (mechanical feedback) (9). The position of the control spool (3) is changed until the feedback torque across the bending spring and the electro-magnetic torque of the torque motor are balanced and the pressure differential at the nozzle flapper plate system becomes zero.

The stroke of the control spool (3) and consequently the flow of the servo valve are controlled proportionally to the electrical input signal. It must be noted that the flow depends on the valve pressure drop.

External control electronics (servo amplifier) serve the actuation of the valve, amplifying an analog input signal (command value) so that with the output signal, the servo valve is actuated in a flow-controlled form.

Version "-104"

This is a directional servo valve in 3-way version which means that depending on the input signal either P to B or B to T is connected. Channel A is always blocked in the control area.

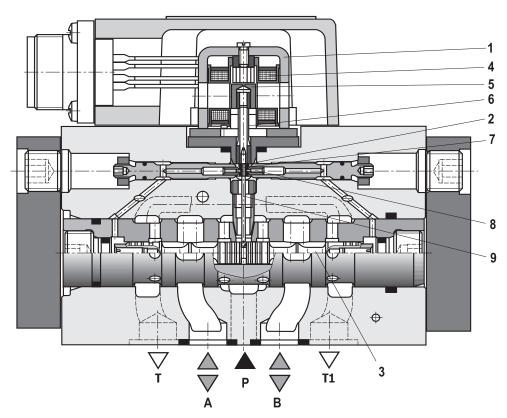

Type 4WS2EM 10...



Directional servo valve | 4WS2EM ...XH 5/16

Technical data

(for applications outside these values, please consult us!)

General				
Installation position		Any - ensure that during start-up of the system, the valve is supplied with sufficient pressure (≥ 10 bar)		
Ambient temperature	range	-20 +60		
Storage temperature	range	+5 +40		
Maximum storage tim	e year	1		
Weight	k	3.56		
Surface protection	► Valve body, cover, filter screw	Nitro-carburated		
	► Cap	Anodized		

Hydraulic										
Operating pressure range										
	10 21	0 or 10	315							
Maximum operating pressure	► Main valve,									
	- Port A, B, P	bar	315							
Maximum return flow pressure	▶ Port T									
	- Pilot oil return internal	bar	Pressure	peaks ·	< 100, st	tatic < 1	0			
	- Pilot oil return external	bar	315							
	▶ Port Y	bar	Pressure	peaks ·	< 100, st	tatic < 1	0			
Hydraulic fluid			see table	e page 6	i					
Hydraulic fluid temperature rar	nge	°C	-15 +	60, pref	erably +	40 +5	0			
Viscosity range		mm²/s	15 38	0; prefe	rably 30	45				
Maximum admissible degree of cleanliness class according to	,	c fluid,	Class 18/16/13 ¹⁾							
Zero flow q _{V,L}		l/min	see characteristic curve on page 9							
Rated flow q _{V nom} (tolerance ±10% with valve pre	ssure differential Δp = 70 bar)	l/min	5	10	20	30	45	60	75	90
Maximum control spool stroke position (in case of error) relat		%	120 170 120 150							
Feedback system			mechanical							
Hysteresis (dither-optimized)		%	1.5							
Range of inversion (dither-opting	mized)	%	≤ 0.3							
Response sensitivity (dither-op	timized)	%	≤ 0.2							
Pressure amplification with 1% change (from the hydraulic zero	•	% of p _P	≥ 30 ≥ 60 ≥ 80					≥ 80		
Zero adjustment flow		%	≤ 3, long	g-term ≤	5					
across the entire operating pre										
Zero shift upon change of:										
► Hydraulic fluid tem	≤ 1									
► Ambient temperatu	ıre	% / 20 °C	≤ 1							
► Operating pressure	e 80 120% of p _P %	6 / 100 bar	≤ 2							
► Return flow pressu	re 0 10% of p _P	% / bar	≤ 1							

The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.

Available filters can be found at www.boschrexroth.com/filter.

 $q_{V,L}$ = zero flow in l/min

 $q_{\text{V nom}}$ = rated flow in l/min

 p_P = operating pressure in bar

 $^{^{2)}}$ With version "-104", valve pressure differential $\mbox{\it \Delta p}$ = 35 bar/control edge



Technical data

(for applications outside these values, please consult us!)

Hydraulic fluid		Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	,	HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM	DIN 51524	90220
Bio-degradable	► Insoluble in water	HETG	FKM	100 15300	
		HEES	FKM	ISO 15380	90221
	► Soluble in water	HEPG	FKM	ISO 15380	

Important information on hydraulic fluids:

- ► For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- ► There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- ► The ignition temperature of the hydraulic fluid used must be at least 150 °C.

Electric		
Protection class according to EN 60529		IP65 (if suitable and correctly mounted mating connectors are used)
Type of signal		analog
Rated current per coil	mA	30
Resistance per coil	Ω	85
Inductivity with 60 Hz ► Parallel connection and 100% rated current	Н	0.25

Motice:

In case of control using non-Rexroth amplifiers, we recommend a superimposed dither signal.

External control electronics		
Recommended safety barrier		see page 7
Servo amplifier in modular design	analog	Type VT 11021 according to data sheet 29743

If Important notice:

The external servo amplifier and the safety barrier must be operated outside the potentially explosive area.

7/16



Directional servo valve | 4WS2EM ...XH

Technical data

(for applications outside these values, please consult us!)

Information on explosion protection							
Area of application according to Directive 2014/34/EU	II 1G						
Type of protection according to EN ISO 80079-36 and EN IEC 60079-0 / EN 60079-11	Ex ia h IIC T4 Ga						
EU type examination certificate	PTB 11 ATEX 2025 X						
Power supply of the valve only from intrinsically safe electric circuits	Maximum values see "Electrical connection"						


Special application conditions for safe application:

- ▶ Valve cap and mating connector consist of aluminum alloys. For the use as a device of category 1 in zone 0, the valve cap must be protected in a way that ensures that even in case of rare operating failures, no explosive sparks from friction, impact or grinding can occur.
- ► The ignition temperature of the hydraulic fluid used must be at least 150 °C.
- ➤ The specified clearance area for the overpressure protection (see page 13) must be complied with so that in case of an error, overpressure may leak through the valve cap.

Electrical connection

The coils may only be connected in parallel.

Parallel connection

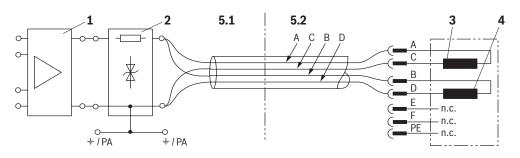

- 1 Servo amplifier
- 2 Safety barrier
- **3** Valve, coil A
- 4 Valve, coil B
- 5.1 Non-explosive area
- 5.2 Explosive area

Power supply of the valve only from intrinsically safe	▶ U max	V	9.3
electric circuits with the following maximum values	► I _{max}	mA	390
	► P _{max}	mW	907
Recommended safety barrier			Type 9001/02-093-390-101 (company Stahl)

M Notice:

Only use approved cables and lines for intrinsically safe electric circuits.

The electric control with plus (+) at A and B and minus (–) at C and D results in direction of flow P \rightarrow A and B \rightarrow T. Inverted electric control results in direction of flow P \rightarrow B and A \rightarrow T. The pins E, F and PE at the connector are not connected.




Characteristic curves


(measured with HLP 32, 3oil = 40 °C ± 5 °C)

Tolerance field of the flow/signal function at constant valve pressure differential Δp


Standard




Special version "-100"



Special version "-102"



Special version "-104"



- 1 Tolerance field
- 2 Typical flow curve




Directional servo valve | 4WS2EM ...XH 9/16

Characteristic curves

(measured with HLP 32, 9_{oil} = 40 °C ± 5 °C)

Flow/load function

(tolerance ±10%) with 100% command value signal

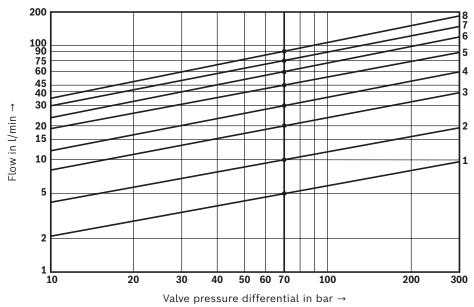


Version	Characteristic			
	curve			
"5"	1			
"10"	2			
"20"	3			
"30"	4			
"45"	5			
"60"	6			
"75"	7			
"90"	8			

Notice:

► Δp = p_P − p_L − p_T
Δp valve pressure
differential
p_P inlet pressure
p_L load pressure
p_T return flow pressure

Zero flow (with control spool overlap "E", measured without dither signal)



Rated flow


- **1** 5 l/min
- **2** 10 l/min
- **3** 20, 30, 45 l/min
- **4** 60, 75 l/min
- **5** 90 l/min





Characteristic curves


(measured with HLP 32, θ_{oil} = 40 °C ± 5 °C)


Transition function with pressure rating 315 bar, step response without flow


















Directional servo valve | 4WS2EM ...XH 11/16


Characteristic curves


(measured with HLP 32, 9oil = 40 °C ± 5 °C)


Frequency response with pressure rating 315 bar, stroke frequency without flow















--- 25% --- 100%





Characteristic curves


(measured with HLP 32, ϑ_{oil} = 40 °C ± 5 °C)


Frequency response with pressure rating 315 bar, stroke frequency without flow
















Directional servo valve | 4WS2EM ...XH 13/16


5

3.7

65

Dimensions

(dimensions in mm)

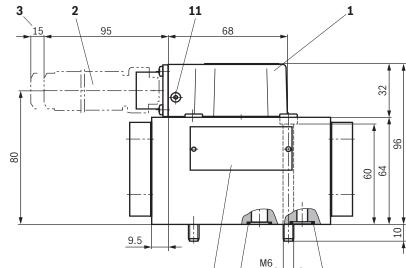

10

12.5

24

min 6



Required surface quality of the valve contact surface

- **1** Cap
- 2 Mating connector (separate order, see page 14)
- **3** Space required for removing the mating connector, also observe the bending radius of the connection line
- **4** Exchangeable filter element with seals Material no.: **R961001950**
- 5 Profile seal for filter screw M16 x 1.5, part of item 4
- 6 Name plate
- 7 Identical seal rings for ports P, A, B, T and T1
- 8 Identical seal rings for ports X and Y; Ports X and Y are also pressurized in case of "internal" pilot oil supply and return
- 9 Machined valve contact surface; Porting pattern according to ISO 4401-05-05-0-05; Port T1 is optional and is recommended for reducing the pressure drop from B → T with rated flows > 45 l/min.
- 10 Valve mounting screws (included in the scope of delivery) Only use valve mounting screws with the subsequently listed thread diameters and strength properties. Observe the screw-in depth.
 - 4 hexagon socket head cap screws ISO 4762 M6 x 70 10.9 (Friction coefficient μ_{total} = 0.09 ... 0.14) Tightening torque M_A = 12.5 Nm ± 1.5 Nm
- 11 Overpressure protection
- 12 Clearance area for overpressure protection

102

127

M Notes:


- ► The dimensions are nominal dimensions which are subject to tolerances.
- ➤ Subplates are no components in the sense of Directive 2014/34/EU and can be used after the manufacturer of the overall system has conducted an assessment of the risk of ignition. The "G...J3" versions are free from aluminum and/or magnesium and galvanized.

Subplates (separate order) with porting pattern according to ISO 4401-05-05-0-05, see data sheet 45100.



Flushing plate with porting pattern according to ISO 4401-05-05-0-05 (dimensions in mm)

Symbol




Ordering code and further information

- ▶ Material number **R900912450**
- ▶ Weight 2.0 kg
- ▶ Identical seal rings for ports P, A, B, T and T1
- ▶ Identical seal rings for ports X and Y
- ► Mounting screws (included in the scope of delivery) For reasons of stability, exclusively use the following valve mounting screws:

4 hexagon socket head cap screws ISO 4762 - M6 x 50 -10.9

(friction coefficient $\mu_{\text{total}} = 0.09 \dots 0.14$);

Tightening torque M_A = 12.5 Nm ± 1.5 Nm



M Notice:

Before assembly and operation, please observe the information in the 29583-XH-B operating instructions.

Accessories (separate order)

Mating connectors

Item 1)	Designation	Version	Short designation	Material number	Data sheet
2	Mating connector; for valves with round connector, 6-pole + PE	straight, metal	7PZ31M	R900223890	08006

1) See dimensions on page 13.



Directional servo valve | 4WS2EM ...XH 15/16

Further information

▶ Analog amplifier module type VT 11021
 ▶ Subplates
 ▶ Hydraulic fluids on mineral oil basis
 ▶ Environmentally compatible hydraulic fluids
 ▶ Data sheet 90220
 ▶ Environmentally compatible hydraulic fluids

▶ Directional servo valve with mechanical position feedback Operating instructions 29583-XH-B

Mating connectors and cable sets for valves and sensors
 Use of non-electrical hydraulic components in an explosive environment (ATEX)
 Data sheet 08006

► Selection of filters

► Information on available spare parts