


RE 91172/2023-11-02
Replaces: 2023-02-07 and
RA-A 91172/03.2012

rexroth
A Bosch Company

Axial piston fixed motor A10FM Axial piston plug-in motor A10FE series 52

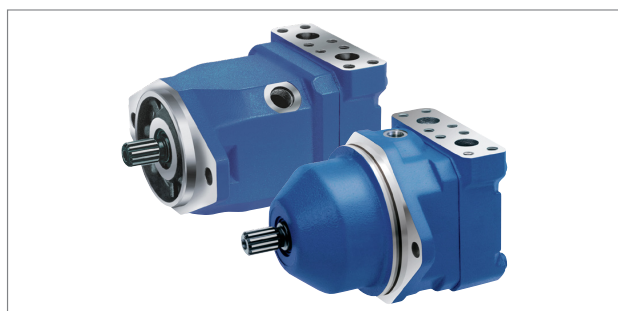

- ▶ Universal medium pressure motors
- ▶ Sizes 10 to 63
- ▶ Nominal pressure 280 bar (4100 psi)
- ▶ Maximum pressure 350 bar (5100 psi)
- ▶ Open and closed circuits

Features

- ▶ Proven A10 rotary group technology
- ▶ Approved for high rotational speeds
- ▶ Long service life
- ▶ High power density
- ▶ Compact design for A10FE
- ▶ Low operating noise
- ▶ Optionally with integral anti cavitation valve, e.g., for fan drives
- ▶ Optional: Speed sensor
- ▶ Swashplate design

Contents

Type code A10FM	2
Type code A10FE	3
Hydraulic fluids	4
Working pressure range	6
Technical data	7
A10FM - Dimensions, size 23 to 63	10
A10FE - Dimensions, size 10	19
A10FE - Dimensions, size 11 to 63	21
Flushing and boost-pressure valve	32
Anti cavitation valve	33
Prepared for speed sensor	34
Speed sensing	35
Installation instructions	36
Project planning notes	38
Safety instructions	39

Values in the US customary unit system are converted and rounded values. In case of doubt, only metric values are valid.

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2 A10FM, A10FE series 52 | Axial piston fixed motor Type code A10FM

Type code A10FM

01	02	03	04	05	06	07	08	09	10	11
A10F	M		/	52	-	V	C			

Axial piston unit

01	Swashplate design, constant, nominal pressure 280 bar (4100 psi), maximum pressure 350 bar (5100 psi)	A10F
----	---	------

Operating mode

02	Motor, open and closed circuit	M
----	--------------------------------	---

Size (NG)

03	For geometric displacement, see table of values, page 7	023	028	037	045	058	063
----	---	-----	-----	-----	-----	-----	-----

Series

04	Series 5, index 2	52
----	-------------------	----

Direction of rotation

		023	028	037	045	058	063
05	Viewed on drive shaft						
	Clockwise ¹⁾	•	•	•	•	•	R
	Counter-clockwise ¹⁾	•	•	•	•	•	L
	Alternating	•	•	•	•	•	W

Sealing material

		023	028	037	045	058	063
06	FKM (fluorocarbon rubber)	•	•	•	•	•	V

Drive shaft

		023	028	037	045	058	063
07	Splined shaft similar to ISO 3019-1						
	For high torque	•	•	•	•	•	R
	For reduced torque	○	○	•	•	•	W
	Tapered shaft with shaft key and threaded bolt	•	•	•	•	•	C

Mounting flange

		023	028	037	045	058	063
08	ISO 3019-1 (SAE); 2 hole	•	•	•	•	•	C

Working port

		023	028	037	045	058	063
09	Flange ports according to ISO 6162						
	A and B; laterally; same side	•	•	•	•	•	10N00
	A and B; laterally; same side	•	•	•	•	•	60N00
	Threaded port according to DIN 3852-1						
	A and B laterally, same side, Threaded port, metric	•	•	•	•	•	16N00
	Threaded port according to ISO 11926						
	A and B laterally, same side, Threaded port, UN	•	•	•	•	•	66N00

Valves

		023	028	037	045	058	063
10	Without valve	•	•	•	•	•	0
	Flushing and boost-pressure valve, integrated	•	•	•	•	•	7
	Anti cavitation valve, integrated	•	•	•	•	•	2

Speed sensing

		023	028	037	045	058	063
11	Without speed sensing (without code)	•	•	•	•	•	
	Prepared for sensor DST or DSAX	•	•	•	•	•	W
	Sensor DSA1/20 mounted (1 = one frequency and direction of rotation signal)	•	•	•	•	•	C ²⁾
	Sensor DSA2/20 mounted (2 = two 90° phase-shifted frequency signals)	•	•	•	•	•	K ²⁾
	DST sensor mounted	•	•	•	•	•	E ²⁾

• = Available ○ = On request - = Not available

- 1) Only when using an integrated anti cavitation valve (order item 10 code 2)
- 2) Type code, technical data, dimensions and information on the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95131 (DST) or 95126 (DSAX/20).

Notice

- Note the project planning notes on page 38.
- In addition to the type code, please specify the relevant technical data when placing your order.

Axial piston fixed motor | **A10FM, A10FE series 52**
Type code A10FE

3

Type code A10FE

01	02	03	04	05	06	07	08	09	10	11
A10F	E		/	52		-	V			

Axial piston unit

01	Swashplate design, constant, nominal pressure 280 bar (4100 psi), maximum pressure 350 bar (5100 psi)	A10F
----	---	------

Operating mode

02	Motor, plug-in design, open and closed circuits	E
----	---	---

Size (NG)

03	For geometric displacement, see table of values, page 7	010	011	014	016	018	023	028	037	045	058	063
----	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Series

04	Series 5, index 2	52
----	-------------------	----

Direction of rotation

		010	011	014	016	018	023	028	037	045	058	063	
05	Viewed on drive shaft												R
	Clockwise ¹⁾	•	•	•	•	•	•	•	•	•	•	•	R
	Counter-clockwise ¹⁾	•	•	•	•	•	•	•	•	•	•	•	L
	Alternating	•	•	•	•	•	•	•	•	•	•	•	W

Sealing material

		010	011	014	016	018	023	028	037	045	058	063	
06	FKM (fluorocarbon rubber)	•	•	•	•	•	•	•	•	•	•	•	V

Drive shaft

		010	011	014	016	018	023	028	037	045	058	063	
07	Splined shaft similar to ISO 3019-1	○	•	•	•	•	•	•	•	•	•	•	R
	For high torque	○	•	•	•	•	•	•	•	•	•	•	R
	For reduced torque	-	-	-	-	-	○	○	•	•	•	•	W
	Tapered shaft with shaft key and threaded bolt	•	•	•	•	•	•	•	•	•	•	•	C

Mounting flange

		010	011	014	016	018	023	028	037	045	058	063	
08	ISO 3019-1 (SAE); 2 hole	•	•	•	•	•	-	-	-	-	-	-	C
	2-hole special flange	-	-	-	-	-	•	•	•	•	•	•	F
	8-hole special flange	-	•	•	•	•	-	-	-	-	-	-	H

Working port

		010	011	014	016	018	023	028	037	045	058	063	
09	Flange ports according to ISO 6162	-	-	-	-	-	•	•	•	•	•	•	10N00
	A and B laterally, same side, Fastening thread metric	-	-	-	-	-	•	•	•	•	•	•	10N00
	Threaded port according to DIN 3852-1	•	•	•	•	•	•	•	•	•	•	-	16N00
	A and B laterally, same side, Threaded port, metric	•	•	•	•	•	•	•	•	•	•	-	16N00
	Flange ports according to ISO 6162	-	-	-	-	-	•	•	•	•	•	•	60N00
	A and B laterally, same side, Fastening thread UNC	-	-	-	-	-	•	•	•	•	•	•	60N00
	Threaded port according to ISO 11926	•	•	•	•	•	•	•	•	•	•	-	66N00
	A and B laterally, same side, Threaded port, UN	•	•	•	•	•	•	•	•	•	•	-	66N00

Valves

		010	011	014	016	018	023	028	037	045	058	063	
10	Without valve	○	•	○	•	•	•	•	•	•	•	•	0
	Flushing and boost-pressure valve, integrated	-	-	-	-	-	•	•	•	•	•	•	7
	Anti cavitation valve, integrated	•	•	•	•	•	•	•	•	•	•	•	2

Speed sensing

		010	011	014	016	018	023	028	037	045	058	063	
11	Without speed sensing (without code)	•	•	•	•	•	•	•	•	•	•	•	
	Prepared for sensor DST or DSAx/20	-	-	-	-	-	•	•	•	•	•	•	W
	Sensor DSA1/20 mounted (1 = one frequency and direction of rotation signal)	-	-	-	-	-	•	•	•	•	•	•	C ²⁾
	Sensor DSA2/20 mounted (2 = two 90° phase-shifted frequency signals)	-	-	-	-	-	•	•	•	•	•	•	K ²⁾
	DST sensor mounted	-	-	-	-	-	•	•	•	•	•	•	E ²⁾

1) Only when using an integrated anti cavitation valve (order item 10 code 2)

2) Type code, technical data, dimensions and information on the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95131 (DST) or 95126 (DSAx/20).

4 A10FM, A10FE series 52 | Axial piston fixed motor Hydraulic fluids

Hydraulic fluids

The A10FM, A10FE fixed motor is designed for operation with HLP mineral oil according to DIN 51524. Application instructions and requirements for hydraulic fluid selection, behavior during operation as well as disposal and environmental protection should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids

Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are listed in the following data sheet:


- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} ; see selection diagram).

Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ²⁾	Remarks
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s (cSt)}$	FKM	$\vartheta_{st} \geq -25 \text{ °C}$ (-13 °F)	$t \leq 3 \text{ min}$, without load ($p \leq 30 \text{ bar (435 psi)}$), $n \leq 1000 \text{ rpm}$ Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K (45 °F)
Warm-up phase	$v = 1600 \dots 400 \text{ mm}^2/\text{s (cSt)}$			$t \leq 15 \text{ min}$, $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$
Permissible operating range	$v = 400 \dots 10 \text{ mm}^2/\text{s (cSt)}^{1)}$	FKM	$\vartheta \leq +110 \text{ °C}$ (+230 °F)	Measured at port L_x
	$v_{opt} = 36 \dots 16 \text{ mm}^2/\text{s (cSt)}$			Optimal operating viscosity and efficiency range
Short-term operation	$v_{min} = 10 \dots 7 \text{ mm}^2/\text{s (cSt)}$	FKM	$\vartheta \leq +110 \text{ °C}$ (+230 °F)	$t \leq 1 \text{ min}$, $p \leq 0.3 \times p_{nom}$, measured at port L_x

▼ Selection diagram

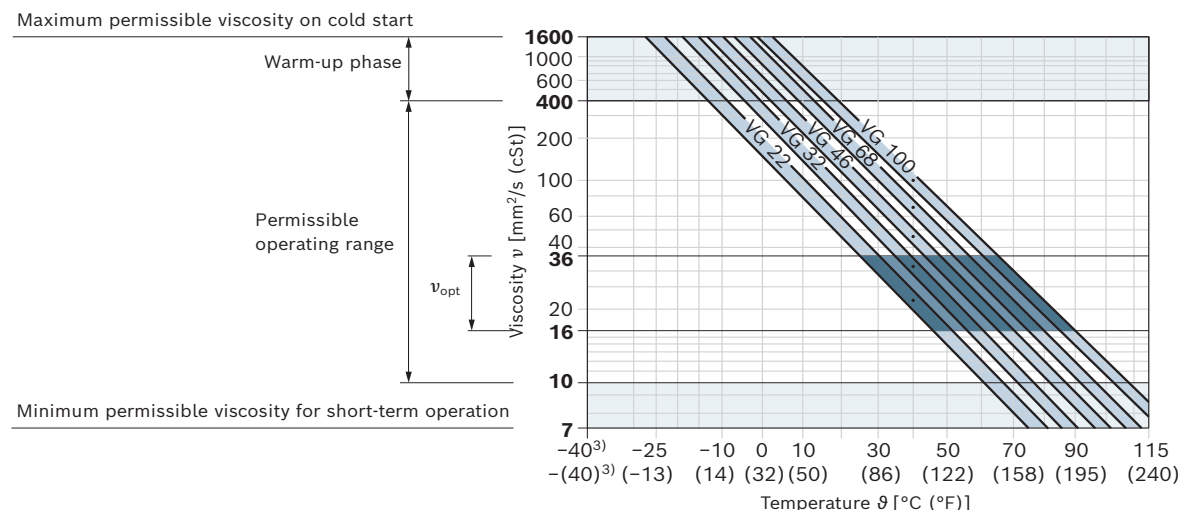

1) This corresponds, for example on the VG 46, to a temperature range of +4 °C to +85 °C (+39 °F to +113 °F) (see selection diagram)

2) If the temperature cannot be adhered to due to extreme operating parameters, please contact us.

3) For applications in the low-temperature range, please contact us.

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 acc. to ISO 4406 should be maintained.

At a hydraulic fluid viscosity of less than 10 mm²/s (cSt) (e.g., due to high temperatures during short-term operation) at the drain port, a cleanliness level of at least 19/17/14 acc. to ISO 4406 is required.

Examples of temperatures of hydraulic fluids at a viscosity of 10 mm²/s:


- ▶ 73 °C at HLP 32
- ▶ 85 °C at HLP 46

6 A10FM, A10FE series 52 | Axial piston fixed motor Working pressure range

Working pressure range


Pressure at working port A or B		Definition
Nominal pressure p_{nom}	280 bar (4100 psi)	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar (5100 psi)	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2.5 ms	
Total operating period	300 h	
Minimum pressure $p_{HD \text{ absolute}}$ (high-pressure side)	10 bar (145 psi)	Minimum pressure on the high-pressure side (A or B) required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A \text{ max}}$	16000 bar/s (232000 psi)	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at port A or B (low-pressure side)		
Minimum pressure $p_{ND \text{ min}}$	2 bar (30 psi) absolute	Minimum pressure on the low-pressure side (A or B) required to prevent damage to the axial piston unit (see diagram).
Leakage pressure at port L, L ₁		
Max. static pressure $p_{L \text{ max}}$	2 bar (30 psi) absolute	

▼ Pressure definition

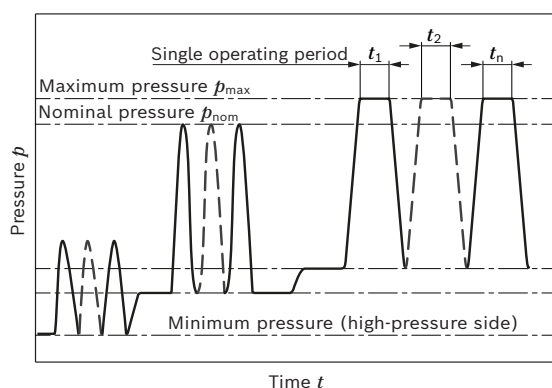


Total operating period = $t_1 + t_2 + \dots + t_n$

Permissible motor speed depending on output pressure (low pressure)

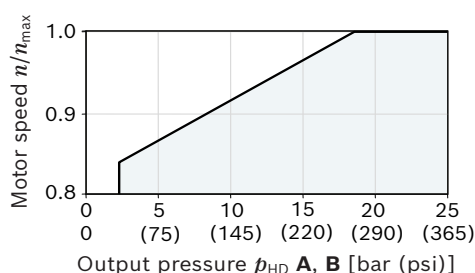

▼ Rate of pressure change $R_{A \text{ max}}$



Flow direction

Direction of rotation viewed on drive shaft	Clockwise	Counter-clockwise
	A to B	B to A

Notice

Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

Technical data

Size	NG		10	11	14	16	18	23	28	37	45
Displacement geometric, per revolution	$V_{g \max}$	cm ³ (inch ³)	10.6 (0.65)	11.5 (0.70)	14.1 (0.86)	16.1 (0.98)	18 (1.10)	23.5 (1.43)	28.5 (1.73)	36.7 (2.24)	44.5 (2.71)
Maximum rotational speed ¹⁾²⁾	at $V_{g \max}$	n_{nom}	rpm	5000	4200	4200	4200	4200	4900	4700	4200
Inlet flow	at n_{nom}	$q_{v \max}$	l/min (gpm)	53 (14)	48 (12.7)	59 (15.6)	68 (17.9)	76 (20.1)	115 (30.4)	134 (35.4)	154 (40.7)
Power	at n_{nom} and $p_N = 280$ bar (4100 psi)	P_{max}	kW (HP)	24.7 (33)	22.5 (30)	27.6 (37)	31.6 (42)	35.3 (47)	53.6 (71)	62.5 (83)	71.8 (95)
Actual starting torque, approx.	at $n = 0$ rpm and $p_N = 280$ bar (4100 psi)	M	Nm (lb-ft)	37.5 (27.6)	30 (22.1)	45 (33.2)	53 (39.1)	67.5 (49.8)	75 (55.3)	105 (77.5)	125 (92.2)
Torque	at $V_{g \max}$ and $p_N = 280$ bar (4100 psi)	M_{max}	Nm (lb-ft)	47 (34.6)	51 (37.5)	63 (46.5)	72 (53.1)	80 (59)	105 (77.4)	127 (93.7)	163 (120)
Rotary stiffness of drive shaft	R	c	Nm/rad (lb-ft/rad)	–	–	–	–	14835 (10942)	28478 (21005)	28478 (21005)	46859 (34563)
	W	c	Nm/rad (lb-ft/rad)	–	–	–	–	–	–	38489 (28389)	38489 (28389)
	C	c	Nm/rad (lb-ft/rad)	15084 (11126)	18662 (13765)	18662 (13765)	18662 (13765)	18662 (13765)	30017 (22140)	30017 (22140)	46546 (34332)
Moment of inertia of the rotary group	J_{TW}	kgm ² (lb-ft ²)	0.0006 (0.014)	0.00093 (0.022)	0.00093 (0.022)	0.00093 (0.022)	0.00093 (0.022)	0.0017 (0.04)	0.0017 (0.04)	0.0033 (0.078)	0.0033 (0.078)
Maximum angular acceleration ³⁾	α	rad/s ²	8000	6800	6800	6800	6800	5500	5500	4000	4000
Case volume	V	l (gal)	0.1 (0.03)	0.15 (0.04)	0.15 (0.04)	0.15 (0.04)	0.15 (0.04)	0.6 (0.16)	0.6 (0.16)	0.7 (0.18)	0.7 (0.18)
Weight approx.	m	kg (lbs)	5 (11.0)	6.5 (14.3)	6.5 (14.3)	6.5 (14.3)	6.5 (14.3)	12 (26.5)	12 (26.5)	17 (37.5)	17 (37.5)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking loads through tests or calculation/simulation and comparing them with the permissible values.

For formulas to determine the characteristics, see page 8

- 1) The values are applicable:
 - for the optimum viscosity range from $\nu_{opt} = 36$ to $16 \text{ mm}^2/\text{s}$ (cSt)
 - with hydraulic fluid based on mineral oils
- 2) The maximum rotational speed depends on the output pressure at the working port **A (B)** (see diagram on page 6).
- 3) The data are valid for values between the minimum required and maximum permissible rotational speed. Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

8 A10FM, A10FE series 52 | Axial piston fixed motor Technical data

Size		NG		58	63
Displacement geometric, per revolution		$V_{g \max}$	cm ³ (inch ³)	58 (3.53)	63.1 (3.84)
Maximum rotational speed ¹⁾²⁾	at $V_{g \max}$	n_{nom}	rpm	3600	3400
Inlet flow	at n_{nom}	$q_{v \max}$	l/min (gpm)	209 (55.2)	215 (56.8)
Power	at n_{nom} and $p_N = 280$ bar (4100 psi)	P_{max}	kW (HP)	97.4 (130)	100.1 (133)
Actual starting torque, approx.	at $n = 0$ rpm and $p_N = 280$ bar (4100 psi)	M	Nm (lb-ft)	205 (151)	230 (169)
Torque	at $V_{g \max}$ and $p_N = 280$ bar (4100 psi)	M_{max}	Nm (lb-ft)	258 (190)	281 (207)
Rotary stiffness of drive shaft	R	c	Nm/rad (lb-ft/rad)	80590 (59443)	80590 (59443)
	W	c	Nm/rad (lb-ft/rad)	60907 (44935)	60907 (44935)
	C	c	Nm/rad (lb-ft/rad)	87667 (64663)	87667 (64663)
Moment of inertia of the rotary group		J_{TW}	kgm ² (lb-ft ²)	0.0056 (0.133)	0.0056 (0.133)
Maximum angular acceleration ³⁾		α	rad/s ²	3300	3300
Case volume		V	l (gal)	0.8 (0.21)	0.8 (0.21)
Weight approx.		m	kg (lbs)	22 (48.5)	22 (48.5)

Determination of the characteristics			
Displacement	q_v	$= \frac{V_g \times n}{1000 \times \eta_v}$	[l/min]
Torque	M	$= \frac{V_g \times \Delta p \times \eta_{\text{hm}}}{20 \times \pi}$	[Nm]
Power	P	$= \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p \times \eta_t}{600}$	[kW]
Output speed	n	$= \frac{q_v \times 1000 \times \eta_v}{V_g}$	[rpm]

Key

V_g	=	Displacement per revolution [cm ³]
Δp	=	Differential pressure [bar]
n	=	Rotational speed [rpm]
η_v	=	Volumetric efficiency
η_{hm}	=	Hydraulic-mechanical efficiency
η_t	=	Total efficiency ($\eta_t = \eta_v \times \eta_{\text{hm}}$)

Determination of the characteristics			
Displacement	q_v	$= \frac{V_g \times n}{231 \times \eta_v}$	[gpm]
Torque	M	$= \frac{V_g \times \Delta p \times \eta_{\text{hm}}}{24 \times \pi}$	[lb-ft]
Power	P	$= \frac{2 \pi \times M \times n}{33000} = \frac{q_v \times \Delta p \times \eta_t}{1714}$	[HP]
Output speed	n	$= \frac{q_v \times 231 \times \eta_v}{V_g}$	[rpm]

Key

V_g	=	Displacement per revolution [inch ³]
Δp	=	Differential pressure [psi]
n	=	Rotational speed [rpm]
η_v	=	Volumetric efficiency
η_{hm}	=	Hydraulic-mechanical efficiency
η_t	=	Total efficiency ($\eta_t = \eta_v \times \eta_{\text{hm}}$)




For information on the technical data, see page 7

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Permissible radial and axial loading on the drive shafts

Size			NG	10	11	14	16	18	23	28	37	45	58	63	
Drive shaft	R, W	C													
Maximum radial force at a/2			$F_{q \max}$	N	250	350	350	350	350	1200	1200	1500	1500	1700	1700
				(lb)	(56)	(79)	(79)	(79)	(79)	(270)	(270)	(337)	(337)	(382)	(382)
Maximum axial force			$\pm F_{ax \max}$	N	400	700	700	700	700	1000	1000	1500	1500	2000	2000
				(lb)	(90)	(157)	(157)	(157)	(157)	(225)	(225)	(337)	(337)	(450)	(450)

Notice


- The specified values are maximum values and must not be exceeded in continuous operation. For radial and axial loading, please contact us.
- All loads of the drive shaft reduce the bearing service life!

10 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FM - Dimensions, size 23 to 28

Dimensions [mm]

A10FM - Dimensions, size 23 to 28

Port plate 10(60)N000

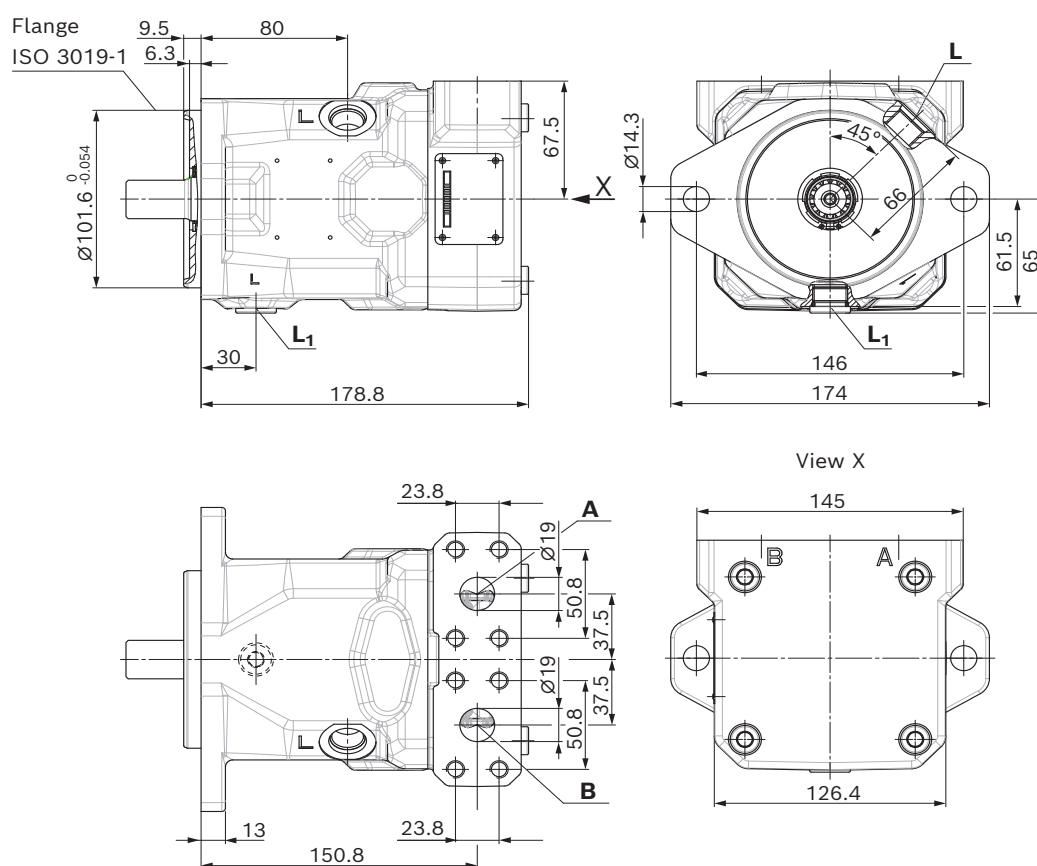

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FM - Dimensions, size 23 to 28

11

A10FM - Dimensions, size 23 to 28

Port plate 16(66)N000

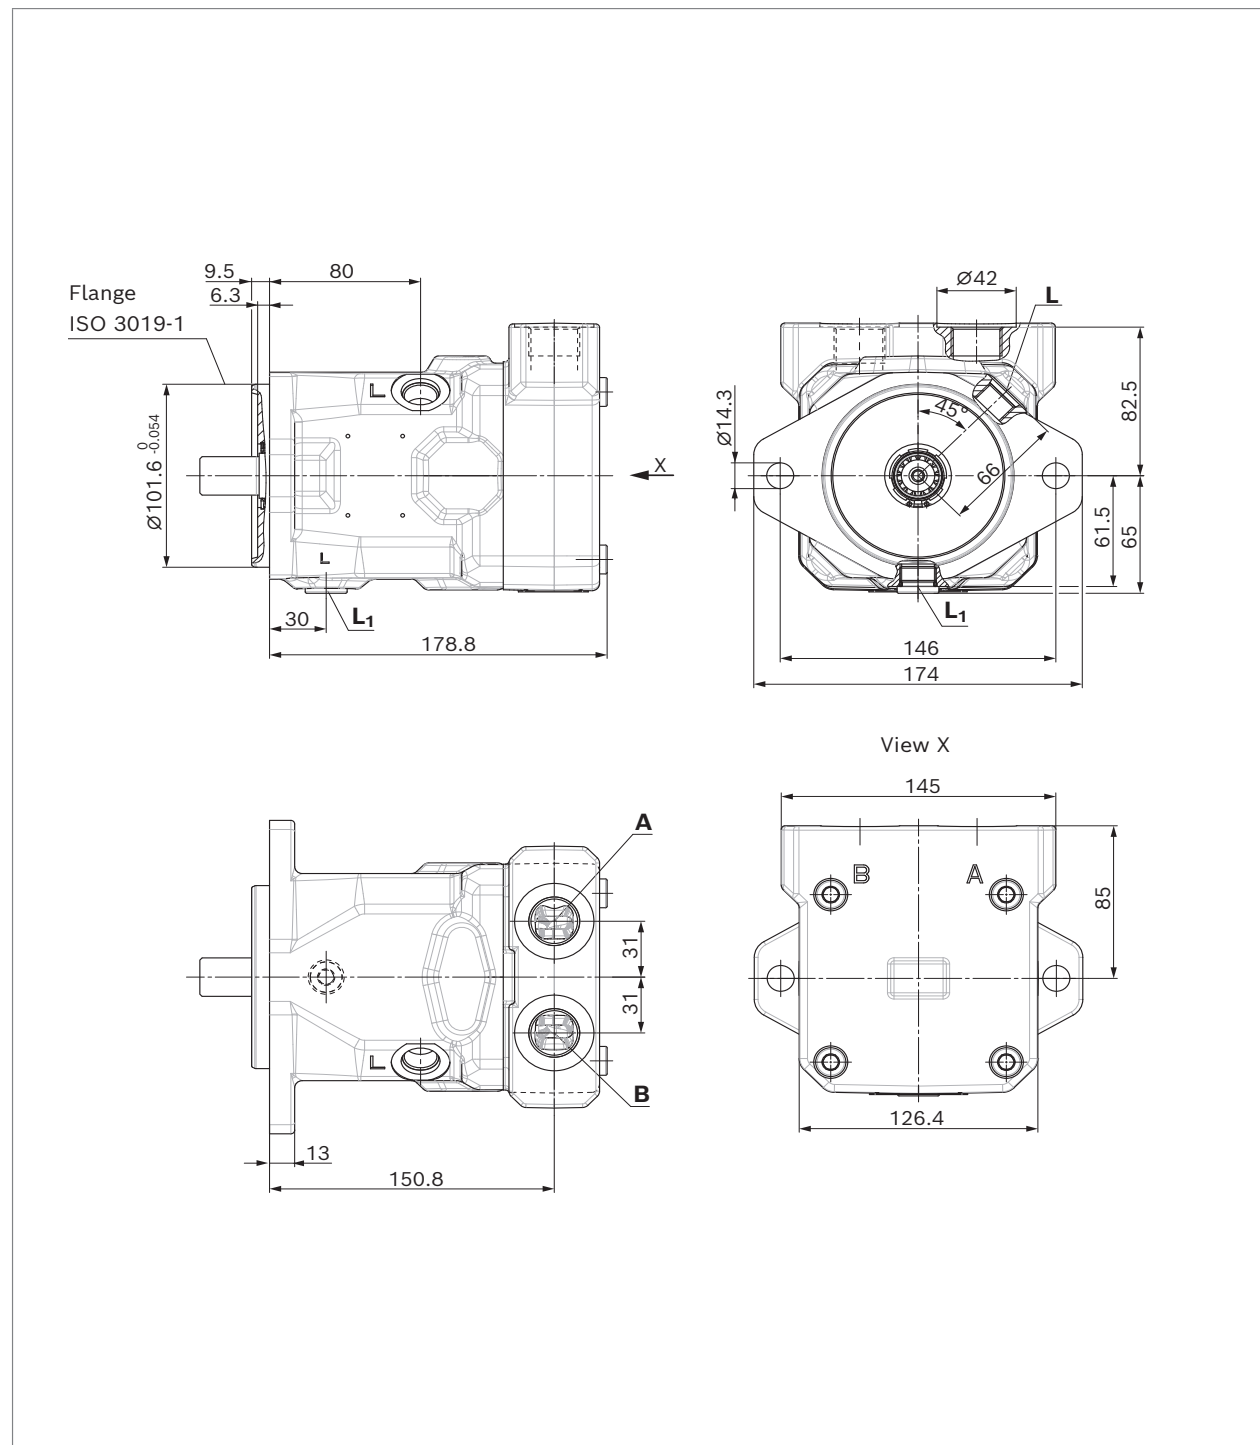

RE 91172/2023-11-02, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


12 **A10FM, A10FE series 52** | Axial piston fixed motor A10FM - Dimensions, size 23 to 28

Dimensions [mm (inch)]

▼ Splined shaft 7/8 in (22-4(B) similar to ISO 3019-1)

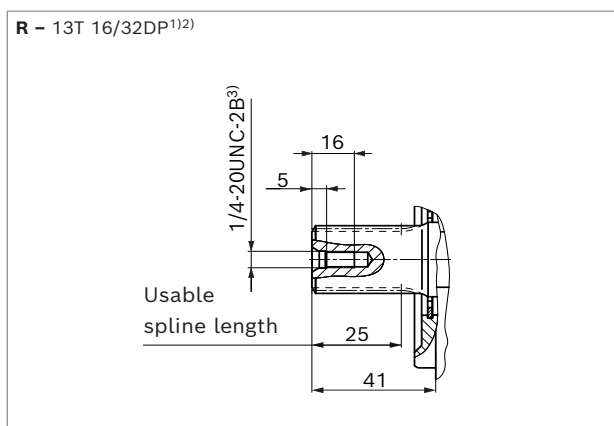

▼ Conical keyed shaft with threaded spigot UNF⁸⁾ (22-3(B) similar to ISO 3019-1)

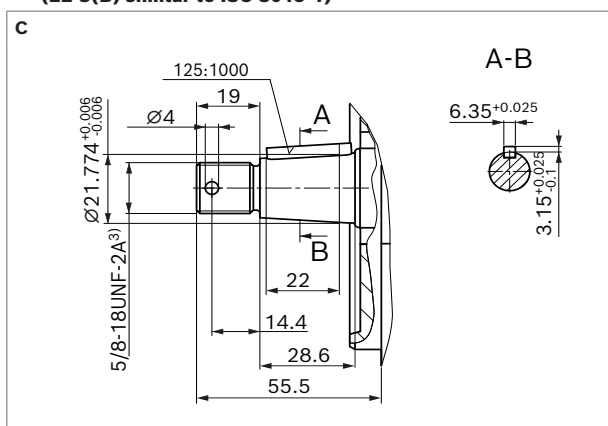

Ports	Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
Port plate 10				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	3/4 in M10 × 1.5; 17 (0.67) deep	350 (5100) O
Port plate 60				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	3/4 in 3/8-16UNC-2B 21 (0.83) deep	350 (5100) O
Port plate 16				
A, B	Working port	DIN 3852-1	M27 × 2; 16 (0.63) deep	350 (5100) O
Port plate 66				
A, B	Working port	ISO 11926	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100) O
Other ports				
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 (0.59) deep	4 (60) O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 (0.59) deep	4(60) X ⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.
6) Depending on the installation position, **L** or **L₁** must be connected (see also installation instructions on pages 36).
7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)
8) Metric threaded spigot on request


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FM - Dimensions, size 37 to 45

13

A10FM - Dimensions, size 37 to 45

Port plate 10(60)N000

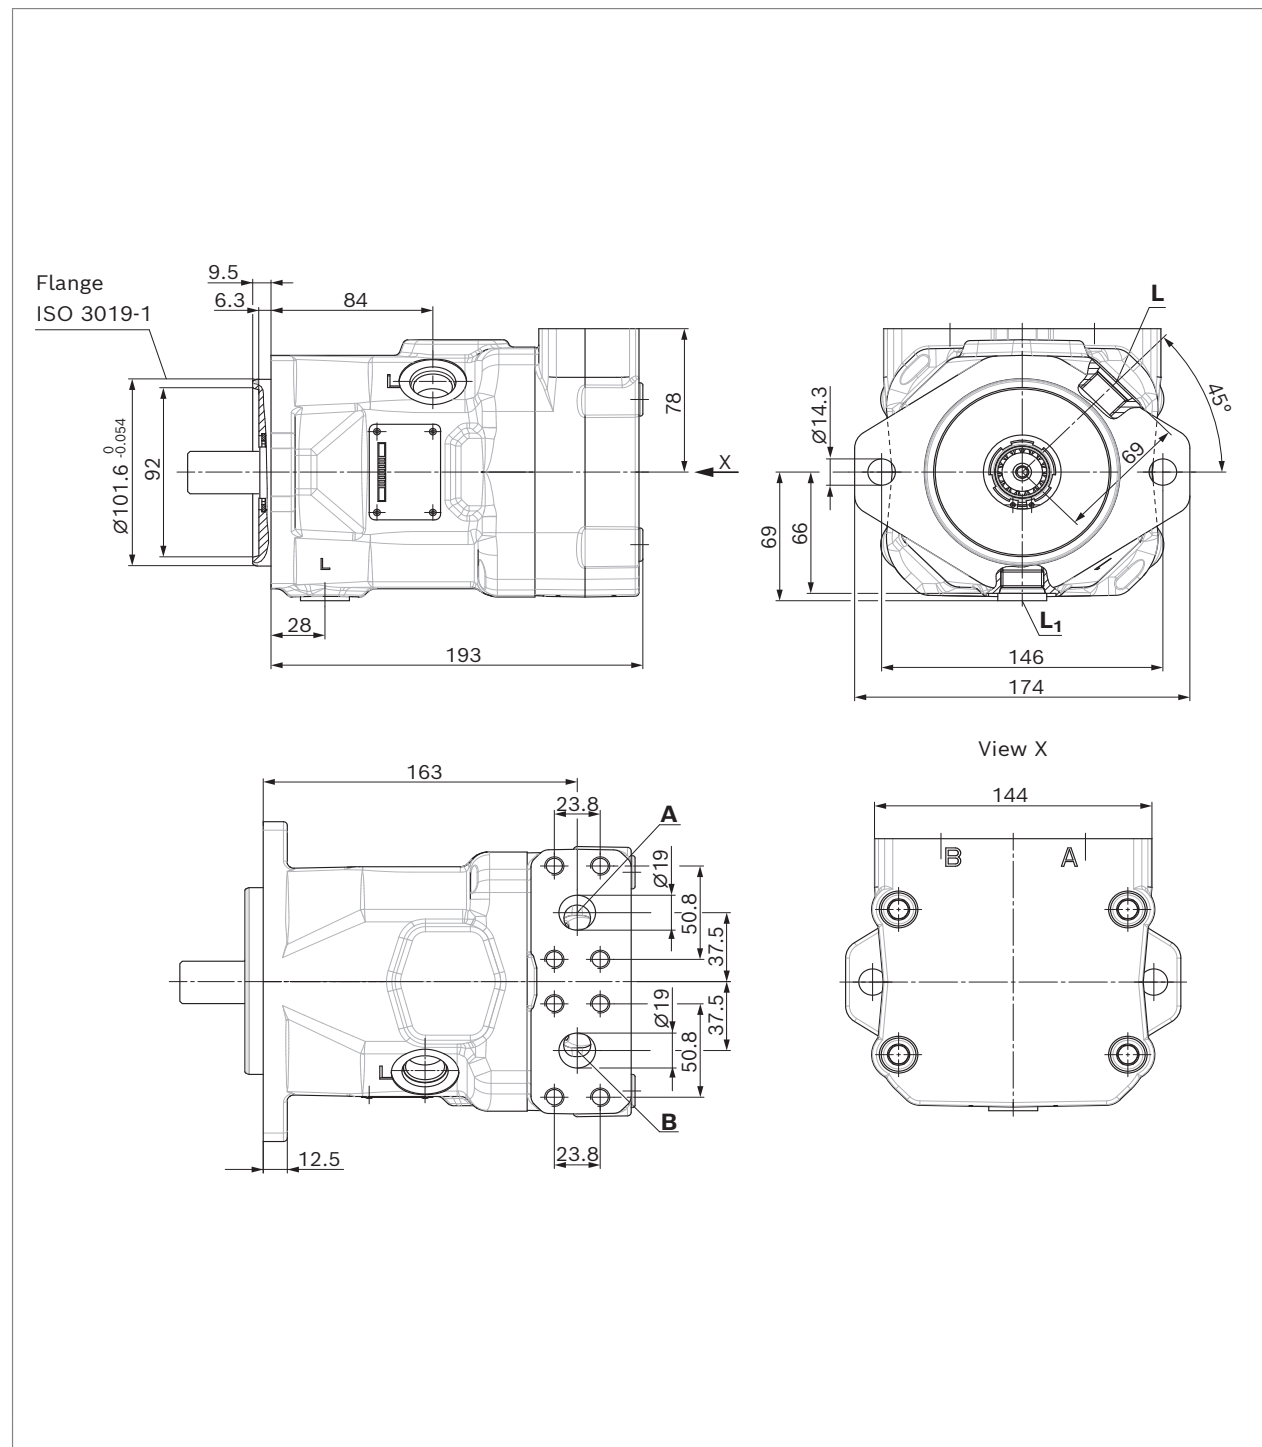

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

14 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FM - Dimensions, size 37 to 45

Dimensions [mm]

A10FM - Dimensions, size 37 to 45

Port plate 16(66)N000

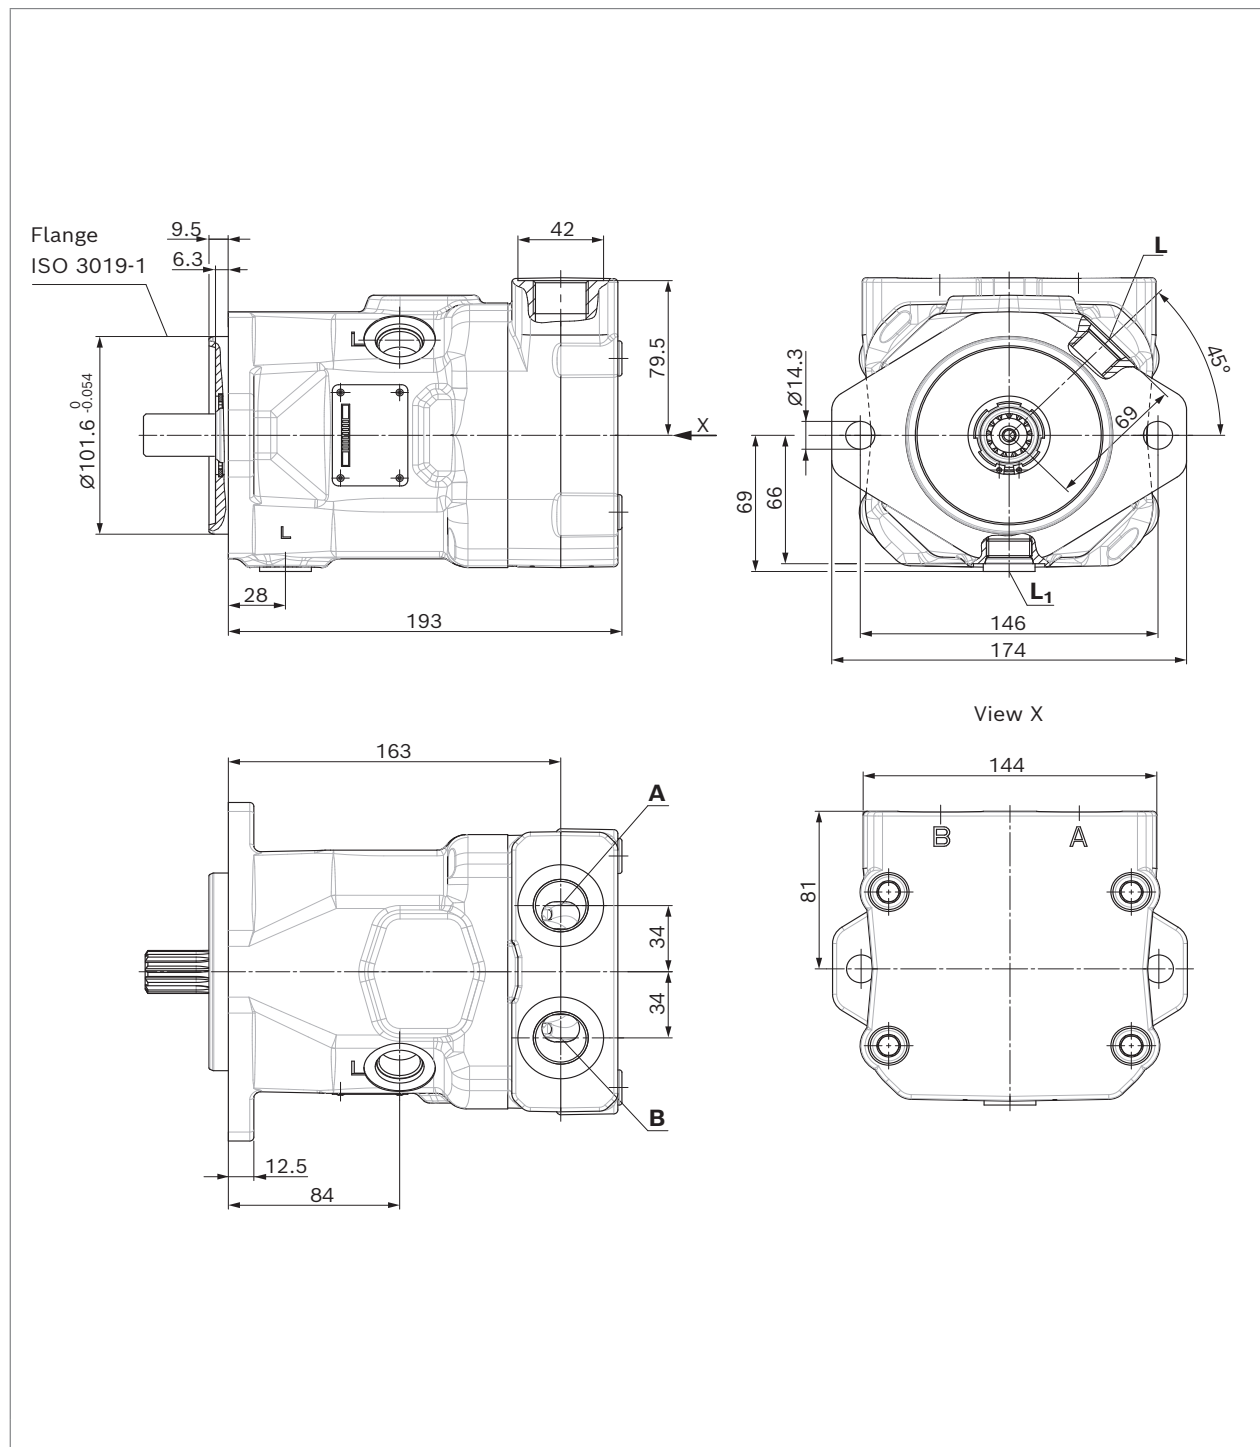

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm (inch)]


Axial piston fixed motor | **A10FM, A10FE series 52**
A10FM - Dimensions, size 37 to 45

15


▼ **Splined shaft 1 in (25-4(B-B) similar to ISO 3019-1)**

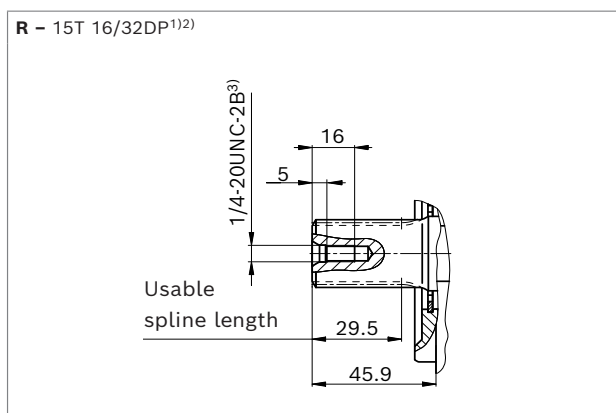

▼ **Conical keyed shaft with threaded spigot, metric⁹⁾ (22-3(B) similar to ISO 3019-1)**

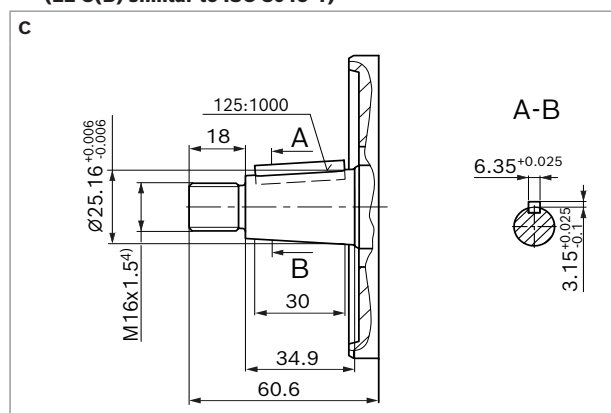

▼ **Splined shaft 7/8 in (22-4(B) similar to ISO 3019-1)**

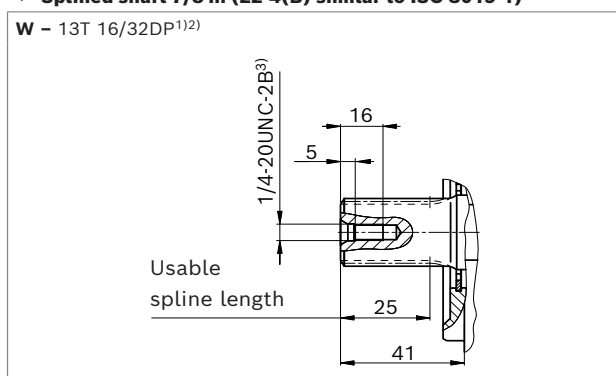

Ports	Standard	Size	p_{max} [bar (psi)] ⁵⁾	State ⁸⁾
Port plate 10; 11				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	3/4 in M10 × 1.5; 17 (0.67) deep	350 (5100) O
Port plate 60; 61				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	3/4 in 3/8-16UNC-2B 21 (0.83) deep	350 (5100) O
Port plate 16				
A, B	Working port	DIN 3852-1	M27 × 2; 17 (0.67) deep	350 (5100) O
Port plate 66				
A, B	Working port	ISO 11026	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100) O
Other ports				
L	Drain port	ISO 11926 ⁶⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) O ⁷⁾
L₁	Drain port	ISO 11926 ⁶⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) X ⁷⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Spline runout is a deviation from the ISO 3019-1 standard.

3) Thread according to ASME B1.1

4) Thread according to DIN 13

5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink may be deeper than specified in the standard.

7) Depending on the installation position, **L** or **L₁** must be connected (see also installation instructions on pages 36).

8) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

9) UNF threaded spigot on request

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]

Port plate 10(60)N000




Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FM - Dimensions, size 58 to 63

17

A10FM - Dimensions, size 58 to 63

Port plate 16(66)N000

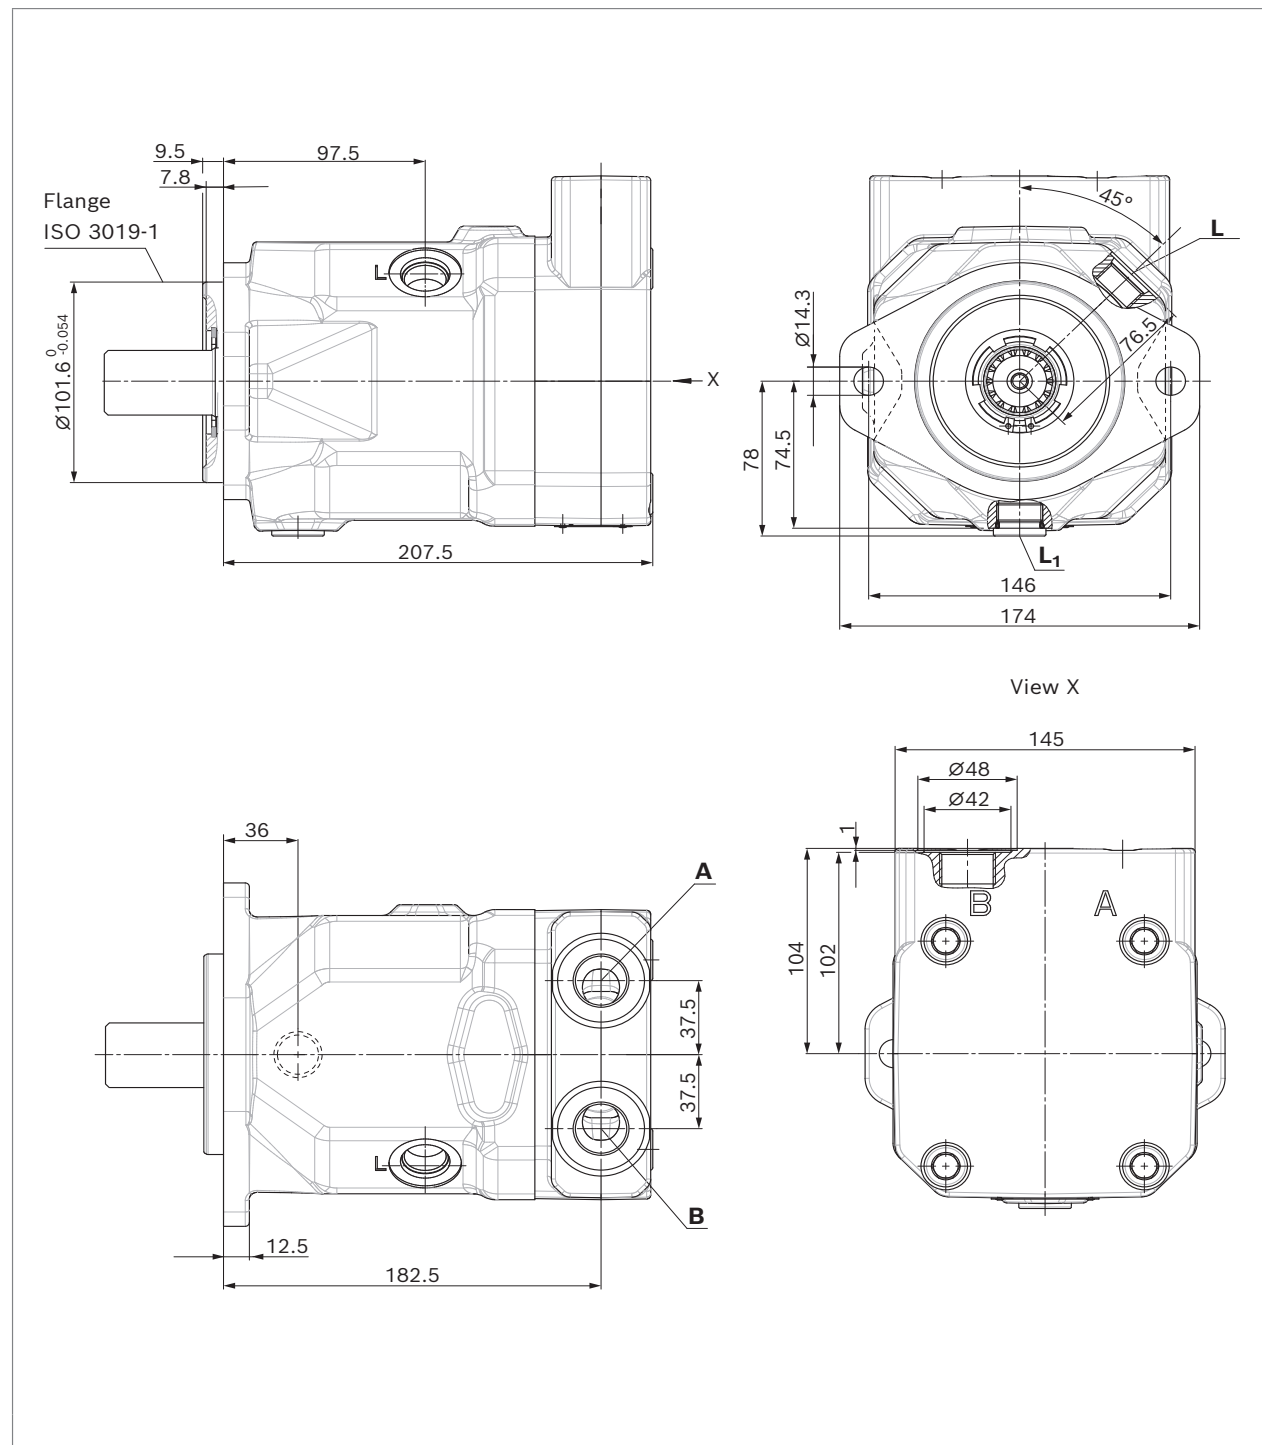

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

18 **A10FM, A10FE series 52** | Axial piston fixed motor A10FM - Dimensions, size 58 to 63

Dimensions [mm (inch)]


▼ Splined shaft 1 1/4 in (32-4(C) similar to ISO 3019-1)

R - 14T 12/24DP¹⁾²⁾




▼ Splined shaft 1 in (25-4(B-B) similar to ISO 3019-1)

W - 15T 16/32DP¹⁾²⁾



▼ Conical keyed shaft with threaded spigot, UNF (32-3(C) similar to ISO 3019-1)

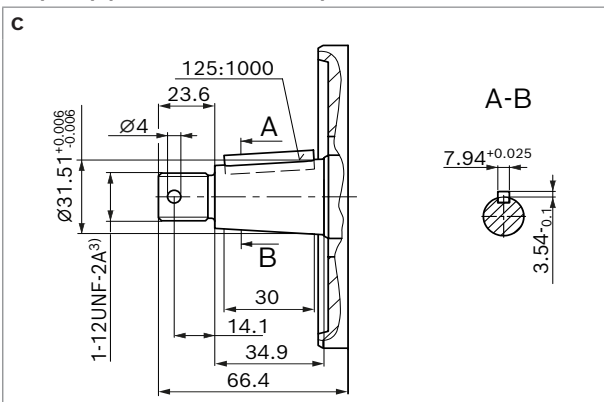

Ports	Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
Port plate 10				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	3/4 in M10 × 1.5; 17 (0.67) deep	350 (5100) O
Port plate 60				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	3/4 in 3/8-16UNC-2B 21 (0.83) deep	350 (5100) O
Port plate 16				
A, B	Working port	DIN 3852-1	M27 × 2; 16 (0.63) deep	350 (5100) O
Port plate 66				
A, B	Working port	ISO 11926	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100) O
Other ports				
L	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) O ⁶⁾
L ₁	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) X ⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.
6) Depending on the installation position, L or L₁ must be connected (see also installation instructions on pages 36).
7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 10

19

A10FE - Dimensions, size 10

Port plate 16(66)N000

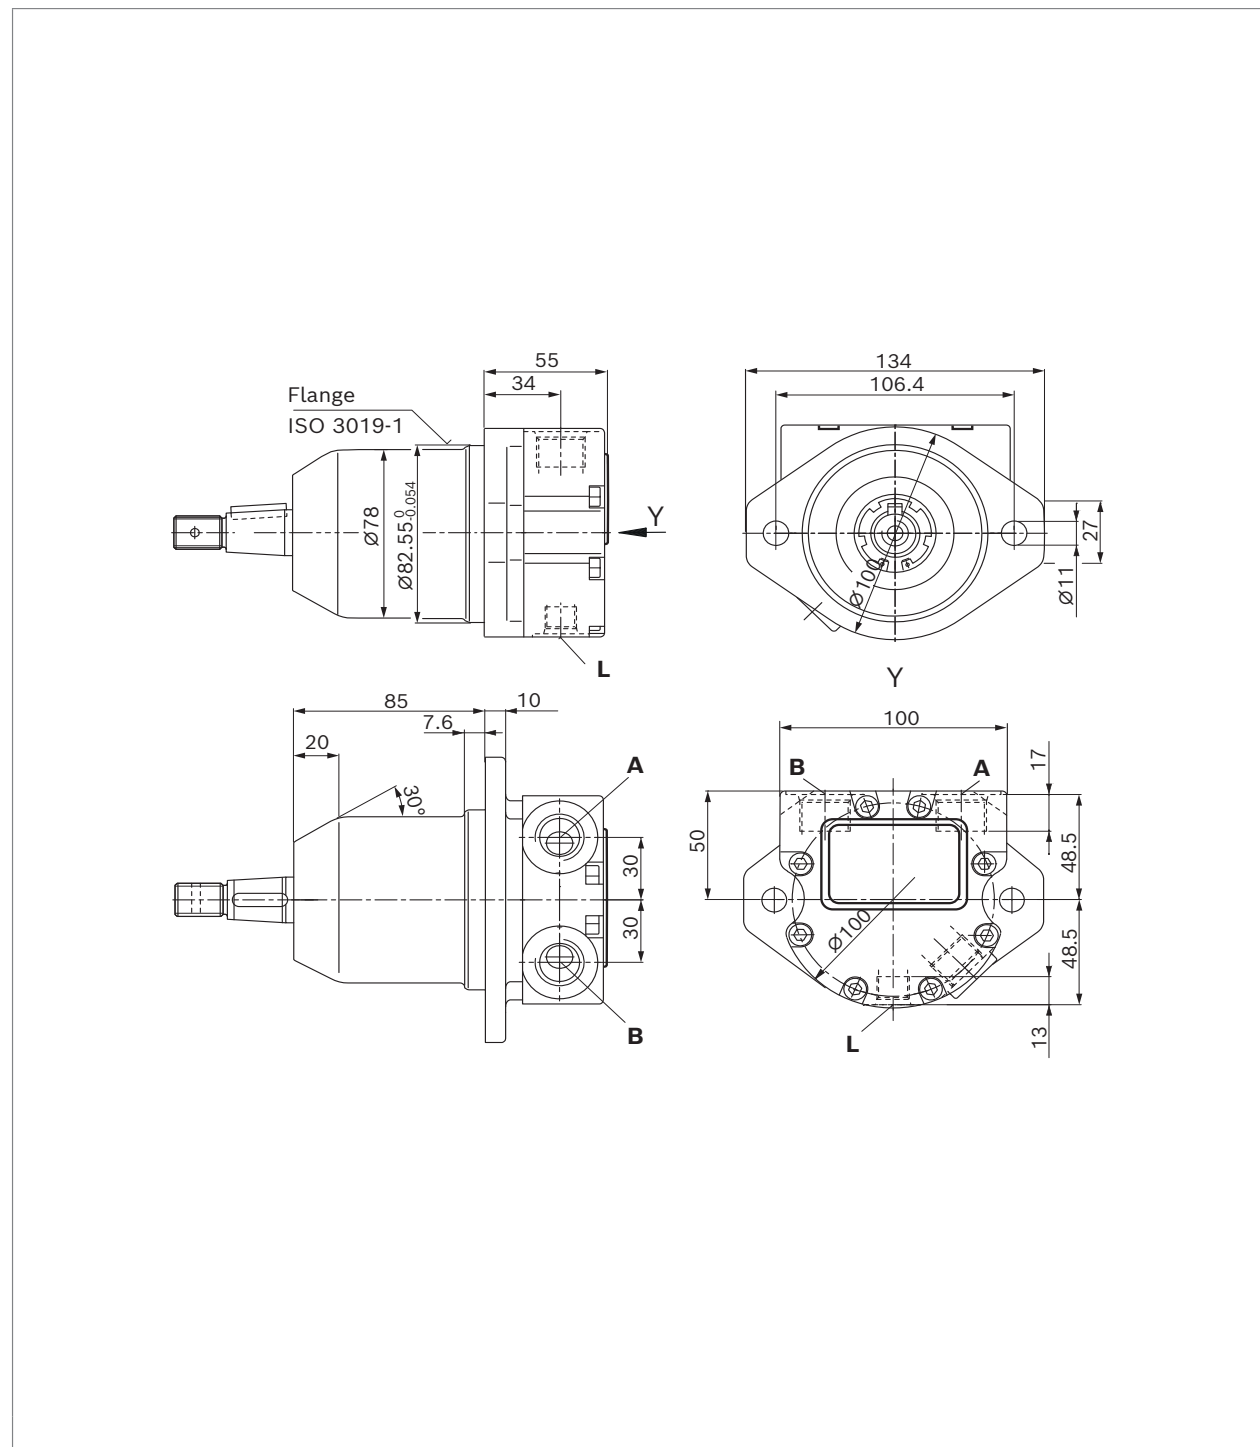

RE 91172/2023-11-02, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

20 A10FM, A10FE series 52 | Axial piston fixed motor
A10FE - Dimensions, size 10

Dimensions [mm (inch)]

▼ Conical keyed shaft with threaded spigot, UNF
(22-3(B) similar to ISO 3019-1)

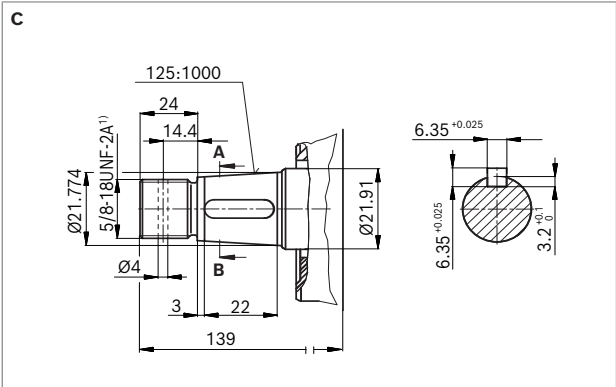

Ports		Standard	Size	p_{max} [bar (psi)] ²⁾	State ⁵⁾
Port plate 16					
A, B	Working port	DIN 3852-1	M18 × 1.5; 12 (0.47) deep	350 (5100)	O
L	Drain port	DIN 3852-1 ³⁾	M14 × 1.5; 12 (0.47) deep	4 (60)	O ⁴⁾
Port plate 66					
A, B	Working port	ISO 11926	7/8-14 UNF-2B; 17 (0.67) deep	350 (5100)	O
L	Drain port	ISO 11926 ³⁾	9/16-18 UNF-2B; 13 (0.51) deep	4 (60)	O ⁴⁾

1) Thread according to ASME B1.1
2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
3) The countersink may be deeper than specified in the standard.
4) L must be connected (see also installation instructions on page 36).
5) O = Must be connected (plugged on delivery)


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 11 to 18

21

A10FE - Dimensions, size 11 to 18

Port plate 16(66)N000

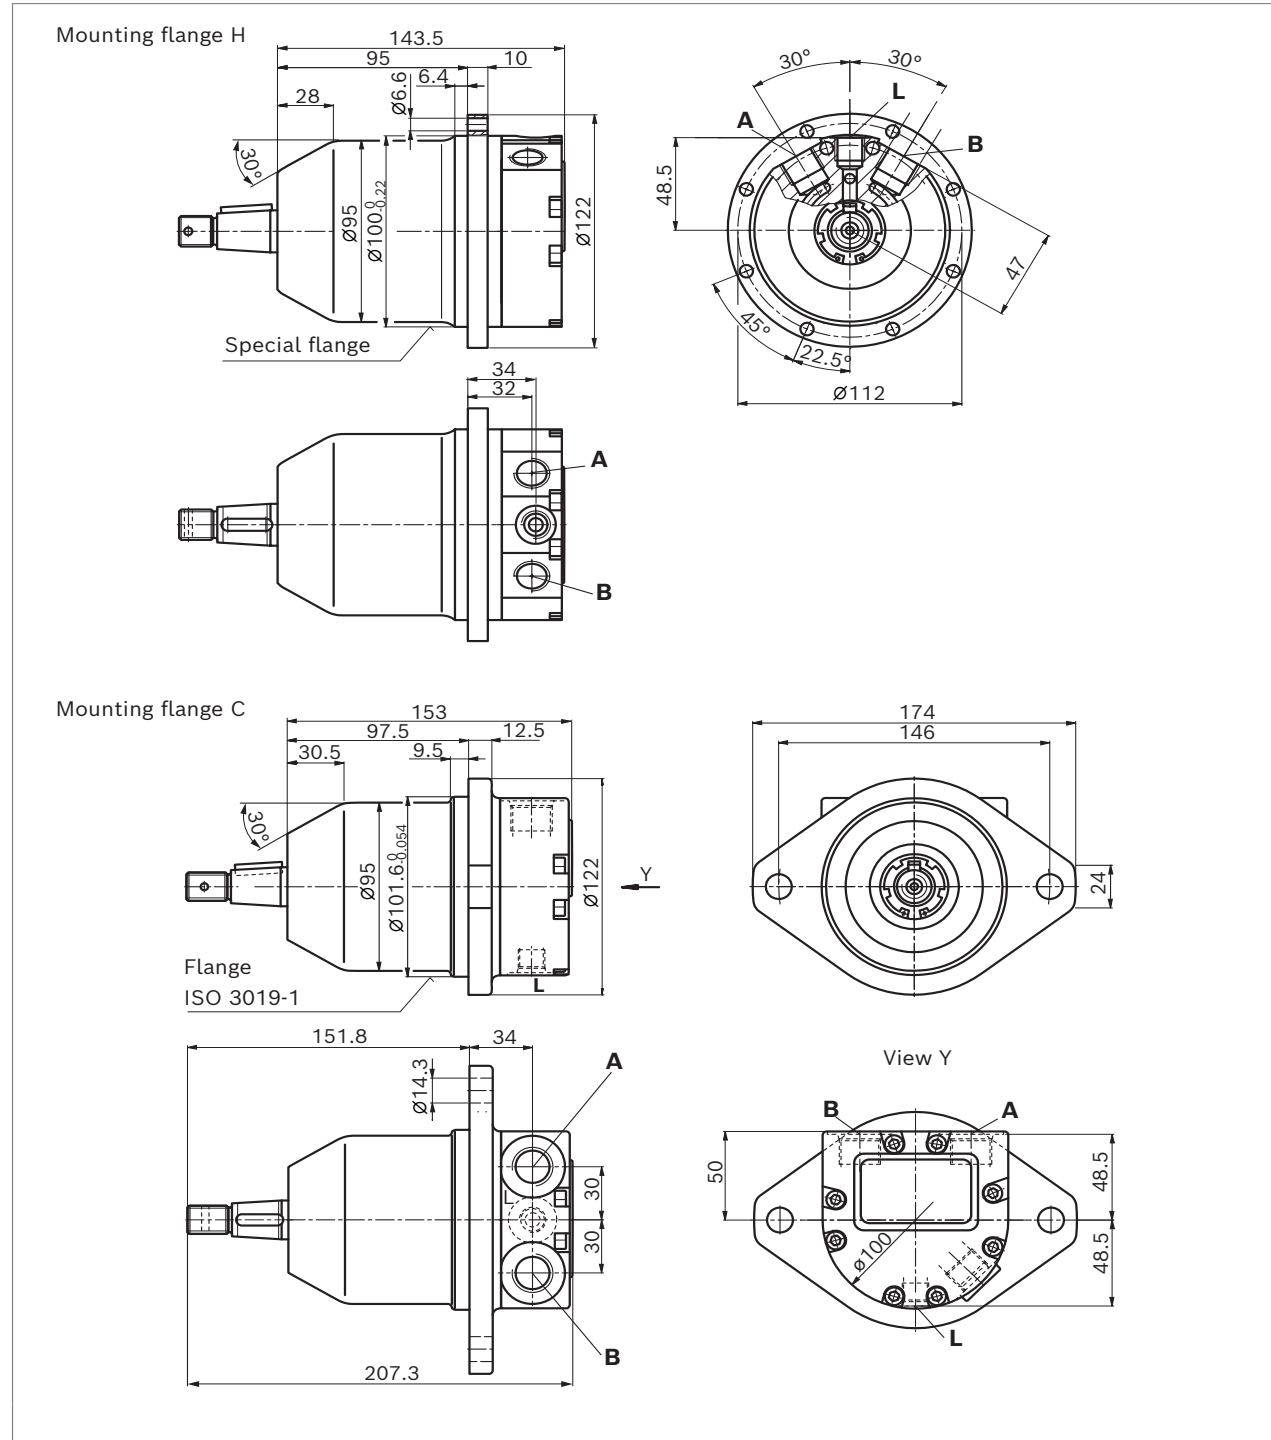


RE 91172/2023-11-02, Bosch Rexroth AG

22 **A10FM, A10FE series 52** | Axial piston fixed motor A10FE - Dimensions, size 11 to 18


Dimensions [mm (inch)]

▼ Splined shaft (19-4 (A-B) similar to ISO 3019-1)

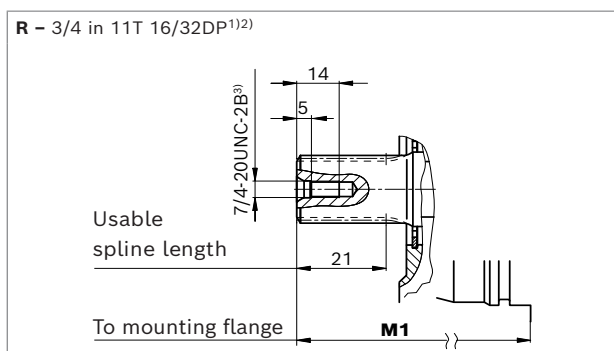

Mounting flange	M1
H	126.6 (0.65)
C	109.2 (4.30)

▼ Conical keyed shaft with threaded spigot, UNF (22-3(B) similar to ISO 3019-1)

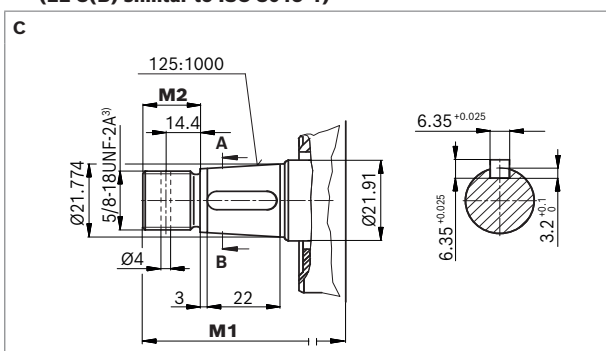

Mounting flange	M1	M2
H	144.2 (5.68)	19 (0.75)
C	151.8 (5.98)	24 (0.94)

Ports	Standard	Size	p_{max} [bar (psi)] ⁽⁴⁾	State ⁽⁷⁾
Port plate 16				
A, B Working port	DIN 3852-1	M18 × 1.5; 12 (0.51) deep	350 (5100)	O
L Drain port	DIN 3852-1	M14 × 1.5; 12 (0.51) deep	4 (60)	O ⁽⁶⁾
Port plate 66				
with mounting flange H				
A, B Working port	ISO 11926	3/4-16 UNF-2B; 15 (0.59) deep	350 (5100)	O
with mounting flange C				
Working port	ISO 11926	7/8-14 UNC-2B; 17 (0.67) deep	350 (5100)	O
L Drain port	ISO 11926 ⁽⁵⁾	9/16-18 UNF-2B; 13 (0.51) deep	4 (60)	O ⁽⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.
6) L must be connected (see also installation instructions on page 36).
7) O = Must be connected (plugged on delivery)


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 23 to 28

23

A10FE - Dimensions, size 23 to 28

Port plate 10(60)N000

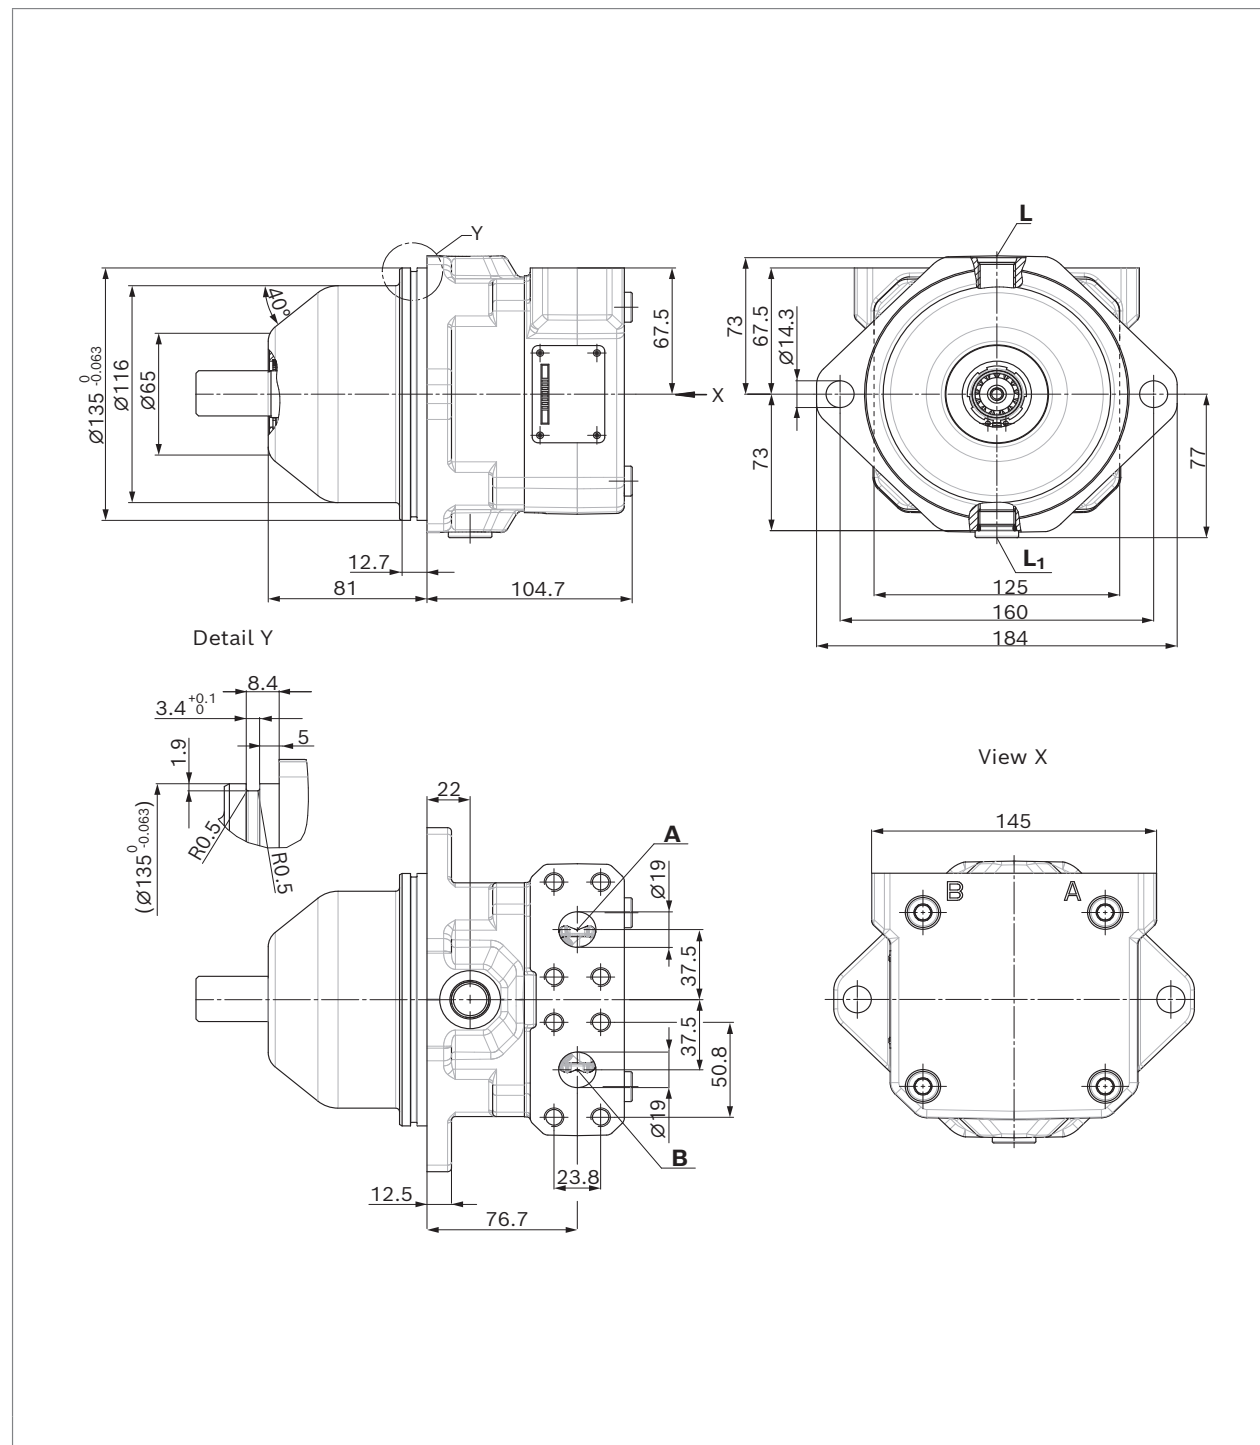

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

24 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FE - Dimensions, size 23 to 28

Dimensions [mm]

A10FE - Dimensions, size 23 to 28

Port plate 16(66)N000

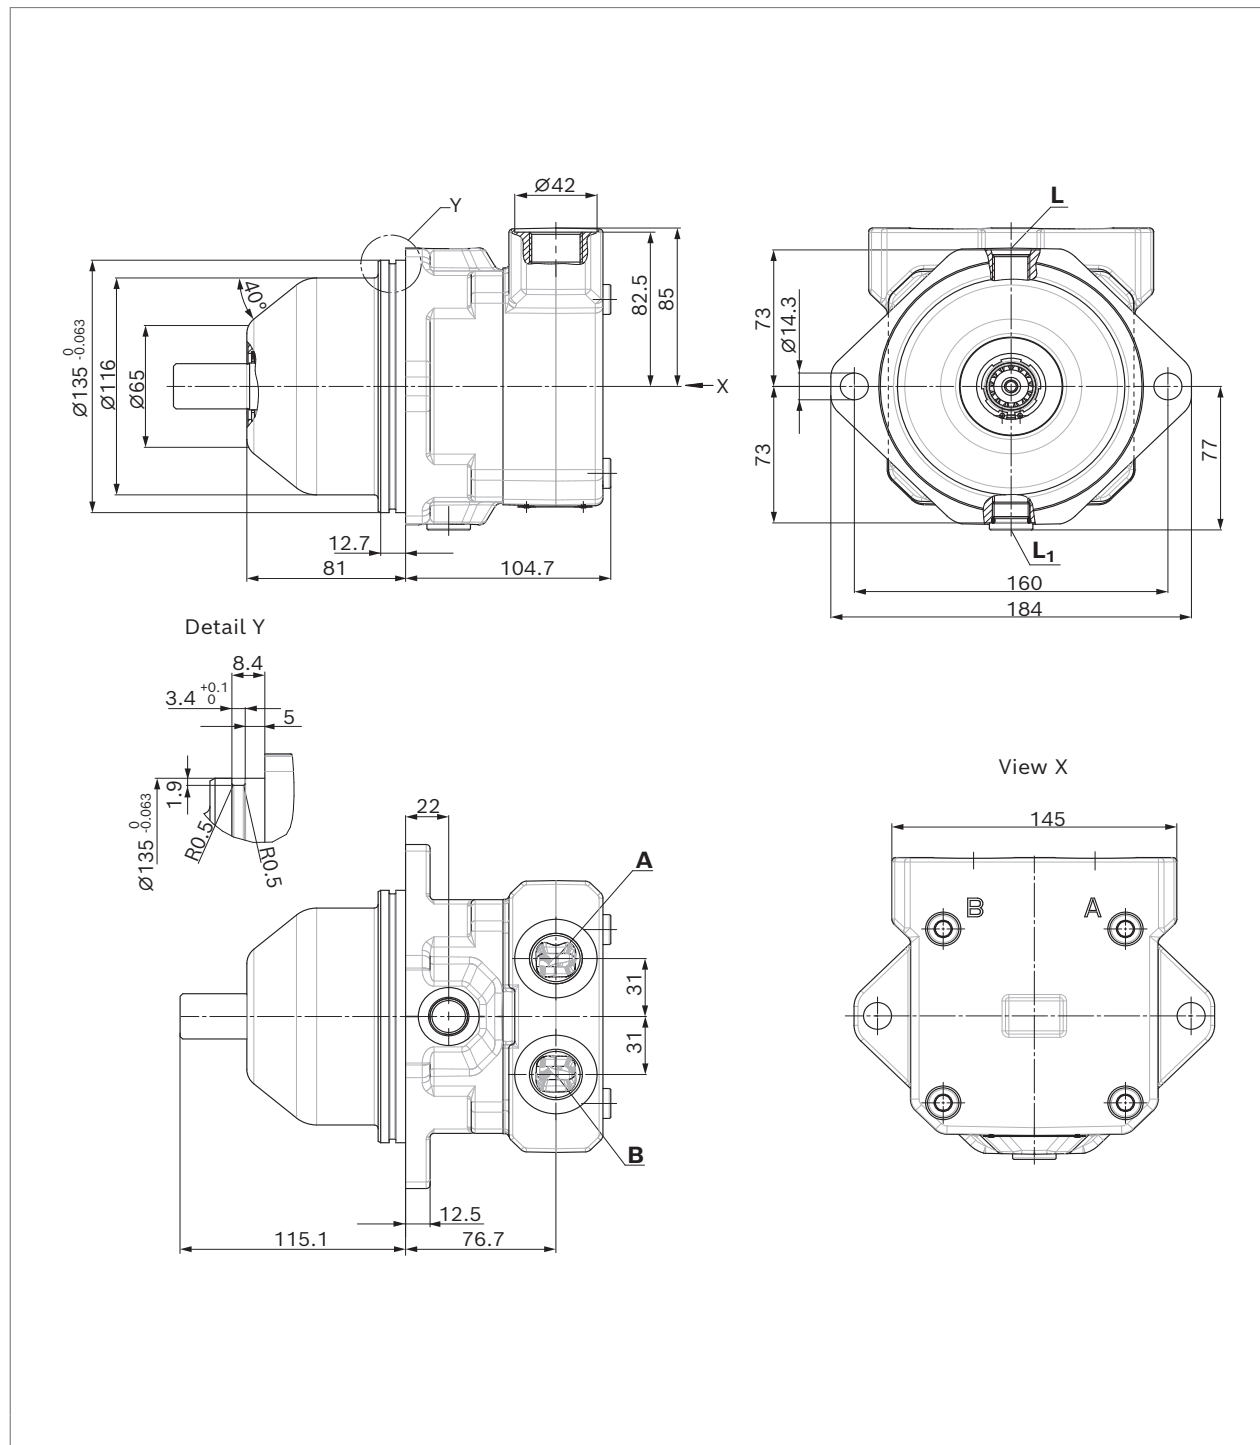

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm (inch)]


Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 23 to 28

25

▼ **Splined shaft (22-4(B) similar to ISO 3019-1)**

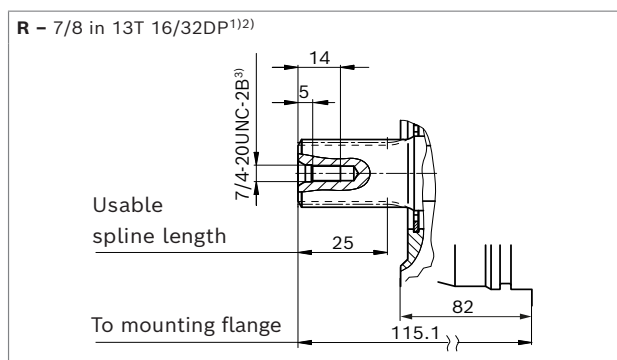

▼ **Conical keyed shaft with threaded spigot, UNF (22-3(B) similar to ISO 3019-1)**

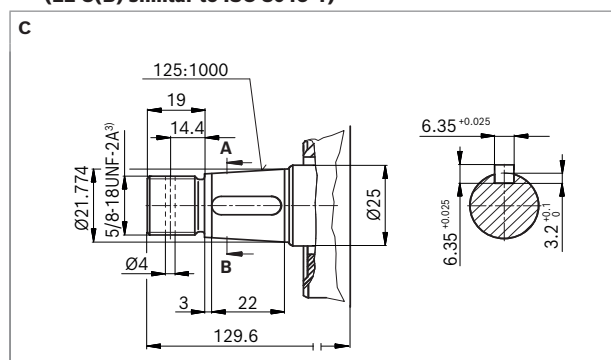

Ports		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
Port plate 10					
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	3/4 in M10 × 1.5; 17 (0.47) deep	350 (5100)	O
Port plate 60					
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	3/4 in 3/8-16UNC-2B 21 (0.83) deep	350 (5100)	O
Port plate 16					
A, B	Working port	DIN 3852-1	M27 × 2; 16 (0.63) deep	350 (5100)	O
Port plate 66					
A, B	Working port	ISO 11926	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100)	O
Other ports					
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 (0.59) deep	4 (60)	O ⁶⁾
L ₁	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 (0.59) deep	4 (60)	X ⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.
6) Depending on the installation position, L or L₁ must be connected (see also installation instructions on pages 36).
7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

26 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FE - Dimensions, size 37 to 45

Dimensions [mm]

A10FE - Dimensions, size 37 to 45

Port plate 10(60)N000

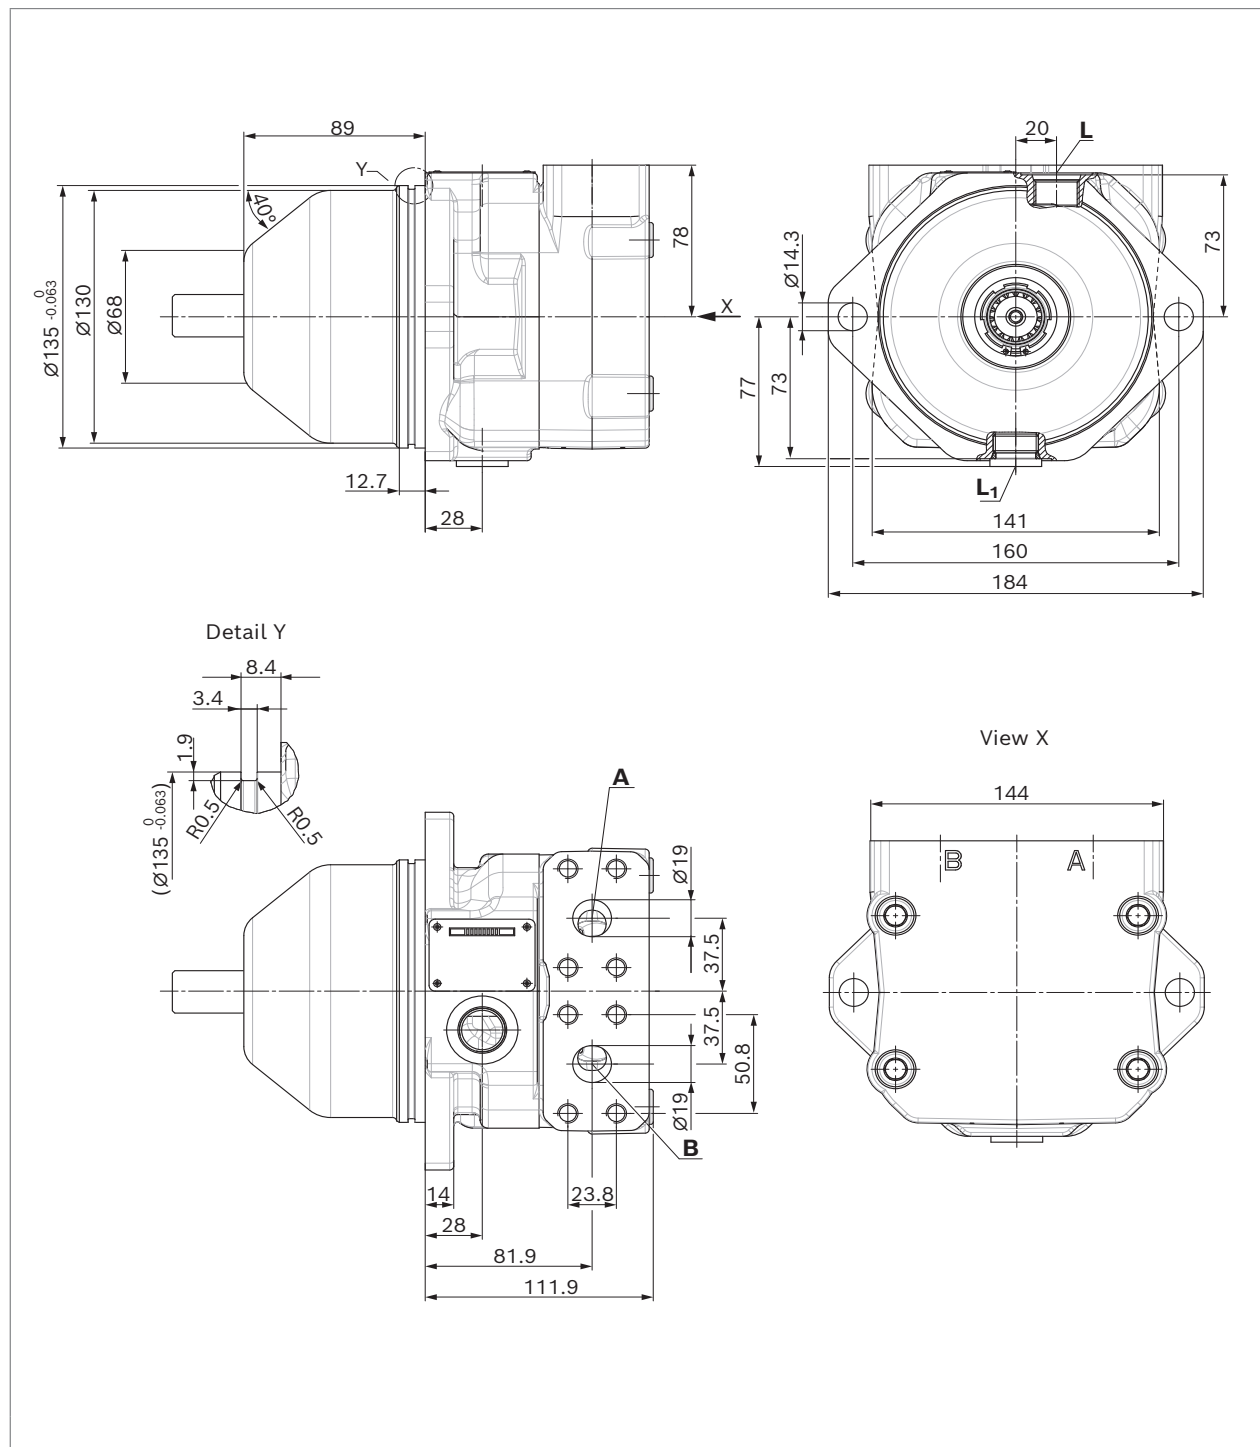

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 37 to 45

27

A10FE - Dimensions, size 37 to 45

Port plate 16(66)N000

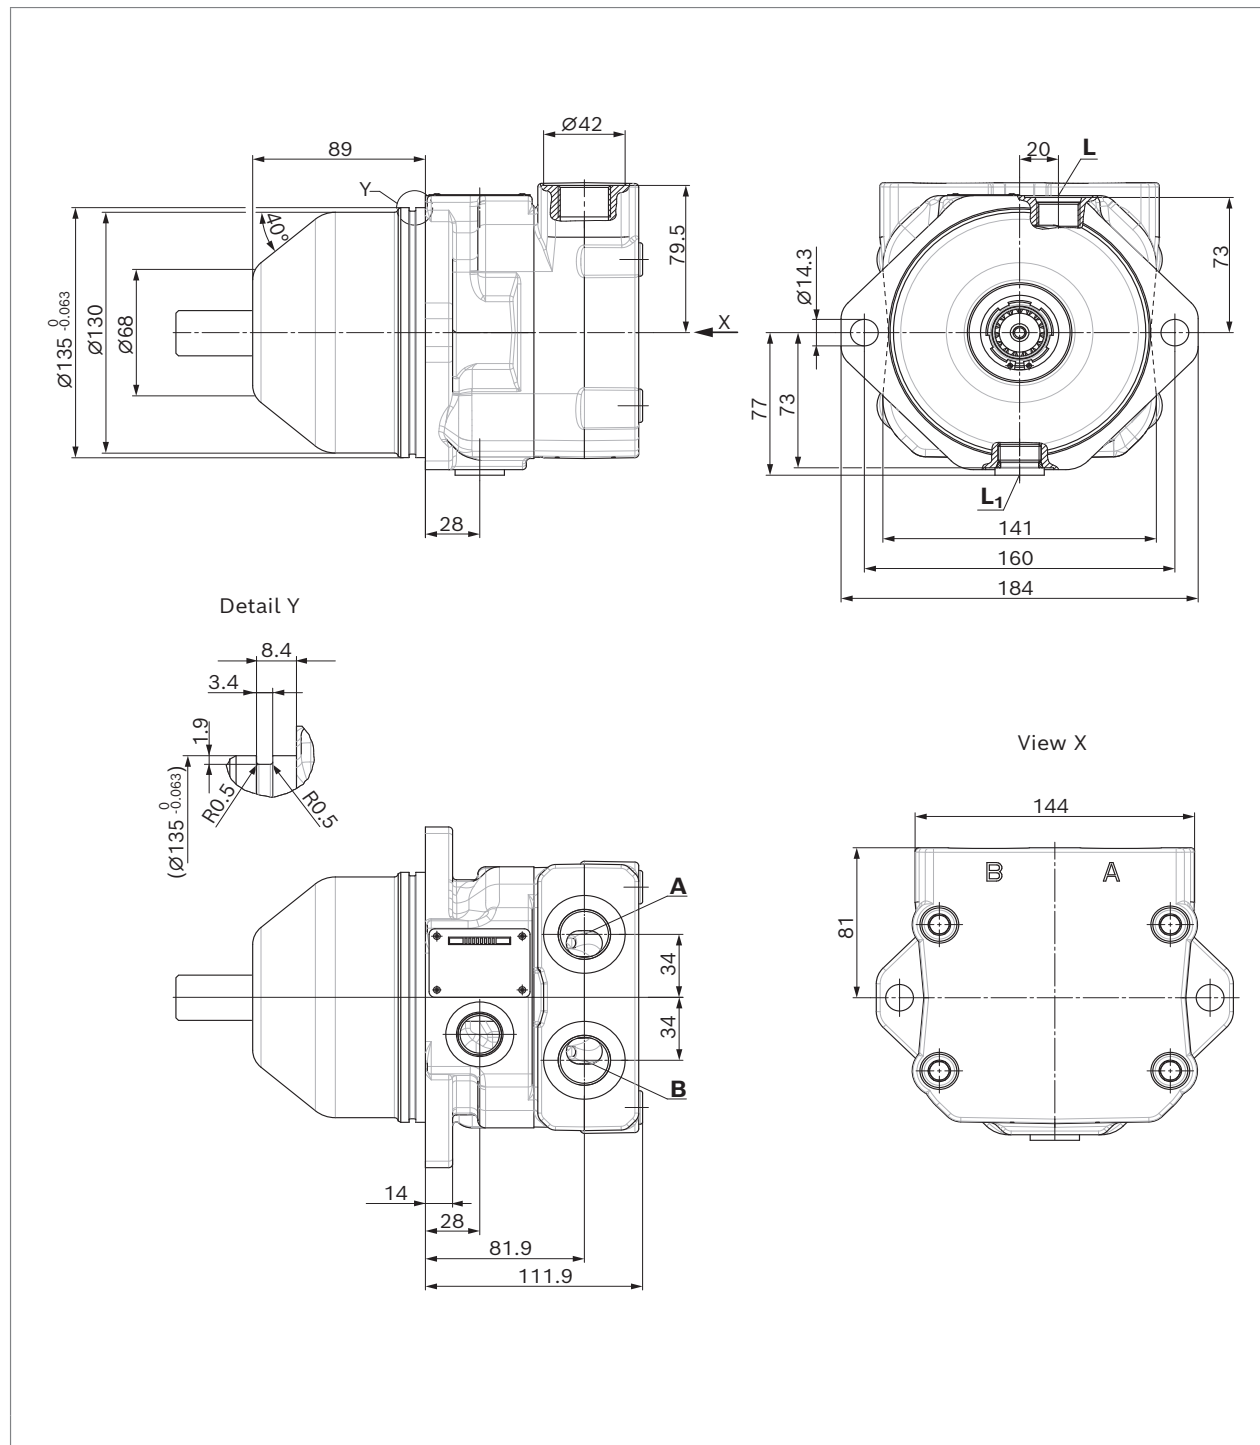

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

28 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FE - Dimensions, size 37 to 45


Dimensions [mm (inch)]

▼ **Splined shaft 1 in (25-4(B-B) similar to ISO 3019-1)**

R - 15T 16/32DP¹⁾²⁾

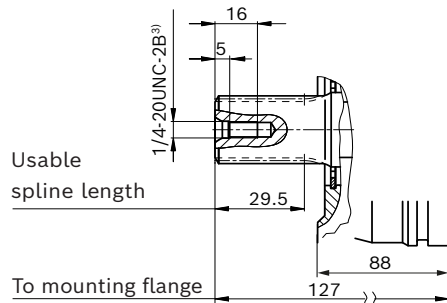


▼ **Conical keyed shaft with threaded spigot, metric⁹⁾**
(25-3(B-B) similar to ISO 3019-1)

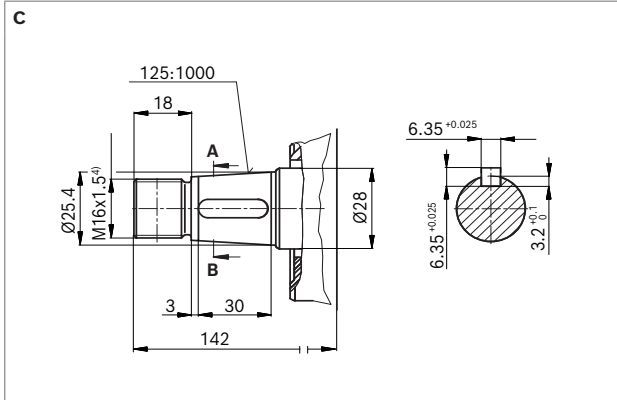

▼ **Splined shaft 7/8 in (22-4(B) similar to ISO 3019-1)**

W - 13T 16/32DP¹⁾²⁾

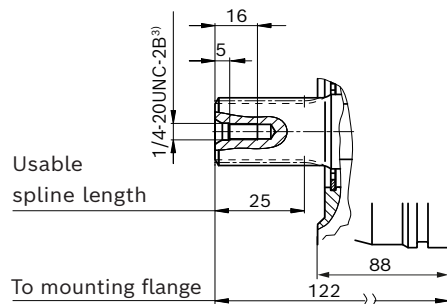

Ports		Standard	Size	p_{\max} [bar (psi)] ⁵⁾	State ⁸⁾
Port plate 10					
A, B	Working port (high-pressure series)	ISO 6162-2	3/4 in	350 (5100)	O
	Fastening thread	DIN 13	M10 × 1.5; 17 (0.67) deep		
Port plate 60					
A, B	Working port (high-pressure series)	ISO 6162-2	3/4 in	350 (5100)	O
	Fastening thread	ASME B1.1	3/8-16UNC-2B 21 (0.83) deep		
Port plate 16					
A, B	Working port	DIN 3852-1	M27 × 2; 17 (0.67) deep	350 (5100)	O
Port plate 66					
A, B	Working port	ISO 11926	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100)	O
Other ports					
L	Drain port	ISO 11926 ⁶⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60)	O ⁷⁾
L ₁	Drain port	ISO 11926 ⁶⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60)	X ⁷⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Thread according to DIN 13
5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink may be deeper than specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (see also installation instructions on pages 36).
8) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)
9) UNF threaded spigot on request

Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 58 to 63

29


Port plate 10(60)N000

30 **A10FM, A10FE series 52** | Axial piston fixed motor
A10FE - Dimensions, size 58 to 63

Dimensions [mm]

A10FE - Dimensions, size 58 to 63

Port plate 16(66)N000

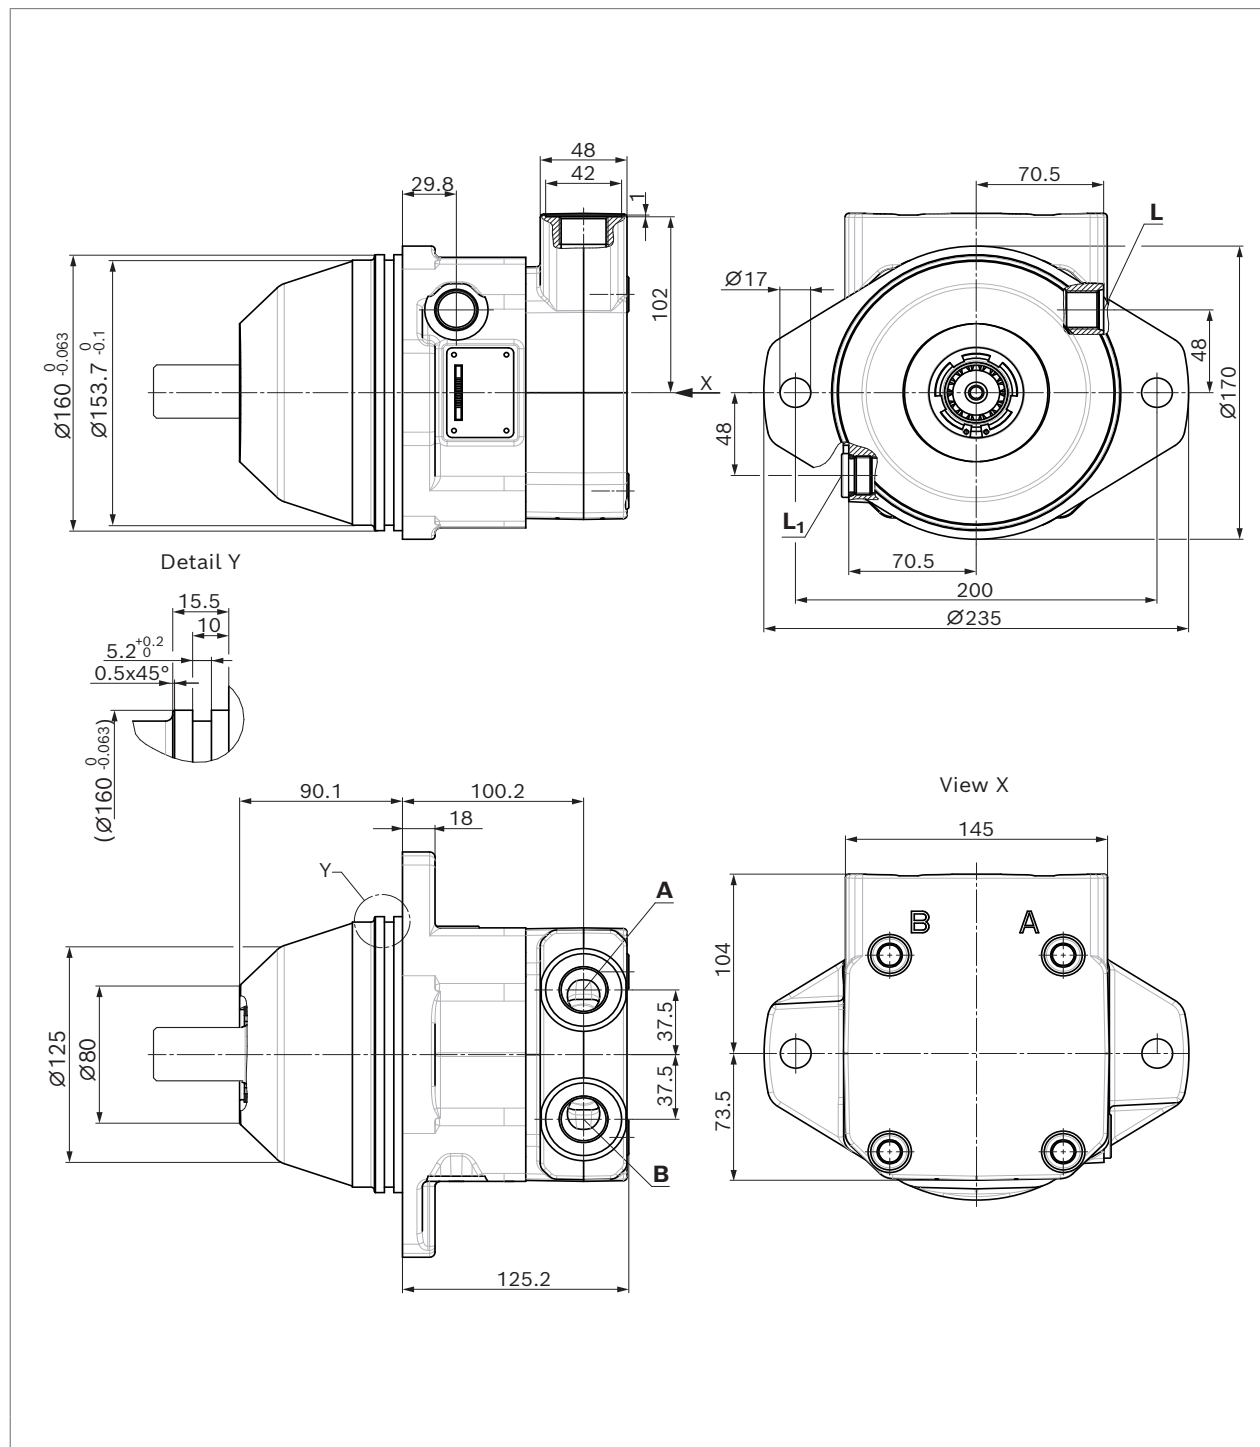

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm (inch)]


Axial piston fixed motor | **A10FM, A10FE series 52**
A10FE - Dimensions, size 58 to 63

31


▼ **Splined shaft 1 1/4 in (32-4(C) similar to ISO 3019-1)**

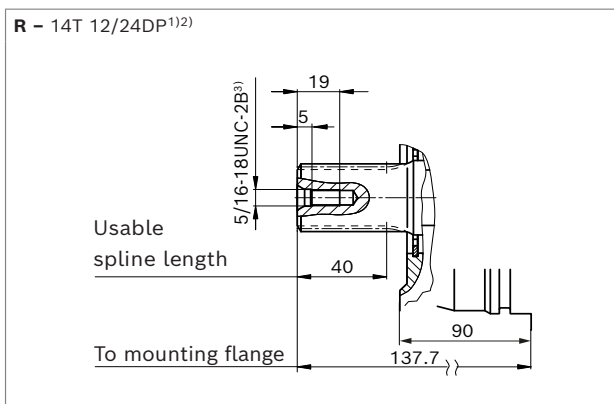

▼ **Splined shaft 1 in (25-4(B-B) similar to ISO 3019-1)**

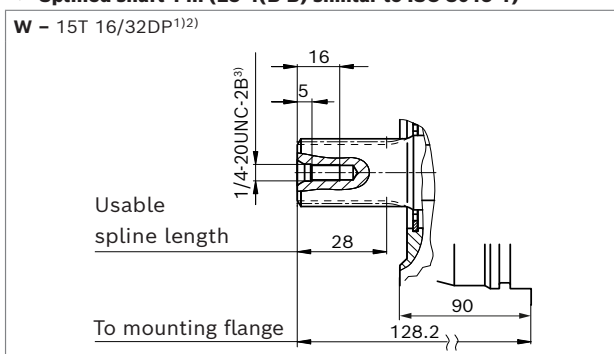

▼ **Conical keyed shaft with threaded spigot, UNF (32-3(C) similar to ISO 3019-1)**

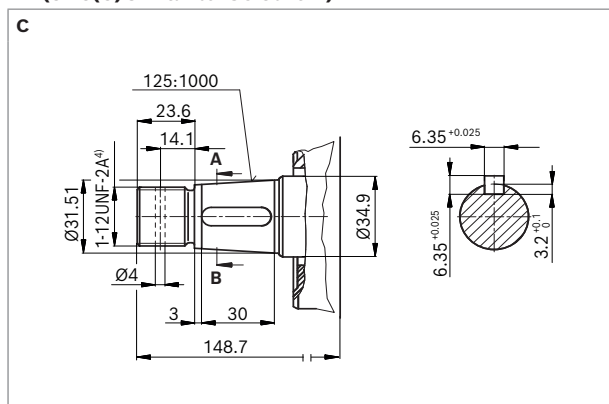

Ports	Standard	Size	p_{\max} [bar (psi)] ⁴⁾	State ⁷⁾
Port plate 10				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	3/4 in M10 × 1.5; 17 (0.67) deep	350 (5100) O
Port plate 60				
A, B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	3/4 in 3/8-16UNC-2B 21 (0.83) deep	350 (5100) O
Port plate 16				
A, B	Working port	DIN 3852-1	M27 × 2; 16 (0.63) deep	350 (5100) O
Port plate 66				
A, B	Working port	ISO 11926	1 1/16-12UN-2B; 20 (0.79) deep	350 (5100) O
Other ports				
L	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 (0.67) deep	4 (60) X ⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Spline runout is a deviation from the ISO 3019-1 standard.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.
6) Depending on the installation position, **L** or **L₁** must be connected (see also installation instructions on pages 36).
7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

32 **A10FM, A10FE series 52** | Axial piston fixed motor
Flushing and boost-pressure valve

Dimensions [mm (inch)]

Flushing and boost-pressure valve


Order option N007

In a closed circuit, the integrated flushing and boost-pressure valve is used for heat dissipation and to safeguard the minimum boost pressure.
Hydraulic fluid is directed from the respective low-pressure side into the motor housing. This is then fed into the reservoir, together with the leakage.
The removed hydraulic fluid must be replaced by cooled hydraulic fluid supplied by the boost pump.
The valve is integrated in the port plate.

Notice

► Cracking pressure of pressure retention valve
Fixed at 16 bar (230 psi)
(observe primary valve setting)

Circuit diagram

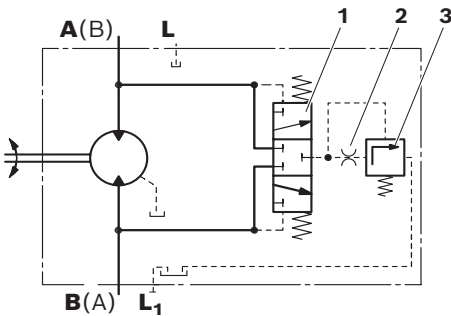


Item	Component
1	Flushing spool
2	Orifice
3	Pressure retention valve

Flushing flow q_v

Orifices can be used to adjust the flushing flows as required.
The following information is based on:
 $\Delta p_{ND} = p_{ND} - p_G = 20 \text{ bar (290 psi)}$ and $v = 10 \text{ mm}^2/\text{s (cSt)}$
(p_{ND} = low pressure, p_G = case pressure)
The standard flushing flow is 5.5 l/min (1.5 gpm) with orifice $\varnothing 1.6 \text{ mm (DIA 0.063 inch)}$. When ordering, please state other orifice diameter sizes in plain text.

Orifice diameter [mm (inch)]	Flushing flow q_v [l/min (gpm)]
1.2 (0.47)	3.5 (0.9)
1.6 (0.63)	5.5 (1.5)
2 (0.79)	9 (2.4)

Dimensions A10FM and A10FE

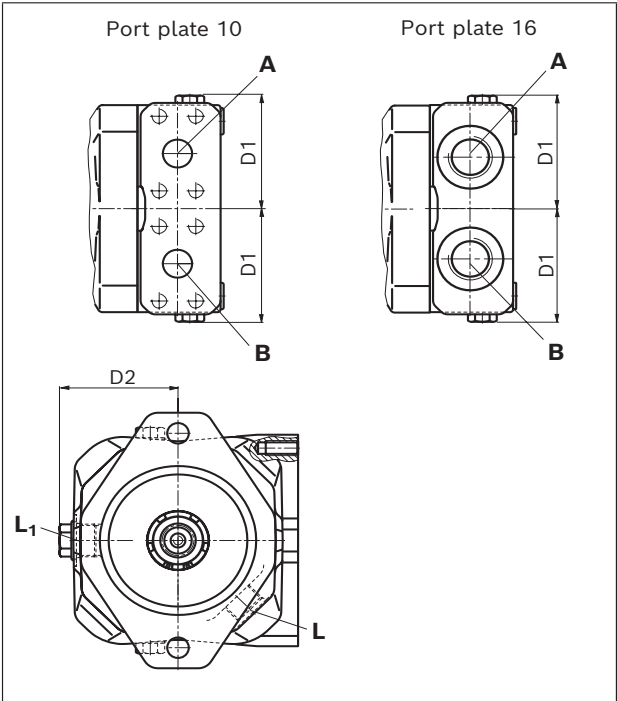

Size	D ₁ [mm (inch)]	D ₂ [mm (inch)]
23/28	72 (2.83)	72 (2.83)
37/45	77 (3.03)	77 (3.03)
68/63	77 (3.03)	82 (3.23)

Anti cavitation valve

Order option N002


When switching off the system, the anti cavitation valve ensures the motor of heavy-duty drives (e.g., hydrostatic fan drives) is supplied with hydraulic fluid until it comes to a standstill.
The valve is integrated in the port plate.

Notice

► The direction of rotation is to be determined as either clockwise or counter-clockwise in the project planning.

The external dimensions of the motor with anti cavitation valve correspond to the standard version.

▼ Circuit diagram

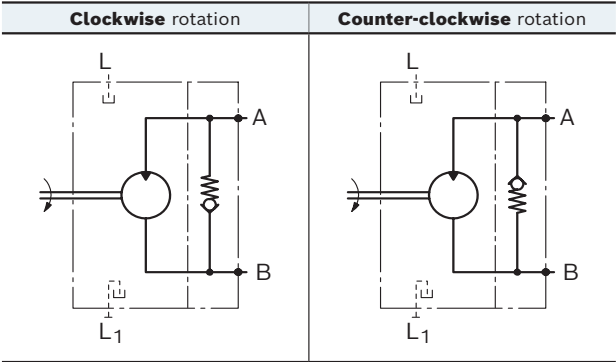

34 A10FM, A10FE series 52 | Axial piston fixed motor
Prepared for speed sensor


Dimensions [mm (inch)]

Prepared for speed sensor


Order option W

The version A10FM/A10FE...W is prepared for the installation of a speed sensor DST or DSA1/20 and DSA2/20 and is equipped with a spline on the rotary group. This spline can be scanned by a sensor and thus a signal proportional to the rotational speed can be generated.
On delivery, the fixture for the speed sensor is plugged with a pressure-resistant cover.

Circuit diagram




Dimension A10FM

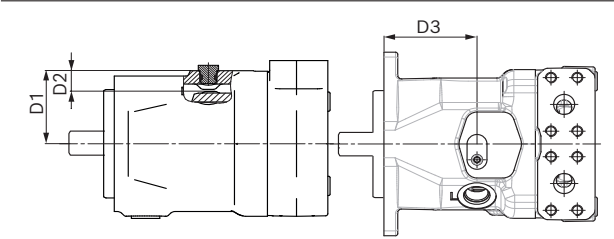

A10FM	Number of teeth	D1	D2	D3	Fastening thread
Size		mm (inch)	mm (inch)	mm (inch)	
23, 28	48	64.8 (2.55)	19.3 (0.76)	101.8 (4.01)	M6 × 1 At least 9 mm deep
37, 45	48	68.5 (2.70)	19.5 (0.77)	86.2 (3.39)	
58, 63	56	75.2 (2.96)	19.5 (0.77)	128.5 (5.06)	

Dimension A10FE

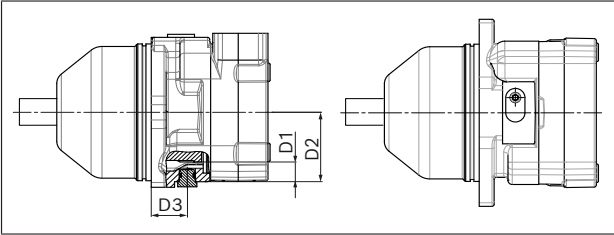

A10FE	Number of teeth	D1	D2	D3	Fastening thread
Size		mm (inch)	mm (inch)	mm (inch)	
23, 28	48	64.8 (2.55)	19.3 (0.76)	27.7 (1.09)	M6 × 1 At least 9 mm deep
37, 45	48	68.5 (2.70)	19.5 (0.77)	33.9 (1.33)	
58, 63	56	75.2 (2.96)	19.5 (0.77)	46.2 (1.82)	

Dimensions [mm (inch)]

Axial piston fixed motor | **A10FM, A10FE series 52**
Speed sensing

35

Speed sensing

Order option ... E, C and K

The mounted speed sensor DST (E) or DSA1/20 (C) and DSA2/20 (K) can record both the rotational speed and the direction of rotation of the motor. Additionally, the sensors also feature an NTC thermistor, which enables measuring the temperature in the installation location of the sensor. Type code, technical data, dimensions and information on the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95131 (DST) or 95126 (DSAx/20).

Notice


- ▶ Painting the sensor with electrostatic charge is not permitted (danger: ESD damage).

Electrostatic discharge


ISO 10605:2008

- ▶ Contact discharge (probe touches the sensor)
±8 kV (sensor operated actively and passively)
- ▶ Air discharge (arc between probe and sensor)
±15 kV (sensor operated actively and passively)


▼ Circuit diagram




▼ Pin assignment, speed sensor DSA1 and DSA2 Order option C and K

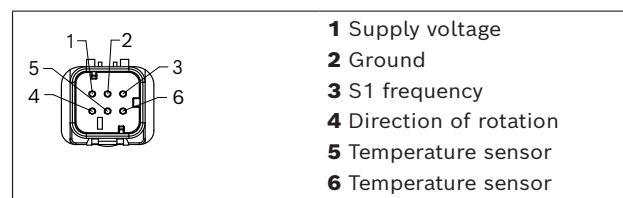

▼ Pin assignment, speed sensor DST Order option E

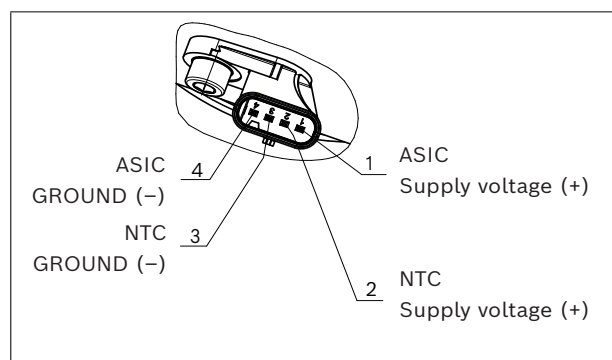


▼ Dimension A10FM with speed sensor DSAx and DST

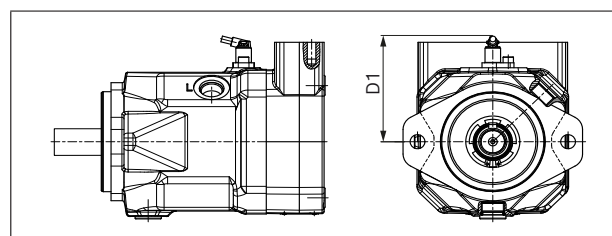

A10FM				
Size	23, 28	37, 45	58, 63	
D1 / DSAx	mm 97	100.6	107	
(Code C, K)	(inch) (3.82)	(3.96)	(4.21)	
D1 / DST	mm 89	92	99	
(Code E)	(inch) (3.50)	(3.62)	(3.90)	

▼ Dimension A10FE with speed sensor DSAx and DST

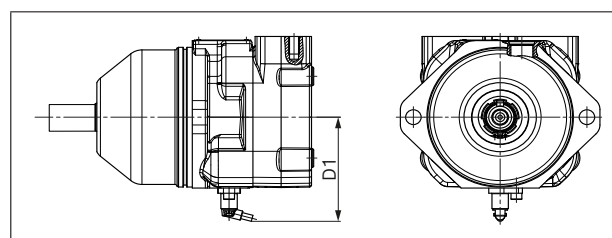

A10FE				
Size	23, 28	37, 45	58, 63	
D1 / DSAx	mm 97	100.6	107	
(Code C, K)	(inch) (3.82)	(3.96)	(4.21)	
D1 / DST	mm 89	92	99	
(Code E)	(inch) (3.50)	(3.62)	(3.90)	

Notice

For dimensions with mating connector, please contact us.

RE 91172/2023-11-02, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Installation instructions

General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines. The leakage in the housing area must be directed to the reservoir via the highest positioned drain port (**L**, **L₁**). If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain line must be laid, if necessary. To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g., reservoir, frame parts). Under all operating conditions, the drain line must flow into the reservoir below the minimum fluid level. When designing the reservoir, ensure that there is adequate distance between the suction line and the drain line. We recommend using a baffle (baffle plate) between suction line and drain line. A baffle improves the air separation ability as it gives the hydraulic fluid more time for desorption. Apart from that, this prevents the heated return flow from being drawn directly back into the suction line. The suction port must be supplied with air-free, calmed and cooled hydraulic fluid.

Key	
F	Filling / Air bleeding
L, L ₁	Drain port
SB	Baffle (baffle plate)
h _{t min}	Minimum required immersion depth (200 mm (7.87 inch))
h _{min}	Minimum required distance to reservoir bottom (100 mm (3.94 inch))

Notice
Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.



Installation position

See the following examples 1 to 8.
Further installation positions are available upon request.
Recommended installation position: 1, 3, 5 and 7



Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

Installation position 1

Air bleeding	Filling	Air bleeding	Filling
F	L (F)	F	L (F)
A10 FM		A10 FE	
			

Installation position 2

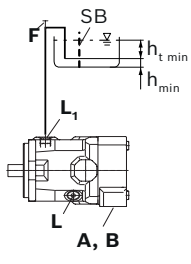
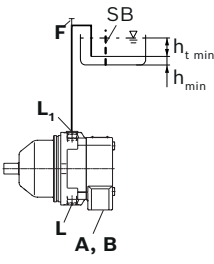
Air bleeding	Filling	Air bleeding	Filling
F	L ₁ (F)	F	L ₁ (F)
A10 FM		A10 FE	
			

For key, see page 36.



Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Installation position 3

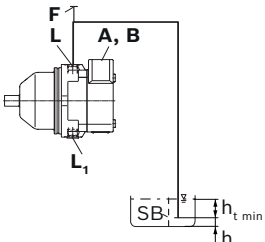Air bleeding	Filling	Air bleeding	Filling
F	L (F)	F	L (F)
A10 FM		A10 FE	
			

Installation position 4

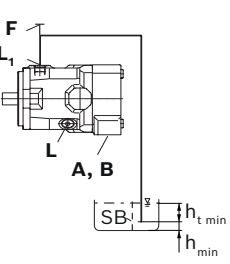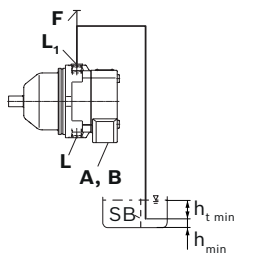Air bleeding	Filling	Air bleeding	Filling
F	L ₁ (F)	F	L ₁ (F)
A10 FM		A10 FE	
			

38 **A10FM, A10FE series 52** | Axial piston fixed motor
 Project planning notes

Project planning notes

- ▶ The axial piston variable motor, A10FM and A10FE, is intended to be used in open and closed circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservation protection for a maximum of 12 months. If longer preservation protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all configuration variants of the product are approved for use in safety functions according to ISO 13849. Please consult the proper contact at Bosch Rexroth if you require reliability parameters (e.g., MTTF_d) for functional safety.
- ▶ A pressure relief must be provided in the hydraulic system. In this connection, observe the technical limits of the pressure relief valve.
- ▶ For drives that are operated for a long period of time with constant rotational speed, the natural frequency of the hydraulic system can be stimulated by the excitation frequency of the pump (rotational speed frequency x 9). This can be prevented with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ The ports and fastening threads are designed for the p_{\max} permissible pressures of the respective ports, see the connection tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The service ports and function ports are only intended to accommodate hydraulic lines.

Bosch Rexroth AG, RE 91172/2023-11-02

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Safety instructions

- During and shortly after operation, there is a risk of getting burnt on the axial piston unit. Take the appropriate safety measures (e.g. by wearing protective clothing).