


Axial piston variable motor

A36VM series 10

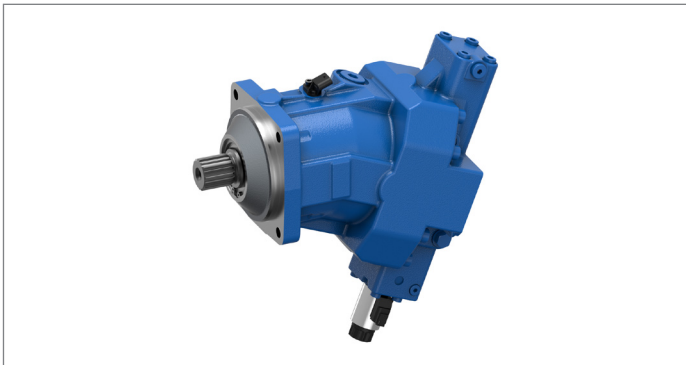

- ▶ High-pressure motor for travel drives
- ▶ Sizes 125 and 255
- ▶ Nominal pressure 450 bar
- ▶ Maximum pressure 530 bar
- ▶ Closed circuit

Features

- ▶ Robust motor with long service life
- ▶ Approved for high rotational speeds
- ▶ High starting efficiency
- ▶ Excellent slow-running characteristics
- ▶ Very wide control range for high travel speeds
- ▶ High torque
- ▶ With integrated flushing and boost-pressure valve
- ▶ Bent-axis design

Contents

Type code	2
Hydraulic fluid	4
Working pressure range	6
Technical data	8
EP – Proportional control, electric	10
Dimensions size 125	12
Dimensions size 255	14
Connector for solenoids	16
Flushing and boost-pressure valve	17
Speed sensor	18
Setting range for displacement	19
Installation instructions	20
Project planning notes	22
Safety instructions	23
Related documentation	24

Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
A36V	M			00	P	0		0	/	10	M	W	V	0					-	0

Axial piston unit

01	Bent-axis design, variable	A36V
----	----------------------------	------

Operating mode

02	Motor	125	255	M
----	-------	-----	-----	---

Size (NG)

03	Geometric displacement, see page 8	125	255
----	------------------------------------	-----	-----

Control device

04	Proportional control electric	positive control	$U = 12\text{ V}$	125	255	EP1
			$U = 24\text{ V}$			EP2
		negative control	$U = 12\text{ V}$			EP5
			$U = 24\text{ V}$			EP6

Override

05	Without	125	255	00
----	---------	-----	-----	----

Connector for solenoids¹⁾

06	DEUTSCH - molded connector, 2-pin, without suppressor diode	125	255	P
----	---	-----	-----	---

Additional function

07	Without	125	255	0
----	---------	-----	-----	---

Stroking time damping (for selection, see control)

08	Without damping (standard for EP1, EP2)		125	255	0
	With damping	both sides			1
		one-sided in outlet from large stroking chamber (standard for EP5, EP6)			7

Setting ranges for displacement²⁾

09	$V_{g\text{ max}}$ setting screw	$V_{g\text{ min}}$ setting screw	125	255	
	Without	without (standard for EP)			0
		short	o	-	A

Series

10	Series 1, index 0	125	255	10
----	-------------------	-----	-----	----

Version of port and fastening threads

11	Metric ports based on ISO 6149 with O-ring seal, metric fastening thread according to DIN 13	125	255	M
----	--	-----	-----	---

Direction of rotation

12	Viewed on drive shaft, bi-directional	125	255	W
----	---------------------------------------	-----	-----	---

Sealing material

13	FKM (fluorocarbon rubber))	125	255	V
----	----------------------------	-----	-----	---

Additional function

14	Without	125	255	0
----	---------	-----	-----	---

1) Connectors for other electric components may deviate.
2) The adjustment values for the setting screws can be found in the table on page 19.

• = Available o = On request
 = Preferred program

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
A36V	M			00	P	0		0	/	10	M	W	V	0					-	0

Mounting flange				125	255	
15	ISO 3019-2 metric	140-4	●	–	N4	
		180-4	–	●	R4	

Drive shaft				125	255	
16	Splined shaft DIN 5480	W40×2×18×9g	●	–	Z9	
		W50×2×24×9g	–	●	A2	

Working port (port plate)				125	255	
17	SAE working port A and B at rear			●	●	1
	SAE working port A and B at side, opposite			●	●	2

Valves				125	255	
18	Without			○	○	0
	With flushing and boost-pressure valve, integrated, flushing on both sides	Flushing flow q_v [l/min]	3.5	●	–	A
	Flushing flow at:		5	●	–	B
	$\Delta p = p_{ND} - p_G = 25$ bar and $v = 10$ mm ² /s		8	●	●	C
	(p_{ND} = low pressure, p_G = case pressure)		10	●	●	D
	Possible with port plates 1 and 2		12	●	●	E
			14	●	–	F
			15	–	●	G
			16	●	–	H
			18	–	●	I
			20	●	–	N
			21	–	●	J
			27	–	●	K
			35	–	●	O
			50	–	●	Q

Other ports			125	255	
19	Without U port (without bearing flushing port)		●	●	1
	With U port (with bearing flushing port)		○	○	2

Sensors				125	255	
20	Without			●	●	0
	Prepared for sensor DSA/20 and DST			●	●	W
	Speed sensor DSA/20 mounted ³⁾			●	●	C
	Speed sensor DST mounted ³⁾			●	●	E

Standard/special version																			
21	Standard version														0				

Notice

- Note the project planning notes on page 22.
- In addition to the type code, please specify the relevant technical data when placing your order.
- Please note that not all type code combinations are available although the individual functions are marked as being available.

● = Available ○ = On request - = Not available

 = Preferred program

³⁾ Specify the type code separately for sensor in accordance with data sheet 95126 (DSA/20) or 95131 (DST/10) and observe the requirements for the electronics.

Hydraulic fluid

The axial piston unit is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluid selection, behavior during operation as well as disposal and environmental protection should be taken from the following data sheets before the start of project planning:

- 90220: Hydraulic fluids based on mineral oils and related hydrocarbons

Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are listed in the following data sheet:

- 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} ; see selection diagram).

Notice

The axial piston unit is not suitable for operation with HF and environmentally acceptable hydraulic fluids.


Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ³⁾	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	NBR ²⁾	$\theta_{St} \geq -40 \text{ }^\circ\text{C}$	$t \leq 3 \text{ min}$, without load ($p \leq 50 \text{ bar}$), $n \leq 1000 \text{ rpm}$ Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K
		FKM	$\theta_{St} \geq -25 \text{ }^\circ\text{C}$	
Warm-up phase	$v = 1600 \dots 400 \text{ mm}^2/\text{s}$			$t \leq 15 \text{ min}$, $p \leq 0.7 \times p_{nom}$ und $n \leq 0.5 \times n_{nom}$
Permissible operating range	$v = 400 \dots 10 \text{ mm}^2/\text{s}^{1)}$	NBR ²⁾	$\theta \leq +78 \text{ }^\circ\text{C}$	Measured at port T
		FKM	$\theta \leq +103 \text{ }^\circ\text{C}$	
	$v_{opt} = 36 \dots 16 \text{ mm}^2/\text{s}$			Optimal operating viscosity and efficiency range
Short-term operation	$v_{min} = 10 \dots 7 \text{ mm}^2/\text{s}$	NBR ²⁾	$\theta \leq +78 \text{ }^\circ\text{C}$	$t \leq 3 \text{ min}$, $p \leq 0.3 \times p_{nom}$, measured at port T
		FKM	$\theta \leq +103 \text{ }^\circ\text{C}$	

Notice

The maximum circuit temperature of +115°C must not be exceeded at the working ports **A** and **B** complying with the permissible viscosity.

▼ Selection diagram

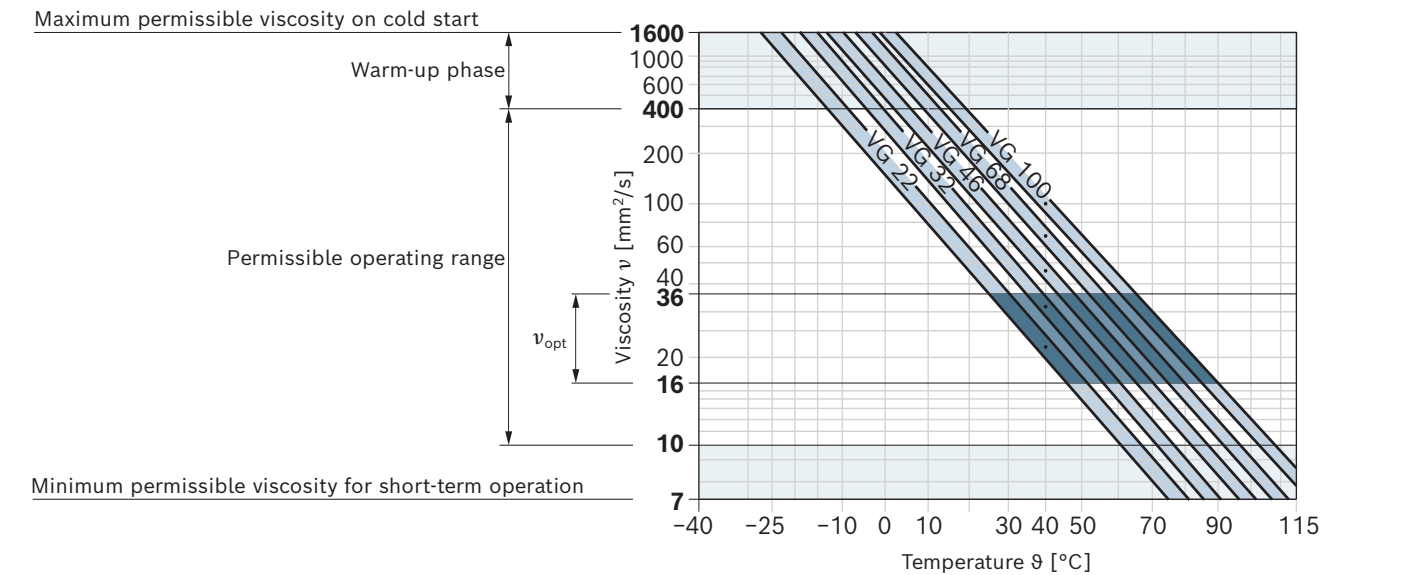

1) This corresponds, for example on the VG 46, to a temperature range of +4 °C to +85 °C (see selection diagram).

2) Special version, please contact us

3) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At a hydraulic fluid viscosity of less than 10 mm²/s (e.g. due to high temperatures during short-term operation), a cleanliness level of at least 19/17/14 according to ISO 4406 is required.

Examples of temperatures of hydraulic fluids at a viscosity of 10 mm²/s:

- 73 °C at HLP 32
- 85 °C at HLP 46


Flow direction

Direction of rotation, viewed on drive shaft	
Clockwise	Counter-clockwise
A to B	B to A


Working pressure range

Pressure at working port A or B		Definition
Nominal pressure p_{nom}	450 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	500 bar	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period. Within the total operating period of 300 h, a maximum pressure of 500 bar to 530 bar is permissible for a limited period of 50 h.
Single operating period	max. 10 s	
Total operating period	300 h	
Maximum pressure p_{max}	530 bar	
Total operating period	50 h	
Minimum pressure (high-pressure side)	25 bar	Minimum pressure at the high-pressure side (A or B) which is required to prevent damage to the axial piston unit.
Minimum pressure – operation as a pump (inlet)	see diagram on page 7	To prevent damage to the axial piston motor during operation as a pump (change of the high-pressure side with constant direction of rotation, e.g. during brake applications) a minimum pressure has to be ensured at the working port (inlet). The minimum pressure is dependent on the rotational speed and displacement of the axial piston unit (see the characteristic curve).
Summation pressure p_{Su} (pressure A + pressure B)	700 bar	The summation pressure is the sum of the pressures at the ports for the working lines (A and B).
Rate of pressure change $R_{A \text{ max}}$		Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
with integrated pressure relief valve	9000 bar/s	
without pressure relief valve	16000 bar/s	
Case pressure at port T		
Continuous differential pressure $\Delta p_{\text{T cont}}$	2 bar	Maximum, averaged differential pressure at the shaft seal (case pressure to ambient pressure)
Pressure peaks $p_{\text{T peak}}$	10 bar	$t < 0.1 \text{ s}$

▼ **Rate of pressure change $R_{A \max}$**

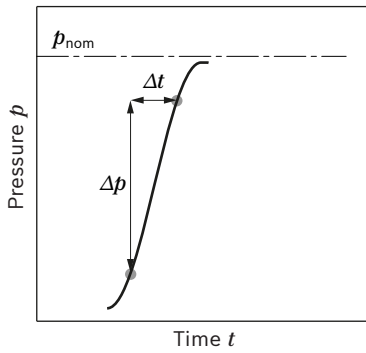


▼ **Minimum pressure – operation as a pump (inlet)**

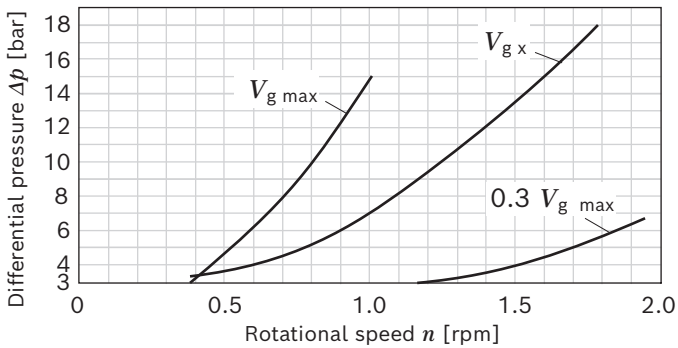

Effect of case pressure on beginning of control

With the EP control options, an increase in case pressure will have no effect on the beginning of control.

▼ **Pressure definition**

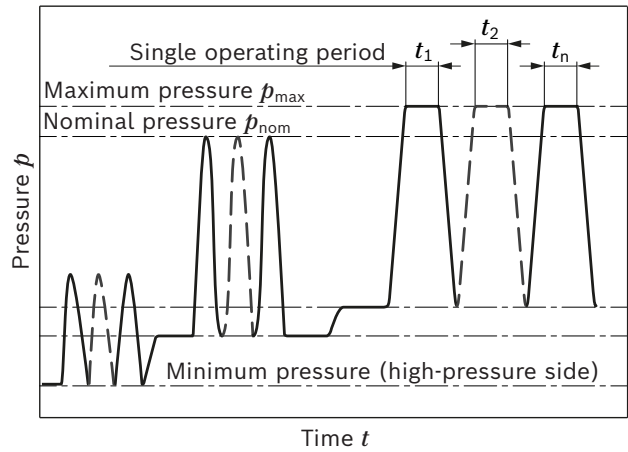

Total operating period = $t_1 + t_2 + \dots + t_n$

Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.
- In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.
- The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure.
- The case pressure must be greater than the external pressure (ambient pressure) at the shaft seal.

Technical data

Size		NG	125	255
Geometric displacement, per revolution ¹⁾		$V_{g \max}$ cm ³	126.4	253.2
		$V_{g \min}$ cm ³	17.8	37.5
		$V_{g \times}$ cm ³	72.0	144
Maximum rotational speed ²⁾ (complying with the maximum permissible inlet flow and pressure)	at $V_{g \max}$	n_{nom} rpm	2560	2050
	at $V_g < V_{g \times}$ (see diagram on page 8)	$n_{\text{max } 1}$ rpm	4500	3600
	at $V_g < 0.3 V_{g \max}$	$n_{\text{max } 2}$ rpm	5000	4000
	intermittent ³⁾ at $V_g < 0.3 V_{g \max}$	$n_{\text{max } 3}$ rpm	please contact us	
Inlet flow	at n_{nom} and $V_{g \max}$	$q_{v \max}$ l/min	324	520
Torque ⁴⁾	at $V_{g \max}$ and $\Delta p = 450$ bar	M Nm	905	1813
Rotary stiffness		c_{\min} kNm/rad	9	27
Moment of inertia of the rotary group		J_{TW} kgm ²	0.010	0.033
Case volume		V l	1.45	2.5
Weight approx.		m kg	43.6	80


Speed range

The minimum rotational speed n_{\min} is not limited.
For applications with requirements on the evenness of the rotation at low rotational speeds, please contact us.

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

Permissible displacement depending on the rotational speed

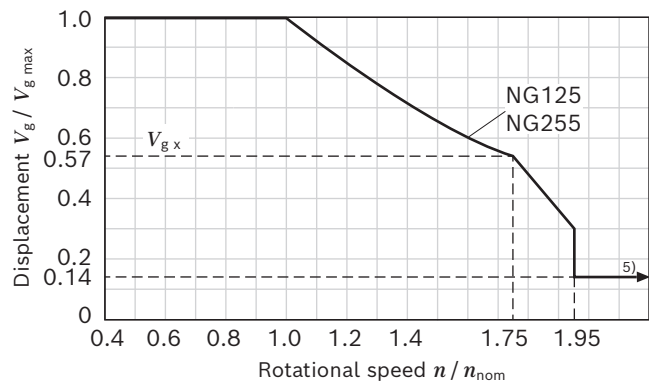

Determination of the operating characteristics

Inlet flow	$q_v = \frac{V_g \times n}{1000 \times \eta_v}$	[l/min]
Rotational speed	$n = \frac{q_v \times 1000 \times \eta_v}{V_g}$	[rpm]
Torque	$M = \frac{V_g \times \Delta p \times \eta_{hm}}{20 \times \pi}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p \times \eta_t}{600}$	[kW]

Key

- V_g Displacement per revolution [cm³]
- Δp Differential pressure [bar]
- n Rotational speed [rpm]
- η_v Volumetric efficiency
- η_{hm} Hydraulic-mechanical efficiency
- η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

¹⁾ The minimum displacement is infinitely adjustable, see type code on page 2.



²⁾ The values are applicable:
– for the optimum viscosity range from $\nu_{\text{opt}} = 36$ to 16 mm²/s
– with hydraulic fluid based on mineral oils

³⁾ Intermittent maximum speed: short-term overspeed,
 $t < 30$ s and $\Delta p < 200$ bar

⁴⁾ Torque without radial force, with radial force see page 9.

⁵⁾ Values in this range on request


Permissible radial and axial loading on the drive shafts

Size	NG	125	255
Drive shaft	Code	Z9	A2
	with splined shaft	Ø	mm
		W40	W50
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N
		a	mm
		18081	29355
Maximum torque at $F_{q \max}$	$M_{q \max}$	Nm	895
Maximum differential pressure at $V_{g \max}$ and $F_{q \max}$	$\Delta p_{q \max}$	bar	450
		450	450
Maximum axial force at standstill or depressurized operation		$+ F_{ax \max}$	N
		$- F_{ax \max}$	N
		0	710
		710	1120
Permissible axial force per bar working pressure	$+ F_{ax \text{ perm/bar}}$	N/bar	9.6
			15.1

Effect of radial force F_q on bearing service life

By selecting a suitable direction of radial force F_q , the load on the bearings, caused by the internal rotary group forces can be reduced, thus optimizing the bearing service life. Recommended position of mating gear is dependent on the direction of rotation. Examples:

▼ Gear output drive

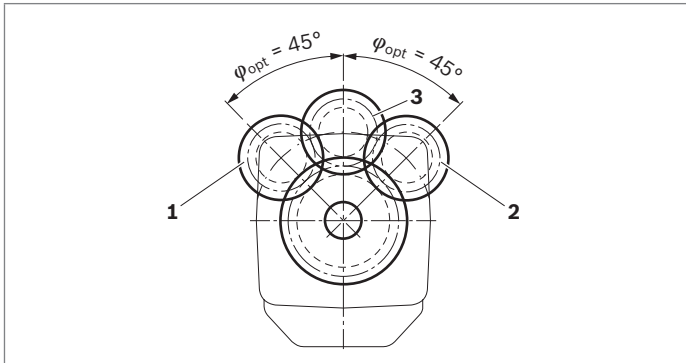

- 1 „Counter-clockwise“ rotation, pressure at port **B**
- 2 „Clockwise“ rotation, pressure at port **A**
- 3 „Bi-directional“ direction of rotation

Notice

- The values given are maximum values and do not apply to continuous operation.
- The permissible axial force in direction $-F_{ax}$ is to be avoided as the bearing service life is reduced.
- Special requirements apply in the case of belt output drives. Please contact us.

EP – Proportional control, electric

The electric control with proportional solenoid provides infinite adjustment of the displacement. Control is proportional to the electric control current applied to the solenoid.


EP1, EP2 positive control

- ▶ Beginning of control at $V_{g\ min}$ (minimum torque, maximum permissible rotational speed at minimum control current)
- ▶ End of control at $V_{g\ max}$ (maximum torque, minimum rotational speed at maximum control current)

EP5, EP6 negative control

- ▶ Beginning of control at $V_{g\ max}$ (maximum torque, minimum rotational speed at minimum control current)
- ▶ End of control at $V_{g\ min}$ (minimum torque, maximum permissible rotational speed at maximum control current)

▼ Characteristic curve

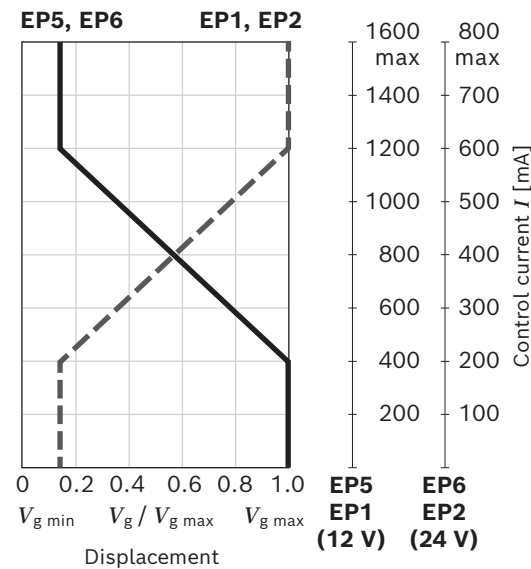

Please note

- ▶ The control oil is internally taken out of the high-pressure passage of the motor (**A** or **B**). For reliable control, a working pressure of at least 30 bar is required in **A** (**B**).

Stroking time damping

The stroking time damping impacts the swivel behavior of the motor and consequently the machine response speed.

Standard

EP without damping.

Option

EP with throttle pin on both sides, symmetrical (see table)

▼ Throttle pin overview

Size	125	255
Groove size [mm]	0.55	0.65


Technical data, solenoid	EP1, EP5	EP2, EP6
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control	400 mA	200 mA
End of control	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither		
Frequency	100 Hz	100 Hz
Minimum oscillation range ¹⁾	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 16		

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.


Further information can also be found on the Internet at www.boschrexroth.com/mobile-electronics.

¹⁾ Minimum required oscillation range of the control current ΔI_{p-p} (peak to peak) within the respective control range (start of control to end of control)


▼ **Circuit diagram EP1, EP2 (positive control)**

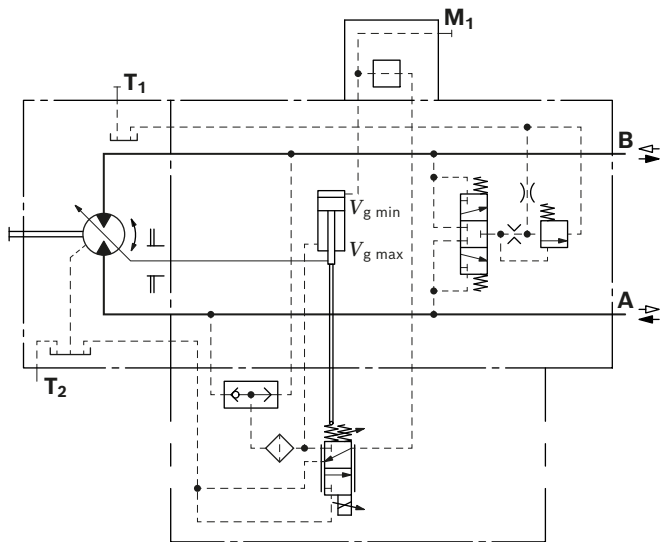

▼ **Circuit diagram EP5, EP6 (negative control)**

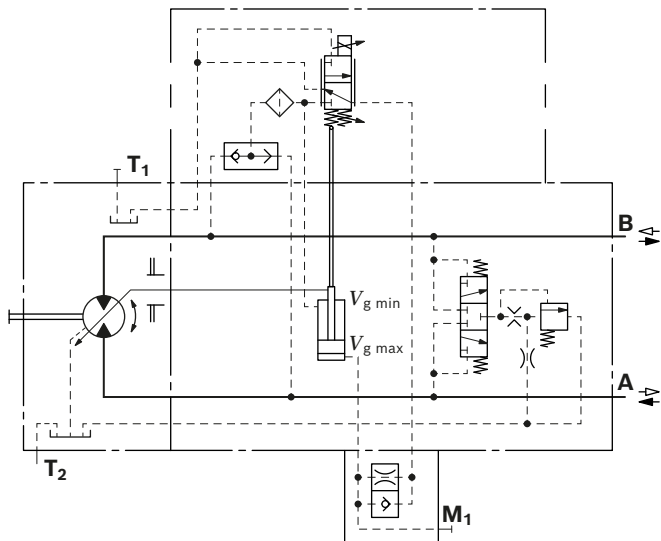

Port plate 1 – SAE working ports **A** and **B** at rear

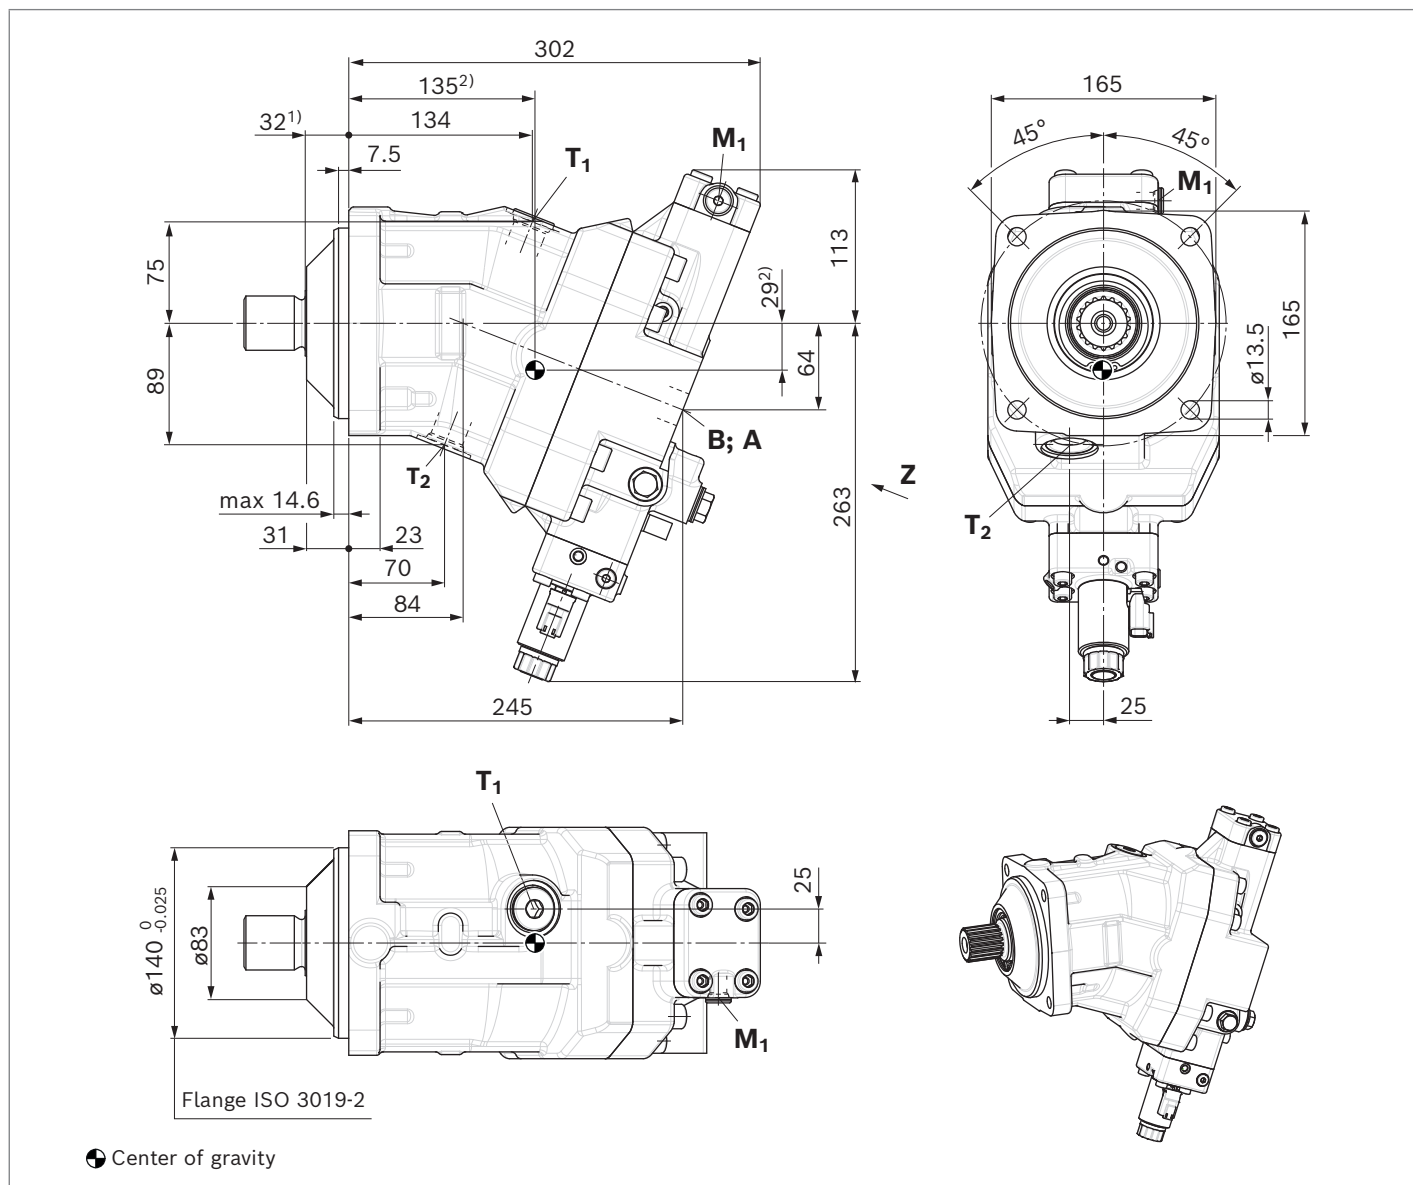


Ports		Standard	Size	p_{\max} [bar] ³⁾	State ⁷⁾
A, B	Working port	SAE J518 ⁴⁾	1 in	530	O
	Fastening thread	DIN 13	M12 × 1.75; 23 deep		
T₁	Drain port	ISO 6149 ⁶⁾	M27 × 2; 19 deep	3	X ⁵⁾
T₂	Drain port	ISO 6149 ⁶⁾	M27 × 2; 19 deep	3	O ⁵⁾
M₁	Measuring port, control pressure	ISO 6149 ⁶⁾	M14 × 1.5; 11.5 deep	530	X

- 1) To shaft collar
- 2) Center of gravity
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.


- 5) Depending on installation position, **T₁** or **T₂** must be connected (see also installation instructions on page 20).
- 6) The countersink may be deeper than specified in the standard.
- 7) **O** = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

▼ Location of working ports on the port plates


- 2** SAE working ports
A and **B** at side, opposite

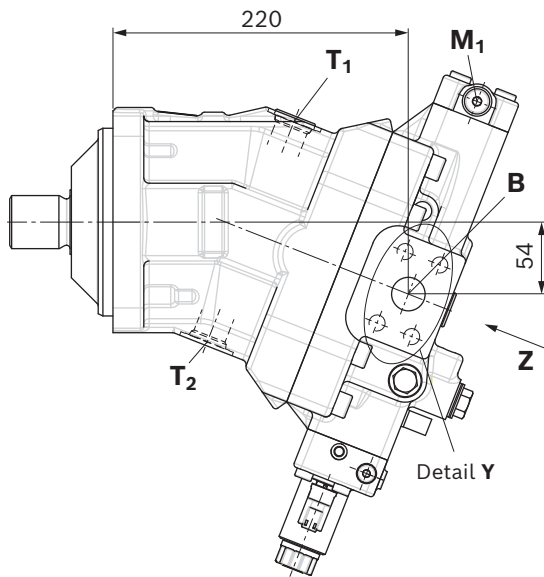

View Z

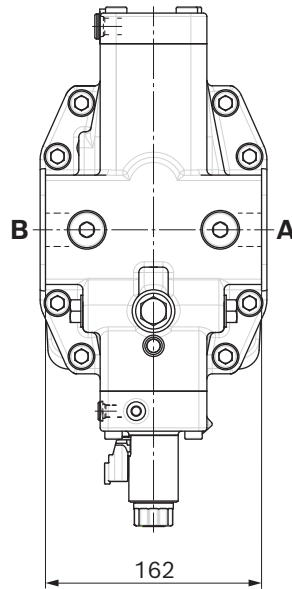


- 1** SAE working ports
A and **B** at rear (view Z)

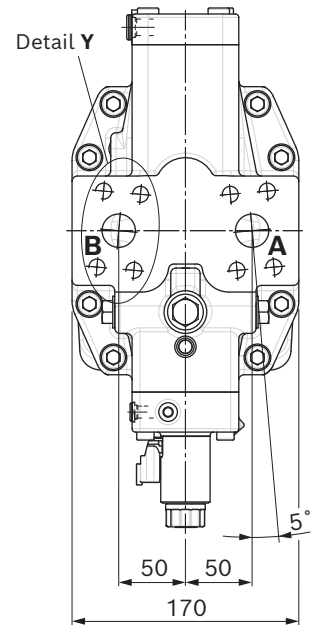


▼ Splined shaft DIN 5480


Z9 – W40×2×18×9g



Detail Y

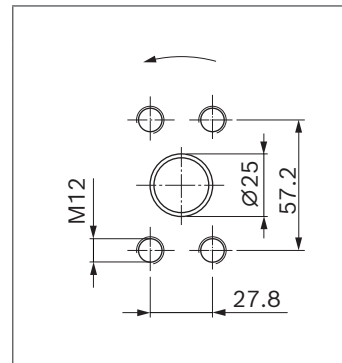

▼ **EP5, EP6** – Proportional control, electric, negative control

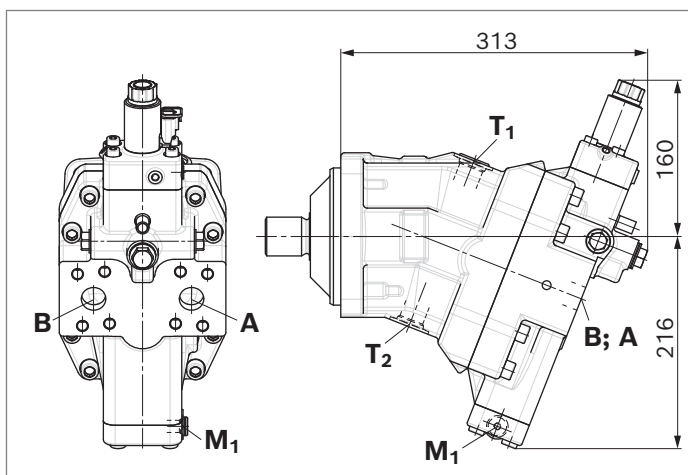


1) Center bore according to DIN 332 (thread according to DIN 13)

Dimensions size 255

EP1, EP2 – Proportional electric control, positive control

Port plate 1 – SAE working ports **A** and **B** at rear

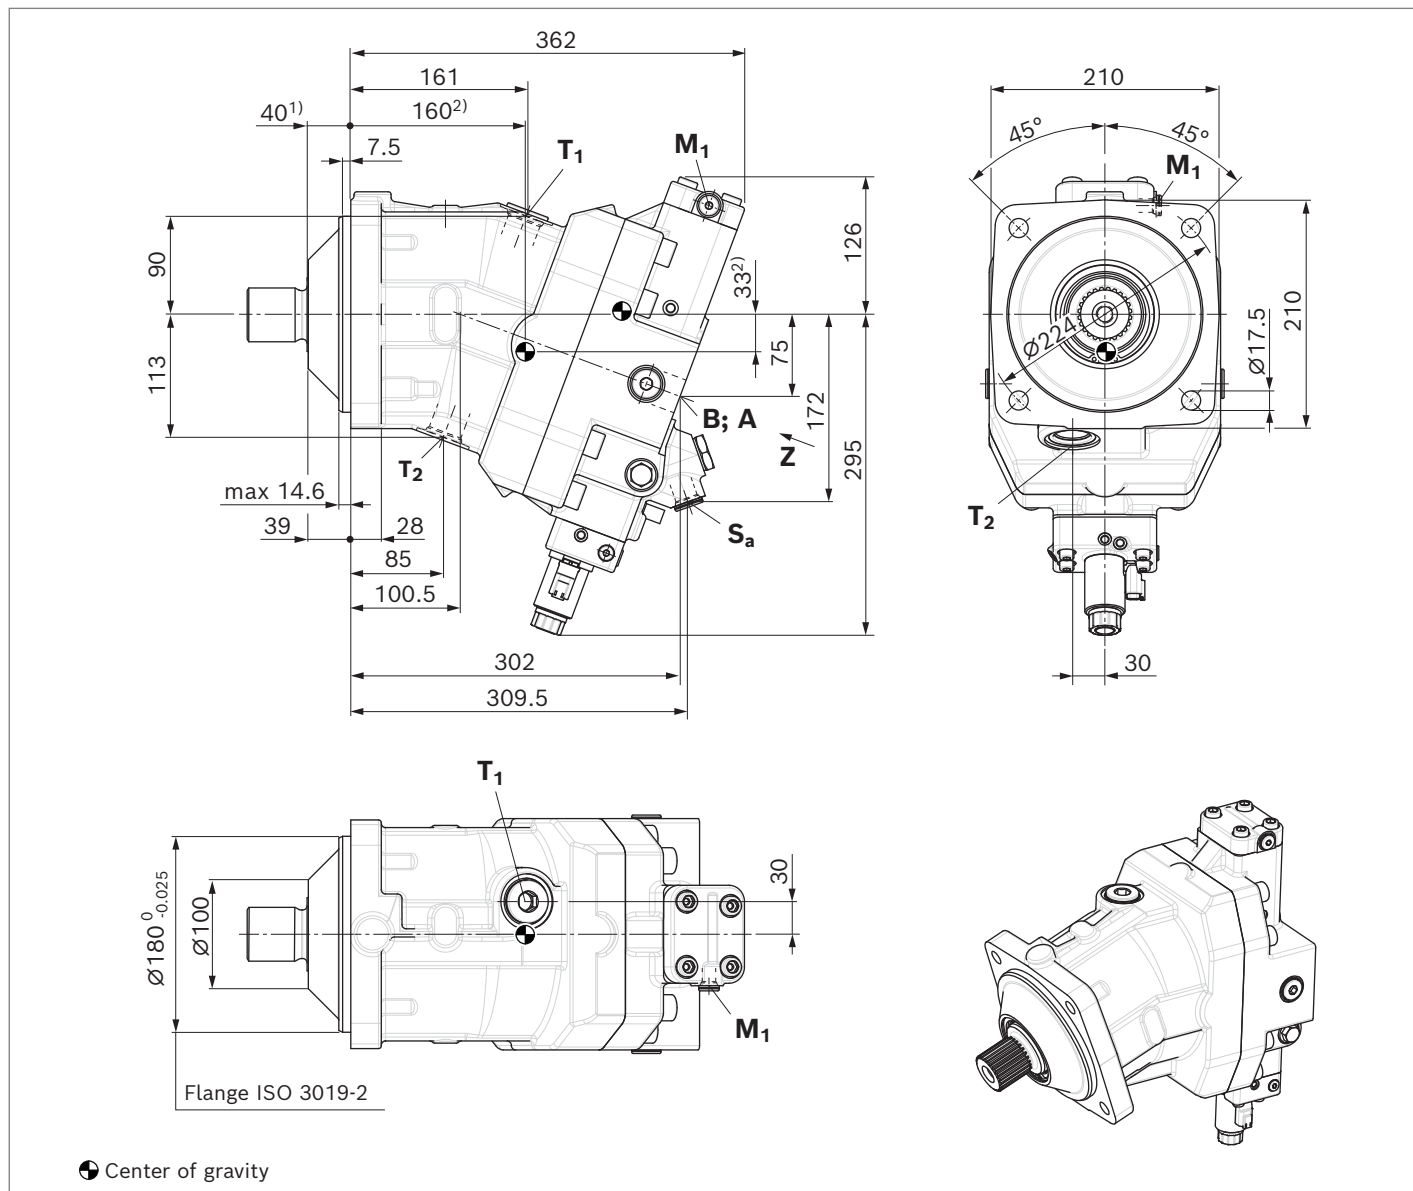

Ports	Standard	Size	p_{\max} [bar] ³⁾	State ⁷⁾
A, B	Working port Fastening thread	SAE J518 ⁴⁾ DIN 13	1 1/4 in M14 × 2; 23 deep	530 O
T₁	Drain port	ISO 6149 ⁶⁾	M33 × 2; 19 deep	3 X ⁵⁾
T₂	Drain port	ISO 6149 ⁶⁾	M33 × 2; 19 deep	3 O ⁵⁾
M₁	Measuring port, control pressure	ISO 6149 ⁶⁾	M14 × 1.5; 11.5 deep	530 X

1) To shaft collar

2) Center of gravity

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) Depending on installation position, **T₁** or **T₂** must be connected (see also installation instructions on page 20).


6) The countersink may be deeper than specified in the standard.

7) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

▼ Location of working ports on the port plates


- 2 SAE working ports
A and B at side, opposite

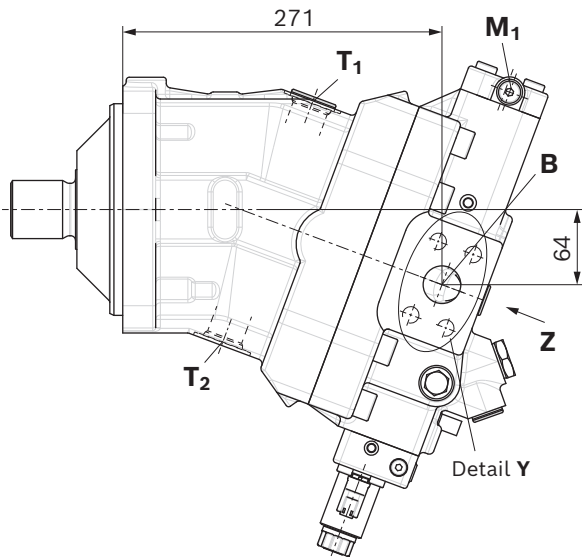

View Z

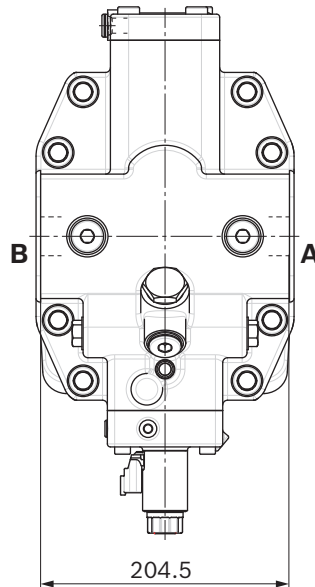


- 1 SAE working ports
A and B at rear (view Z)

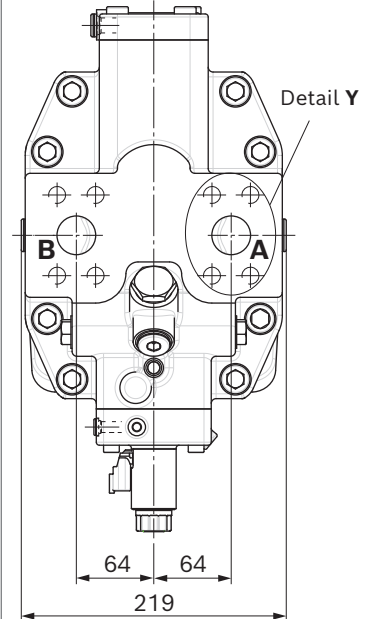


▼ Splined shaft DIN 5480


A2 – W50×2×24×9g



Detail Y

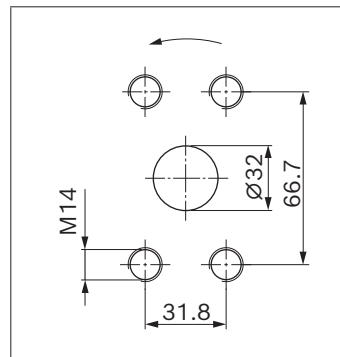

▼ EP5, EP6 – Proportional control, electric, negative control

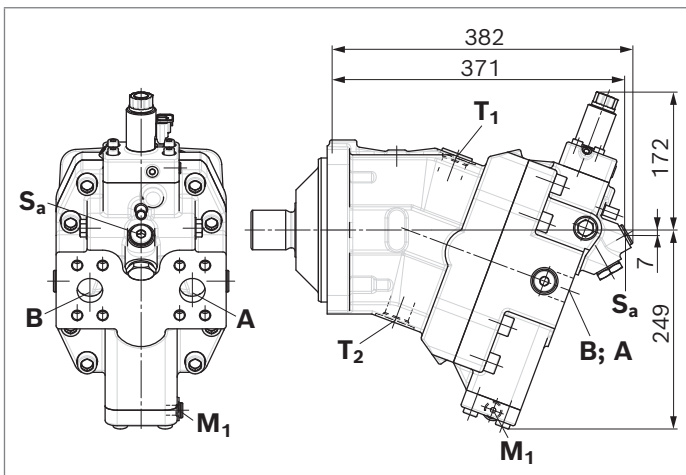

1) Center bore according to DIN 332 (thread according to DIN 13)


Connector for solenoids

DEUTSCH DT04-2P-EP04

Molded, 2-pin, without bidirectional suppressor diode
The following type of protection ensues with the installed mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

▼ **Switching symbol**



▼ **Mating connector DEUTSCH DT06-2S-EP04**

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery.
This can be supplied by Bosch Rexroth on request (material number R902601804).

Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid body.
- ▶ The procedure is defined in the instruction manual.

Flushing and boost-pressure valve

The flushing and boost-pressure valve is used to remove heat from the hydraulic circuit.

In a closed circuit, it is used for flushing the housing and safeguarding the minimum boost pressure.

Hydraulic fluid is directed from the respective low-pressure side into the motor housing. This is then fed into the reservoir, together with the leakage. In the closed circuit, the removed hydraulic fluid must be replaced by cooled hydraulic fluid supplied by the boost pump.

The valve is integrated in the port plate.

Cracking pressure of pressure retention valve

(observe when setting the primary valve)

- fixed setting 16 bar

Switching pressure of flushing spool Δp

- 8 ± 1 bar


Flushing flow q_v

Orifices can be used to adjust the flushing flows as required. The following parameters are based on:

$$\Delta p_{ND} = p_{ND} - p_G = 25 \text{ bar and } v = 10 \text{ mm}^2/\text{s}$$

(p_{ND} = low pressure, p_G = case pressure)

▼ Circuit diagram EP1, EP2 (positive control)


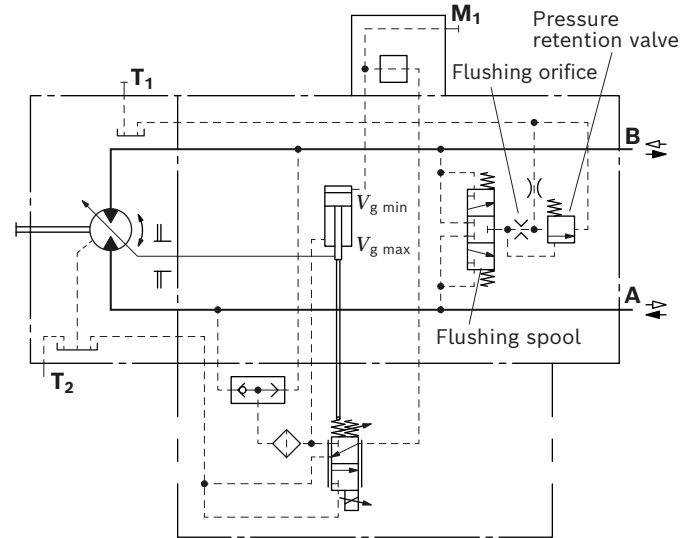


Flushing valve for size 125

Material number of orifice	Ø [mm]	q_v [l/min]	Code
R902290106	1.2	3.5	A
R902290107	1.4	5	B
R902290109	1.8	8	C
R902290110	2.0	10	D
R902290111	2.3	12	E
R902290112	2.4	14	F
R902290113	3.0	16	H
Without	Without	20	N

Flushing valve for size 255

Material number of orifice	Ø [mm]	q_v [l/min]	Code
R902290118	1.8	8	C
R902290119	2.0	10	D
R902290120	2.3	12	E
R902290121	2.5	15	G
R902290123	2.8	18	I
R902290124	3.1	21	J
R902290125	3.5	27	K
R902290126	4.0	35	O
R902290127	5.0	50	Q

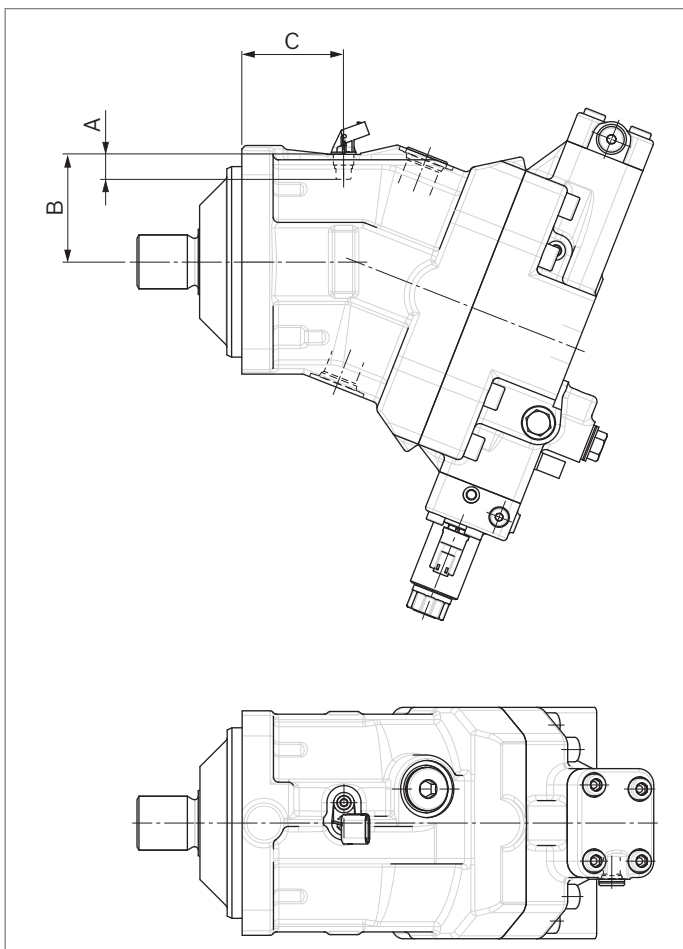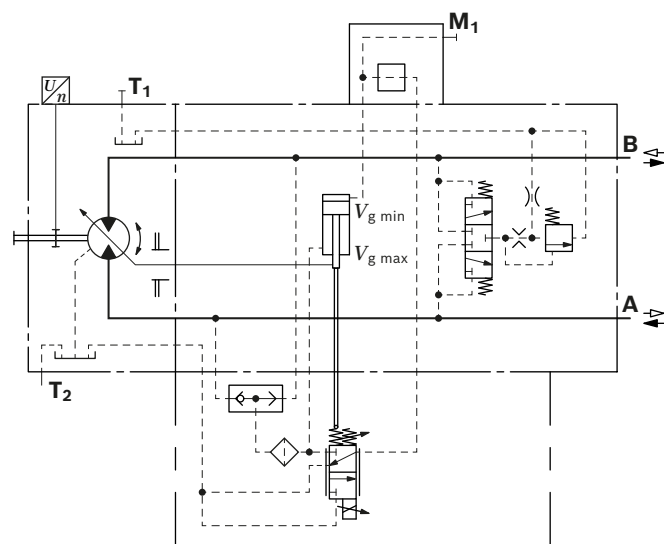

Setting range for displacement

	125				255			
	$V_{g \max}$ (cm ³ /rev)		$V_{g \min}$ (cm ³ /rev)		$V_{g \max}$ (cm ³ /rev)		$V_{g \min}$ (cm ³ /rev)	
	from	to	from	to	from	to	from	to
0	126.4	126.4	17.8	17.8	253.2	253.2	37.5	37.5
	Without screw		Without screw		Without screw		Without screw	
A	126.4	126.4	> 17.8	33	253.2	253.2	> 37.5	62.5
	Without screw		M12 × 60 R909083530		Without screw		M12 × 70 R909085976	

Specify exact settings for $V_{g \min}$ and $V_{g \max}$ in plain text when ordering:

► $V_{g \min} = \dots \text{ cm}^3$, $V_{g \max} = \dots \text{ cm}^3$

Theoretical, maximum setting:

► for $V_{g \min} = 0.3 \times V_{g \max}$

Settings that are not listed in the table may lead to damage. Please contact us.

Installation instructions

General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines. The leakage in the housing area must be directed to the reservoir via the highest drain port (**T₁**, **T₂**). If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain line must be laid. To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g. reservoir, frame parts). Under all operating conditions, the drain line must flow into the reservoir below the minimum fluid level.

Notice

In certain installation positions, an influence on the adjustment or control can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in actuating time.

Key	
F	Filling/air bleeding
T₁, T₂	Drain port
$h_{t\ min}$	Minimum required immersion depth (200 mm)
h_{min}	Minimum required distance to reservoir bottom (100 mm)

Notice

Port **F** is part of the external piping and must be provided on the customer side to simplify the filling and air bleeding.


Installation position

See the following examples **1** to **4**.
Further installation positions are available upon request.
Recommended installation position: **1** and **2**


Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

▼ Installation position 1

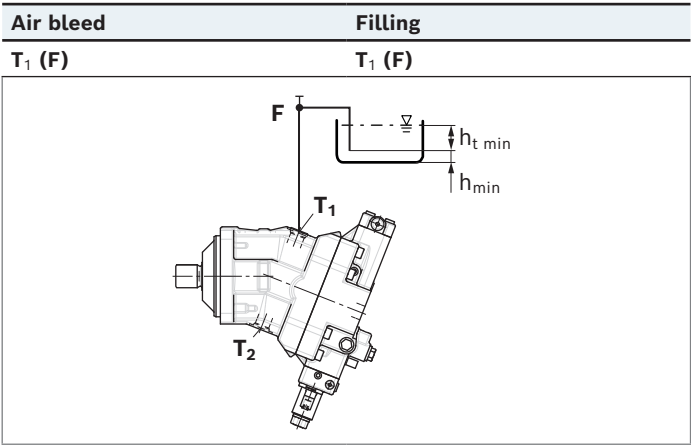


▼ Installation position 2

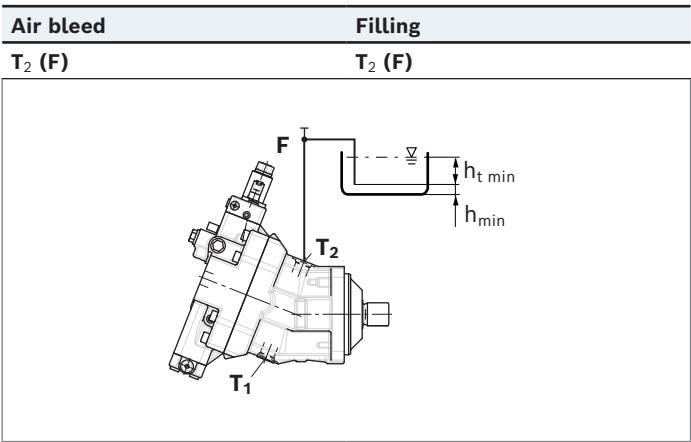


Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

▼ **Installation position 3**

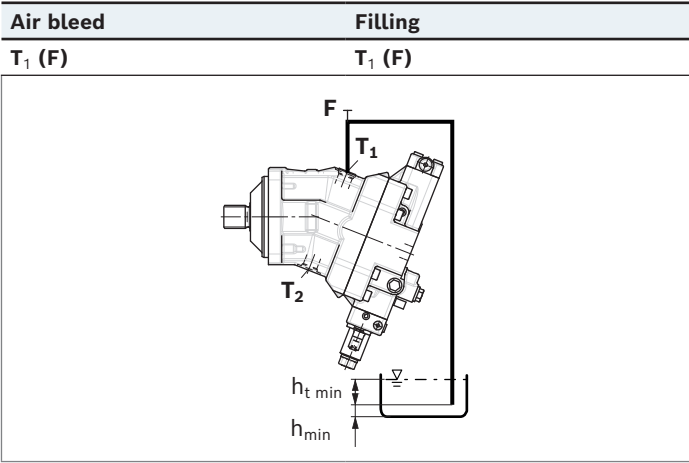

▼ **Installation position 4**

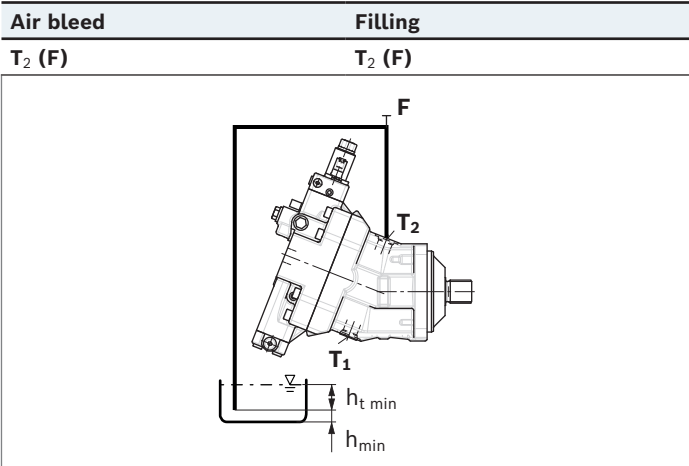

Project planning notes

- ▶ The motor A36VM is designed to be used in closed circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ For safety reasons, controls with beginning of control at $V_{g\ min}$ (e.g., EP1/2) are not permissible for winch drives, e.g. anchor winches!
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservation protection for a maximum of 12 months. If longer preservation protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all configuration variants of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. $MTTF_D$) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. Applying a direct voltage signal (DC) to solenoids does not create electromagnetic interference (EMI) nor is the solenoid affected by EMI. Electromagnetic interference (EMI) potential exists when operating and controlling a solenoid with a modulated direct voltage signal (e.g. PWM signal). Appropriate testing and measures should be taken by the machine manufacturer to ensure other components or operators (e.g. with pacemaker) are not affected by this potential.
- ▶ A pressure relief valve must be provided in the hydraulic system. In this connection, observe the technical limits of the pressure relief valve.
- ▶ Please note that a hydraulic system is an oscillating system. This can lead, for example, to the stimulation the natural frequency within the hydraulic system during operation at constant rotational speed over a long period of time. The frequency of the motor to be observed is 9 times the rotational speed frequency. This can be prevented, for example, with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ The ports and fastening threads are designed for the permissible pressures p_{max} of the respective ports, see the connection tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The service ports and function ports are only intended to accommodate hydraulic lines.
- ▶ Please note that the series connection of motors and the operation under summation pressure affect the efficiency of the units.
- ▶ The control behavior of the motor can change slightly due to natural influences such as running-in or setting behavior over time. Calibration may be required.

Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk.
The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.
- ▶ In certain conditions, moving parts in high-pressure relief valves might get stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid). This can result in restriction or loss of load-holding functions in lifting winches.
Therefore it is the machine and/or system manufacturers responsibility to make sure that the load can always be put in a safe mode if needed. Also, he needs to ensure that these measures are properly implemented.
- ▶ When using the axial piston motor in winch drives, make certain that the technical limit values are not exceeded under all operating conditions. If the axial piston motor is extremely overloaded (e.g. if the maximum permissible rotational speeds are exceeded during weighing of the anchor while the ship is in motion), the rotary group may be damaged and, in the worst case, the axial piston motor may burst. The machine manufacturer/system manufacturer is to undertake additional measures, up to and including encapsulation.

Related documentation

Product-specific documentation

Document type	Title	Document number
Instruction manual	Axial piston variable motor A36VM series 10, A36VM/A36VE series 50	91650-01-B
Data sheet	Storage and preservation of axial piston units	90312

Documentation for mounted components

Document type	Title	Document number
Data sheet	BODAS speed sensor DST, series 10	95131
	BODAS speed sensor DSA, series 20	95126
Instruction manual	BODAS speed sensors	95290-01-B

Documentation for hydraulic fluids

Document type	Title	Document number
Data sheet	Hydraulic fluids based on mineral oils and related hydrocarbons	90220
	Rating of hydraulic fluids used in Rexroth hydraulic components (pumps and motors)	90235
	Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)	90245