


RE 92701/2023-04-24
Replaces: 2021-08-16

rexroth
A Bosch Company

Axial piston variable pump A10VO series 31

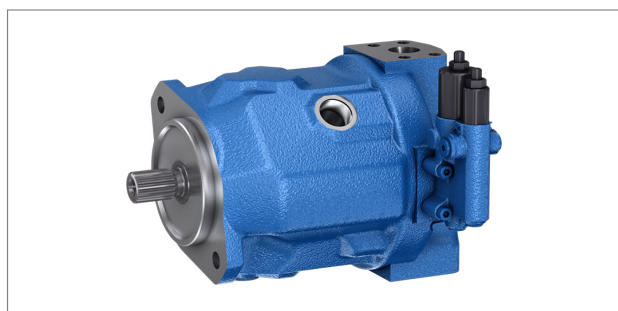

- ▶ All-purpose medium pressure pump
- ▶ Sizes 18 to 100
Size 140 (see data sheet 92705)
- ▶ Nominal pressure 280 bar (4100 psi)
- ▶ Maximum pressure 350 bar (5100 psi)
- ▶ Open circuit

Features

- ▶ Variable pump with axial piston rotary group in swashplate design for hydrostatic drives in open circuit.
- ▶ Flow is proportional to drive speed and displacement.
- ▶ The flow can be smoothly changed by adjusting the swashplate.
- ▶ 2 drain ports
- ▶ Excellent suction characteristics
- ▶ Low noise level
- ▶ Long service life
- ▶ Good power to weight ratio
- ▶ Versatile controller range
- ▶ Short control time
- ▶ The through drive is suitable for adding gear pumps and axial piston pumps up to the same size, i.e., 100% through drive.

Contents

Type code	2
Hydraulic fluids	4
Working pressure range	6
Technical data, standard unit	8
Technical data, high-speed version	9
DG – Two-point control, direct operated	12
DR – Pressure controller	13
DRG – Pressure controller, remotely controlled	14
DFR / DFR1 / DRSC – Pressure flow controller	15
DFLR – Pressure, flow and power controller	17
ED – Electro-hydraulic pressure control	18
ER – Electro-hydraulic pressure control	20
EC4 – Electro-hydraulic control valve (positive control)	22
Dimensions, size 18 to 100	24
Dimensions, through drive	48
Overview of mounting options	51
Combination pumps A10VO + A10VO	52
Connector for solenoids	53
Swivel angle sensor	54
Installation instructions	55
Project planning notes	59
Safety instructions	60

Values in the US customary unit system are converted and rounded values. In case of doubt, only metric values are valid.

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

2 A10VO series 31 | Axial piston variable pump

Type code

Type code

01	02	03	04	05	06	07	08	09	10	11	12	13
	A10V	O			/	31		-	V			

Version										18	28	45	71	88	100
01	Standard version (without code)									•	•	•	•	•	•
	High-speed version (external dimensions are the same as the standard version)									-	-	•	•	-	H

Axial piston unit

02	Swashplate design, variable, nominal pressure 280 bar (4100 psi), maximum pressure 350 bar (5100 psi)									•	•	•	•	•	A10V
----	---	--	--	--	--	--	--	--	--	---	---	---	---	---	------

Operating mode

03	Pump, open circuit										O
----	--------------------	--	--	--	--	--	--	--	--	--	---

Size (NG)

04	Geometric displacement, see table of values on page 8 and 9									18	28	45	71	88	100
----	---	--	--	--	--	--	--	--	--	----	----	----	----	----	-----

Control device

05	Two-point control, direct operated				●	●	●	●	●	●	DG	
	Pressure controller		Hydraulic		●	●	●	●	●	●	DR	
	With flow controller	Hydraulic	X-T open		●	●	●	●	●	●	DFR	
			X-T plugged, with flushing function		●	●	●	●	●	●	DFR1	
			X-T plugged without flushing function		●	●	●	●	●	●	DRSC	
					●	●	●	●	●	●	DRSC	
	With pressure cut-off	Hydraulic	Remote controlled		●	●	●	●	●	●	DRG	
			Electric	Negative control	U = 12 V		●	●	●	●	●	●
		U = 24 V			●	●	●	●	●	●	ED72	
		Positive control		U = 12 V		●	●	●	●	●	●	ER71 ¹⁾
				U = 24 V		●	●	●	●	●	●	ER72 ¹⁾
		Electro-hydraulic control valve		Positive control	U = 12 V to 24 V	—	● ³⁾	●	●	● ⁵⁾	● ⁴⁾	EC4 ²⁾
Pressure, flow and power controller				—	●	●	●	●	●	DFLR		

Series

06	Series 3, index 1										31
----	-------------------	--	--	--	--	--	--	--	--	--	----

Direction of rotation

07	Viewed on drive shaft									Clockwise		R
										Counter-clockwise		L

Sealing material

08	FKM (fluorocarbon rubber)										V
----	---------------------------	--	--	--	--	--	--	--	--	--	---

Drive shaft

09	Splined shaft ISO 3019-1									18	28	45	71	88	100
			Standard shaft							•	•	•	•	•	S
			Similar to shaft "S" however for higher torque							•	•	•	•	•	R
			Reduced diameter; limited suitability for through drive (see table of values, page 10)							•	•	•	•	•	U
			Same as "U", higher torque; limited suitability for through drive (see table of values, page 10); for mounting option, see page 51							-	•	•	•	•	W

1) Observe the project planning notes on page 21.

2) The electro-hydraulic EC4 control valve is always equipped with a swivel angle sensor (see also page 22 and 54).

3) Only with lateral working ports (order item 12 port plate 12 and 62)

4) Only available with mounting flange "D" (not available for versions with mounting flange "C")

5) Further variant with series 32 features on request

Axial piston variable pump | **A10VO series 31**
Type code

3

01	02	03	04	05	06	07	08	09	10	11	12	13
	A10V	O			/	31	-	V				

Mounting flange

10	Based on ISO 3019-1 (SAE)	SAE C; 2-hole										
		SAE C; 2/4-hole										

Working port

11	SAE flange connections according to ISO 6162, working ports metric	Fastening thread metric ; rear	Not for through drive									
		Fastening thread metric ; lateral top bottom	For through drive									
	SAE flange connections according to ISO 6162, working ports UNC	Fastening thread UNC ; rear	Not for through drive									
		Fastening thread UNC ; lateral top bottom	For through drive									

Through drive (for mounting options, see page 51)

12	For flange ISO 3019-1	Hub for splined shaft ⁶⁾										
	Diameter	Mounting ⁷⁾	Diameter									
	Without through drive											
	82-2 (A)	82-2 (A)	5/8 in 9T 16/32DP									
			3/4 in 11T 16/32DP									
	101-2 (B)	101-2 (B)	7/8 in 13T 16/32DP									
			1 in 15T 16/32DP									
	127-2 (C)	127-2 (C)	1 1/4 in 14T 12/24DP									
			1 1/2 in 17T 12/24DP									

Connector for solenoids⁸⁾

13	Without connector (without solenoid, only for hydraulic controls, without code)											
	DEUTSCH - molded connector, 2-pin, without suppressor diode											

● = Available ○ = On request - = Not available

Notice

- Observe the project planning notes on page 59 and the project planning notes regarding each control device.
- In addition to the type code, please specify the relevant technical data when placing your order.

⁶⁾ Hub for splined shaft according to ANSI B92.1a (drive shaft allocation according to ISO 3019-1)
⁷⁾ Mounting holes pattern viewed from through drive with control at top.
⁸⁾ Connectors for other electric components can deviate.

4 A10VO series 31 | Axial piston variable pump Hydraulic fluids

Hydraulic fluids

The A10V(S)O variable pump is designed for operation with HLP mineral oil according to DIN 51524. See the following data sheets for application instructions and requirements for hydraulic fluids before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: HFD hydraulic fluids (for permissible technical data, see data sheet 90225)

Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235. Hydraulic fluids with positive evaluation in the Fluid Rating are listed in the following data sheet:

- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} ; see selection diagram).


Notice

The axial piston unit is not suitable for operation with water-free HF hydraulic fluids / HF hydraulic fluids containing water / HFx hydraulic fluids.

Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ²⁾	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s (cSt)}$	FKM	$\vartheta_{st} \geq -25 \text{ °C (-13 °F)}$	$t \leq 1 \text{ min}$, without load ($p \leq 30 \text{ bar (435 psi)}$), $n \leq 1000 \text{ min}^{-1} \text{ (rpm)}$. Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K (45 °F)
Warm-up phase	$v = 1600 \dots 400 \text{ mm}^2/\text{s (cSt)}$			$t \leq 15 \text{ min}$, $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$
Continuous operation	$v = 400 \dots 10 \text{ mm}^2/\text{s (cSt)}^{1)}$ $v_{opt} = 36 \dots 16 \text{ mm}^2/\text{s (cSt)}$	FKM	$\vartheta \leq +110 \text{ °C (230 °F)}$	Measured at port L, L ₁ Optimal operating viscosity and efficiency range
Short-term operation	$v_{min} = 10 \dots 7 \text{ mm}^2/\text{s (cSt)}$	FKM	$\vartheta \leq +110 \text{ °C (230 °F)}$	$t \leq 1 \text{ min}$, $p \leq 0.3 \times p_{nom}$, measured at port L, L ₁

▼ Selection diagram

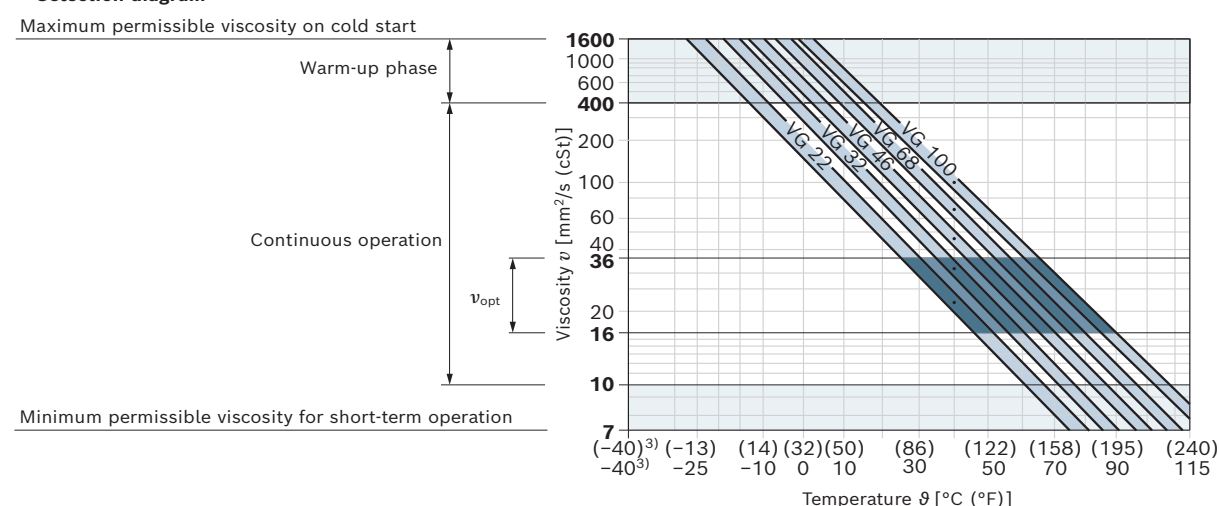

1) This corresponds, for example on the VG 46, to a temperature range of +4 °C to +85 °C (+39 °F to +185 °F) (see selection diagram)

2) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

3) For applications in the low-temperature range, please contact us.

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406

At a hydraulic fluid viscosity of less than 10 mm²/s (cSt) (e.g., due to high temperatures during short-term operation) at the drain port, a cleanliness level of at least 19/17/14 acc. to ISO 4406 is required.

For example, viscosity corresponds to 10 mm²/s at:


- HLP 32 a temperature of 73 °C
- HLP 46 a temperature of 85 °C

6 A10VO series 31 | Axial piston variable pump Working pressure range

Working pressure range

Pressure at working port B			Definition
Nominal pressure p_{nom}	280 bar (4100 psi)		The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar (5100 psi)		The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2 ms		
Total operating period	300 h		
Minimum pressure $p_{B absolute}$ (high-pressure side)	10 bar (145 psi) ¹⁾		Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	16000 bar/s (232060 psi/s)		Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)			
Minimum pressure $p_{S min}$	Standard	0.8 bar (12 psi) absolute	Minimum pressure at suction port S (inlet) which is required to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$		10 bar (145 psi) absolute ²⁾	
Case pressure at port L, L ₁			
Maximum pressure $p_{L max}$		2 bar (30 psi) absolute ²⁾	Maximum 0.5 bar (7.5 psi) higher than inlet pressure at port S, but not higher than $p_{L max}$. The case pressure must always be higher than the ambient pressure. A drain line to the reservoir is required.
Pilot pressure port X with external high pressure			
Maximum pressure p_{max}		350 bar (5100 psi)	When designing all control lines with external high pressure, the values for the rate of pressure change, maximum single operating period and total operating period applicable to port B must not be exceeded.

▼ Rate of pressure change $R_{A max}$




Notice

- ▶ Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.
- ▶ In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.
- ▶ The case pressure must be greater than the external pressure (ambient pressure) at the shaft seal.

1) Lower pressure is time-dependent, please contact us
2) Other values on request


▼ Pressure definition

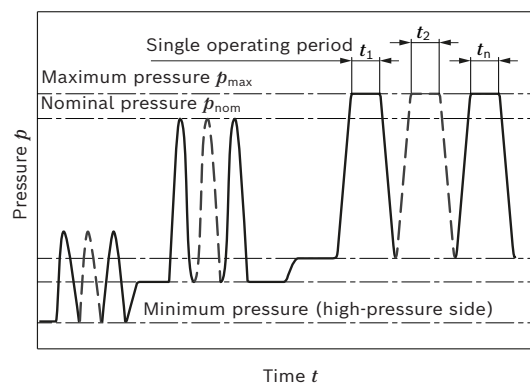

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

Minimum permissible inlet pressure at suction port **S** with speed increase

In order to prevent damage to the pump (cavitation), a minimum inlet pressure must be ensured at the suction port **S**. The level of the minimum input pressure depends on the rotational speed and the displacement volume of the variable pump.

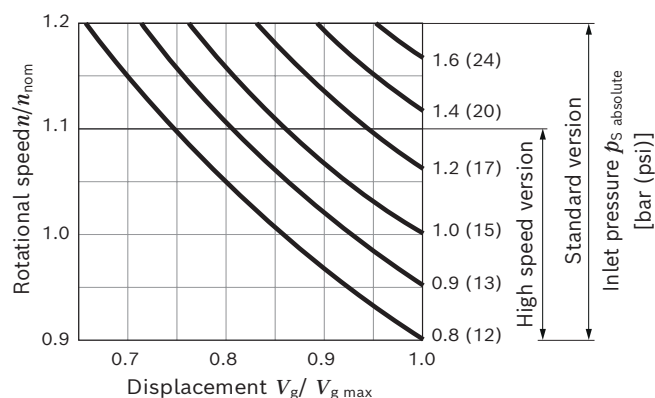

During continuous operation in overspeed over n_{nom} , a reduction in operational service life is to be expected due to cavitation erosion.

8 A10VO series 31 | Axial piston variable pump Technical data, standard unit

Technical data, standard unit

Size		NG		18	28	45	71	88	100
Geometric displacement, per revolution	$V_{g \max}$	cm^3		18	28	45	71	88	100
			inch^3	1.10	1.71	2.75	4.33	5.37	6.10
Maximum rotational speed ¹⁾	at $V_{g \max}$	n_{nom}	rpm	3300	3000	2600	2200	2100	2000
	at $V_g < V_{g \max}^{2)}$	$n_{\text{max perm}}$	rpm	3900	3600	3100	2600	2500	2400
Flow	at n_{nom} and $V_{g \max}$	$q_{v \max}$	l/min	59	84	117	156	185	200
			gpm	15.6	22	30.9	41.2	8.9	52.8
Power	at n_{nom} , $V_{g \max}$ and $\Delta p = 280 \text{ bar (4100 psi)}$	P_{max}	kW	28	39	55	73	86	93
			HP	38	52	74	98	115	125
Torque at $V_{g \max}$ and	$\Delta p = 280 \text{ bar (4100 psi)}$	M_{max}	Nm	80	125	200	316	392	445
			lb-ft	59	92	148	233	289	328
	$\Delta p = 100 \text{ bar (1450 psi)}$	M	Nm	30	45	72	113	140	159
			lb-ft	22	33	53	83	103	117
Rotary stiffness of drive shaft	S	c	Nm/rad	11087	22317	37500	71884	71884	121142
			lb-ft/rad	8177	16460	27659	53019	53019	89350
	R	c	Nm/rad	14850	26360	41025	76545	76545	–
			lb-ft/rad	10953	19442	30258	56457	56457	–
	U	c	Nm/rad	8090	16695	30077	52779	52779	91093
			lb-ft/rad	5967	12314	22184	38928	38928	67187
	W	c	Nm/rad	–	19898	34463	57460	57460	101847
			lb-ft/rad	–	14676	25419	42380	42380	75118
Moment of inertia of the rotary group		J_{TW}	kgm^2	0.00093	0.0017	0.0033	0.0083	0.0083	0.0167
			lbs-ft^2	0.022	0.040	0.078	0.197	0.197	0.396
Maximum angular acceleration ³⁾		α	rad/s^2	6800	5500	4000	2900	2600	2400
Case volume		V	l	0.4	0.7	1.0	1.6	1.6	2.2
			gal	0.106	0.185	0.264	0.420	0.420	0.580
Weight without through drive (approx.)		m	kg	12.9	18	23.5	35.2	35.2	49.5
			lbs	28	40	52	78	78	109
Weight with through drive (approx.)			kg	14	19.3	25.1	38	38	55.4
			lbs	31	43	55	84	84	122

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking the loading by means of test or calculation / simulation and comparison with the permissible values.

For formulas to determine the characteristics, see page 9

1) The values are applicable:
– at absolute pressure $p_{\text{abs}} = 1 \text{ bar (15 psi)}$ at suction port **S**
– for the optimum viscosity range from $\nu_{\text{opt}} = 36 \text{ to } 16 \text{ mm}^2/\text{s (cSt)}$
– with hydraulic fluid based on mineral oils
2) For a speed increase up to $n_{\text{max perm}}$, please observe the diagram on page 7.

3) The data are valid for values between the minimum required and maximum permissible rotational speed. It applies for external stimuli (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.

Technical data, high-speed version

Size		NG		45	71	100
Geometric displacement, per revolution		$V_{g \max}$	cm ³	45	71	100
			inch ³	2.75	4.33	6.10
Maximum rotational speed ¹⁾	at $V_{g \max}$	n_{nom}	rpm	3000	2550	2300
	at $V_g < V_{g \max}^{2)}$	$n_{\text{max perm}}$	rpm	3300	2800	2500
Flow	at n_{nom} and $V_{g \max}$	$q_{v \max}$	l/min	135	178	230
			gmp	35.7	47	60.8
Power	at n_{nom} , $V_{g \max}$ and $\Delta p = 280 \text{ bar (4100 psi)}$	P_{max}	kW	63	83	107
			HP	84	111	143
Torque at $V_{g \max}$ and	$\Delta p = 280 \text{ bar (4100 psi)}$	M_{max}	Nm	200	316	445
			lb-ft	148	233	328
	$\Delta p = 100 \text{ bar (1450 psi)}$	M	Nm	72	113	159
			lb-ft	53	83	117
Rotary stiffness of drive shaft	S	c	Nm/rad	37500	71884	121142
			lb-ft/rad	27659	53019	89350
	R	c	Nm/rad	41025	76545	–
			lb-ft/rad	30258	56457	–
	U	c	Nm/rad	30077	52779	91093
			lb-ft/rad	22184	38928	67187
	W	c	Nm/rad	34463	57460	101847
			lb-ft/rad	25419	42380	75118
Moment of inertia of the rotary group		J_{TW}	kgm ²	0.0033	0.0083	0.0167
			lb-ft ²	0.078	0.107	0.396
Maximum angular acceleration ³⁾		α	rad/s ²	4000	2900	2400
Case volume		V	l	1.0	1.6	2.2
			gal	0.264	0.420	0.580
Weight without through drive (approx.)			kg	23.5	35.2	49.5
			lbs	52	78	109
Weight with through drive (approx.)		m	kg	25.1	38	55.4
			lbs	55	84	122

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000 \text{ (231)}}$	[l/min (gpm)]
Torque	$M = \frac{V_g \times \Delta p}{20 \text{ (24)} \times \pi \times \eta_{\text{mh}}}$	[Nm (lb-ft)]
Power	$P = \frac{2 \pi \times M \times n}{60000 \text{ (33000)}} = \frac{q_v \times \Delta p}{600 \text{ (1714)} \times \eta_t}$	[kW (HP)]

Key

V_g	Displacement per revolution [cm ³ (inch ³)]
Δp	Differential pressure [bar (psi)]
n	Rotational speed [rpm]
η_v	Volumetric efficiency
η_{hm}	Hydraulic-mechanical efficiency
η_t	Total efficiency ($\eta_t = \eta_v \times \eta_{\text{hm}}$)

Observe **notice** on page 8

- The values are applicable:
 - at absolute pressure $p_{\text{abs}} = 1 \text{ bar (15 psi)}$ at suction port **S**
 - for the optimum viscosity range from $\nu_{\text{opt}} = 36 \text{ to } 16 \text{ mm}^2/\text{s (cSt)}$
 - with hydraulic fluid based on mineral oils
- For a speed increase up to $n_{\text{max perm}}$, please observe the diagram on page 7.
- The data are valid for values between the minimum required and maximum permissible rotational speed. It applies for external stimuli (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.



RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

10 A10VO series 31 | Axial piston variable pump Technical data, high-speed version

Permissible radial and axial loading of the drive shaft

Size		NG	18	28	45	71	88	100
Maximum radial force at a/2		$F_{q \max}$ N	350	1200	1500	1900	1900	2300
		lbf	79	270	337	427	427	517
Maximum axial force		$\pm F_{ax \max}$ N	700	1000	1500	2400	2400	4000
		lbf	157	225	337	540	540	899

Notice

- The values given are maximum values and do not apply to continuous operation. All loads of the drive shaft reduce the bearing service life!
- For drives with radial loading (pinion, V-belt), please contact us


Permissible inlet and through-drive torques

Size			18	28	45	71	88	100
Torque at $V_{g\max}$ and $\Delta p = 280$ bar (4100 psi) ¹⁾	M_{\max}	Nm	80	125	200	316	392	445
		lb-ft	59	92	148	232	289	328
Max. input torque on drive shaft ²⁾								
S	$M_{E\max}$	Nm	124	198	319	626	626	1104
		lb-ft	91	145	235	462	462	814
		Ø	inch	3/4	7/8	1	1 1/4	1 1/4
R	$M_{E\max}$	Nm	160	250	400	644	644	–
		lb-ft	118	184	295	475	475	–
		Ø	inch	3/4	7/8	1	1 1/4	1 1/4
U	$M_{E\max}$	Nm	59	105	188	300	300	595
		lb-ft	43	77	139	221	221	438
		Ø	inch	5/8	3/4	7/8	1	1
W	$M_{E\max}$	Nm	–	140	220	394	394	636
		lb-ft	–	103	162	291	291	469
		Ø	inch	–	3/4	7/8	1	1
Maximum through-drive torque								
S	$M_{D\max}$	Nm	108	160	319	492	492	778
		lb-ft	80	118	235	363	363	573
R	$M_{D\max}$	Nm	120	176	365	548	548	–
		lb-ft	89	130	269	404	404	–
U	$M_{D\max}$	Nm	59	105	188	300	300	595
		lb-ft	43	77	139	221	221	438
W	$M_{D\max}$	Nm	–	140	220	394	394	636
		lb-ft	–	103	162	291	291	469

¹⁾ Efficiency not considered

²⁾ For drive shafts with no radial force

▼ Distribution of torques

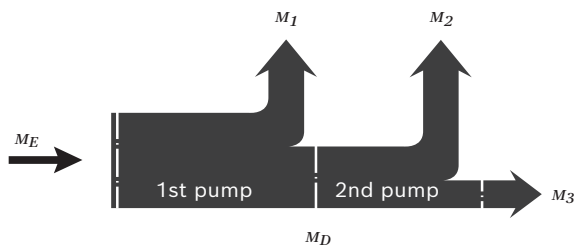

Torque at 1st pump	M_1
Torque at 2nd pump	M_2
Torque at 3rd pump	M_3
Input torque	$M_E = M_1 + M_2 + M_3$
	$M_E < M_{E\max}$
Through-drive torque	$M_D = M_2 + M_3$
	$M_D < M_{D\max}$

12 A10VO series 31 | Axial piston variable pump DG – Two-point control, direct operated

DG – Two-point control, direct operated

The variable pump can be set to a minimum swivel angle by connecting an external switching pressure to port **X**. This will supply control fluid directly to the stroking piston; a minimum control pressure of $p_{St} \geq 50$ bar (725 psi) is required.


The variable pump can only be switched between $V_{g\ max}$ or $V_{g\ min}$.

Please note that the required switching pressure at port **X** is directly dependent on the actual working pressure p_B in port **B**. (See switching pressure characteristic curve). The maximum permissible switching pressure is 280 bar (4100 psi).


Switching pressure p_{St} in **X** = 0 bar (0 psi) $\triangleq V_{g\ max}$

Switching pressure p_{St} in **X** ≥ 50 bar (725 psi) $\triangleq V_{g\ min}$

Switching pressure characteristic curve

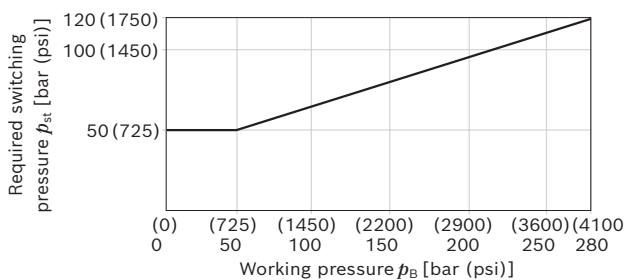

Circuit diagram DG

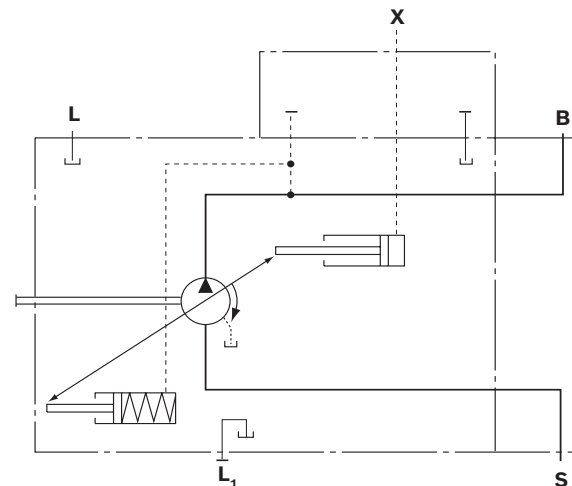


DR – Pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the working pressure exceeds the pressure command value at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Basic position in depressurized state: $V_{g \max}$.
- ▶ Setting range¹⁾ for infinitely variable 50 to 280 bar pressure control (725 to 4100 psi).
Standard is 280 bar (4100 psi).

▼ Characteristic curve

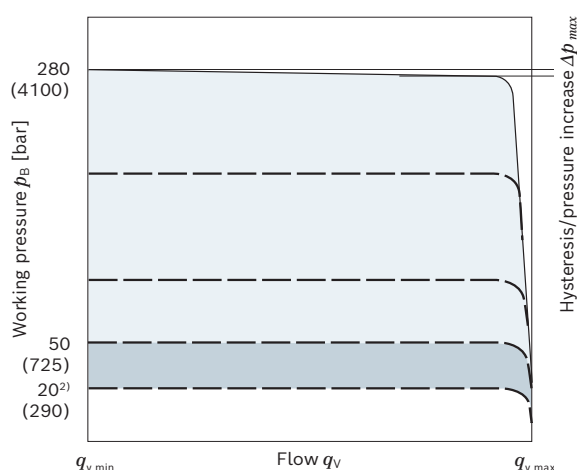

Characteristic curve valid at $n_1 = 1500$ rpm
and $\vartheta_{fluid} = 50$ °C (120 °F).

▼ Circuit diagram DR

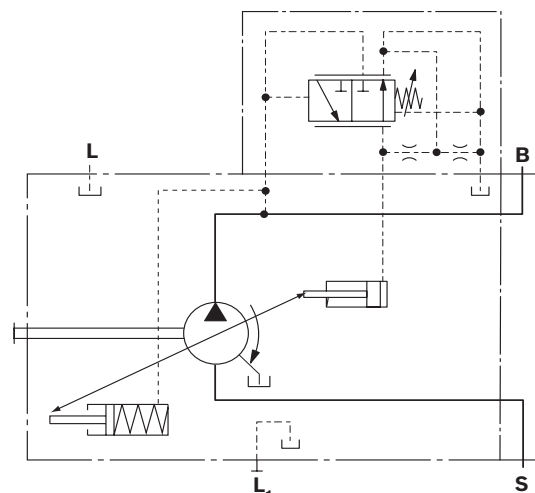

Controller data DR

NG		18	28	45	71	88	100
Pressure increase	Δp [bar (psi)]	4 (60)	4 (60)	6 (87)	8 (115)	9 (130)	10 (145)
Hysteresis and repeatability	Δp [bar (psi)]	maximum 3 (45)					
Pilot fluid consumption	[l/min (gpm)]	maximum approx. 3 (0.8)					

- ¹⁾ In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- ²⁾ For settings below 50 bar (725 psi), please use the SO275 special pressure controller (setting range: 20 to 100 bar (510 to 1450 psi)).

14 A10VO series 31 | Axial piston variable pump DRG – Pressure controller, remotely controlled

DRG – Pressure controller, remotely controlled

For the remotely controlled pressure controller, the pressure limitation is performed using a separately arranged pressure relief valve. Therefore, any pressure control value under the pressure set on the pressure controller can be regulated. Pressure controller DR see page 13.

A pressure relief valve is externally piped up to port **X** for remote control. This relief valve is not included in the scope of delivery of the DRG control.


When there is differential pressure of 20 bar (290 psi) Δp (standard setting), the quantity of control fluid at the port is **X** approx. 1.5 l/min (0.4 gpm). If another setting is required (range from 10 to 22 bar (145 to 320psi)) please state in plain text.

As a separate pressure relief valve (1) we recommend:

- ▶ A direct operated, hydraulic or electric proportional one, suitable for the quantity of pilot fluid mentioned above. The maximum line length should not exceed 2 m (6.6 ft).
- ▶ Basic position in depressurized state: $V_{g \max}$.
- ▶ Setting range¹⁾ for pressure control 50 to 280 bar (725 to 4100 psi) (3).
Standard is 280 bar (4100 psi).
- ▶ Setting range for differential pressure 10 to 22 bar (145 to 320 psi) (2).
Standard is 20 bar (290 psi).


Unloading port **X** to the reservoir results in a zero stroke pressure (standby) which is approx. 1 to 2 bar (15 to 30 psi) higher than the defined differential pressure Δp , however system influences are not taken into account.

▼ Characteristic curve DRG

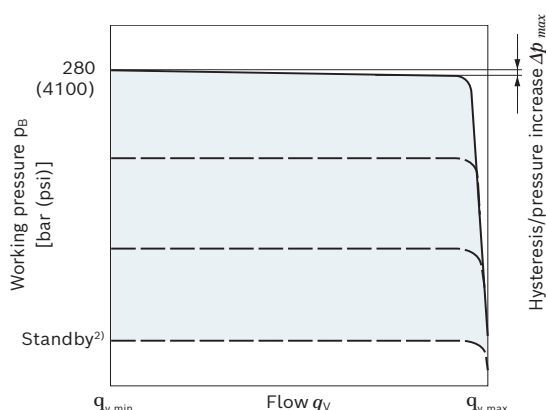

Characteristic curve valid at $n_1 = 1500$ rpm
and $\vartheta_{\text{fluid}} = 50$ °C (120 °F).

▼ Circuit diagram DRG

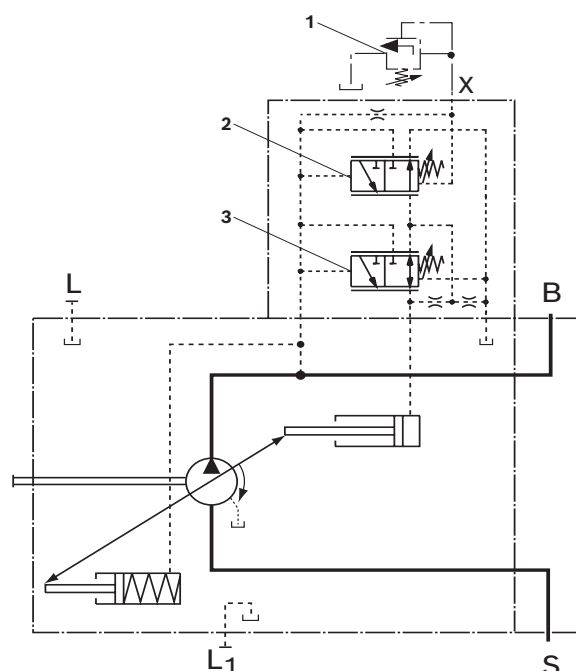

- 1 The separate pressure relief valve and the line are not included in the scope of delivery.
- 2 Remotely controlled pressure cut-off (G)
- 3 Pressure controller (DR)

Controller data DRG

NG		18	28	45	71	88	100
Pressure increase	Δp [bar (psi)]	4 (60)	4 (60)	6 (87)	8 (115)	9 (130)	10 (145)
Hysteresis and repeatability	Δp [bar (psi)]	maximum 4 (60)					
Pilot fluid consumption DR and DRG	[l/min (gpm)]	maximum approx. 4.5 (1.2)					


- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke pressure from pressure setting Δp on controller (2)

DFR / DFR1 / DRSC – Pressure flow controller


In addition to the pressure controller function (see page 13), an adjustable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer. With all controller combinations, the V_g reduction has priority.

- ▶ Basic position in depressurized state: $V_{g \max}$.
- ▶ Setting range¹⁾ to 280 bar (4100 psi).
Standard is 280 bar (4100 psi).
- ▶ DR pressure controller data see page 13

▼ Characteristic curve

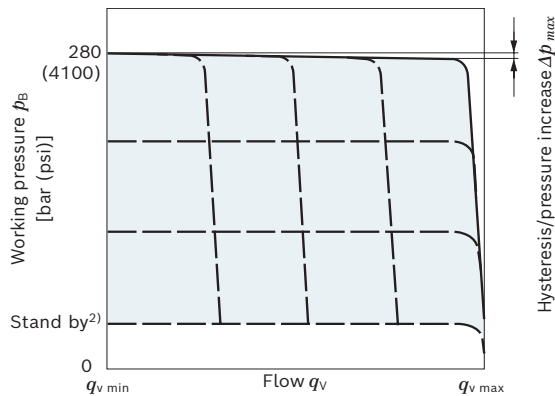


▼ Characteristic curve at variable rotational speed

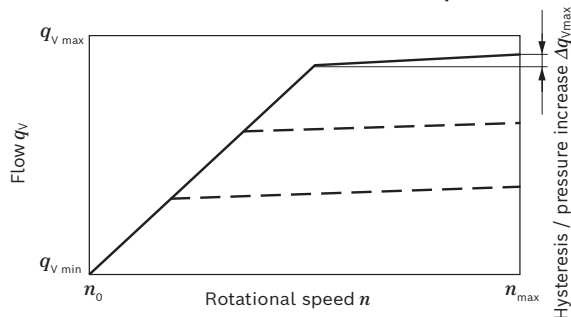

Characteristic curves valid at $n_1 = 1500$ rpm
and $\theta_{fluid} = 50$ °C (120 °F).

- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded.
The range of possible settings at the valve is higher.
- 2) Zero stroke pressure from pressure setting Δp on controller (2)

▼ Circuit diagram DFR

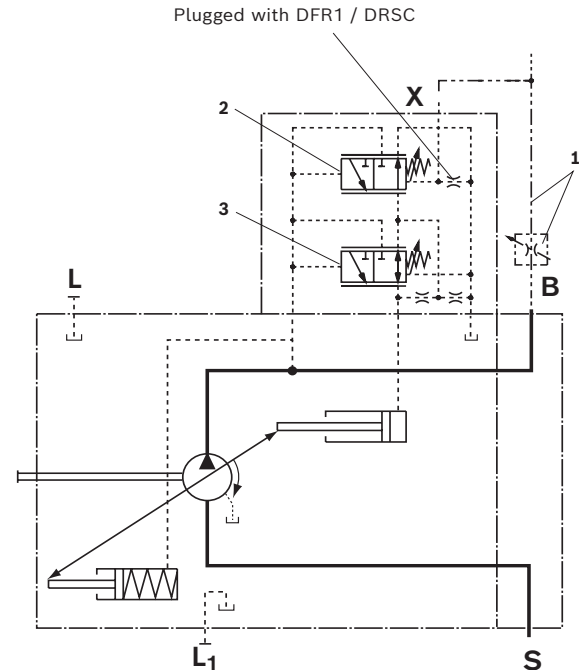

- 1 The metering orifice (control block) and the line is not included in the scope of delivery.
- 2 Flow controller (FR).
- 3 Pressure controller (DR)

Notice

- ▶ The DFR1 and DRSC versions have no unloading between **X** and the reservoir. The LS must thus be unloaded in the system. Because of the flushing function of the flow controller in the DFR1 control valve, sufficient unloading of the **X** line must also be provided. If this unloading of the **X** line does not have to be guaranteed, the DRSC control valve must be used.

For further information see page 16

16 **A10VO series 31** | Axial piston variable pump
DFR / DFR1 / DRSC – Pressure flow controller

Differential pressure Δp :

- ▶ Standard setting: 14 bar (200 psi)
If another setting is required, please state in the plain text.
- ▶ Setting range: 14 bar to 22 bar (200 to 320 psi)
Unloading port **X** to the reservoir results in a zero stroke pressure (standby) which is approx. 1 to 2 bar (15 to 30 psi) higher than the defined differential pressure Δp , however system influences are not taken into account.

Controller data

DR pressure controller data, see page 13
Maximum flow deviation measured at drive speed
n = 1500 rpm.


NG		18	28	45	71	88	100
Pressure increase	Δp						
	[bar (psi)]	4 (60)	4 (60)	6 (87)	8 (115)	9 (130)	10 (145)
Flow deviation	Δq_{Vmax}						
	[l/min (gpm)]	0.9 (0.20)	1.0 (0.30)	1.8 (0.50)	2.8 (0.70)	3.4 (0.90)	4.0 (1.10)
Hysteresis and repeatability	Δp				maximum		
	[bar (psi)]				4 (60)		
Pilot fluid consumption	[l/min (gpm)]				maximum approx. 3 to 4.5 (0.8 to 1.2) at DFR		
					maximum approx. 3 (0.8) at DFR1/DRSC		

DFLR – Pressure, flow and power controller

Pressure controller equipped as DR(G), see page 13 and 14.

Flow controller equipped like DFR, DFR1, see page 15.
In order to achieve a constant drive torque with varying working pressures, the swivel angle and with it the output flow from the axial piston pump is varied so that the product of flow and pressure remains constant.
Flow control is possible below the power control curve.


▼ Characteristic curve and torque characteristic

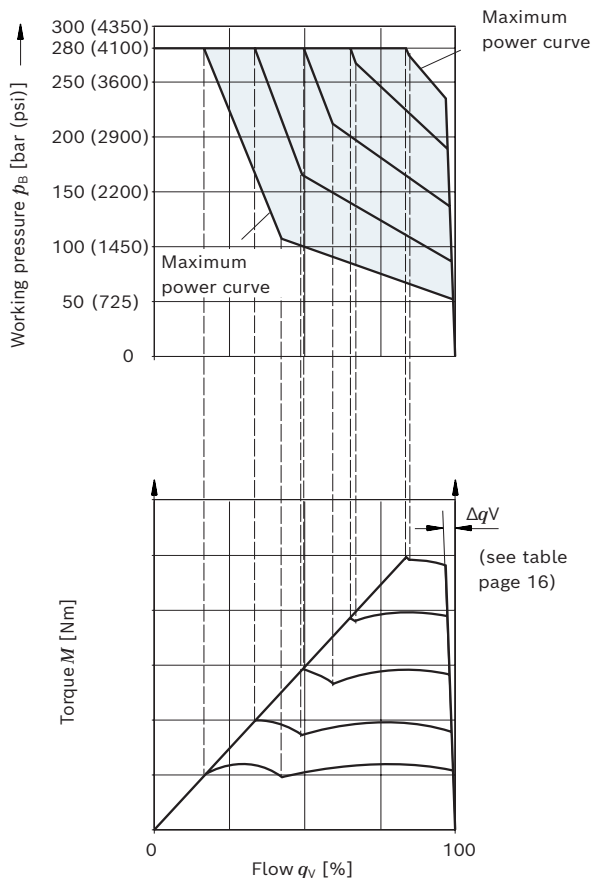

Please contact us regarding beginning of control at < 50 bar (725 psi)

When ordering please state the power characteristics to be set at the factory in plain text, e.g. 20 kW (27 HP) at 1500 rpm.

▼ Circuit diagram DFLR

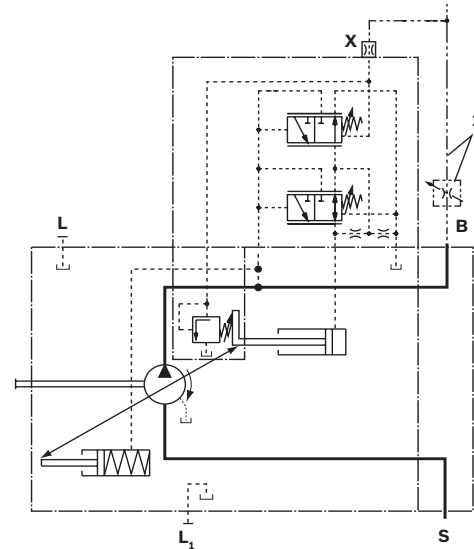

1 The metering orifice (control block) and the line is not included in the scope of delivery.

Controller data

- For technical data of pressure controller DR see page 13.
- For technical data of flow controller FR see page 16.
- Pilot fluid consumption: maximum approx. 5.5 l/min (1.5 gpm)

18 A10VO series 31 | Axial piston variable pump ED – Electro-hydraulic pressure control


ED – Electro-hydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.

When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level. The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.


As the solenoid current signal drops towards zero, the pressure will be limited to p_{\max} by an adjustable hydraulic pressure cut-off (secure fail safe function in case of power failure, e.g. for fan speed control). The swivel time characteristic of the ED control was optimized for the use as a fan drive system. When ordering, specify the type of application in plain text.

▼ Current/pressure characteristic curve ED (negative characteristic curve)

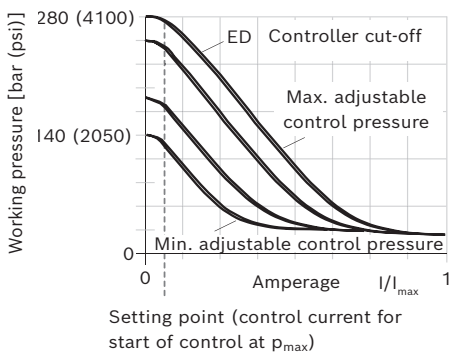

Hysteresis static < 3 bar (45 psi).


▼ Flow-pressure characteristic curve

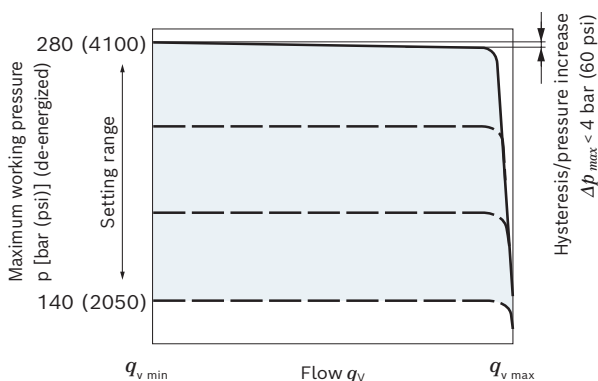


Characteristic curves valid at $n_1 = 1500 \text{ rpm}$
and $\vartheta_{\text{fluid}} = 50 \text{ °C (120 °F)}$.

- Pilot fluid consumption: 3 to 4.5 l/min (0.8 to 1.2 gpm).
- For standby standard setting, see the following diagram; other values on request.

▼ Influence of the pressure setting on standby (maximally energized)

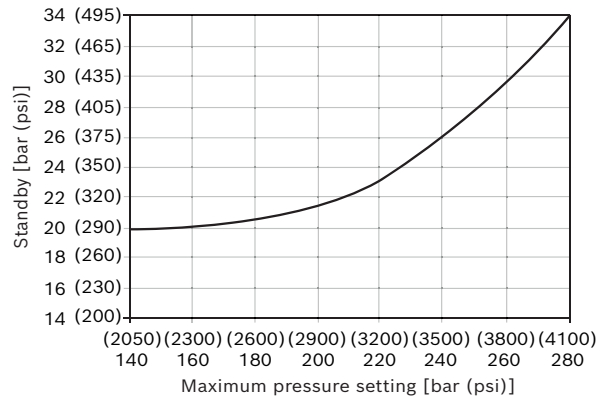

▼ Circuit diagram ED71/ED72

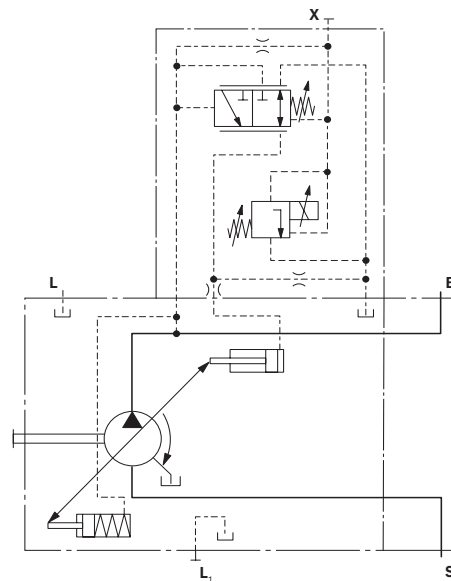

Technical data, solenoids	ED71	ED72
Voltage	12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Control current		
Start of control at p_{\max}	100 mA	50 mA
Start of control at p_{\min}	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C (68 °F))	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Recommended amplitude	120 mA	60 mA
Duty cycle	100%	100%
Type of protection: see connector version page 53		
Operating temperature range at valve -20 °C to +115 °C (-4 °F to +239 °F)		

The following electronic control units are available for controlling the electro-hydraulic pressure control:

BODAS Controllers	Data sheet
RC5-6, series 40	95207
RC18-12, series 40	95208
RC27-18, series 40	95208

Notice

With **ED71**, de-energized operating condition (jump from 100 to 0 mA) results in a pressure increase of the maximum pressure of 4 to 5 bar (60 to 75 psi).
 With **ED72**, de-energized operating condition (jump from 50 to 0 mA) results in a pressure increase of the maximum pressure of 4 to 5 bar (60 to 75 psi).


20 **A10VO series 31** | Axial piston variable pump
ER – Electro-hydraulic pressure control

ER – Electro-hydraulic pressure control

The ER valve is set to a certain pressure by a specified variable solenoid current.


When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level. The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current. If the solenoid current drops towards zero, the pressure will be limited to p_{\min} (standby) by an adjustable hydraulic pressure cut-off. Observe project planning note.

▼ Current-pressure characteristic curve (positive characteristic curve)

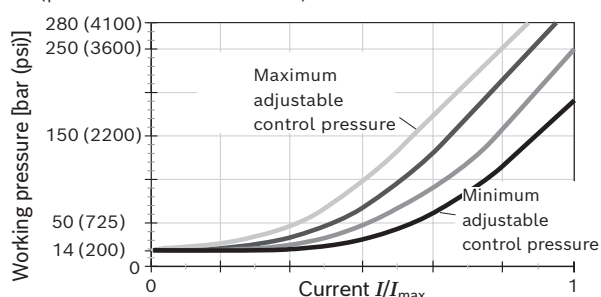

Hysteresis static < 3 bar (45 psi).


▼ Flow-pressure characteristic curve

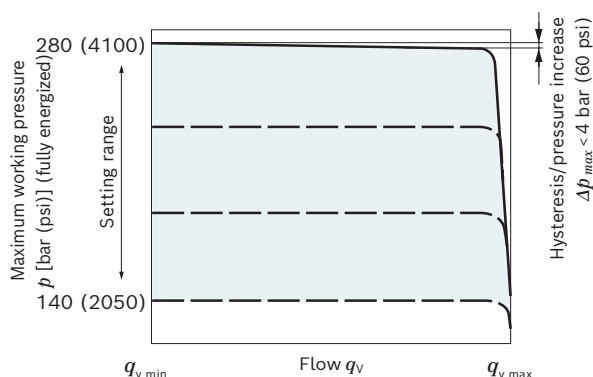

Characteristic curves valid at $n_1 = 1500 \text{ rpm}$
and $\vartheta_{\text{fluid}} = 50 \text{ °C (120 °F)}$.

- ▶ Pilot fluid consumption: 3 to 4.5 l/min (0.8 to 1.2 gpm).
- ▶ Standby standard setting 14 bar (200 psi).
Other values on request.
- ▶ Influence of pressure setting on standby $\pm 2 \text{ bar}$
($\pm 30 \text{ psi}$).

▼ Circuit diagram ER71/ER72

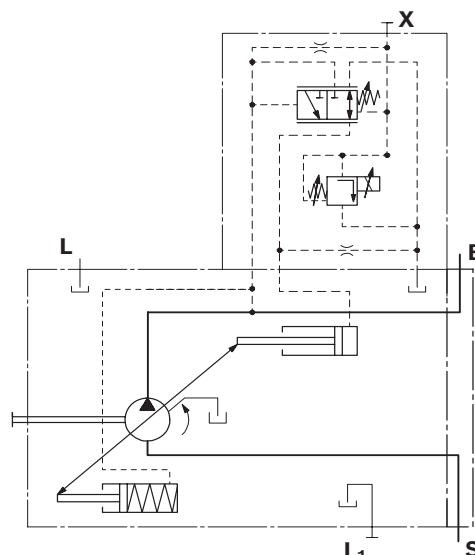

Technical data, solenoids	ER71	ER72
Voltage	12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Control current		
Start of control at p_{\min}	100 mA	50 mA
End of control at p_{\max}	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C (68 °F))	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Recommended amplitude	120 mA	60 mA
Duty cycle	100%	100%
Type of protection, see connector version page 53		
Control electronics, see page 21		
Operating temperature range at valve	-20 °C to +115 °C (-4 °F to +239 °F)	

The following electronic control units are available for controlling the electro-hydraulic pressure control:

BODAS Controllers	Data sheet
RC5-6, series 40	95207
RC18-12, series 40	95208
RC27-18, series 40	95208

Project planning note

Excessive current levels ($I > 1200$ mA at 12 V or $I > 600$ mA at 24 V) to the ER solenoid can result in undesired pressure increases which can lead to pump or system damage. Therefore:

- ▶ Use I_{\max} current limiter solenoids.
- ▶ An intermediate plate pressure controller can be used to protect the pump in the event of overflow.

An accessory kit with intermediate plate pressure controller can be ordered from Bosch Rexroth under part number R902490825.

22 A10VO series 31 | Axial piston variable pump EC4 – Electro-hydraulic control valve (positive control)

EC4 – Electro-hydraulic control valve (positive control)

The proportional directional valve EC4 serves to control an axial piston variable pump with eOC control functions in an electronically closed control circuit.

The valve spool is clamped between a proportional solenoid and a spring and releases a opening cross-section depending on the stroke.

This results in a proportionality of the solenoid current with respect to the opening cross-section and thus the swiveling speed of the pump.

The neutral position, which does not lead to a swivel motion, is assigned to a respective neutral current.

If the neutral current is above the neutral position ($I_{neutral}$), the pump swivels in the direction of $V_{g\ max}/100\%$; if it is below, the pump swivels in the direction of $V_{g\ min}/0\%$.

With eOC closed loop control, the pump can also be operated in the swiveling range $<V_{g\ min}/0\%$ - please contact us if required.

For control of the pump with BODAS eOC, a swivel angle sensor is required.


Further information about the swivel angle sensor can be found on page 54 and in data sheet 95153.

Further information on project planning of the BODAS eOC control system including other required system components can be found in data sheet 95345.


The BODAS eOC control software supports all four basic control types of axial piston variable pumps in electrically closed control circuits:

- ▶ Pressure and differential pressure regulation (p)
- ▶ Swivel angle and flow control (α)
- ▶ Torque control (M)
- ▶ Power control

▼ Control variants with EC4¹⁾

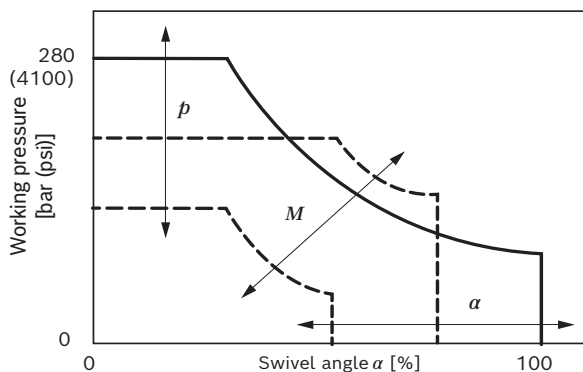

▼ Circuit diagram EC4

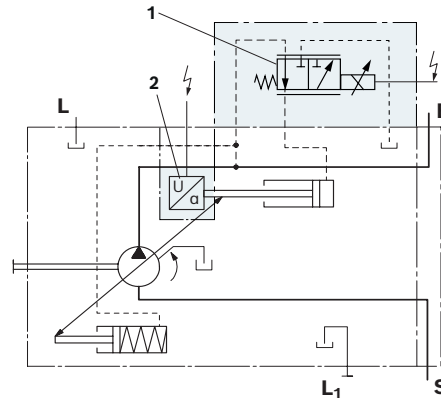

1 Proportional directional valve EC4


2 Swivel angle sensor (see data sheet 95153)

The following electronic control units are available for controlling the proportional solenoids:

BODAS Controllers	Data sheet
RC5-6, series 40	95207
RC18-12, series 40	95208
RC27-18, series 40	95208

For further technical data on the solenoid with respective information, see pages 23 and 53

▼ Operating principle EC4

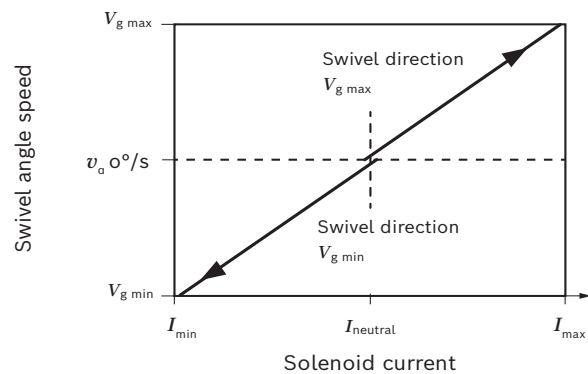

¹⁾ Display for positive quadrants 0% to +100%

Solenoid technical data


EC4	
Maximum solenoid current	1900 mA
Nominal resistance at 20 °C (68 °F) winding temperature	4.26 ±0.26 Ω
Hot resistance 180 °C (356 °F) winding temperature	6.92 ±0.42 Ω
Limit temperature for winding	Insulating material class H (180 °C (356 °F))
Hydraulic fluid or operating temperature	from -40 °C to 110 °C (-40 °F to 230 °F)
Type of protection and control electronics, see page 53	

Notice

- ▶ The coil has a limit voltage of 100 V. In general, the maximum current must not be exceeded by the actual current.
- ▶ For calculation of the hot resistance, a temperature coefficient of 0.0039k⁻¹ is to be applied.

▼ Characteristic curve of permitted operating range

Example: At a hydraulic fluid temperature of 88 °C (190 °F), an ambient temperature of 110 °C (230 °F) is permitted.

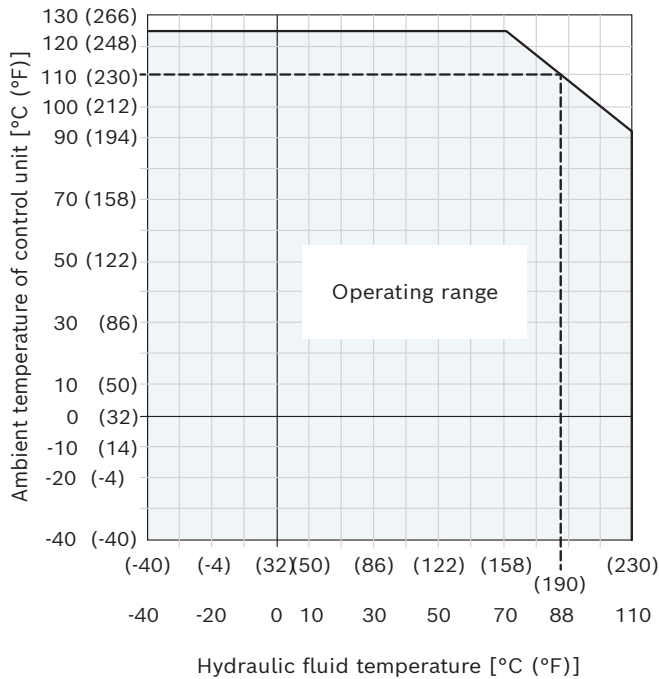


24 **A10VO series 31** | Axial piston variable pump
Dimensions, size 18

Dimensions [mm]

Dimensions, size 18

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: Ports metric

▼ Port plate 12

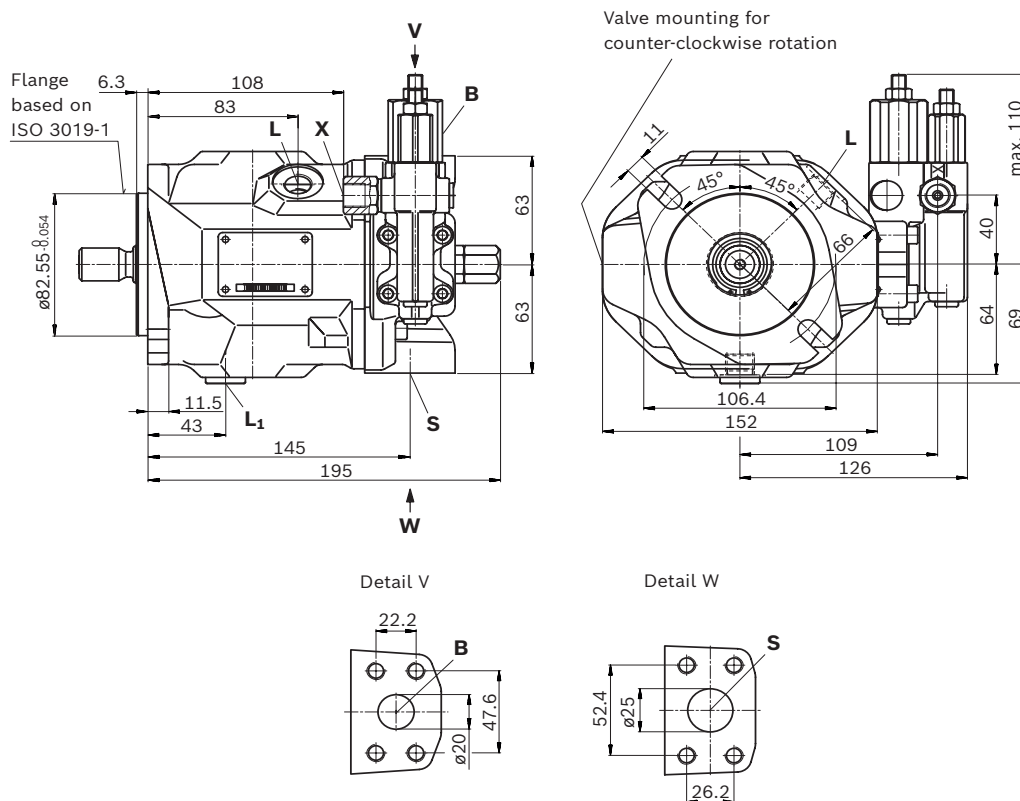

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 18

25

Dimensions, size 18

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: SAE ports

▼ Port plate 62

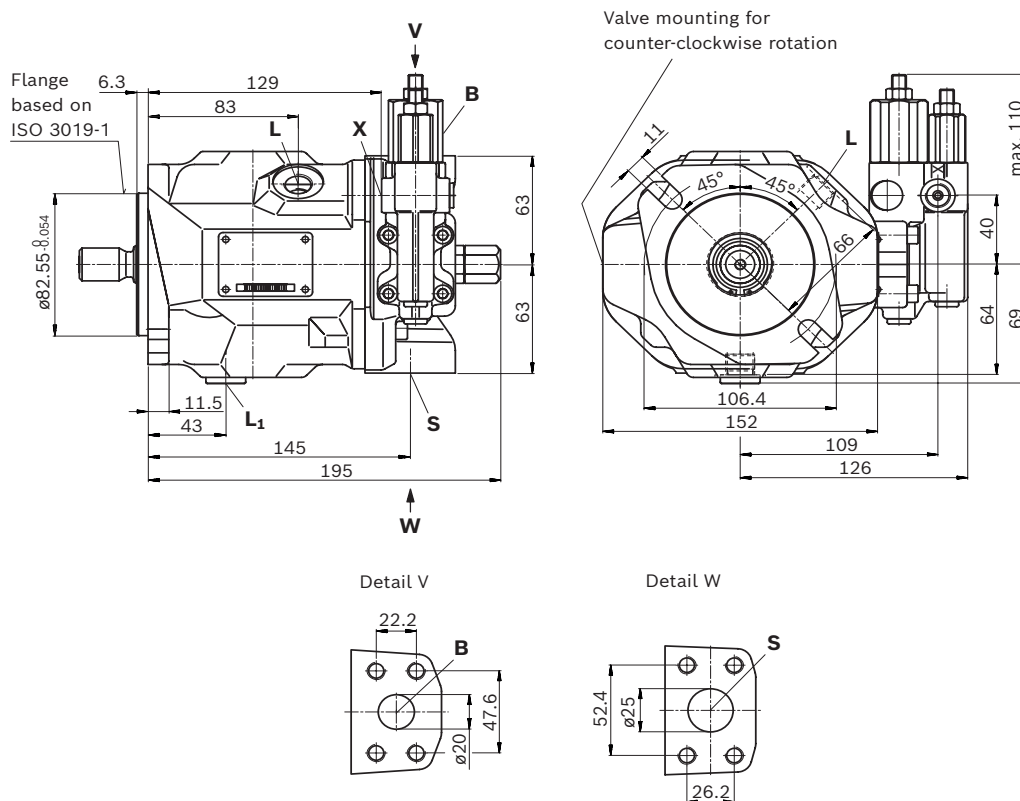

RE 92701/2023-04-24, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


26 **A10VO series 31** | Axial piston variable pump
Dimensions, size 18

Dimensions [mm (inch)]


▼ **Splined shaft 3/4 in**
(19-4, ISO 3019-1)

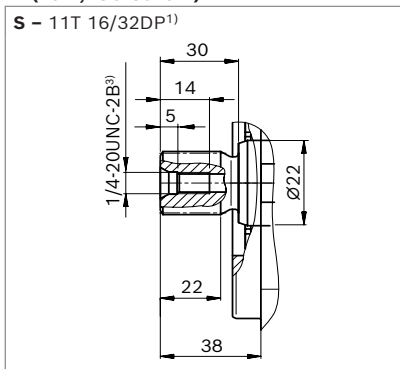

▼ **Splined shaft 3/4 in**
(similar to ISO 3019-1)

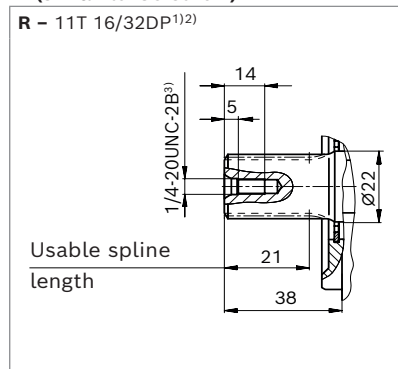

▼ **Splined shaft 5/8 in**
(16-4, ISO 3019-1)

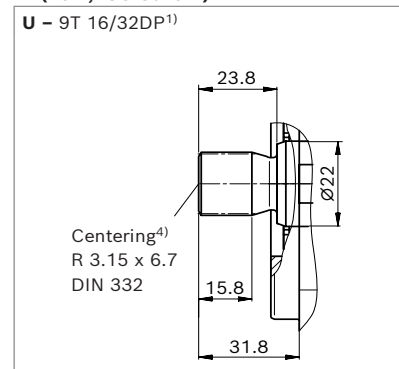

Ports - version metric port plate 12		Standard	Size	p_{max} [bar (psi)] ⁵⁾	State ⁸⁾
B	Working port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	3/4 in M10 × 1.5; 17 (0.67) deep	350 (5100)	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 in M10 × 1.5; 17 (0.67) deep	10 (145)	O
L	Drain port	DIN 3852 ⁶⁾	M16 × 1.5; 12 (0.47) deep	2 (30)	O ⁷⁾
L₁	Drain port	DIN 3852 ⁶⁾	M16 × 1.5; 12 (0.47) deep	2 (30)	X ⁷⁾
X	Pilot pressure	DIN 3852	M14 × 1.5; 12 (0.47) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

Ports - version SAE port plate 62		Standard	Size	p_{max} [bar (psi)] ⁵⁾	State ⁸⁾
B	Working port (standard pressure series) Fastening thread	ISO 6162-1 ASME B1.1	3/4 in 3/8-16 UNC-2B; 20 (0.79) deep	350 (5100)	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 ASME B1.1	1 in 3/8-16 UNC-2B; 20 (0.79) deep	10 (145)	O
L	Drain port	ISO 11926 ⁶⁾	9/16-18 UNF-2B; 13 (0.51) deep	2 (30)	O ⁷⁾
L₁	Drain port	ISO 11926 ⁶⁾	9/16-18 UNF-2B; 13 (0.51) deep	2 (30)	X ⁷⁾
X	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 (0.45) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
3) Thread according to ASME B1.1
4) Coupling axially secured, e.g. with a clamp coupling or radially mounted clamping screw

5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
6) The countersink may be deeper than specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 55).
8) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)


Dimensions [mm]

Axial piston variable pump | **A10VO series 31**
Dimensions, size 18

27


▼ **DG – Two-point control, direct operated**

Port plate 12 (62)

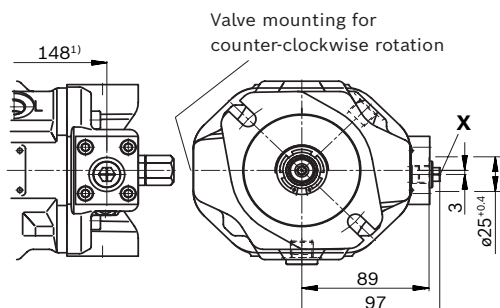


▼ **DR – Pressure controller**

Port plate 12 (62)

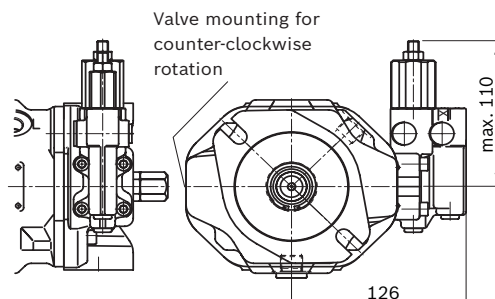


▼ **DRG – Pressure controller, remotely controlled**

Port plate 12 (62)

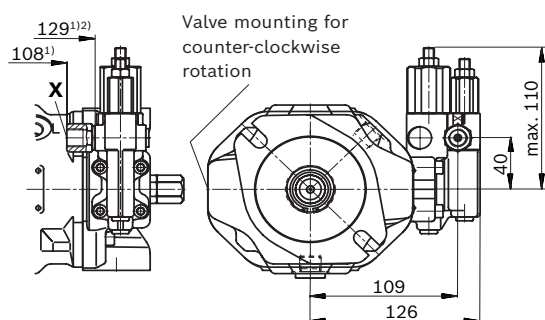

▼ **ED7.,ER7. – Electro-hydraulic pressure control**

Port plate 12 (62)

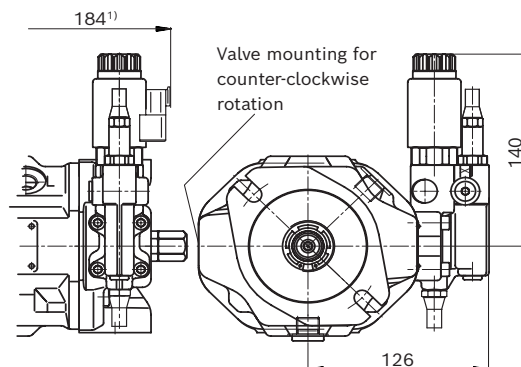

1) To flange surface

2) For version with port plates 62

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


28 **A10VO series 31** | Axial piston variable pump
Dimensions, size 28

Dimensions [mm]


Dimensions, size 28

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: Ports metric

▼ Port plate 12

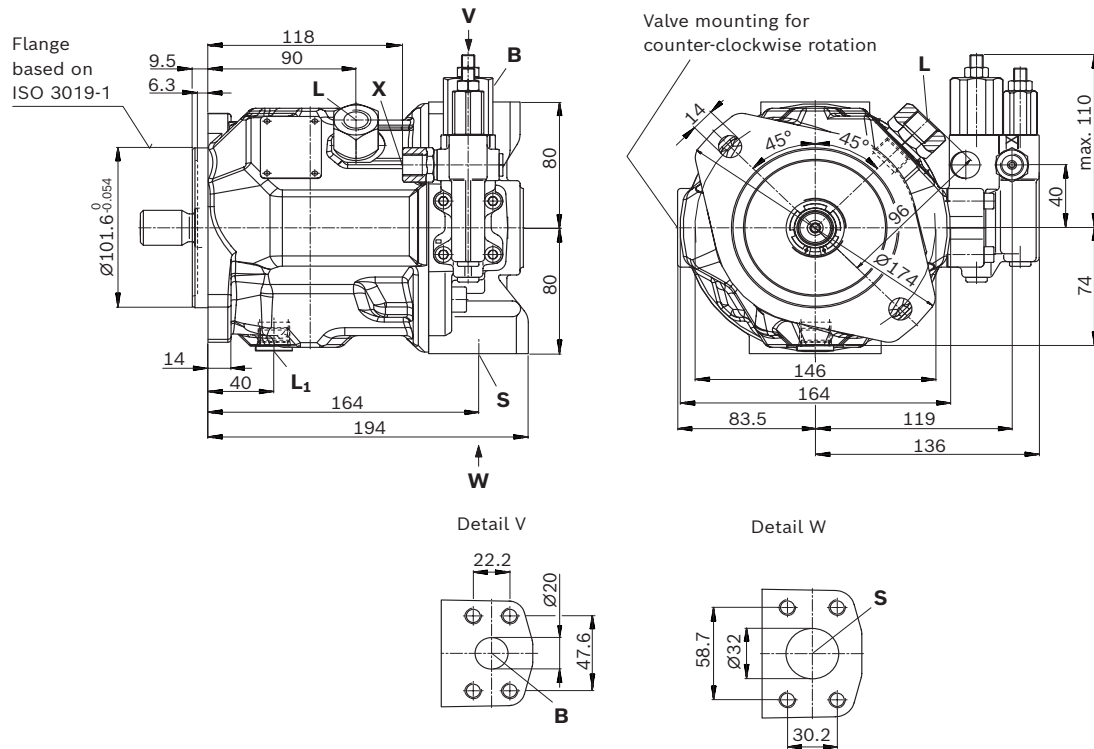

▼ Port plate 11

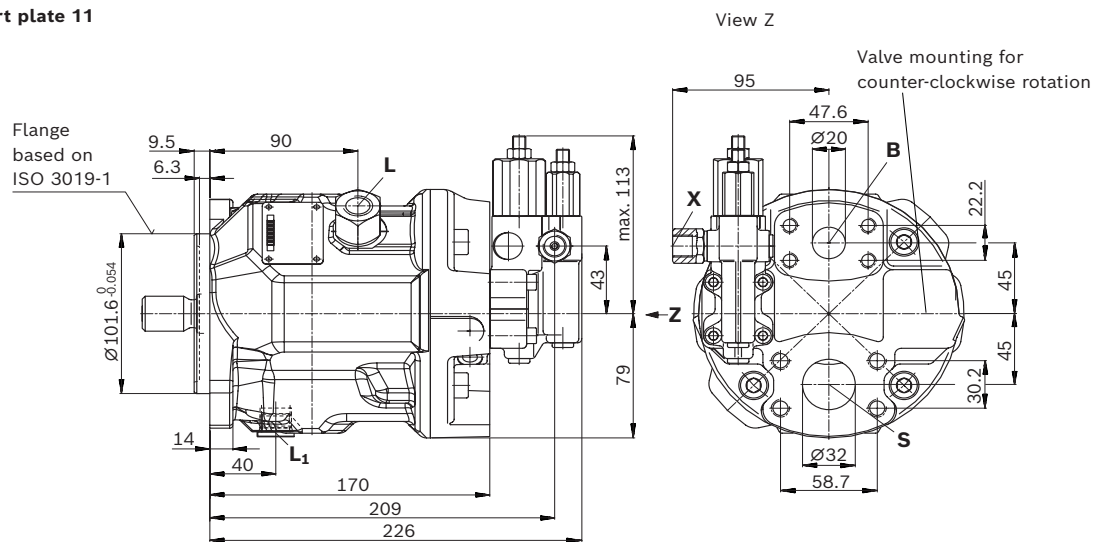

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 28

29


Dimensions, size 28

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: SAE ports

▼ Port plate 62

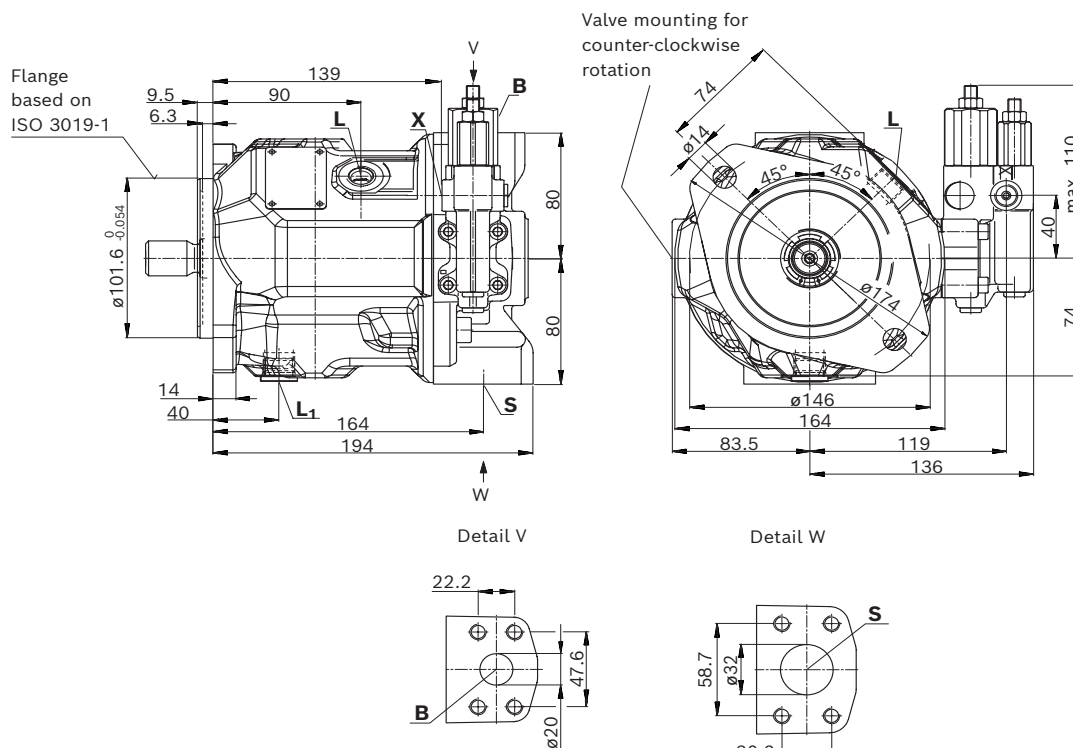

▼ Port plate 61

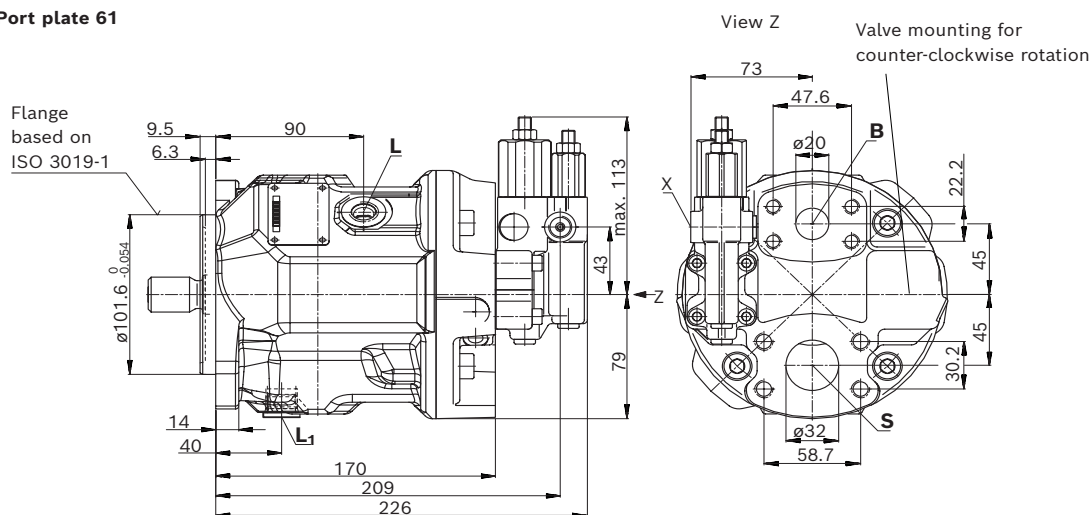

RE 92701/2023-04-24, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


30 **A10VO series 31** | Axial piston variable pump
Dimensions, size 28

Dimensions [mm (inch)]


▼ **Splined shaft 7/8 in**
(22-4, ISO 3019-1)

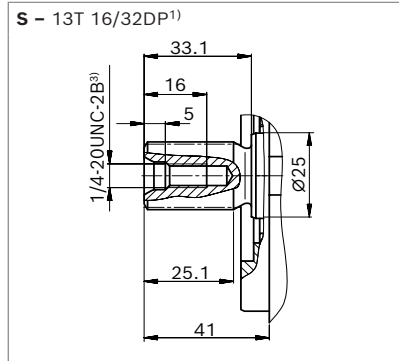


▼ **Splined shaft 7/8 in**
(similar to ISO 3019-1)

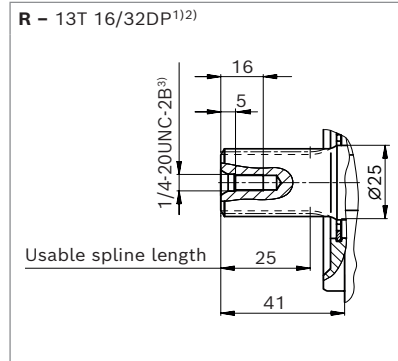

▼ **Splined shaft 3/4 in**
(19-4, ISO 3019-1)

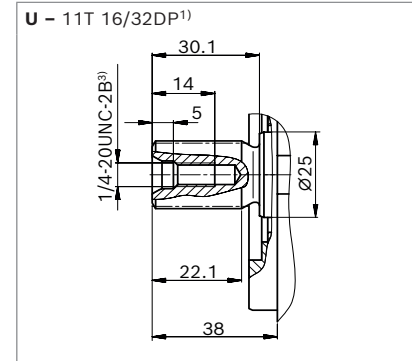

▼ **Splined shaft 3/4 in**
(similar to ISO 3019-1)

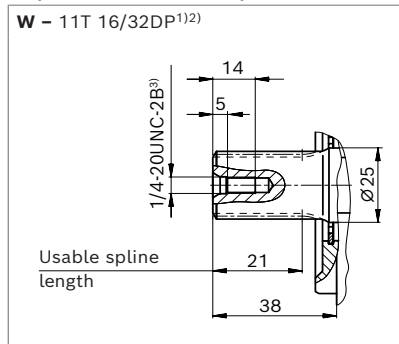

Ports - version metric port plate 11/12		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	3/4 in	350 (5100)	O
	Fastening thread	DIN 13	M10 × 1.5; 17 (0.67) deep		
S	Suction port (standard pressure series)	ISO 6162-1	1 1/4 in	10 (145)	O
	Fastening thread	DIN 13	M10 × 1.5; 17 (0.67) deep		
L	Drain port	DIN 3852 ⁵⁾	M18 × 1.5; 12 (0.47) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	3/4-16 UNF-2B; 15 (0.59) deep	2 (30)	X ⁶⁾
X	Pilot pressure	DIN 3852	M14 × 1.5; 12 (0.47) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O
Ports - version SAE port plate 61/62		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	3/4 in	350 (5100)	O
	Fastening thread	ASME B1.1	3/8-16 UNC-2B; 20 (0.79) deep		
S	Suction port (standard pressure series)	ISO 6162-1	1 1/4 in	10 (145)	O
	Fastening thread	ASME B1.1	7/16-14 UNC-2B; 24 (0.94) deep		
L	Drain port	ISO 11926 ⁵⁾	3/4-16 UNF-2B; 15 (0.59) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	3/4-16 UNF-2B; 15 (0.59) deep	2 (30)	X ⁶⁾
X	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 (0.45) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
3) Thread according to ASME B1.1
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
6) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 55).
7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 28

31


▼ **DG – Two-point control, direct operated**

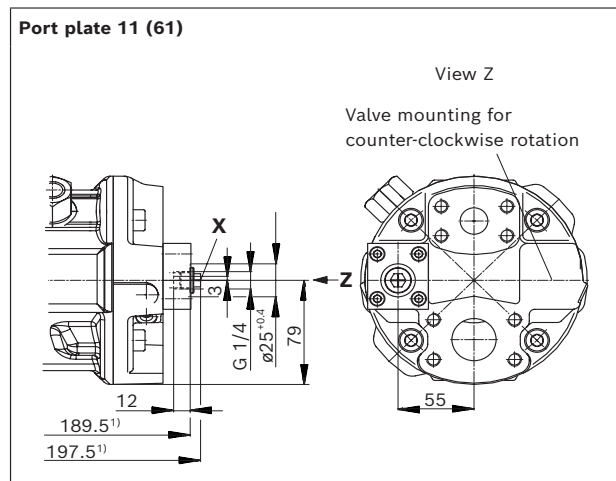


▼ **DG – Two-point control, direct operated**

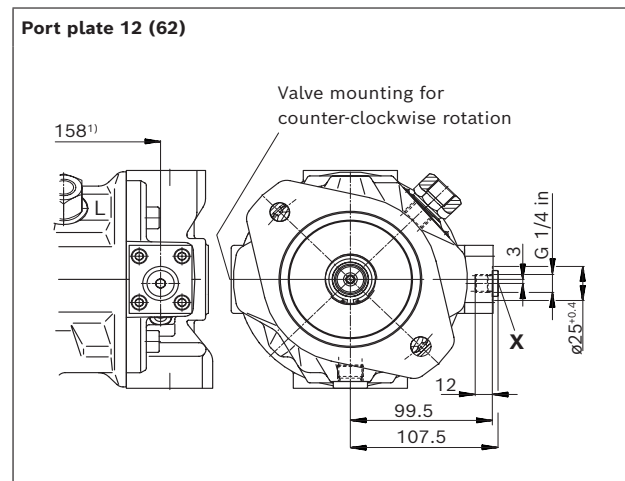


▼ **DR – Pressure controller**

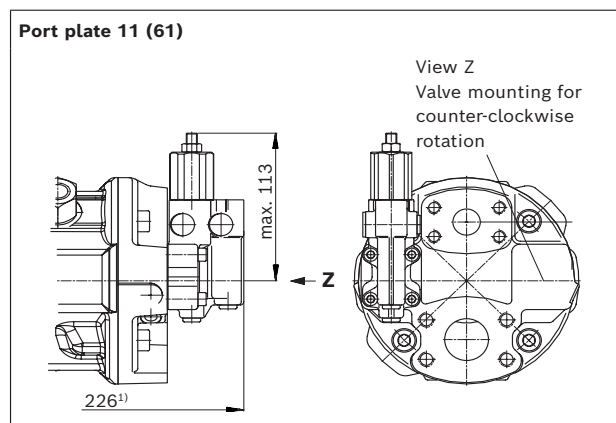


▼ **DR – Pressure controller**

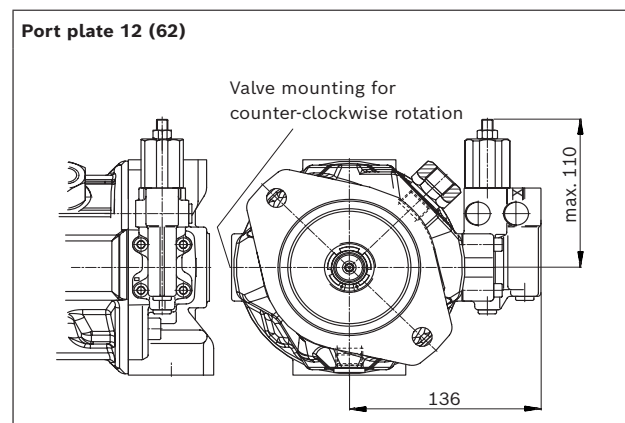

▼ **DRG – Pressure controller, remotely controlled**

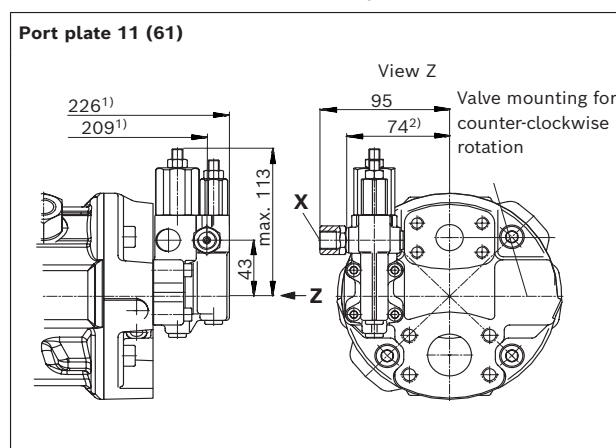

▼ **DRG – Pressure controller, remotely controlled**

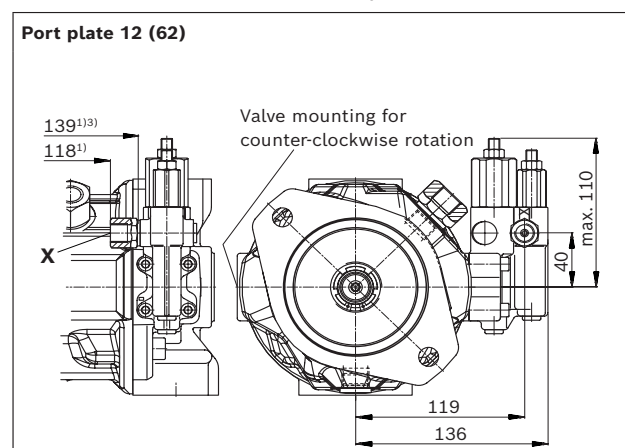

- 1) To flange surface
2) For version with port plate 61

- 3) For version with port plate 62

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

32 **A10VO series 31** | Axial piston variable pump
Dimensions, size 28

Dimensions [mm]


▼ **DFLR – Pressure, flow and power controller**

Port plate 11 (61)

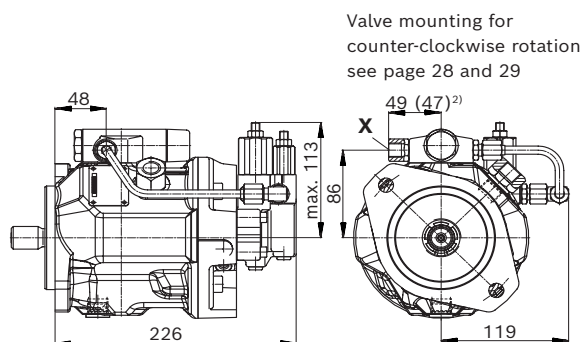


▼ **DFLR – Pressure, flow and power controller**

Port plate 12 (62)

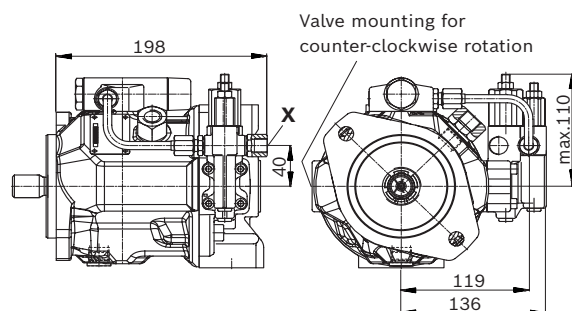


▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 11 (61)

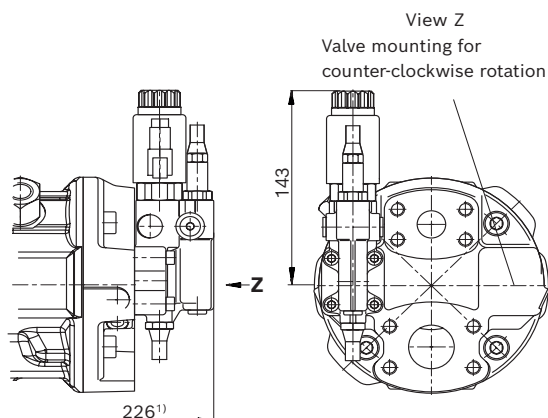


▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 12 (62)

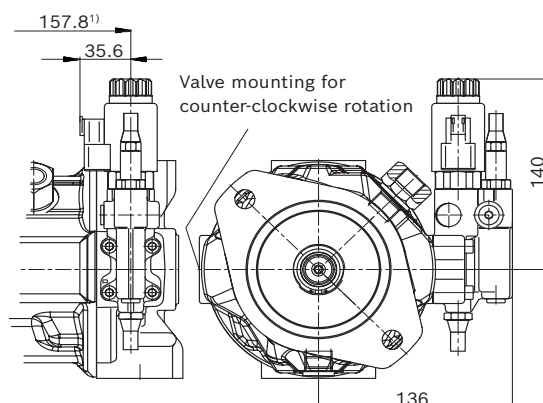

▼ **EC4 – Electro-hydraulic control valve**

Port plate 12 (62)

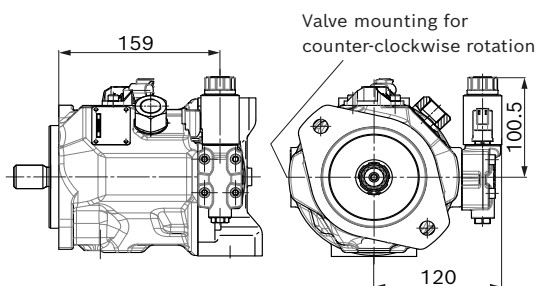

¹) To flange surface

²) For version with port plate 61

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 45

33


Dimensions, size 45

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: Ports metric

▼ Port plate 12

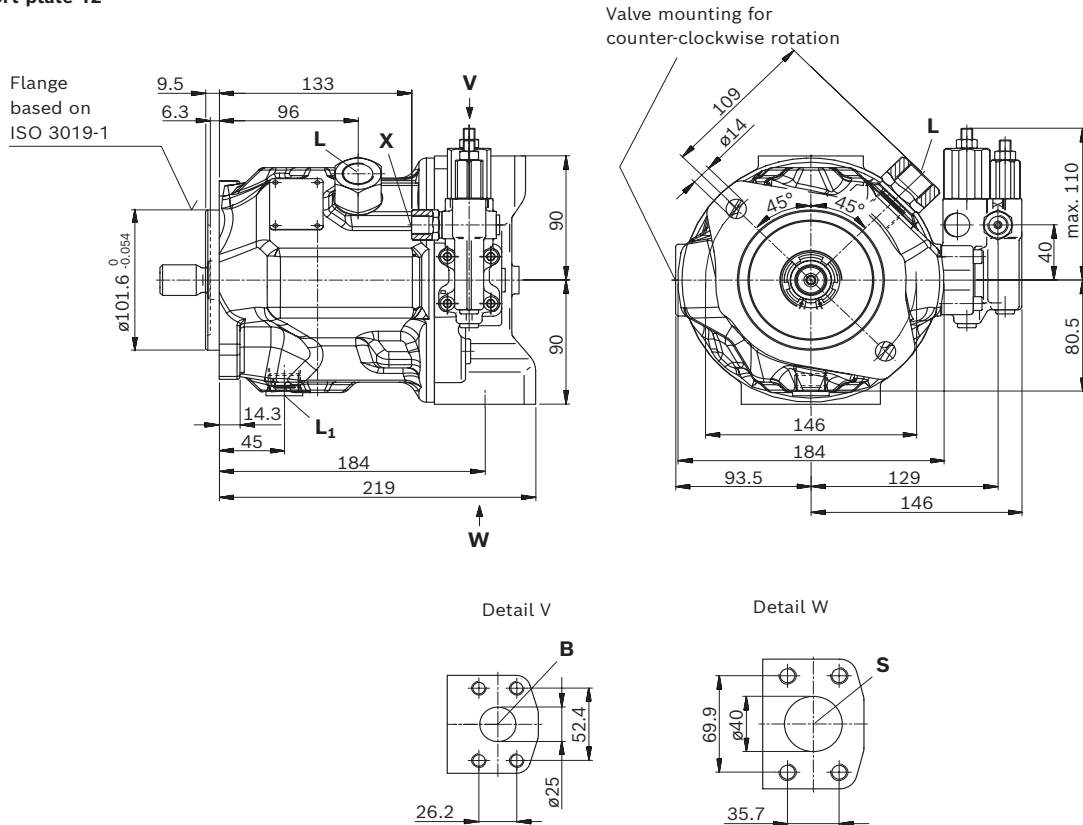

▼ Port plate 11

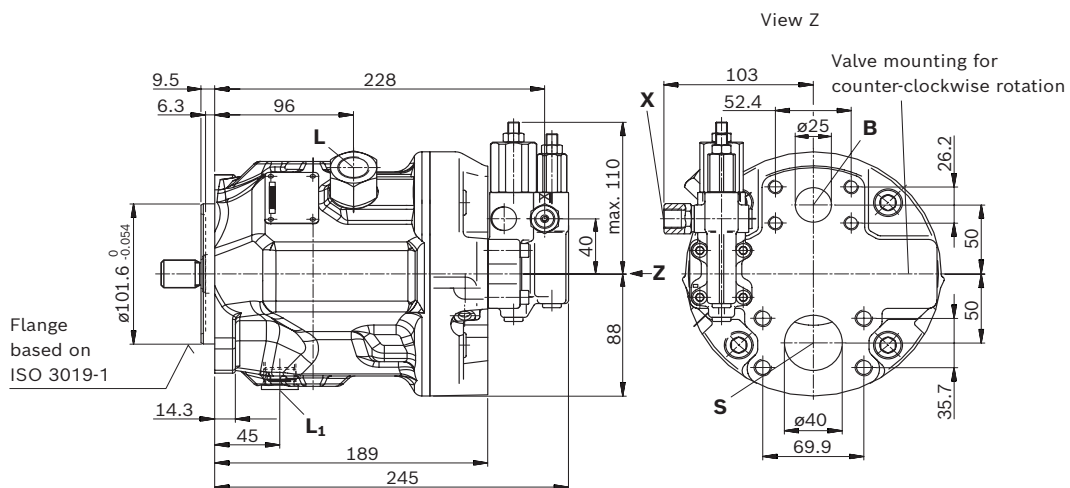

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


34 **A10VO series 31** | Axial piston variable pump
Dimensions, size 45

Dimensions [mm]


Dimensions, size 45

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: SAE ports

▼ Port plate 62

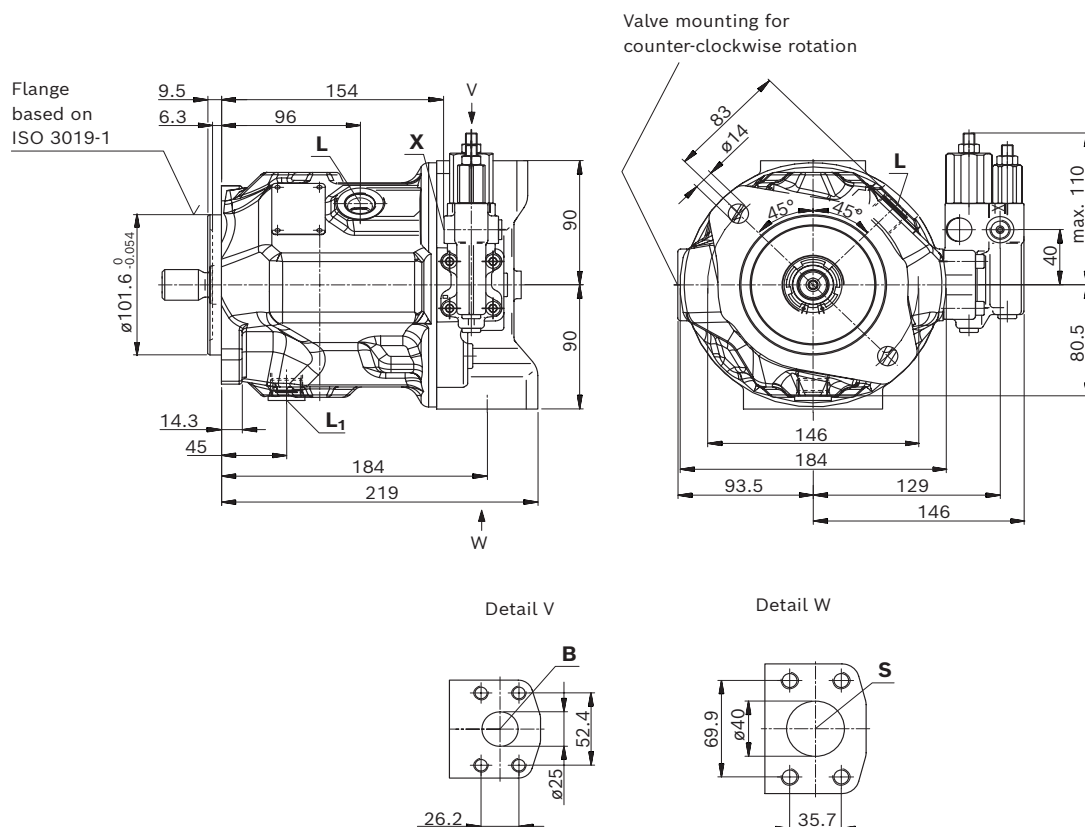

▼ Port plate 61

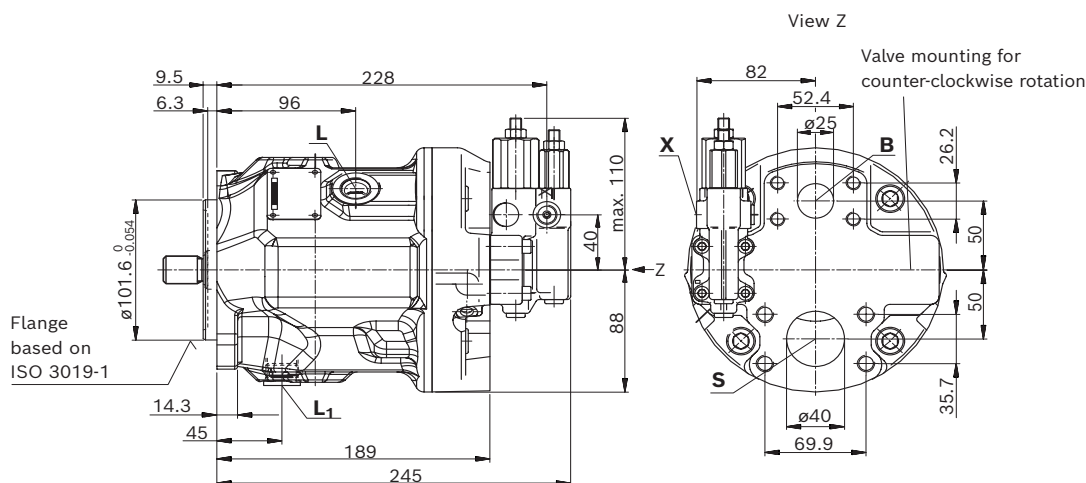

Bosch Rexroth AG, RE 92701/2023-04-24


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm (inch)]

Axial piston variable pump | **A10VO series 31** 35
Dimensions, size 45


▼ **Splined shaft 1 in (25-4, ISO 3019-1)**

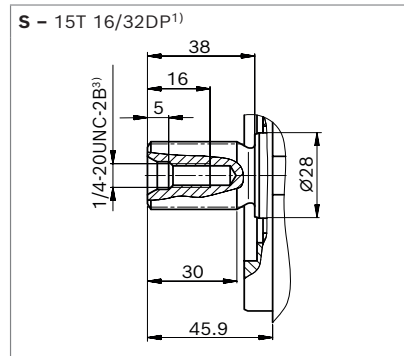


▼ **Splined shaft 1 in (similar to ISO 3019-1)**

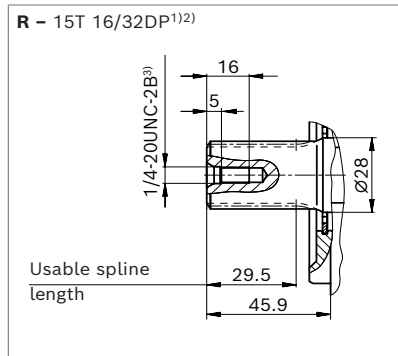

▼ **Splined shaft 7/8 in (22-4, ISO 3019-1)**

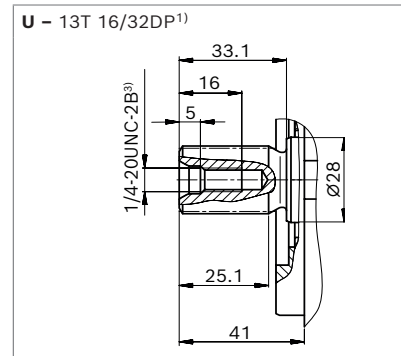

▼ **Splined shaft 7/8 in (similar to ISO 3019-1)**

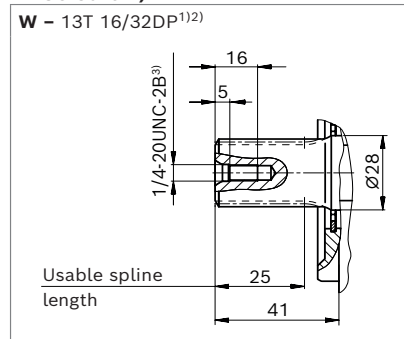

Ports - version metric port plate 11/12		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	1 in	350 (5100)	O
	Fastening thread	DIN 13	M10 × 1.5; 17 (0.67) deep		
S	Suction port (standard pressure series)	ISO 6162-1	1 1/2 in	10 (145)	O
	Fastening thread	DIN 13	M12 × 1.75; 20 (0.79) deep		
L	Drain port	DIN 3852 ⁵⁾	M22 × 1.5; 14 (0.55) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	X ⁶⁾
X	Pilot pressure	DIN 3852	M14 × 1.5; 12 (0.47) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O
Ports - version SAE port plate 61/62		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	1 in	350 (5100)	O
	Fastening thread	ASME B1.1	3/8-16 UNC-2B; 17 (0.67) deep		
S	Suction port (standard pressure series)	ISO 6162-1	1 1/2 in	10 (145)	O
	Fastening thread	ASME B1.1	1/2-13 UNC-2B; 20 (0.79) deep		
L	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	X ⁶⁾
X	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 (0.45) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 55).
- 7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

36 **A10VO series 31** | Axial piston variable pump
Dimensions, size 45

Dimensions [mm]


▼ **DG – Two-point control, direct operated**

Port plate 11 (61)

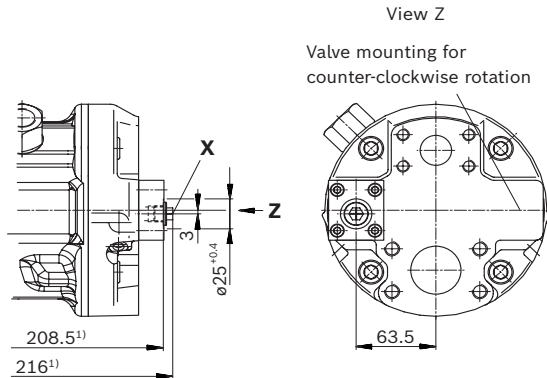


▼ **DG – Two-point control, direct operated**

Port plate 12 (62)

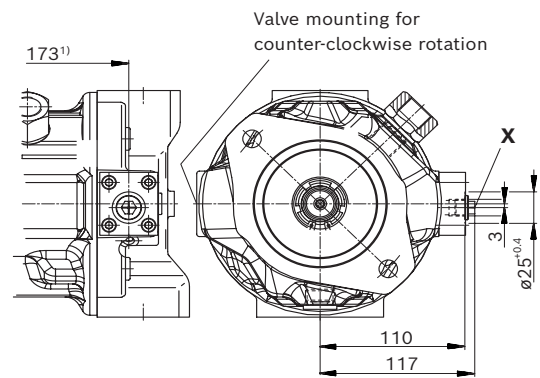


▼ **DR – Pressure controller**

Port plate 11 (61)

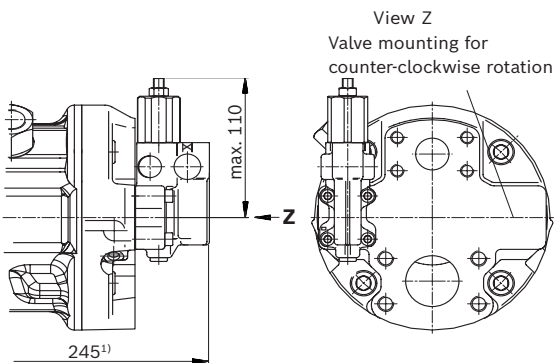


▼ **DR – Pressure controller**

Port plate 12 (62)

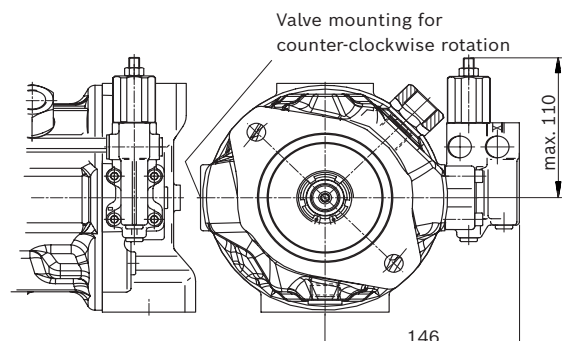


▼ **DRG – Pressure controller, remotely controlled**

Port plate 11 (61)

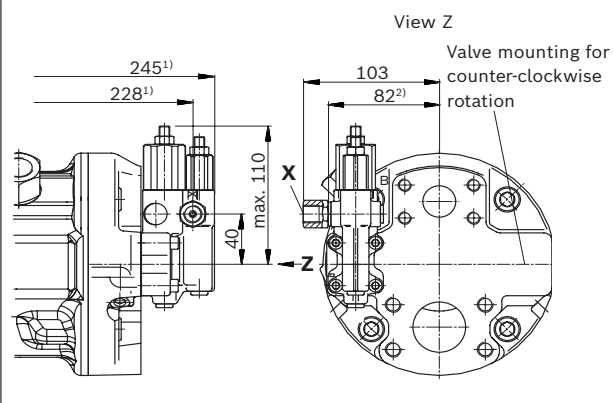

▼ **DRG – Pressure controller, remotely controlled**

Port plate 12 (62)

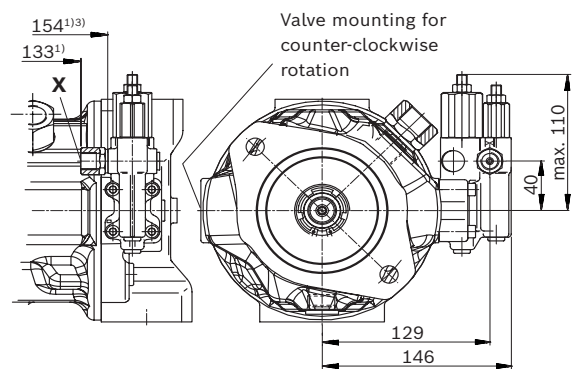

- 1) To flange surface
2) For version with port plate 61

- 3) For version with port plate 62

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]

Axial piston variable pump | **A10VO series 31** 37
 Dimensions, size 45


▼ **DFLR – Pressure, flow and power controller**

Port plate 11 (61)

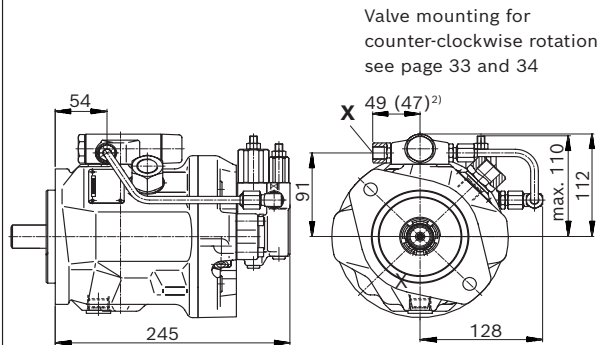


▼ **DFLR – Pressure, flow and power controller**

Port plate 12 (62)

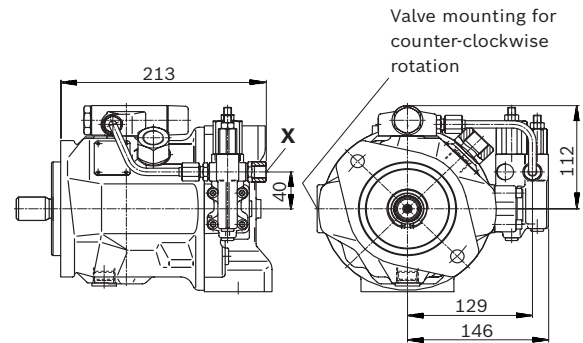


▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 11 (61)

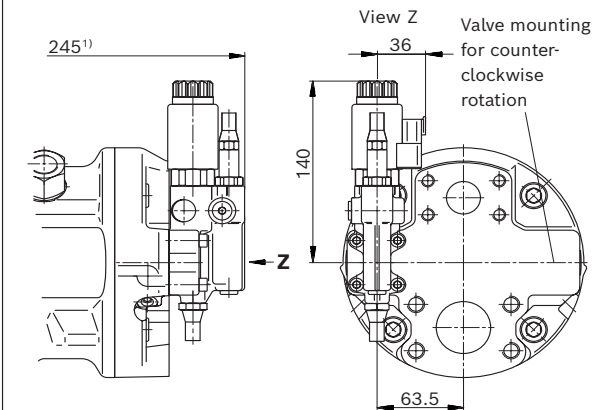


▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 12 (62)

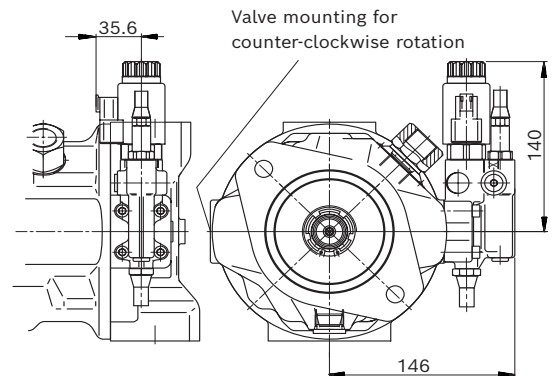

▼ **EC4 – Electro-hydraulic control valve**

Port plate 12 (62)

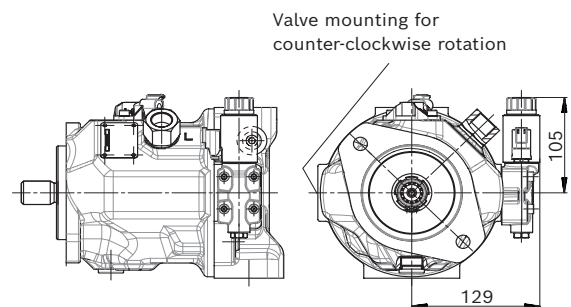

1) To flange surface
 2) For version with port plate 61

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


38 **A10VO series 31** | Axial piston variable pump
 Dimensions, sizes 71 and 88

Dimensions [mm]


Dimensions, sizes 71 and 88

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: Ports metric

▼ Port plate 42

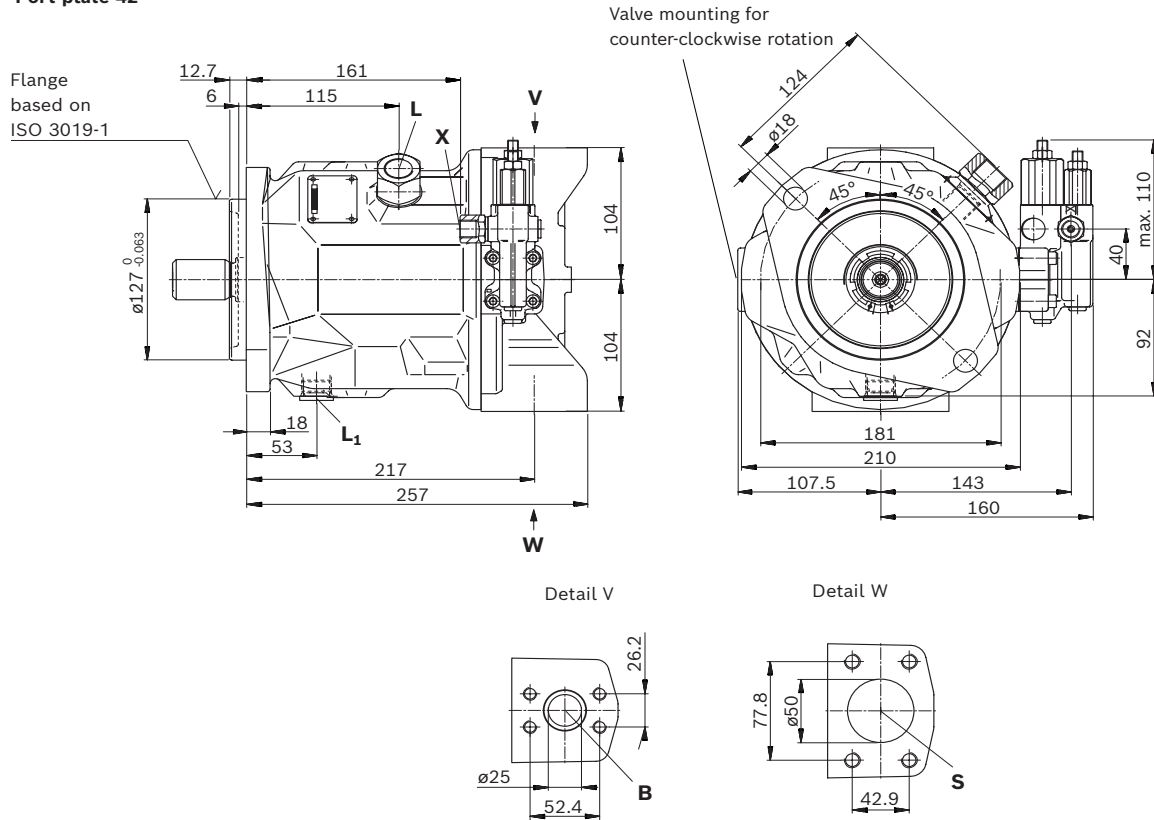

▼ Port plate 41

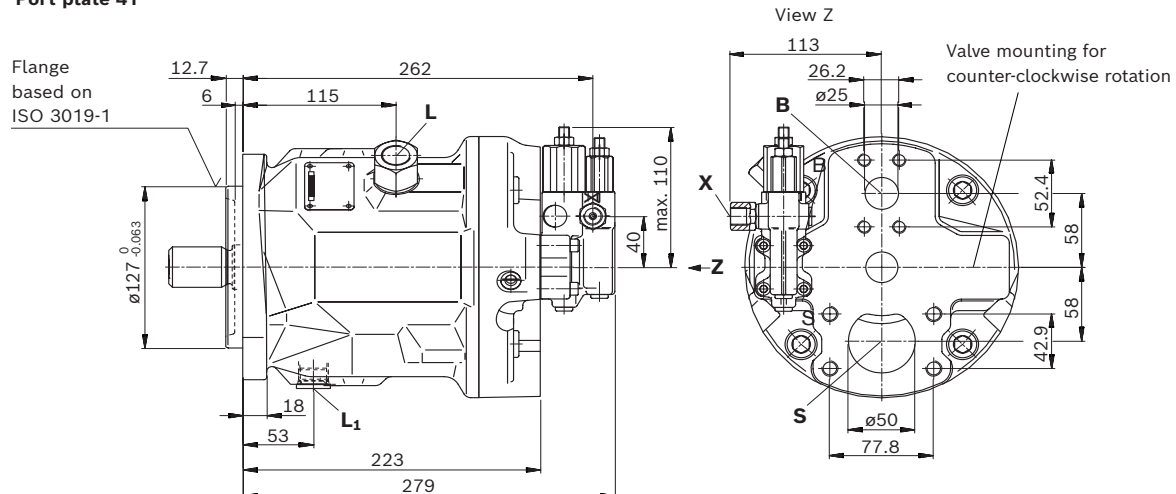

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, sizes 71 and 88

39


Dimensions, sizes 71 and 88

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: SAE ports

▼ Port plate 92

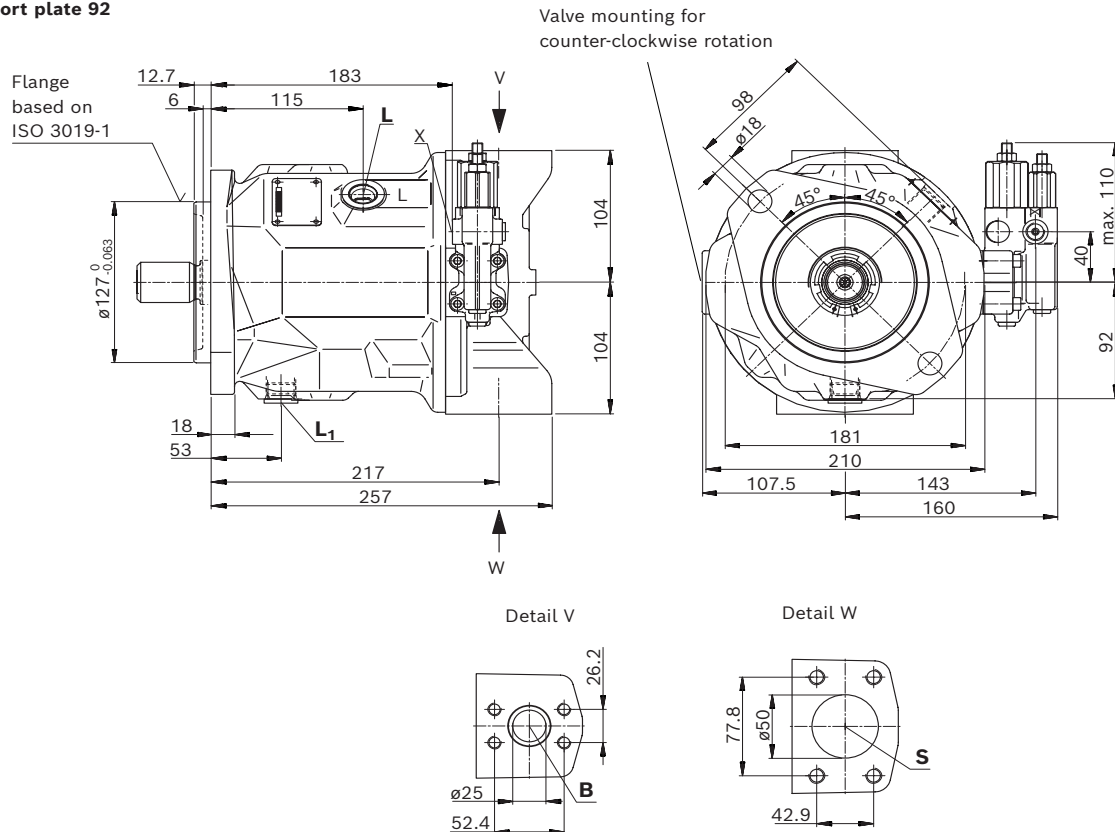

▼ Port plate 91

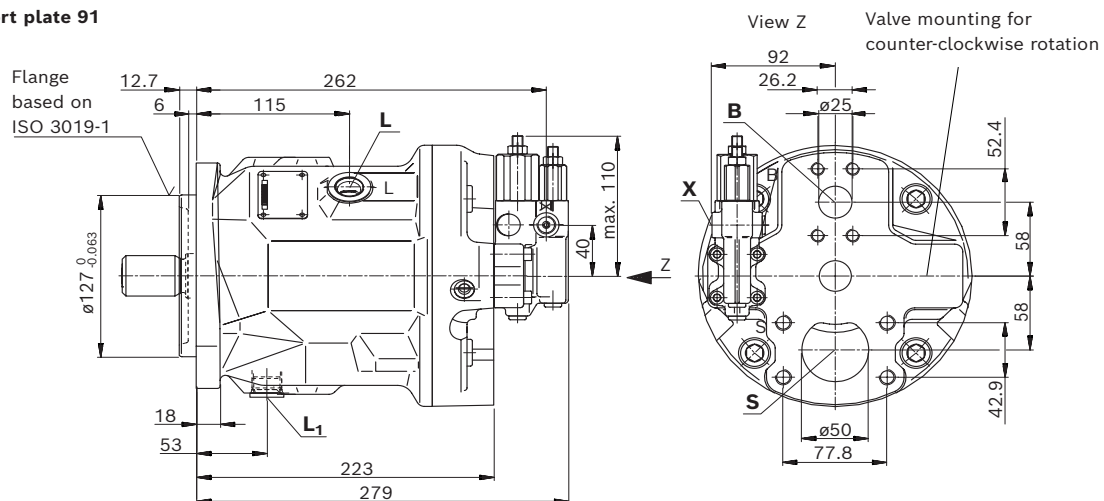

RE 92701/2023-04-24, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


40 **A10VO series 31** | Axial piston variable pump
 Dimensions, sizes 71 and 88

Dimensions [mm (inch)]


▼ **Splined shaft 1 1/4 in
(32-4, ISO 3019-1)**

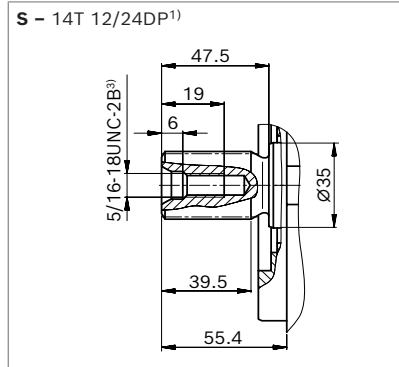


▼ **Splined shaft 1 1/4 in
(similar to ISO 3019-1)**

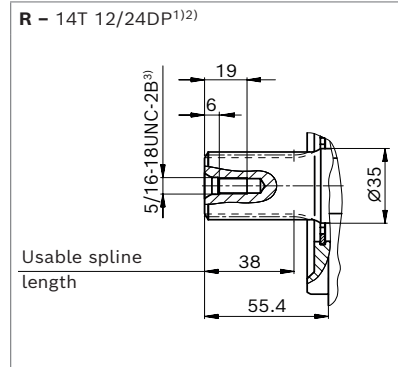

▼ **Splined shaft 1 in
(25-4, ISO 3019-1)**

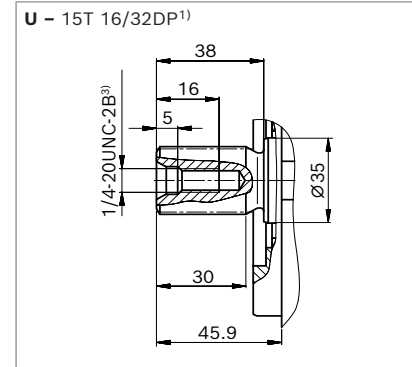

▼ **Splined shaft 1 in (similar to ISO 3019-1)**

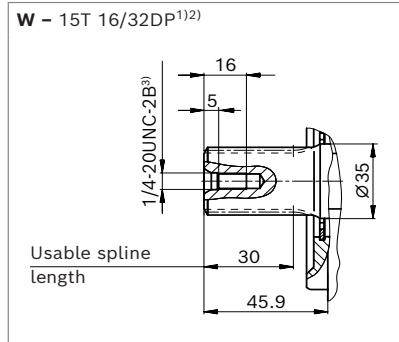

Ports - version metric port plate 41/42		Standard	Size	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	1 in	350 (5100)	O
	Fastening thread	DIN 13	M10 × 1.5; 17 (0.67) deep		
S	Suction port (standard pressure series)	ISO 6162-1	2 in	10 (145)	O
	Fastening thread	DIN 13	M12 × 1.75; 20 (0.79) deep		
L	Drain port	DIN 3852 ⁵⁾	M22 × 1.5; 14 (0.55) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	X ⁶⁾
X	Pilot pressure	DIN 3852	M14 × 1.5; 12 (0.47) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O
Ports - version SAE port plate 91/92		Standard	Size ⁴⁾	p_{max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series)	ISO 6162-1	1 in	350 (5100)	O
	Fastening thread	ASME B1.1	3/8-16 UNC-2B; 18 (0.71) deep		
S	Suction port (standard pressure series)	ISO 6162-1	2 in	10 (145)	O
	Fastening thread	ASME B1.1	1/2-13 UNC-2B; 22 (0.87) deep		
L	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14 UNF-2B; 17 (0.67) deep	2 (30)	X ⁶⁾
X	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 (0.45) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
 3) Thread according to ASME B1.1
 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
 6) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 55).
 7) O = Must be connected (plugged on delivery)
 X = Plugged (in normal operation)

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, sizes 71 and 88

41


▼ **DG – Two-point control, direct operated**

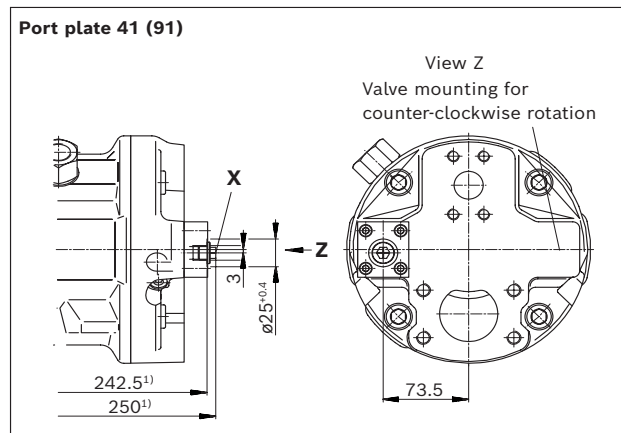


▼ **DG – Two-point control, direct operated**

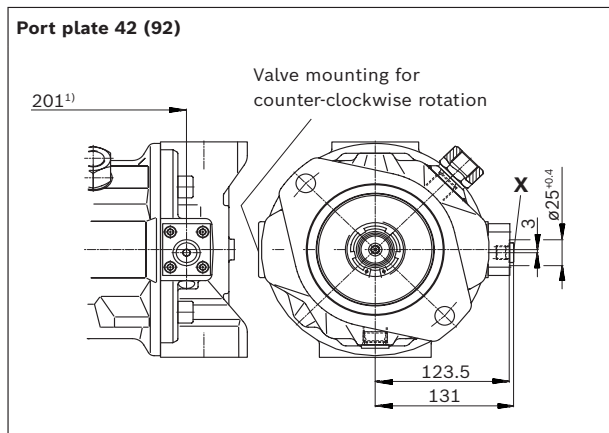


▼ **DR – Pressure controller**

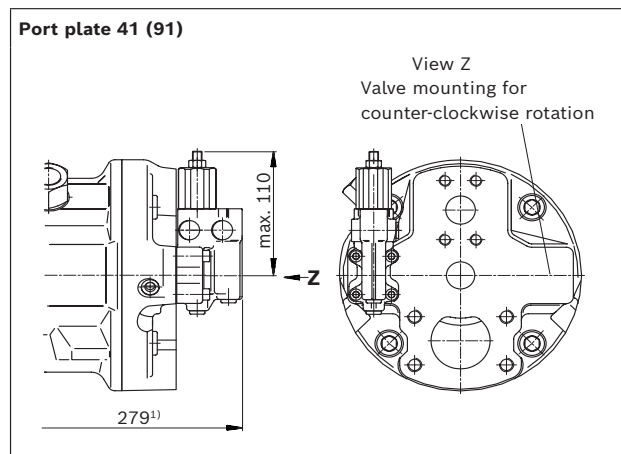


▼ **DR – Pressure controller**

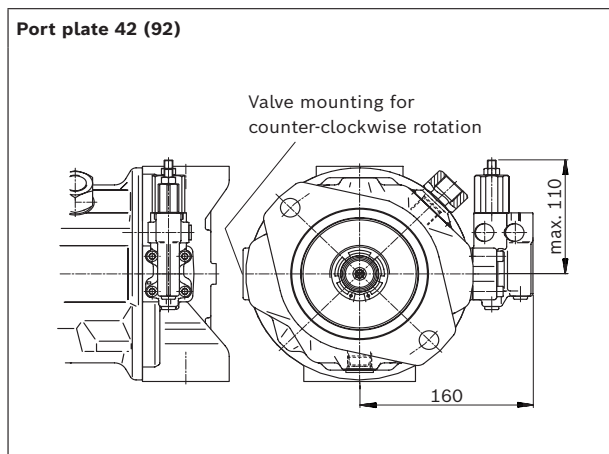

▼ **DRG – Pressure controller, remotely controlled**

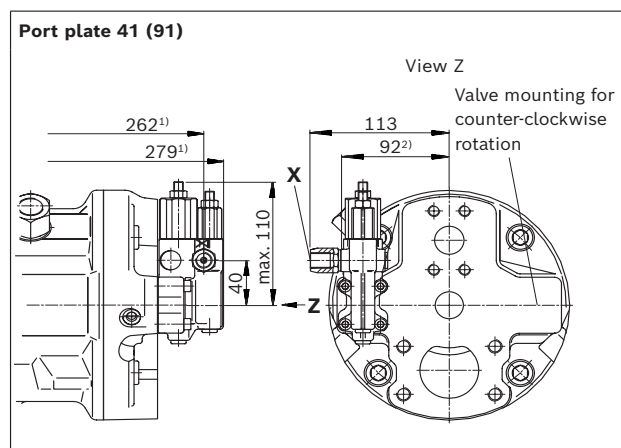

▼ **DRG – Pressure controller, remotely controlled**

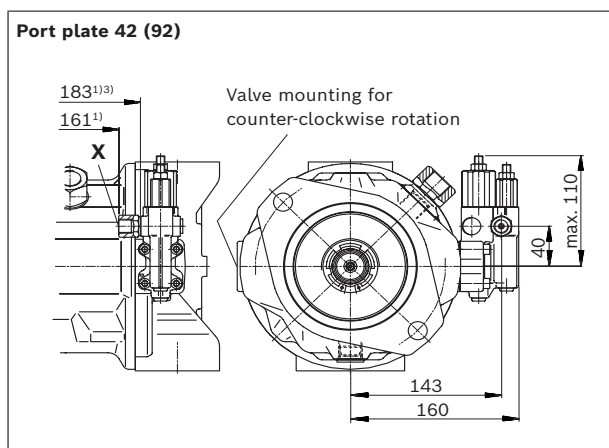

1) To flange surface

2) For version with port plate 91

3) For version with port plate 92

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

42 **A10VO series 31** | Axial piston variable pump
Dimensions, sizes 71 and 88

Dimensions [mm]


▼ **DFLR – Pressure, flow and power controller**

Port plate 41 (91)

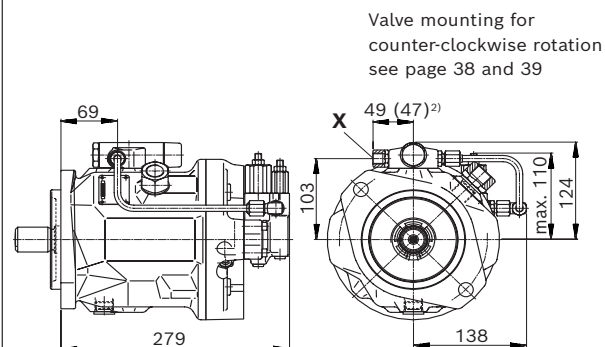


▼ **DFLR – Pressure, flow and power controller**

Port plate 42 (92)

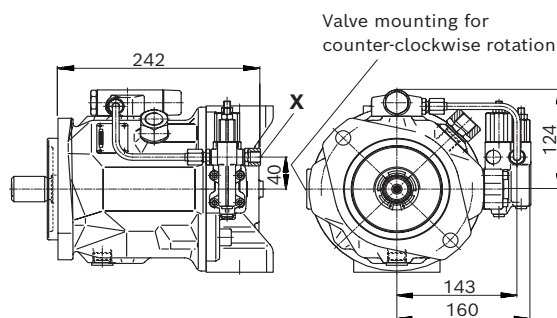


▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 41 (91)

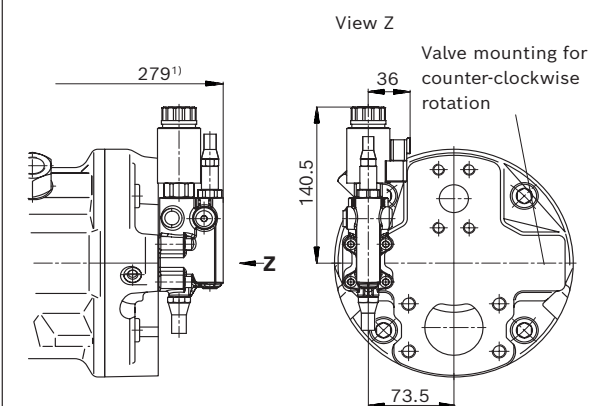

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

Port plate 42 (92)

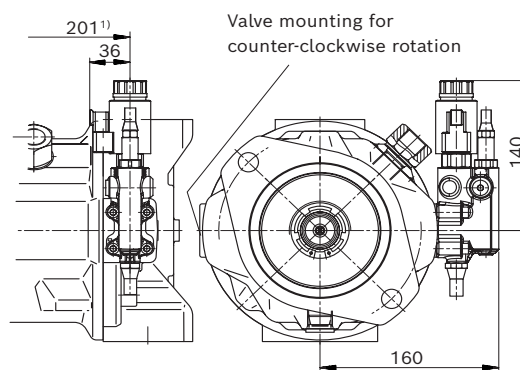

1) To flange surface

2) For version with port plate 91

Dimensions [mm]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 100

43


Dimensions, size 100

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: Ports metric


▼ Port plate 12

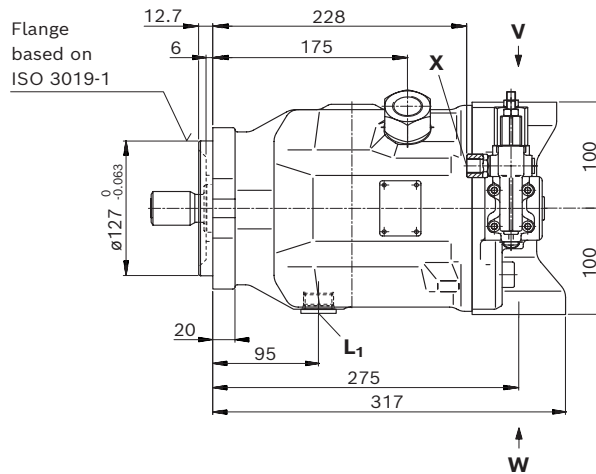


Detail V




Detail W





▼ Mounting flange C

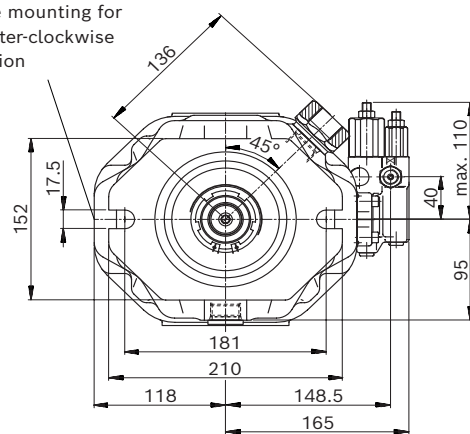

▼ Mounting flange D

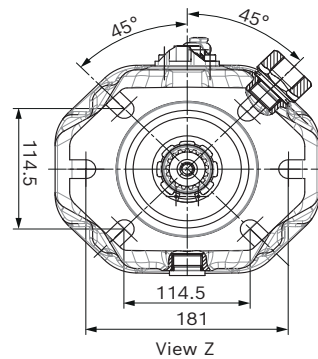

▼ Port plate 11

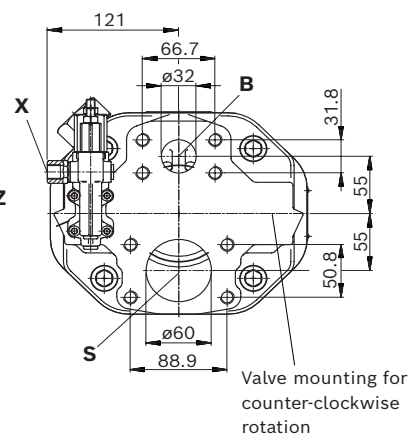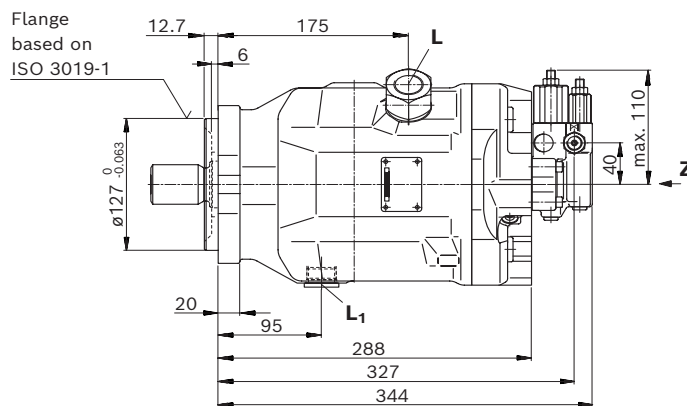

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

44 **A10VO series 31** | Axial piston variable pump
Dimensions, size 100

Dimensions [mm]

Dimensions, size 100

DFR / DFR1 / DRSC – Pressure flow controller, hydraulic; clockwise rotation, version: SAE ports

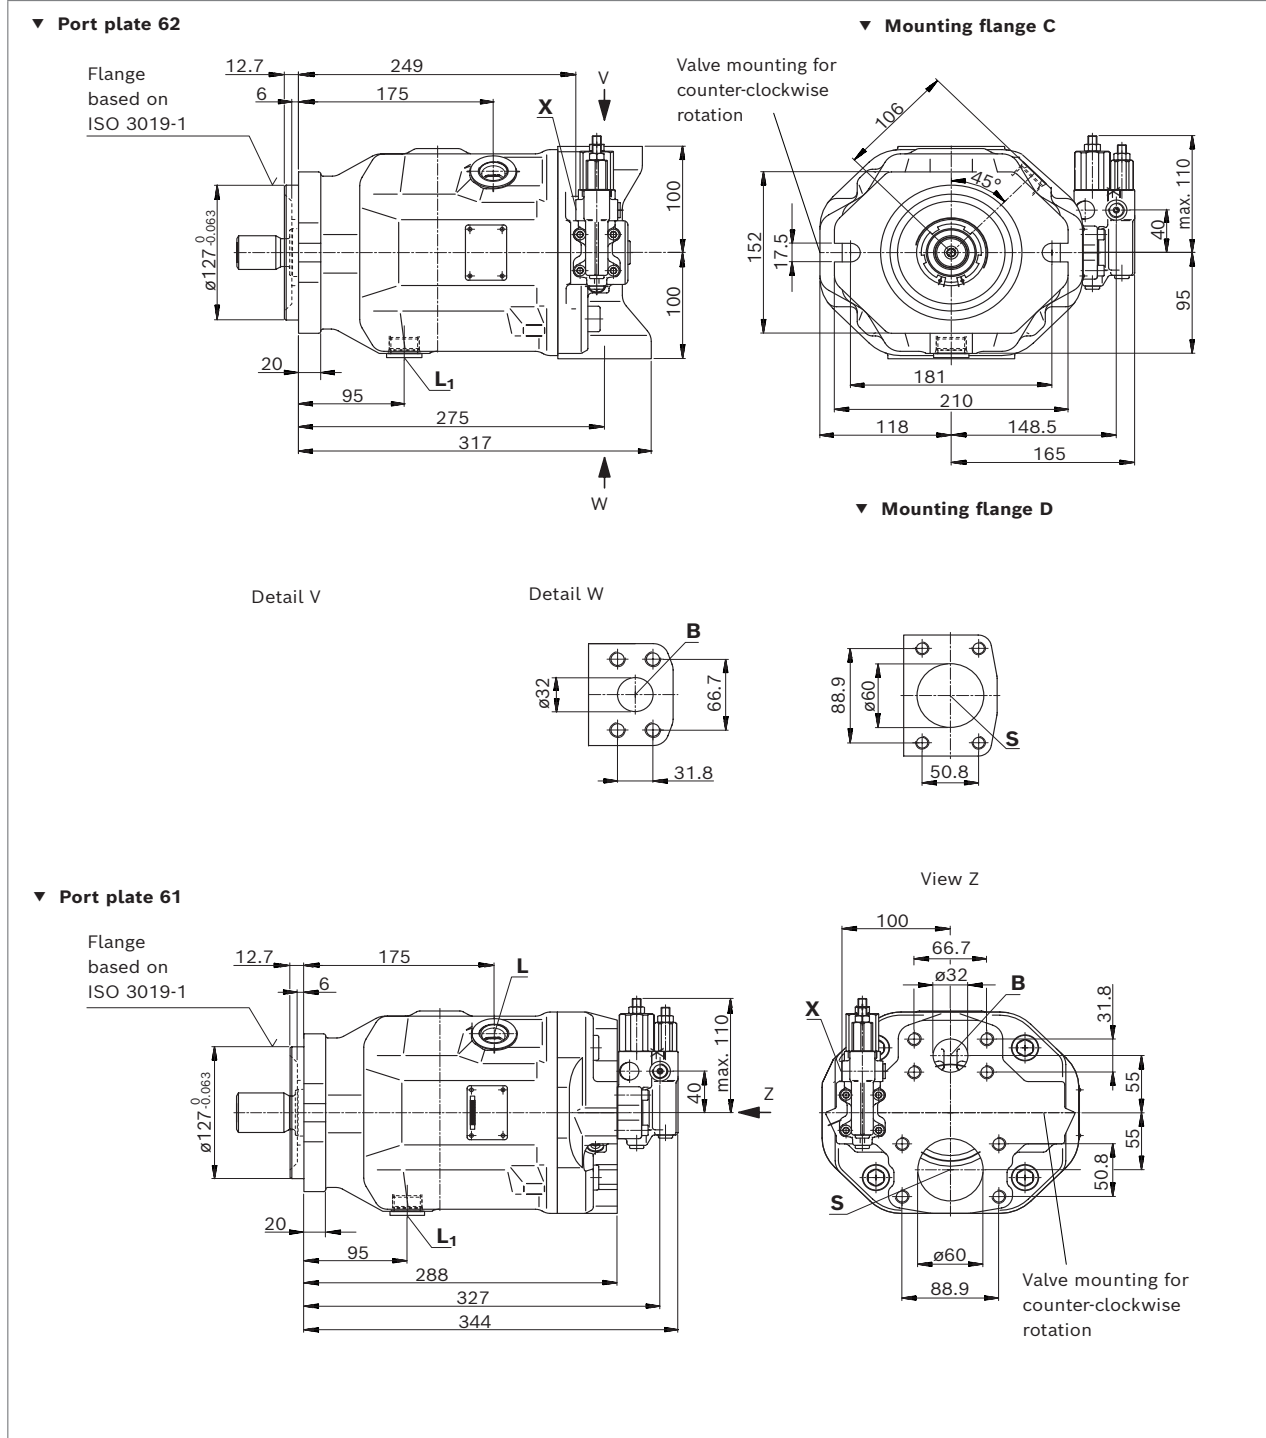

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm (inch)]


Axial piston variable pump | **A10VO series 31**
Dimensions, size 100

45


▼ **Splined shaft 1 1/2 in**
(38-4, ISO 3019-1)

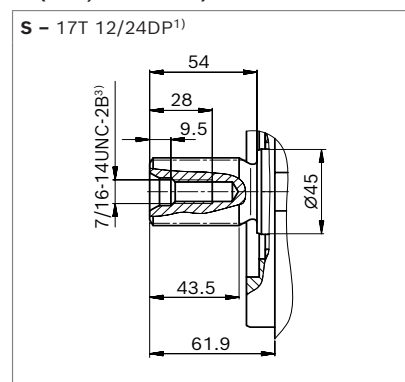

▼ **Splined shaft 1 1/4 in**
(32-4, ISO 3019-1)

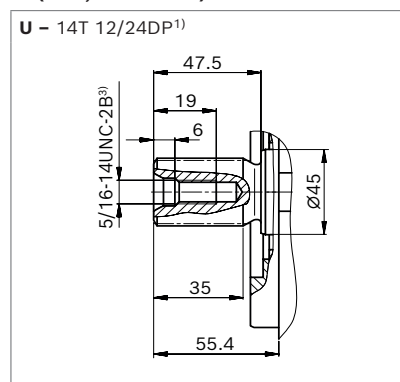

▼ **Splined shaft 1 1/4 in**
(similar to ISO 3019-1)

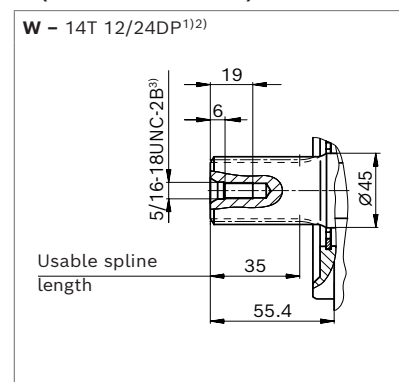

Ports - version metric port plate 11/12		Standard	Size	p_{\max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 (0.75) deep	350 (5100)	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	2 1/2 in M12 × 1.75; 17 (0.67) deep	10 (145)	O
L	Drain port	DIN 3852 ⁵⁾	M27 × 2; 16 (0.63) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	1 1/16-12 UNF-2B; 20 (0.79) deep	2 (30)	X ⁶⁾
X	Pilot pressure	DIN 3852	M14 × 1.5; 12 (0.47) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O
Ports - version SAE port plate 61/62		Standard	Size	p_{\max} [bar (psi)] ⁴⁾	State ⁷⁾
B	Working port (high-pressure series) Fastening thread	ISO 6162-2 ASME B1.1	1 1/4 in 1/2-13 UNC-2B; 19 (0.75) deep	350 (5100)	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 ASME B1.1	2 1/2 in 1/2-13 UNC-2B; 27 (1.06) deep	10 (145)	O
L	Drain port	ISO 11926 ⁵⁾	1 1/16-12 UNF-2B; 20 (0.79) deep	2 (30)	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	1 1/16-12 UNF-2B; 20 (0.79) deep	2 (30)	X ⁶⁾
X	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 (0.45) deep	350 (5100)	O
X	Pilot pressure with DG-control	DIN 3852-2	G1/4 in; 12 (0.47) deep	350 (5100)	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 55).
- 7) O = Must be connected (plugged on delivery)
X = Plugged (in normal operation)

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

46 **A10VO series 31** | Axial piston variable pump
Dimensions, size 100

Dimensions [mm]


▼ **DG – Two-point control, direct operated**

Port plate 11 (61)

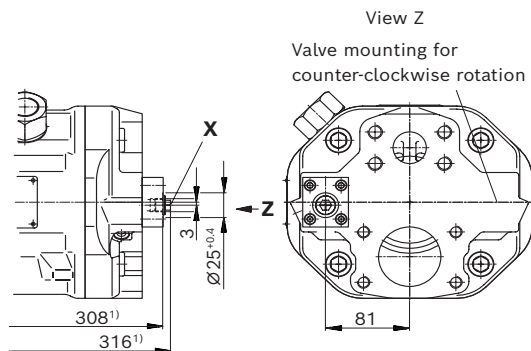


▼ **DG – Two-point control, direct operated**

Port plate 12 (62)

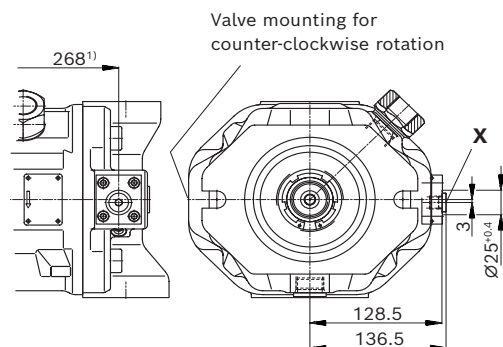


▼ **DR – Pressure controller**

Port plate 11 (61)

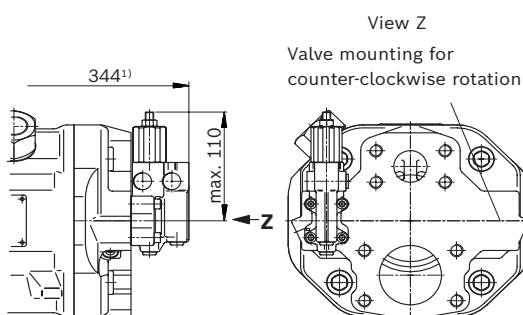


▼ **DR – Pressure controller**

Port plate 12 (62)

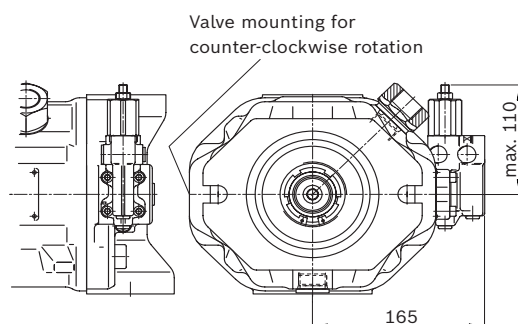


▼ **DRG – Pressure controller, remotely controlled**

Port plate 11 (61)

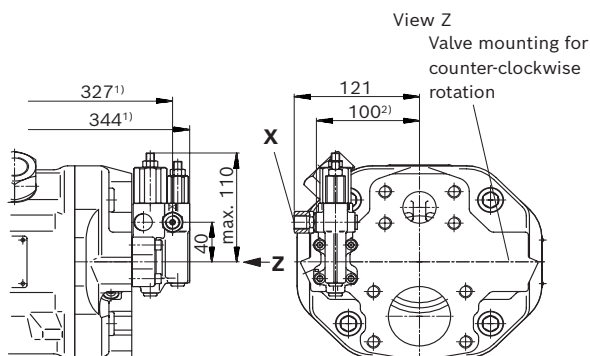

▼ **DRG – Pressure controller, remotely controlled**

Port plate 12 (62)

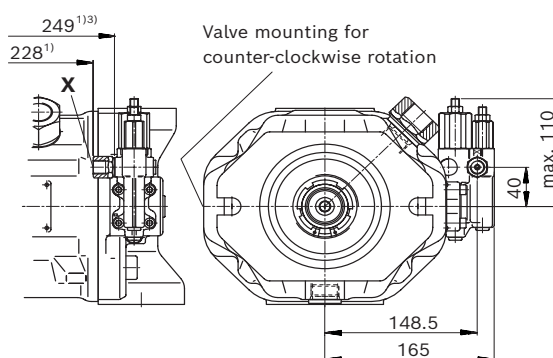

1) To flange surface
2) For version with port plate 61

3) For version with port plate 62


Dimensions [mm]

Axial piston variable pump | **A10VO series 31**
Dimensions, size 100

47


▼ DFLR – Pressure, flow and power controller

Port plate 11 (61)

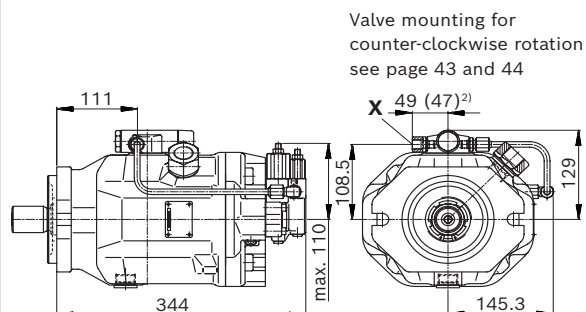


▼ DFLR – Pressure, flow and power controller

Port plate 12 (62)

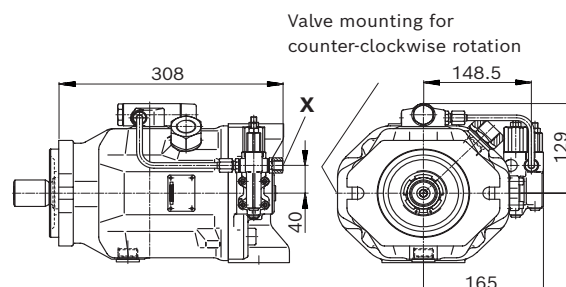


▼ ED7. / ER7. – Electro-hydraulic pressure control

Port plate 11 (61)

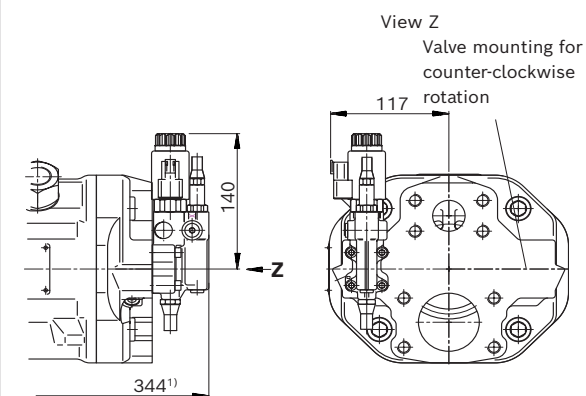


▼ ED7. / ER7. – Electro-hydraulic pressure control

Port plate 12 (62)

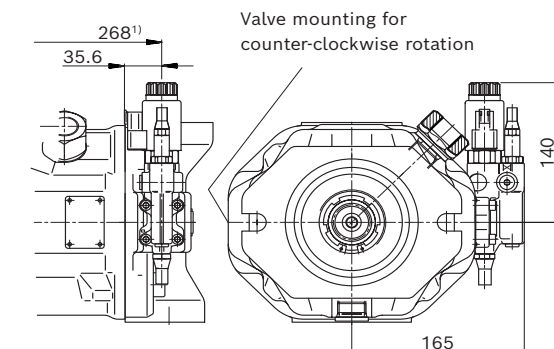


▼ EC4 – Electro-hydraulic control valve

Port plate 11 (61)

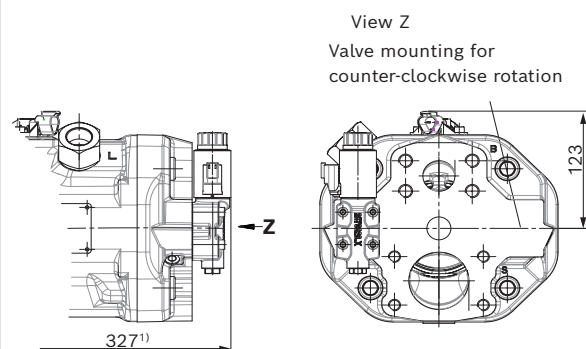

▼ EC4 – Electro-hydraulic control valve

Port plate 12 (62)

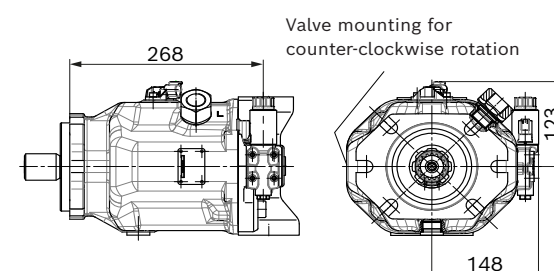

- 1) To flange surface
2) For version with port plate 61

RE 92701/2023-04-24, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

48 **A10VO series 31** | Axial piston variable pump
Dimensions, through drive

Dimensions [mm (inch)]


Dimensions, through drive

For flanges and shafts according to ISO 3019-1

Flange Diameter	Mounting ⁴⁾	Hub for splined shaft ¹⁾ Diameter	Availability across sizes						Code
			18	28	45	71	88	100	
82-2 (A)	8, 8P, 80	5/8 in 9T 16/32DP	•	•	•	•	•	•	K01
		3/4 in 11T 16/32DP	•	•	•	•	•	•	K52


• = Available - = Not available

▼ 82-2

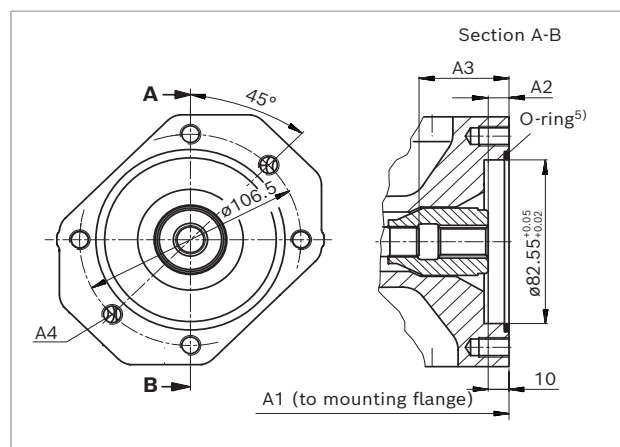

K01 (16-4 (A))	NG	A1	A2 ³⁾	A3 ³⁾	A4 ²⁾
18	182 (7.17)	182 (7.17)	9.3 (0.37)	42.5 (1.67)	M10×1.5; 14.5 (0.57) deep
28	204 (8.03)	204 (8.03)	9.2 (0.36)	36.2 (1.43)	M10×1.5; 16 (0.63) deep
45	229 (9.02)	229 (9.02)	10.1 (0.40)	52.7 (2.07)	M10×1.5; 16 (0.63) deep
71	267 (10.50)	267 (10.50)	11.2 (0.44)	60.6 (2.39)	M10×1.5; 20 (0.79) deep
88	267 (10.50)	267 (10.50)	11.2 (0.44)	60.6 (2.39)	M10×1.5; 20 (0.79) deep
100	338 (13.30)	338 (13.30)	10.0 (0.39)	64.3 (2.53)	M10×1.5; 16 (0.63) deep

▼ 82-2

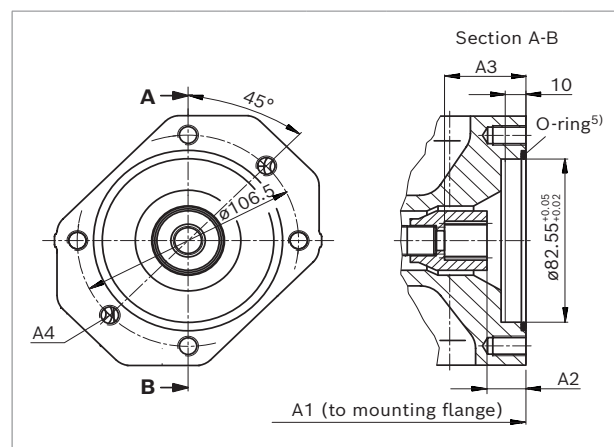

K52 (19-4 (A-B))	NG	A1	A2 ³⁾	A3 ³⁾	A4 ²⁾
18	182 (7.17)	182 (7.17)	18.3 (0.72)	39.2 (1.54)	M10×1.5; 14.5 (0.57) deep
28	204 (8.03)	204 (8.03)	18.4 (0.72)	39.4 (1.55)	M10×1.5; 16 (0.63) deep
45	229 (9.02)	229 (9.02)	18.4 (0.72)	38.8 (1.53)	M10×1.5; 16 (0.63) deep
71	267 (10.50)	267 (10.50)	20.8 (0.82)	41.2 (1.62)	M10×1.5; 20 (0.79) deep
88	267 (10.50)	267 (10.50)	20.8 (0.82)	41.2 (1.62)	M10×1.5; 20 (0.79) deep
100	338 (13.30)	338 (13.30)	18.6 (0.73)	39.6 (1.56)	M10×1.5; 16 (0.63) deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to DIN 13

3) Minimum dimensions

4) Mounting holes pattern viewed on through drive with control at top

5) O-ring included in the scope of delivery

Dimensions [mm (inch)]


Axial piston variable pump | **A10VO series 31** 49
Dimensions, through drive

For flanges and shafts according to ISO 3019-1

Flange Diameter	Mounting ⁵⁾	Hub for splined shaft ¹⁾		Availability across sizes						Code
		Diameter		18	28	45	71	88	100	
101-2 (B)	8, 8°, 8°	7/8 in	13T 16/32DP	–	•	•	•	•	•	K68
		1 in	15T 16/32DP	–	–	•	•	•	•	K04


• = Available – = Not available

▼ 101-2

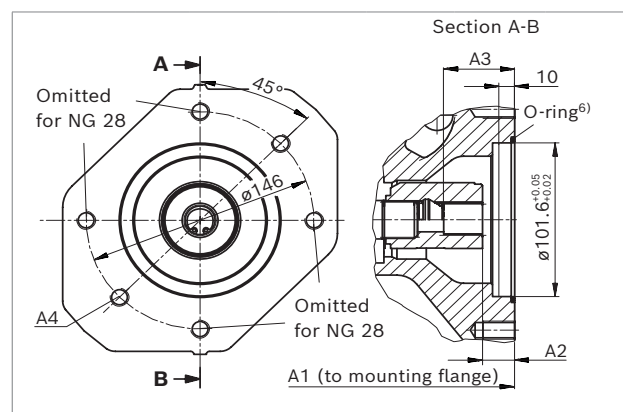

K68 (22-4 (B))	NG	A1	A2 ⁴⁾	A3 ⁴⁾	A4 ²⁾
	28	204 (8.03)	17.4 (0.68)	42.4 (1.67)	M12×1.75 ³⁾
	45	229 (9.02)	17.4 (0.68)	41.8 (1.65)	M12×1.75; 18 (0.71) deep
	71	267 (10.50)	19.8 (0.78)	44.2 (1.74)	M12×1.75; 20 (0.79) deep
	88	267 (10.50)	19.8 (0.78)	44.2 (1.74)	M12×1.75; 20 (0.79) deep
	100	338 (13.30)	17.6 (0.69)	41.9 (1.65)	M12×1.75; 20 (0.79) deep

▼ 101-2

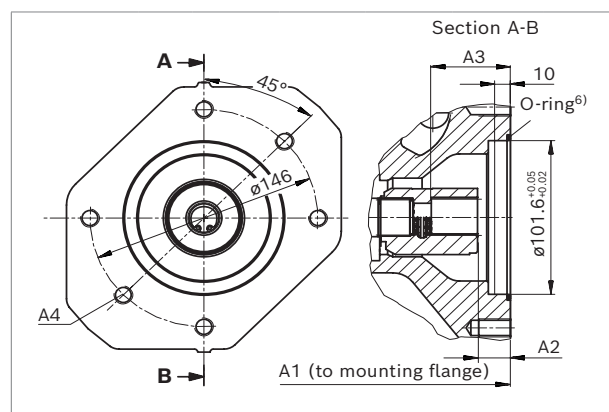

K04 (25-4 (B-B))	NG	A1	A2 ⁴⁾	A3 ⁴⁾	A4 ²⁾
	45	229 (9.02)	17.9 (0.70)	47.4 (1.87)	M12×1.75; 18 (0.71) deep
	71	267 (10.50)	20.3 (0.80)	49.2 (1.94)	M12×1.75; 20 (0.79) deep
	88	267 (10.50)	20.3 (0.80)	49.2 (1.94)	M12×1.75; 20 (0.79) deep
	100	338 (13.30)	17.8 (0.70)	46.6 (1.83)	M12×1.75; 20 (0.79) deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Thread according to DIN 13
3) Continuous
4) Minimum dimensions

5) Mounting holes pattern viewed on through drive with control at top
6) O-ring included in the scope of delivery

50 **A10VO series 31** | Axial piston variable pump
Dimensions, through drive


Dimensions [mm (inch)]

For flanges and shafts according to ISO 3019-1

Flange Diameter	Mounting ⁵⁾	Hub for splined shaft ¹⁾ Diameter	Availability across sizes						Code
			18	28	45	71	88	100	
127-2 (C)	⌀, ∞	1 1/4 in 14T 12/24DP	–	–	–	•	•	•	K07
		1 1/2 in 17T 12/24DP	–	–	–	–	–	•	K24


• = Available – = Not available

▼ 127-2

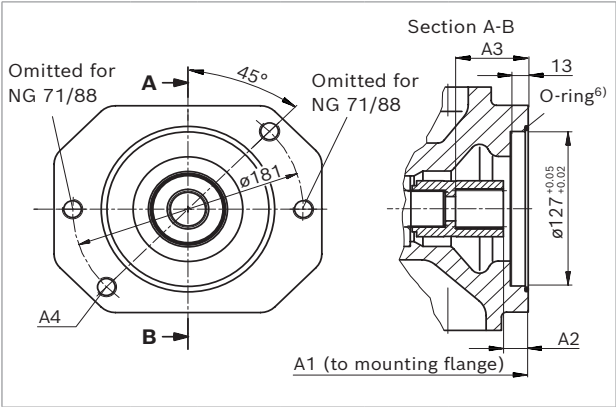

K07 (32-4 (C))	NG	A1	A2 ⁴⁾	A3 ⁴⁾	A4 ²⁾
71		267	20.3	58.3	M16×2, ³⁾
		(10.50)	(0.80)	(2.30)	
88		267	20.3	58.3	M16×2, ³⁾
		(10.50)	(0.80)	(2.30)	
100		338	19.1	57.1	M16×2, ³⁾
		(13.30)	(0.75)	(2.25)	

▼ 127-2

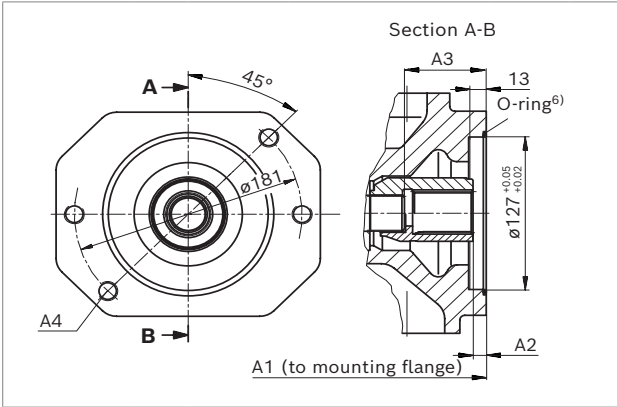

K24 (38-4 (C-C))	NG	A1	A2 ⁴⁾	A3 ⁴⁾	A4 ²⁾
100		338	10.0	64.3	M16×2, ³⁾
		(13.30)	(0.39)	(2.53)	

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Thread according to DIN 13
3) Continuous
4) Minimum dimensions

5) Mounting holes pattern viewed on through drive with control at top
6) O-ring included in the scope of delivery

Overview of mounting options

SAE – Mounting flange

Through drive			Mounting options – 2nd pump					
Flange ISO 3019-1	Hub for splined shaft	Code	A10V(S)O/31 NG (shaft)	A10V(S)O/5x NG (shaft)	A10VO/60 NG (shaft)	A1VO/10 NG (shaft)	External gear pump design (NG)	Through drive available for NG
82-2 (A)	5/8 in	K01	18 (U)	10 (U), 18 (U)			Series F	18 to 100
	3/4 in	K52	18 (S, R)	10 (S) 18 (S, R)		18, 28 (S3)	–	18 to 100
101-2 (B)	7/8 in	K68	28 (S, R) 45 (U, W) ¹⁾	28 (S, R) 45 (U, W) ¹⁾	45 (S4)	28, 35 (S4)	Series N/G	28 to 100
	1 in	K04	45 (S, R) –	45 (S, R) 60, 63, 72 (U, W) ²⁾	45 (S5)	35 (S5)	–	45 to 100
127-2 (C)	1 1/4 in	K07	71 (S, R) 88 (S, R) 100 (U) ³⁾	60, 63 (S, R) 85 (U) ³⁾ 100 (U) ³⁾			–	71 to 100
	1 1/2 in	K24	100 (S)	85 (S) 100 (S)			–	100

¹⁾ Not for main pump NG28 with K68

²⁾ Not for main pump NG45 with K04

³⁾ Not for main pump NG71 and NG88 with K07

52 **A10VO series 31** | Axial piston variable pump
Combination pumps A10VO + A10VO

Dimensions [mm (inch)]

Combination pumps A10VO + A10VO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes.

When ordering combination pumps the type designations for the 1st and the 2nd pump must be joined by a "+".

Order example:

A10VO100DFR1/31R-VSC12K04+

A10VO45DFR/31R-VSC12N00

If no further pumps are to be mounted at the factory, the simple type designation is sufficient.

A tandem pump, with two pumps of equal size, is permissible without additional supports, assuming that the dynamic mass acceleration does not exceed maximum 10 g (= 98.1 m/s²).


For combination pumps consisting of more than two pumps, a calculation of the mounting flange regarding the permissible mass torque is required (please contact us).

Through drives are plugged with a **non-pressure-resistant** cover. Therefore, single pumps must be equipped with a pressure-resistant cover before commissioning. Through drives can also be ordered with a pressure-resistant cover, please specify in plain text.

Notice

Through drives with installed hub are supplied with a spacer.

The spacer must be removed before installation of the 2nd pump and before commissioning. For information, please refer to instruction manual 92701-01-B.

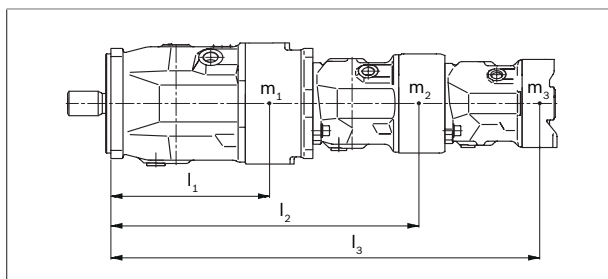

m_1, m_2, m_3	Weight of pump	[kg (lbs)]
l_1, l_2, l_3	Distance from center of gravity	[mm (inch)]
$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{102 (12)}$ [Nm (lb-ft)]		

Calculation for multiple pumps

l_1	= Front pump distance from center of gravity (values from "Permissible moments of inertia" table)
l_2	= Dimension "A1" from through drive drawings (page 48 to 50) + l_1 of the 2nd pump
l_3	= Dimension "A1" from through drive drawings (page 48 to 50) of the 1st pump + "A1" of the 2nd pump + l_1 of the 3rd pump

Permissible moments of inertia

Size			18	28	45	71	88	100
Static	T_m	Nm	500	880	1370	2160	2160	3000
		lb-ft	369	649	1010	1593	1593	2213
Dynamic at 10 g (98.1 m/s ²)	T_m	Nm	50	88	137	216	216	300
		lb-ft	37	65	101	159	159	221
Weight without through drive N00	m	kg	12.9	18	23.5	35.2	35.2	49.5
		lbs	28	40	52	78	78	109
Weight with through drive K..	m	kg	13.8	19.3	25.1	38	38	55.4
		lbs	30	43	55	84	84	122
Distance, center of gravity without through drive N00	l_1	mm	92	100	113	127	127	161
		inch	3.62	3.94	4.45	5.00	5.00	6.34
Distance, center of gravity with through drive K..	l_1	mm	98	107	120	137	137	178
		inch	3.86	4.21	4.72	5.39	5.39	7.01

Dimensions [mm (inch)]

Axial piston variable pump | **A10VO series 31** 53
Connector for solenoids

Connector for solenoids


DEUTSCH DT04-2P

Molded connector, 2-pin, without bidirectional suppressor diode **P**

With correctly mounted mating connector, the following type of protection can be achieved:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)


▼ Switching symbol



▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

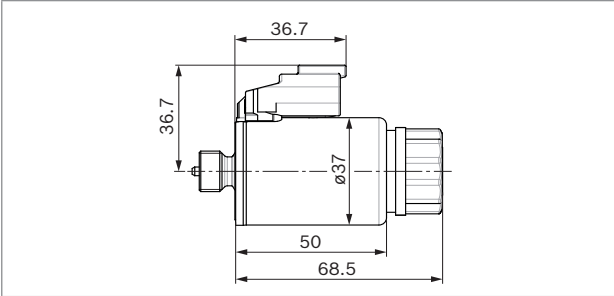

Notice


- ▶ If necessary, you can change the position of the connector by turning the solenoid body.
- ▶ The procedure is defined in the instruction manual 92701-01-B.
- ▶ Only the dead weight (<1 N (0.22 lbf)) of the connection cable with a length of 150 mm (5.91 inch) may act on the plug-in connection and the solenoid coil with coil nut. Other forces and vibrations are not permissible. For example, this can be realized by suspension of the cable at the same vibration system.

54 A10VO series 31 | Axial piston variable pump Swivel angle sensor

Swivel angle sensor

Description

The swivel angle sensor serves the contactless detection of the swivel angle of axial piston units in the swivel axis using a Hall-effect based sensor IC with a supply voltage of 5 V. The measured value determined is converted into an analog signal corresponding to the output characteristic shown below.

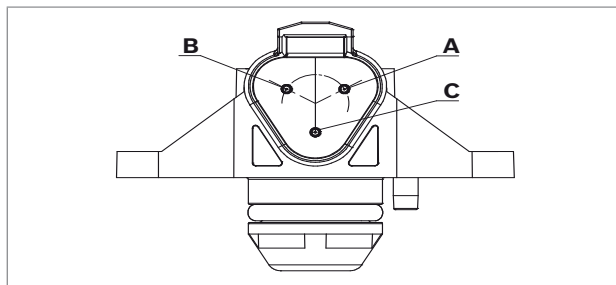

▼ Pin assignment

PIN	Port
B	Supply voltage U_B
A	Ground GND
C	Sensor signal OUT


▼ Mating connector DEUTSCH DT06-3S

Consisting of	DT designation
1 housing, 3-pin	DT06-3S-EP04
1 wedge	W3S
3 sockets	0462-201-16141

The mating connector is not included in the scope of delivery.

This can be supplied by Bosch Rexroth on request.

▼ Output curve for A10VO series 31

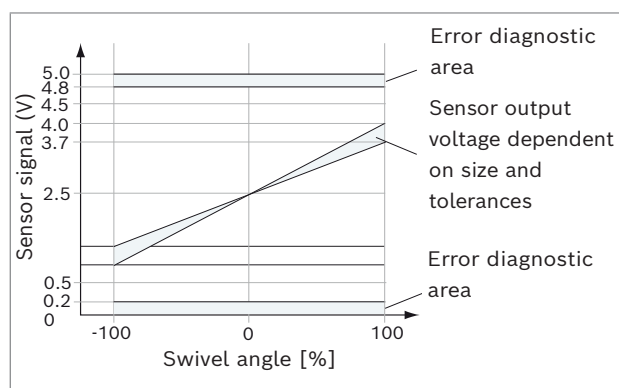

Features

- Contactless angle sensor for contactless detection of the swivel angle of axial piston units in the pivot axis using the Hall effect
- The determined angle value is output as an analog voltage signal
- High temperature stability of the output signal
- Shock and vibration resistance
- Type of protection (with plugged mating connector and cable) IPx9k, IP6kx, IPx6 and IPx7 (ISO 20653)

Type	SWS25
Supply voltage U_B	4.75 to 5.25 V DC
Nominal voltage	5 V DC
Current consumption without load	Normal operation ≤ 20 mA
Output signal	0.5 V to 4.5 V, ratiometric
Load resistance	Minimum 5 k Ω
Operation and storage temperature	-40 °C to +110 °C (-40 °F to +230 °F)
Supply overvoltage resistance	16 V DC
Type of protection (with plugged mating connector and cable)	IPx9k, IP6kx, IPx6 and IPx7 (ISO 20653)

Notice

- Information on environmental and EMC conditions upon request.
- Further information such as type codes, technical data, dimensions and safety instructions for the swivel angle sensor can be found in the associated data sheet 95153.
- Painting the sensor with electrostatic charge is not permitted (danger: ESD damage).

Electrostatic discharge (ESD)

According to ISO 10605: 2008

- Contact discharge (probe touches the sensor) ± 8 kV (sensor operated actively and passively)
- Air discharge (arc between probe and sensor) ± 15 kV (sensor operated actively and passively)

Installation instructions

General

The axial piston unit must be filled with hydraulic fluid and vented during commissioning and operation. This must also be observed during longer standstills, as the axial piston unit can empty itself via the hydraulic lines.

Particularly with the "drive shaft up/down" installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the housing area must be directed to the reservoir via the highest available drain port (**L**, **L₁**). For combination pumps, the leakage must be drained off at each single pump.

If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain lines must be laid if necessary.

To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g. reservoir, frame parts). Under all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height h_s results from the total pressure loss, but must not be higher than $h_{s\ max} = 800\text{ mm}$ (31.5 inch). The minimum suction pressure at port **S** of 0.8 bar (12 psi) absolute must not be fallen below during operation and cold start. When designing the reservoir, ensure that there is adequate distance between the suction line and the drain line. This minimizes oil turbulence and carries out degassing, which prevents the heated hydraulic fluid from being sucked directly back in again.

Notice

In certain installation positions, an influence on the adjustment or control can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in actuating time.

Installation position

See the following examples **1** to **12**. Further installation positions are available upon request. Recommended installation position: **1** and **3**

Key	
F	Filling / Air bleeding
S	Suction port
L; L ₁	Drain port
SB	Baffle (baffle plate)
h _{t min}	Minimum required immersion depth (200 mm (7.87 inch))
h _{min}	Minimum required distance to reservoir bottom (100 mm (3.94 inch))
h _{ES min}	Minimum height required to prevent axial piston unit from draining (25 mm (0.98 inch))
h _{S max}	Maximum permissible suction height (800 mm (31.5 inch))

Notice


Port **F** is part of the external piping and must be provided on the customer side to simplify the filling and air bleeding.

56 A10VO series 31 | Axial piston variable pump Installation instructions


Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.


▼ Installation position 1

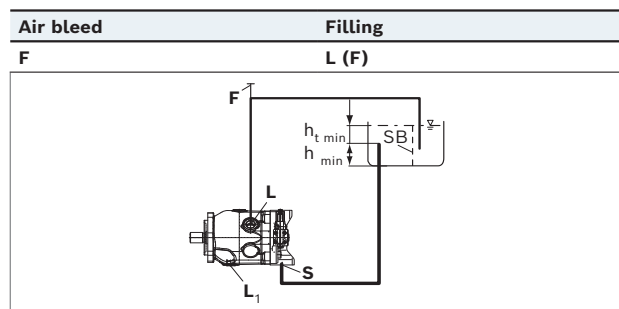


▼ Installation position 2¹⁾

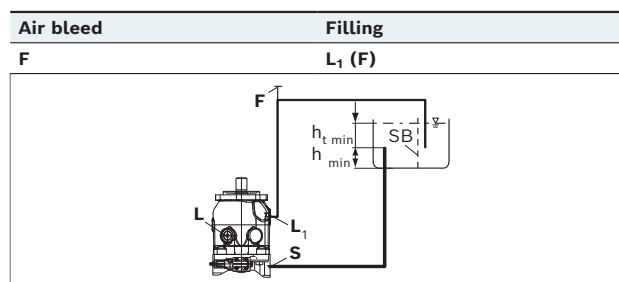

▼ Installation position 3

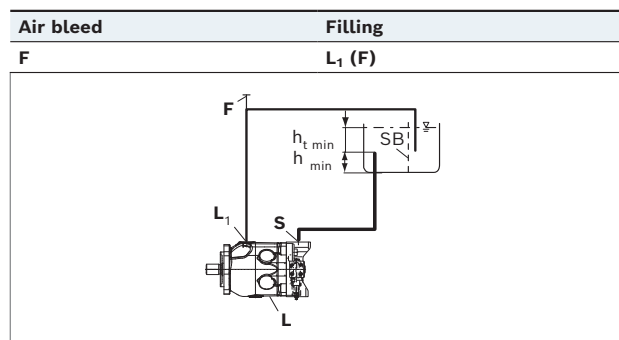

▼ Installation position 4¹⁾

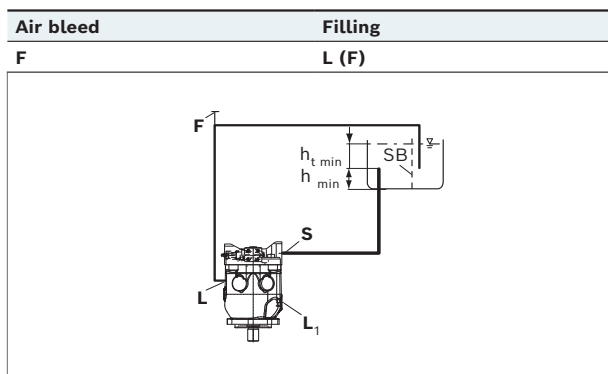


For key, see page 55.

¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.


Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining, a height difference $h_{ES\ min}$ of at least 25 mm (0.98 inch) is required in position 6. Observe the maximum permissible suction height $h_{S\ max} = 800\ mm\ (31.5\ inch)$. A check valve in the drain line is only permissible in individual cases. Consult us for approval.


▼ Installation position 5

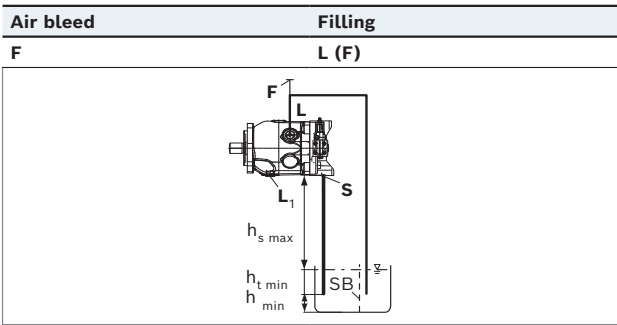


▼ Installation position 6¹⁾

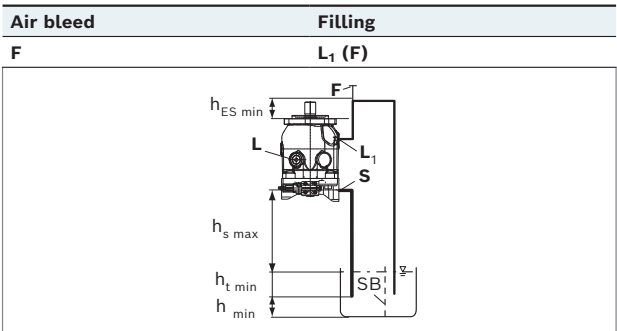

▼ Installation position 7

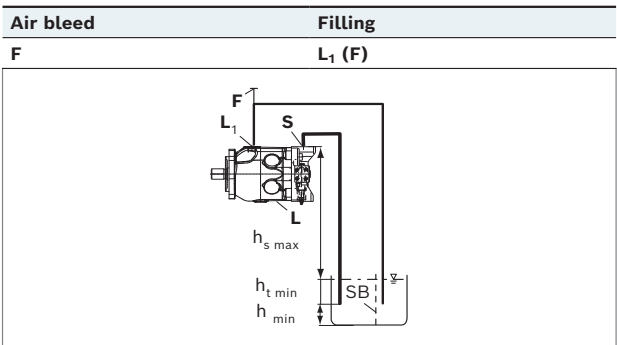

▼ Installation position 8

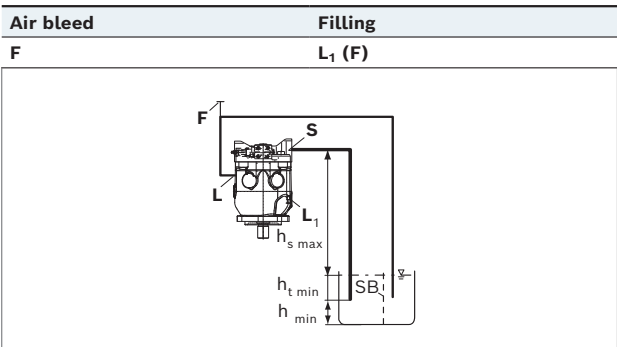

For key, see page 55.

¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

58 A10VO series 31 | Axial piston variable pump Installation instructions

Inside-reservoir installation


Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter "Above-reservoir installation". Axial piston units with electrical components (e.g. electric control, sensors) may not be installed in a reservoir below the fluid level.

Notice

► Our advice is to fit a suction pipe to the suction port **S** and to fit a pipe to case drain port **L** or **L₁**. In this case, the other drain port must be plugged. The housing of the axial piston unit is to be filled via **L** or **L₁** (see installation position 9 to 12) before the pipework is fitted and the reservoir is filled with hydraulic fluid.


Installation position 9

Air bleed	Filling
L (F)	L (F)




Installation position 10¹⁾

Air bleed	Filling
L ₁ (F)	L ₁ (F)




Installation position 11

Air bleed	Filling
L ₁ (F)	L ₁ (F)



Installation position 12¹⁾

Air bleed	Filling
L (F)	L (F)



¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Project planning notes

- ▶ The axial piston variable pump A10VO is designed to be used in an open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ The characteristic curve may also shift due to the dither frequency or control electronics.
- ▶ Preservation: Our axial piston units are supplied as standard with preservation protection for a maximum of 12 months. If longer preservation protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the proper contact at Bosch Rexroth if you require reliability parameters (e.g., MTTF_d) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. Applying a direct voltage signal (DC) to solenoids does not create electromagnetic interference (EMI) nor is the solenoid affected by EMI. Electromagnetic interference (EMI) potential exists when operating and controlling a solenoid with a modulated direct voltage signal (e.g. PWM signal). Appropriate testing and measures should be taken by the machine manufacturer to ensure other components or operators (e.g. with pacemaker) are not affected by this potential.
- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Please note that a hydraulic system is an oscillating system. This can lead, for example, to the stimulation the natural frequency within the hydraulic system during operation at constant rotational speed over a long period of time. The excitation frequency of the pump is 9 times the rotational speed frequency. This can be prevented, for example, with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ The ports and fastening threads are designed for the p_{\max} permissible pressures of the respective ports, see the connection tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The service ports and function ports are only intended to accommodate hydraulic lines.

60 **A10VO series 31** | Axial piston variable pump
Safety instructions

Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk.

The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g., safe stop) and ensure any measures are properly implemented.

Bosch Rexroth AG, RE 92701/2023-04-24

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK