

RE 92750/2020-03-03  
Replaces: 2019-12-12

**rexroth**  
A Bosch Company

## Axial piston variable pump A10VG Series 10



- ▶ Medium pressure pump for closed-circuit applications
- ▶ Size 18 ... 63
- ▶ Nominal pressure 300 bar
- ▶ Maximum pressure 350 bar
- ▶ Closed circuit

### Features

- ▶ Integrated boost pump for boost and pilot oil supply
- ▶ Flow direction changes when the swashplate is moved through the neutral position
- ▶ High-pressure relief valves with integrated boost function
- ▶ Boost-pressure relief valve
- ▶ Optional with pressure cut-off
- ▶ Large variety of controls
- ▶ Swashplate design

### Contents

|  |    |
|--|----|
| Type code  | 2  |
| Hydraulic fluids   | 5  |
| Working pressure range   | 6  |
| Technical data   | 8  |
| HD – Proportional control, hydr., pilot-pressure related         | 10 |
| HW – Proportional control, hydr., mechanical servo               | 12 |
| DA – Automatic control, speed related                            | 14 |
| DG – Hydraulic control, direct operated                          | 17 |
| EP – Proportional control, electric                              | 18 |
| EZ – Two-point control, electric                                 | 20 |
| ET – Electric control, direct operated                           | 21 |
| ED – Electric pressure control                                   | 22 |
| Dimensions, size 18  | 24 |
| Dimensions, size 28  | 27 |
| Dimensions, size 45  | 32 |
| Dimensions, size 63  | 37 |
| Dimensions, through drive  | 41 |
| Overview of mounting options                                     | 44 |
| Combination pumps A10VG + A10VG                                  | 45 |
| High-pressure relief valves                                      | 46 |
| Pressure cut-off   | 47 |
| Mechanical stroke limiter  | 48 |
| Stroking chamber pressure port X <sub>3</sub> and X <sub>4</sub> | 49 |
| Measuring ports M <sub>A</sub> , M <sub>B</sub> , M <sub>H</sub> | 50 |
| Filtration in the boost pump suction line                        | 51 |
| Filtration in the boost pump pressure line                       | 51 |
| External boost pressure supply                                   | 52 |
| Connector for solenoids  | 53 |
| Rotary inch valve  | 54 |
| Installation dimensions for coupling assembly                    | 55 |
| Installation instructions  | 56 |
| Project planning notes   | 59 |
| Safety instructions  | 60 |

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 2 A10VG Series 10 | Axial piston variable pump Type code

### Type code

|      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 01   | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| A10V | G  |    |    |    |    |    |    |    | /  | 10 |    | -  | N  |    | C  |    |    |    |    |    |    |

#### Axial piston unit

|    |   |      |
|----|---|------|
| 01 | Swashplate design, variable, nominal pressure 300 bar, maximum pressure 350 bar | A10V |
|----|---|------|

#### Operating mode

|    |                      |   |
|----|----------------------|---|
| 02 | Pump, closed circuit | G |
|----|----------------------|---|

#### Size (NG)

|    |  |    |    |    |    |
|----|--|----|----|----|----|
| 03 | Geometric displacement, see "Technical data" on page 8 | 18 | 28 | 45 | 63 |
|----|--|----|----|----|----|

#### Control device

| Control device   |  |   | 18              | 28 | 45 | 63 |     |     |
|--|--|---|-----------------|----|----|----|-----|-----|
| 04   | Proportional control hydraulic   | pilot-pressure related, with inlet filtration in <b>P</b> and <b>X<sub>1</sub>/X<sub>2</sub></b>    | ●               | ●  | ●  | ●  | HD3 |     |
|  |  | mechanical servo  | ●               | ●  | ●  | ●  | HW  |     |
|  | Automatic control, speed related <sup>1)</sup>                         |   | <i>U</i> = 12 V | –  | ●  | ●  | ●   | DA1 |
|  |  |   | <i>U</i> = 24 V | –  | ●  | ●  | ●   | DA2 |
|  | Hydraulic control  | direct operated   | ●               | ●  | ●  | ●  | DG  |     |
|  | Proportional control, electric   | with proportional solenoid with inlet filtration in <b>P</b> and <b>X<sub>1</sub>/X<sub>2</sub></b> | <i>U</i> = 12 V | ●  | ●  | ●  | ●   | EP3 |
|  |  |   | <i>U</i> = 24 V | ●  | ●  | ●  | ●   | EP4 |
|  | Two-point control, electric  | with switching solenoid   | <i>U</i> = 12 V | ●  | ●  | ●  | ●   | EZ1 |
|  |  |   | <i>U</i> = 24 V | ●  | ●  | ●  | ●   | EZ2 |
|  | Electric control, direct operated two pressure reducing valves (FTDRE) |   | <i>U</i> = 12 V | –  | ●  | ●  | –   | ET3 |
|  |  | <i>U</i> = 24 V   | –               | ●  | ●  | –  | ET4 |     |
| Electric pressure controller, negative control, with 4/2 directional valve and one pressure reducing valve <sup>1)</sup> | de-energized, stroking chamber is controlled via <b>X<sub>1</sub></b>  | <i>U</i> = 24 V   | –               | ●  | ●  | ●  | ED2 |     |
|  | de-energized, stroking chamber is controlled via <b>X<sub>2</sub></b>  | <i>U</i> = 24 V   | –               | ●  | ●  | ●  | ED4 |     |

#### Pressure cut-off

|    |   | 18 | 28 | 45 | 63 |   |
|----|---|----|----|----|----|---|
| 05 | Without pressure cut-off (without code) | •  | •  | •  | •  |   |
|    | With pressure cut-off                   | -  | •  | •  | •  | D |

#### Neutral position switch

|    |  | 18 | 28 | 45 | 63 |   |
|----|--|----|----|----|----|---|
| 06 | Without neutral position switch (without code)                       | •  | •  | •  | •  |   |
|    | Neutral position switch with DEUTSCH connector (only for HW control) | •  | •  | •  | •  | L |

#### Mechanical stroke limiter<sup>2)</sup>

|    |  | 18 | 28 | 45 | 63 |   |
|----|--|----|----|----|----|---|
| 07 | Without mechanical stroke limiter (without code) | •  | •  | •  | •  |   |
|    | Mechanical stroke limiter, externally adjustable | •  | •  | •  | •  | M |

#### Stroking chamber pressure port<sup>2)</sup>

|    |   | 18 | 28 | 45 | 63 |   |
|----|---|----|----|----|----|---|
| 08 | Without stroking chamber pressure port X <sub>3</sub> , X <sub>4</sub> (without code) | •  | •  | •  | •  |   |
|    | Stroking chamber pressure port X <sub>3</sub> , X <sub>4</sub>                        | -  | •  | •  | •  | T |

• = Available    ○ = On request    - = Not available     = Preferred program

<sup>1)</sup> Only possible in combination with pressure cut-off (DA.D..., ED.D...)

<sup>2)</sup> Not available in combination with DG control device

Axial piston variable pump | **A10VG Series 10**  
Type code

3

|      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 01   | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| A10V | G  |    |    |    |    |    |    |    | /  | 10 | -  | N  |    | C  |    |    |    |    |    |    |    |

**DA control valve for NG28 ... 63**

HD HW DG DA EP EZ ET ED

|    |  |   |   |   |   |   |   |   |   |    |
|----|--|---|---|---|---|---|---|---|---|----|
| 09 | Without DA control valve   | • | • | • | - | • | • | • | • | 1  |
|    | DA control valve, fixed setting  | • | • | • | • | • | - | - | - | 2  |
|    | DA control valve, mechanically adjustable, direction of actuation, counter-clockwise with position lever | • | • | • | • | • | - | - | - | 3L |
|    | DA control valve, mechanically adjustable, direction of actuation, clockwise with position lever         | • | • | • | • | • | - | - | - | 3R |
|    | DA control valve, fixed setting, ports for pilot control device  | • | • | - | • | • | - | - | - | 7  |
|    | DA control valve, fixed setting, and hydraulic inch valve mounted, control with mineral oil              | - | - | - | • | - | - | - | - | 8  |

**Series**

|    |                   |    |
|----|-------------------|----|
| 10 | Series 1, index 0 | 10 |
|----|-------------------|----|

**Direction of rotation**

18 28 45 63

|    |                       |                   |   |   |   |   |   |
|----|-----------------------|-------------------|---|---|---|---|---|
| 11 | Viewed on drive shaft | clockwise         | • | • | • | • | R |
|    |                       | counter-clockwise | • | • | • | • | L |

**Sealing material**

18 28 45 63

|    |  |   |   |   |   |   |
|----|--|---|---|---|---|---|
| 12 | NBR (nitrile rubber), shaft seal made of FKM (fluoroelastomer) | • | • | • | • | N |
|----|--|---|---|---|---|---|

**Drive shaft**

18 28 45 63

|    |                                       |   |   |   |   |   |
|----|---------------------------------------|---|---|---|---|---|
| 13 | Splined shaft for single pump         | • | • | • | • | S |
|    | ANSI B92.1a-1976 for combination pump | - | • | • | • | T |

**Mounting flange**

18 28 45 63

|    |          |        |   |   |   |   |   |
|----|----------|--------|---|---|---|---|---|
| 14 | SAE J744 | 2-hole | • | • | • | • | C |
|----|----------|--------|---|---|---|---|---|

**Working port**

|    |   |  |    |    |    |    |
|----|---|--|----|----|----|----|
| 15 | <b>Port thread: Metric with profile sealing ring sealing according to DIN 3852</b>                  |  | 18 | 28 | 45 | 63 |
|    | <b>Fastening thread at the SAE working port and through drive: Metric according to DIN 13</b>       |  |    |    |    |    |
|    | SAE working port <b>A</b> and <b>B</b> , same side left   | suction port <b>S</b> bottom   | -  | ●  | ●  | ●  |
|    | SAE working port <b>A</b> and <b>B</b> , same side right  | suction port <b>S</b> at top<br>(externally piped up, except for DG) | -  | ●  | ●  | ●  |
|    | <b>Port and working port thread: Metric with profile sealing ring sealing according to DIN 3852</b> |  |    |    |    |    |
|    | <b>Fastening thread at the through drive: Metric according to DIN 13</b>                            |  | 18 | 28 | 45 | 63 |
|    | Threaded port <b>A</b> and <b>B</b> , same side right   | suction port <b>S</b> bottom   | ●  | -  | -  | -  |

**Boost pump**

18 28 45 63

|    |                               |                                |   |   |   |   |   |
|----|-------------------------------|--------------------------------|---|---|---|---|---|
| 16 | Without integrated boost pump | without through drive          | • | • | • | • | N |
|    |                               | with through drive             | • | • | • | • | K |
|    | Integrated boost pump         | with and without through drive | • | • | • | • | F |

• = Available    ○ = On request    - = Not available     = Preferred program

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 4 A10VG Series 10 | Axial piston variable pump Type code

|   | 01  | 02 | 03 | 04                   | 05  | 06 | 07 | 08 | 09             | 10                            | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19              | 20              | 21 | 22 |    |
|---|---|----|----|----------------------|---|----|----|----|----------------|-------------------------------|----|----|----|----|----|----|----|----|-----------------|-----------------|----|----|----|
| A10V  | G   |    |    |                      |   |    |    |    | /              | 10                            |    | -  | N  |    | C  |    |    |    |                 |                 |    |    |    |
| Through drive <sup>3)</sup>                             |   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | 18 | 28              | 45              | 63 |    |    |
| 17  | Without through drive, only for version N and F (position 16)                                     |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 00 |    |
|   | Flange SAE J744   |    |    |                      | Hub for splined shaft <sup>4)</sup>                               |    |    |    |                |                               |    |    |    |    |    |    |    |    |                 |                 |    |    |    |
|   | 82-2 (A)  |    |    |                      | 5/8 in 9T 16/32DP   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 01 |    |
|   |   |    |    |                      | 3/4 in 11T 16/32DP  |    |    |    |                |                               |    |    |    |    |    |    |    | -  | ●               | ●               | ●  | 52 |    |
|   | 101-2 (B)   |    |    |                      | 7/8 in 13T 16/32DP  |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 02 |    |
|   |   |    |    |                      | 1 in 15T 16/32DP  |    |    |    |                |                               |    |    |    |    |    |    |    | -  | ●               | ●               | ●  | 04 |    |
| 127-2 (C)   |   |    |    | 1 1/4 in 14T 12/24DP |   |    |    |    |                |                               |    |    |    |    |    |    | -  | -  | -               | ●               | 07 |    |    |
| High-pressure relief valve                              |   |    |    |                      |   |    |    |    |                | Setting range $\Delta p_{HD}$ |    |    |    |    |    |    |    | 18 | 28              | 45              | 63 |    |    |
| 18  | High-pressure relief valve<br>direct operated, fixed setting                                      |    |    |                      | 250 ... 320 bar   |    |    |    | without bypass |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 3  |    |
|   |   |    |    |                      |   |    |    |    | with bypass    |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 5  |    |
|   |   |    |    |                      | 100 ... 250 bar   |    |    |    | without bypass |                               |    |    |    |    |    |    |    | -  | ●               | ●               | ●  | 4  |    |
|   |   |    |    |                      |   |    |    |    | with bypass    |                               |    |    |    |    |    |    |    | -  | ●               | ●               | ●  | 6  |    |
| Filtration boost circuit/external boost pressure supply |   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | 18 | 28              | 45              | 63 |    |    |
| 19  | Filtration in the boost pump suction line   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | S  |    |
|   | Filtration in the boost pump pressure line  |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | -  | ● <sup>5)</sup> | ● <sup>5)</sup> | ●  | D  |    |
|   | Ports for external boost circuit filtration ( <b>F<sub>e</sub></b> and <b>G (F<sub>a</sub>)</b> ) |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    |    |                 |                 |    |    |    |
|   | External boost pressure supply (on version without integrated boost pump - N, K)                  |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | E  |    |
| Connector for solenoids <sup>6)</sup>                   |   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | 18 | 28              | 45              | 63 |    |    |
| 20  | Without connector (without code), only with purely hydraulic controls                             |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  |    |    |
|   | DEUTSCH molded connector  |    |    |                      | without suppressor diode  |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | P  |    |
|   | 2-pin, DT04-2P  |    |    |                      | with suppressor diode (only for EZ, DA and ED switching solenoid) |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | Q  |    |
| Flushing valve  |   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | 18 | 28              | 45              | 63 |    |    |
| 21  | Without flushing valve (without code)   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  |    |    |
|   | Flushing valve  |    |    |                      | SAE connection diagram, metric mounting                           |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 1  |    |
|   |   |    |    |                      | metric threaded ports   |    |    |    |                |                               |    |    |    |    |    |    |    | ●  | ●               | ●               | ●  | 3  |    |
| Standard/special version                                |   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    |    |                 |                 |    |    |    |
| 22  | Standard version  |    |    |                      | without code  |    |    |    |                |                               |    |    |    |    |    |    |    |    |                 |                 |    |    |    |
|   | Special version   |    |    |                      |   |    |    |    |                |                               |    |    |    |    |    |    |    |    |                 |                 |    |    | -S |

• = Available    ◦ = On request    - = Not available      = Preferred program

### Notice

- Note the project planning notes on page 59!
- In addition to the type code, please specify the relevant technical data when placing your order.
- Please note that not all type code combinations are available although the individual functions are marked as being available.

<sup>3)</sup> Specifications for version with integrated boost pump, please contact us for version without boost pump

<sup>4)</sup> Hub for splined shaft according to ANSI B92.1a-1976 (drive shaft allocation according to SAE J744)

<sup>5)</sup> Pressure filtration is not possible in connection with DA control valve

<sup>6)</sup> Connectors for other electric components may deviate

## Hydraulic fluids

The axial piston unit is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluid selection, behavior during operation as well as disposal and environmental protection should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90225: Limited technical data for operation with waterfree and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFAE, HFAS, HFB, HFC)

## Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are provided in the following technical data sheet:


- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ ; see selection diagram).

## Viscosity and temperature of hydraulic fluids

|                      | Viscosity                                     | Shaft seal        | Temperature <sup>3)</sup>                        | Comment   |
|----------------------|---|-------------------|--|---|
| Cold start           | $v_{max} \leq 1600 \text{ mm}^2/\text{s}$     | NBR <sup>2)</sup> | $\vartheta_{St} \geq -40 \text{ }^\circ\text{C}$ | $t \leq 3\text{min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$                  |
|                      |   | FKM               | $\vartheta_{St} \geq -25 \text{ }^\circ\text{C}$ | Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K |
| Warm-up phase        | $v = 1600 \dots 400 \text{ mm}^2/\text{s}$    |                   |  | $t \leq 15\text{min}$ , $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$                         |
| Continuous operation | $v = 400 \dots 10 \text{ mm}^2/\text{s}^{1)}$ | NBR <sup>2)</sup> | $\vartheta \leq +85 \text{ }^\circ\text{C}$      | measured at port T  |
|                      |   | FKM               | $\vartheta \leq +110 \text{ }^\circ\text{C}$     |   |
|                      | $v_{opt} = 36 \dots 16 \text{ mm}^2/\text{s}$ |                   |  | optimal operating viscosity and efficiency range  |
| Short-term operation | $v_{min} = 10 \dots 7 \text{ mm}^2/\text{s}$  | NBR <sup>2)</sup> | $\vartheta \leq +85 \text{ }^\circ\text{C}$      | $t \leq 3\text{min}$ , $p \leq 0.3 \times p_{nom}$ , measured at port T                                     |
|                      |   | FKM               | $\vartheta \leq +110 \text{ }^\circ\text{C}$     |   |

## ▼ Selection diagram

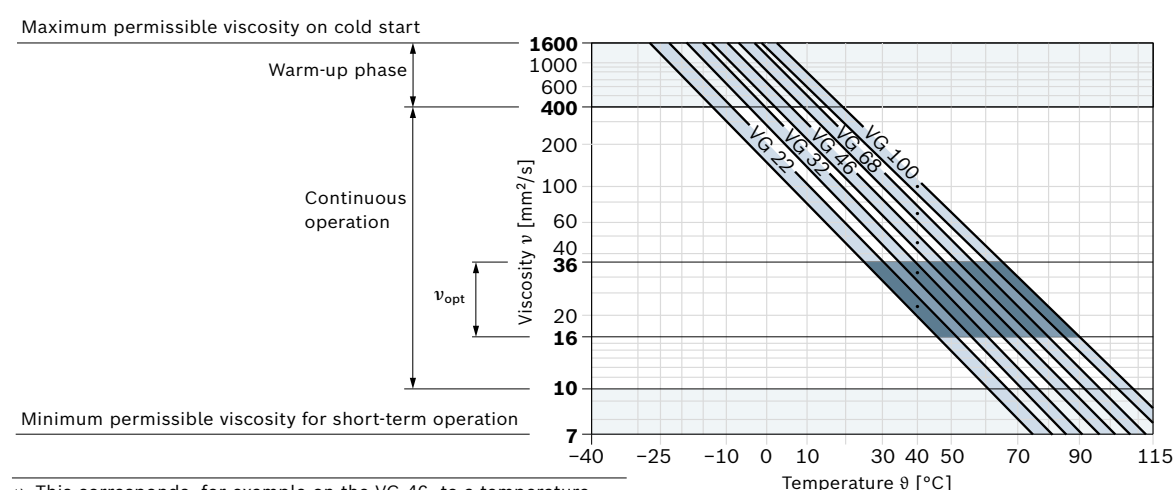

- 1) This corresponds, for example on the VG 46, to a temperature range of +4 °C ... +85 °C (see selection diagram)
- 2) Special version, please contact us
- 3) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 6 A10VG Series 10 | Axial piston variable pump Working pressure range

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At a hydraulic fluid viscosity of less than 10 mm<sup>2</sup>/s (e.g. due to high temperatures during short-term operation) at the drain port, a cleanliness level of at least 19/17/14 according to ISO 4406 is required.


For example, the viscosity is 10 mm<sup>2</sup>/s at:

- ▶ HLP 32 a temperature of 73°C
- ▶ HLP 46 a temperature of 85°C


### Working pressure range

| Pressure at working port A or B                                 |                            | Definition   |
|---|----------------------------|--|
| Nominal pressure $p_{nom}$                                      | 300 bar                    | The nominal pressure corresponds to the maximum design pressure.   |
| Maximum pressure $p_{max}$                                      | 350 bar                    | The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.                           |
| Maximum single operating period                                 | 10 s                       |  |
| Total operating period  | 300 h                      |  |
| Minimum pressure (low-pressure side)                            | 10 bar above case pressure | Minimum pressure on the low-pressure side (A or B) required to prevent damage to the axial piston unit.  |
| Rate of pressure change $R_{A max}$                             | 9000 bar/s                 | Maximum permissible pressure build-up and reduction speed during a pressure change across the entire pressure range.   |
| Boost pump  |                            | Definition   |
| Nominal pressure  | NG18 20 bar                |  |
| $p_{Sp nom}$  | NG28, 45, 63 25 bar        |  |
| Maximum pressure  | NG18 25 bar                |  |
| $p_{Sp max}$  | NG28, 45, 63 40 bar        |  |
| Pressure at suction port S (inlet)                              |                            |  |
| Continuous $p_{S min}$  | ≥0.8 bar abs.              | $v \leq 30 \text{ mm}^2/\text{s}$  |
| Short-term, at a cold start                                     | ≥0.5 bar abs.              | $t < 3 \text{ min}$  |
| Maximum pressure $p_{S max}$                                    | ≤5 bar abs.                |  |
| Control pressure  |                            | Definition   |
| Minimum control pressure $p_{St min}$ at $n = 2000 \text{ rpm}$ |                            | Required control pressure $p_{St}$ , to ensure the function of the control. The required control pressure is dependent on rotational speed, working pressure and the spring assembly of the stroking piston. |
| Controls EP, EZ, HW and HD                                      | 18 bar above case pressure |  |
| Controls DA, DG, ET and ED                                      | 25 bar above case pressure |  |
| Case pressure at port T   |                            | Definition   |
| Maximum differential pressure $\Delta p_{T max}$                | see the diagram            | Permissible differential pressure at the shaft seal (case to ambient pressure)   |
| Pressure peaks $p_{T peak}$                                     | 10 bar                     | $t < 0.1 \text{ s}$ , maximum 1000 pressure peaks permissible  |


▼ **Maximum pressure  $p_{\max}$  up to 350 bar and total operating period**

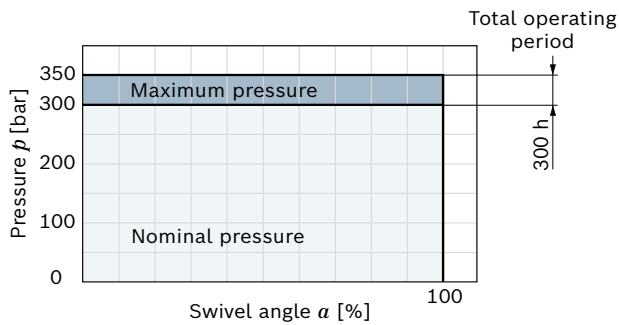


▼ **Rate of pressure change  $R_{A \max}$**



▼ **Maximum differential pressure at the shaft seal**

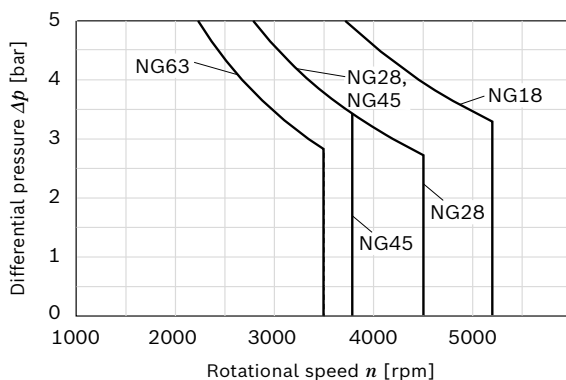

▼ **Pressure definition**

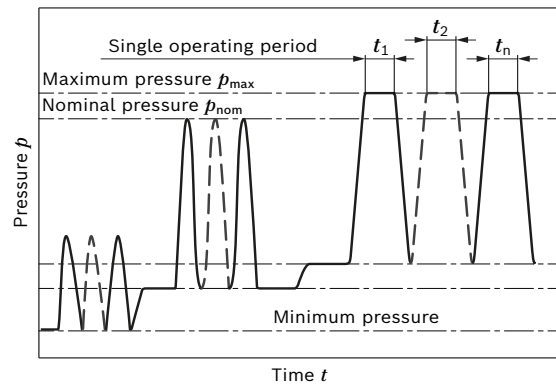

Total operating period =  $t_1 + t_2 + \dots + t_n$

**Notice**

- ▶ Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.
- ▶ In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.
- ▶ The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure.
- ▶ The case pressure must be greater than the ambient pressure.

## 8 A10VG Series 10 | Axial piston variable pump Technical data

### Technical data

| Size   |   | NG                 |                    | 18      | 28     | 45     | 63     |
|--|---|--------------------|--------------------|---------|--------|--------|--------|
| Geometric displacement, per revolution               |   |                    |                    |         |        |        |        |
|  | variable pump   | $V_{g \max}$       | cm <sup>3</sup>    | 18      | 28     | 46     | 63     |
|  | boost pump (at $p = 20$ bar)                                | $V_{g \text{ Sp}}$ | cm <sup>3</sup>    | 5.5     | 6.1    | 8.6    | 14.9   |
| Rotational speed <sup>1)</sup>                       | maximum at $V_{g \max}$                                     | $n_{\text{nom}}$   | min <sup>-1</sup>  | 4000    | 3900   | 3300   | 3000   |
|  | limited maximum <sup>2)</sup>                               | $n_{\text{max1}}$  | min <sup>-1</sup>  | 4850    | 4200   | 3550   | 3250   |
|  | intermittent maximum <sup>3)</sup>                          | $n_{\text{max2}}$  | min <sup>-1</sup>  | 5200    | 4500   | 3800   | 3500   |
|  | minimum   | $n_{\text{min}}$   | min <sup>-1</sup>  | 500     | 500    | 500    | 500    |
| Flow   | at $n_{\text{nom}}$ and $V_{g \max}$                        | $q_v$              | l/min              | 72      | 109    | 152    | 189    |
| Power <sup>4)</sup>                                  | at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 300$ bar | $P$                | kW                 | 36      | 54.6   | 75.9   | 94.5   |
| Torque <sup>4)</sup>                                 | with $V_{g \max}$ and $\Delta p = 300$ bar                  | $M$                | Nm                 | 86      | 134    | 215    | 301    |
|  |   | $M$                | Nm                 | 28.6    | 44.6   | 72     | 100.3  |
| Rotary stiffness of drive shaft                      | S   | $c$                | kNm/rad            | 20.28   | 32.14  | 53.40  | 78.37  |
|  | T   | $c$                | kNm/rad            | –       | –      | 73.80  | 92.37  |
| Moment of inertia of the rotary group                |   | $J_{\text{TW}}$    | kgm <sup>2</sup>   | 0.00093 | 0.0017 | 0.0033 | 0.0056 |
| Maximum angular acceleration <sup>5)</sup>           |   | $\alpha$           | rad/s <sup>2</sup> | 6800    | 5500   | 4000   | 3300   |
| Case volume  |   | $V$                | l                  | 0.45    | 0.64   | 0.75   | 1.1    |
| Weight (without through drive) approx. <sup>6)</sup> |   | $m$                | kg                 | 18      | 25     | 27     | 39     |

#### Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

#### Determining the operating characteristics

|        |   |         |
|--------|---|---------|
| Flow   | $q_v = \frac{V_g \times n \times \eta_v}{1000}$   | [l/min] |
| Torque | $M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$                            | [Nm]    |
| Power  | $P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$ | [kW]    |

#### Key

|             |   |
|-------------|---|
| $V_g$       | Displacement per revolution [cm <sup>3</sup> ]          |
| $\Delta p$  | Differential pressure [bar]                             |
| $n$         | Rotational speed [rpm]                                  |
| $\eta_v$    | Volumetric efficiency                                   |
| $\eta_{hm}$ | Hydraulic-mechanical efficiency                         |
| $\eta_t$    | Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ ) |

- The values are applicable:
  - for the optimum viscosity range from  $v_{\text{opt}} = 36 \dots 16 \text{ mm}^2/\text{s}$
  - for hydraulic fluid based on mineral oils (for HF hydraulic fluids, observe the technical data in 90225)
- Valid at half corner power (e.g. at  $V_{g \max}$  and  $p_N/2$ )
- Valid at  $\Delta p = 70 \dots 150$  bar or  $\Delta p < 300$  bar and  $t < 0.1$  s
- Without boost pump

- The data are valid for values between the minimum required and maximum permissible rotational speed.  
 Valid for external excitation (e. g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency).  
 The limit value is only valid for a single pump.  
 The load capacity of the connection parts must be considered.
- Weight may vary by equipment.

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## Permissible radial and axial loading of the drive shaft

| Size   | NG              |    | 18   | 28   | 28    | 45   | 45    | 63    | 63    |
|--|-----------------|----|------|------|-------|------|-------|-------|-------|
| Drive shaft  |                 | in | 7/8  | 1    | 1 1/4 | 1    | 1 1/4 | 1 1/4 | 1 3/8 |
| Maximum radial force at distance a (to the shaft collar) | $F_{q \max}$    | N  | 1300 | 2500 | 2500  | 3600 | 3600  | 5000  | 5000  |
|  | a               | mm | 16.5 | 17.5 | 17.5  | 17.5 | 17.5  | 17.5  | 17.5  |
| Maximum axial force                                      | $+ F_{ax \max}$ | N  | 973  | 987  | 987   | 1500 | 1500  | 2200  | 2200  |
|  | $- F_{ax \max}$ | N  | 973  | 987  | 987   | 1500 | 1500  | 2200  | 2200  |


### Notice

- The axial and radial loading generally influence the bearing service life.
- Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

## Permissible input and through-drive torques

| Size  | NG           |              | 18  | 28  | 45    | 63    |
|---|--------------|--------------|-----|-----|-------|-------|
| Torque at $V_{g \max}$ and $\Delta p = 300 \text{ bar}^{1)}$                | $M$          | Nm           | 86  | 134 | 220   | 301   |
| Maximum input torque on drive shaft <sup>2)</sup><br>ANSI B92.1a (SAE J744) | S            | $M_{E \max}$ | Nm  | 192 | 314   | 602   |
|   |              |              | in  | 7/8 | 1     | 1 1/4 |
|   | T            | $M_{E \max}$ | Nm  | –   | 602   | 970   |
|   |              |              | in  | –   | 1 1/4 | 1 3/8 |
| Maximum through-drive torque  | $M_{D \max}$ | Nm           | 112 | 220 | 314   | 439   |

### ▼ Distribution of torques

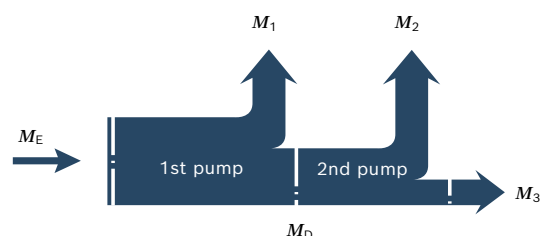

|                      |                         |
|----------------------|-------------------------|
| Torque at 1st pump   | $M_1$                   |
| Torque at 2nd pump   | $M_2$                   |
| Torque at 3rd pump   | $M_3$                   |
| Input torque         | $M_E = M_1 + M_2 + M_3$ |
|                      | $M_E < M_{E \max}$      |
| Through-drive torque | $M_D = M_1 + M_2 + M_3$ |
|                      | $M_D < M_{D \max}$      |

<sup>1)</sup> Efficiency not considered

<sup>2)</sup> For drive shafts free of radial force

- 10 **A10VG Series 10** | Axial piston variable pump  
HD – Proportional control, hydraulic, pilot-pressure related


## HD – Proportional control, hydraulic, pilot-pressure related

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the difference in pilot pressure applied to the two pilot signal ports ( $Y_1$  and  $Y_2$ ).

The pilot signal, coming from an external source, is a pressure signal. Flow is negligible, as the pilot signal acts only on the control spool of the control valve. This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given pilot signal within the control range.

If the pump is also equipped with a DA control valve (see page 14), automotive operation is possible for travel drives.

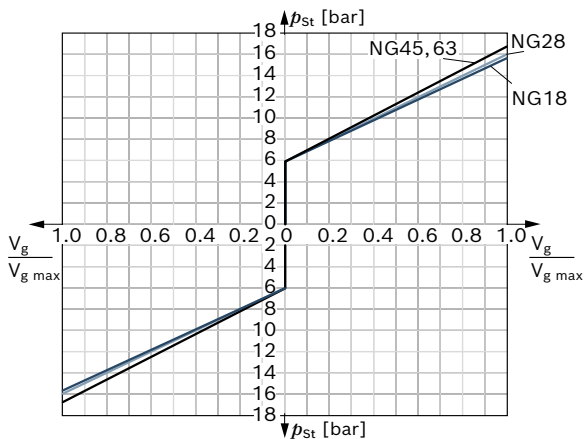

| Size                              | 18                | 28 | 45   | 63   |
|-----------------------------------|-------------------|----|------|------|
| Beginning of control ( $V_{g0}$ ) | $p_{St}$ bar 6    | 6  | 6    | 6    |
| End of control ( $V_{g max}$ )    | $p_{St}$ bar 15.7 | 16 | 16.7 | 16.7 |


### Key

- $V_g$  Displacement
- $V_{g0}$  Displacement in neutral position
- $V_{g max}$  Maximum displacement
- $p_{St}$  Pilot signal at port  $Y_1, Y_2$


### Notice

In the neutral position, the HD control module must be unloaded to reservoir via the external pilot control device.


### ▼ Circuit diagram, version without pressure cut-off

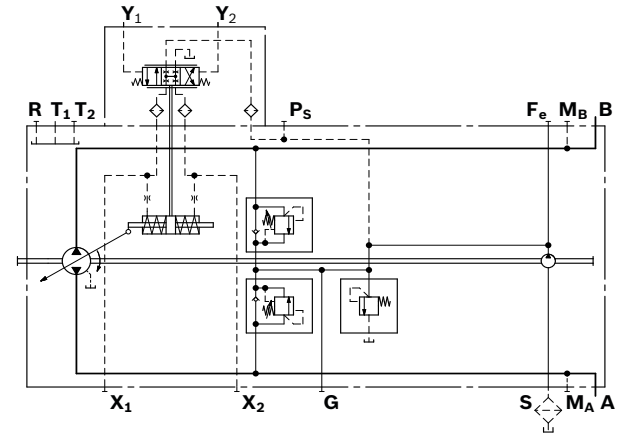

### ▼ Circuit diagram, version with pressure cut-off

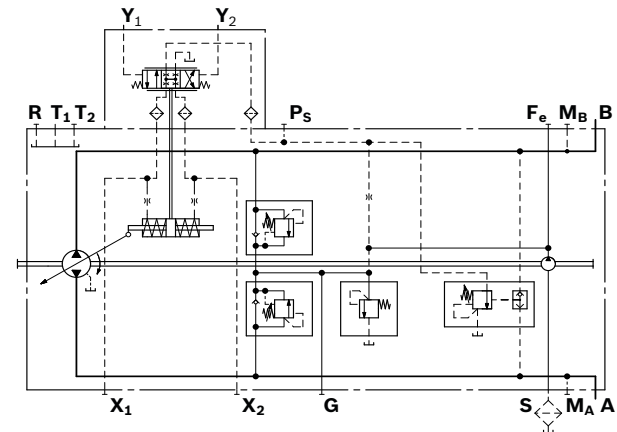

| Correlation of direction of rotation, control and flow direction |                |                |                   |                |
|--|----------------|----------------|-------------------|----------------|
| Direction of rotation  | Clockwise      |                | Counter-clockwise |                |
| Pilot signal   | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>1</sub>    | Y <sub>2</sub> |
| Control pressure   | X <sub>1</sub> | X <sub>2</sub> | X <sub>1</sub>    | X <sub>2</sub> |
| Flow direction   | A to B         | B to A         | B to A            | A to B         |
| Working pressure   | M <sub>B</sub> | M <sub>A</sub> | M <sub>A</sub>    | M <sub>B</sub> |

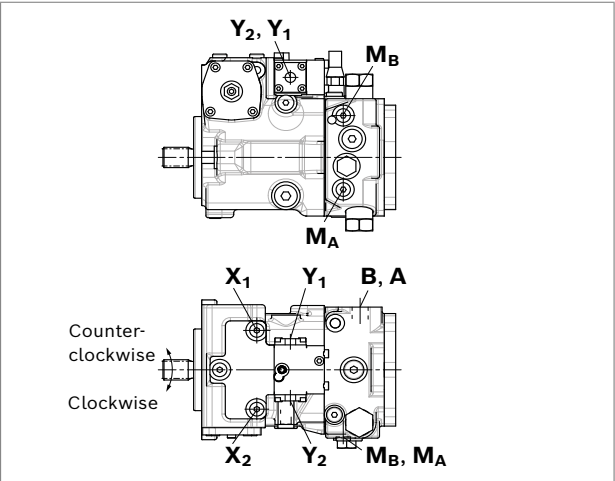


## 12 A10VG Series 10 | Axial piston variable pump HW – Proportional control, hydraulic, mechanical servo

### HW – Proportional control, hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the swivel angle of the control lever.

A feedback lever connected to the stroking piston maintains the pump flow for any given position of the control lever. If the pump is also equipped with a DA control valve (see page 14), automotive operation is possible for travel drives.

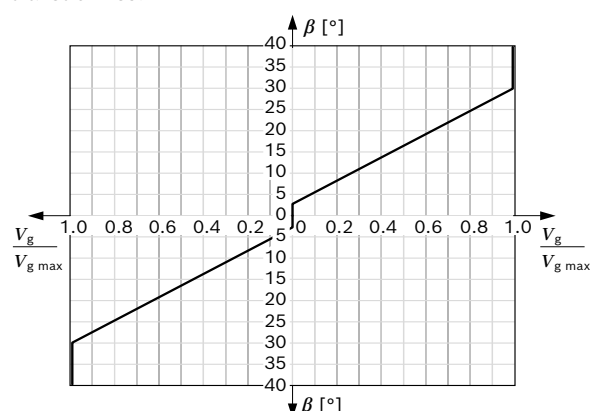

| Size  | 18 ... 63            |
|---|----------------------|
| Beginning of control ( $V_{g0}$ )           | $\beta \pm 3^\circ$  |
| End of control ( $V_{gmax}$ )               | $\beta \pm 30^\circ$ |
| Rotational limiter control lever (internal) | $\beta \pm 38^\circ$ |

The maximum required torque at the control lever is 170 Ncm. To prevent damage to the HW control module, a positive mechanical stop of  $33^\circ \pm 1$  must be provided for the HW control lever on the customer side.

#### Key

|            |                                   |
|------------|-----------------------------------|
| $V_g$      | Displacement                      |
| $V_{g0}$   | Displacement in neutral position  |
| $V_{gmax}$ | Maximum displacement              |
| $\beta$    | Swivel angle at the control lever |

#### Notices


- Spring-centering enables the pump, depending on pressure and rotational speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control module.
- As standard delivery, the control lever is oriented toward the through drive (see dimensions).
- If necessary, the position of the control lever can be changed. The procedure is defined in the instruction manual.
- The position of the control lever can deviate from the installation drawing.

#### Option: Neutral position switch


The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of the central position in either direction. Thus, the neutral position switch provides a monitoring function for drive units that require the control lever at the HW control module to be in the neutral position during certain operating conditions (e.g. starting diesel engine).

| Technical data     |   |
|--------------------|---|
| Load capacity      | 20 A (continuous), without switching operations             |
| Switching capacity | 15 A / 32 V (resistive load)<br>4 A / 32 V (inductive load) |
| Connector version  | DEUTSCH DT04-2P-EP04<br>(mating connector, see page 53)     |


#### ▼ Circuit diagram, version without pressure cut-off

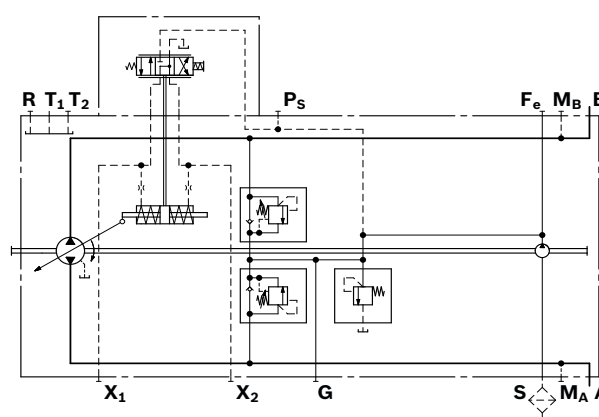

▼ Circuit diagram, version with neutral position switch and pressure cut-off

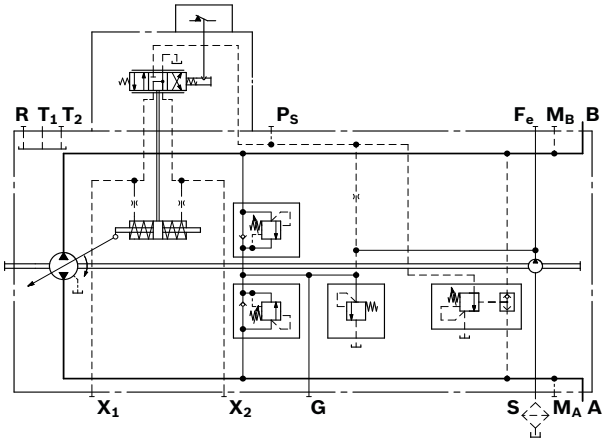

| Correlation of direction of rotation, control and flow direction |                |                |                   |                |
|--|----------------|----------------|-------------------|----------------|
| Direction of rotation  | Clockwise      |                | Counter-clockwise |                |
| Lever direction  | a              | b              | a                 | b              |
| Control pressure   | X <sub>2</sub> | X <sub>1</sub> | X <sub>2</sub>    | X <sub>1</sub> |
| Flow direction   | B to A         | A to B         | A to B            | B to A         |
| Working pressure   | M <sub>A</sub> | M <sub>B</sub> | M <sub>B</sub>    | M <sub>A</sub> |

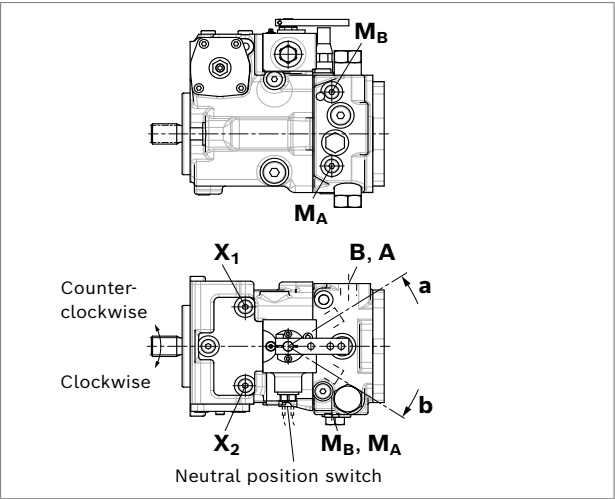

## 14 A10VG Series 10 | Axial piston variable pump DA – Automatic control, speed related

### DA – Automatic control, speed related

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump drive speed. This pilot pressure is directed to the stroking cylinder of the pump by an electromagnetically actuated 4/3-way directional valve. The pump displacement is infinitely variable in each flow direction and is influenced by both pump drive speed and system pressure. The flow direction (e.g. machine moving forward or backward) is determined by either solenoid **a** or **b** being activated. Increasing the pump drive speed generates a higher pilot pressure from the DA control valve, with a subsequent increase in pump flow.

Depending on the selected pump operating characteristics, increasing system pressure (e.g. machine load) causes the pump to swivel back towards a smaller displacement. An overload protection for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.

Any additional power requirement, e.g. for hydraulic functions from attachments, could cause the engine speed to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.


Various override options are available for DA control function to allow controlled operation of the implement hydraulics with high rpm at reduced travel speed. The DA control valve can also be used in pumps with DG, HW, HD and EP control modules to protect the combustion engine against overload.

### Notices

DA closed loop control is only suitable for certain types of travel drive systems and requires review of the motor and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

| Technical data, switching solenoid                | DA1                 | DA2                 |
|---|---------------------|---------------------|
| Voltage   | 12 V (±20%)         | 24 V (±20%)         |
| Neutral position $V_g = 0$                        | de-energized        | de-energized        |
| Position $V_{g \max}$                             | current switched on | current switched on |
| Nominal resistance (at 20 °C)                     | 5.5 Ω               | 21.7 Ω              |
| Nominal power                                     | 26.2 W              | 26.5 W              |
| Minimum active current required                   | 1.32 A              | 0.67 A              |
| Duty cycle  | 100%                | 100%                |
| Type of protection: see connector version page 53 |                     |                     |


| Correlation of direction of rotation, control and flow direction |                      |                      |                      |                      |
|--|----------------------|----------------------|----------------------|----------------------|
| Direction of rotation  | Clockwise            |                      | Counter-clockwise    |                      |
| Actuation  | <b>a</b>             |                      | <b>a</b>             |                      |
| Switching solenoid   | <b>b</b>             |                      | <b>b</b>             |                      |
| Control pressure   | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> |
| Flow direction   | <b>B to A</b>        | <b>A to B</b>        | <b>A to B</b>        | <b>B to A</b>        |
| Working pressure   | <b>M<sub>A</sub></b> | <b>M<sub>B</sub></b> | <b>M<sub>B</sub></b> | <b>M<sub>A</sub></b> |

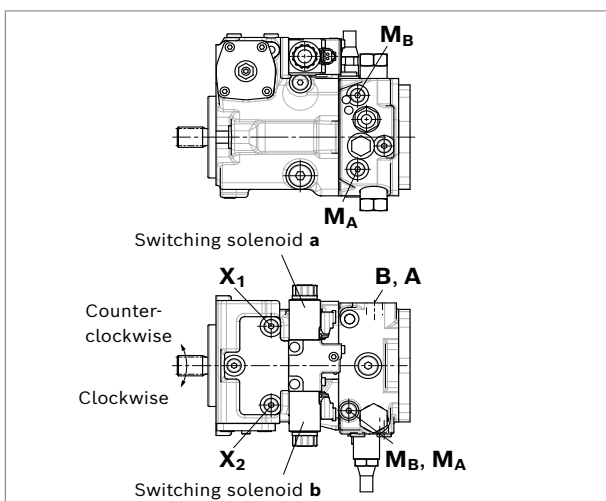

## DA..2 – DA control valve, fixed setting

Pilot pressure is generated in relation to drive speed.

### ▼ Circuit diagram, DA control valve, fixed setting, DA1D2/DA2D2<sup>1)</sup>

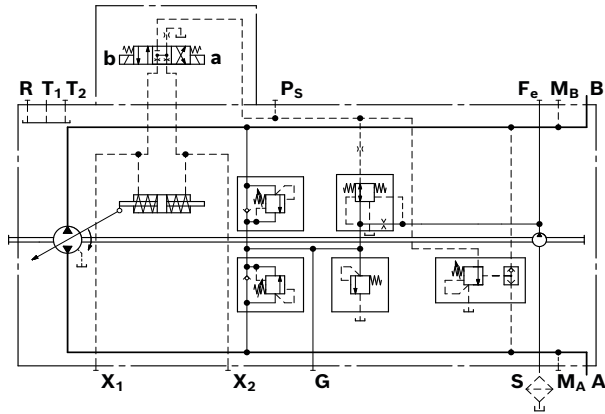

## DA..3 – DA control valve, mechanically adjustable with position lever

Pilot pressure is generated in relation to drive speed.

Any reduction of pilot pressure possible, independently of drive speed, through mechanical actuation of the position lever (inch function).

The maximum permissible actuation torque at the position lever is  $T_{max} = 4 \text{ Nm}$ .

In the standard version, the position lever is configured for control module.

The maximum angle of rotation is  $70^\circ$ .


### DA..3R

Direction of actuation of the position lever: clockwise

### DA..3L

Direction of actuation of the position lever: counter-clockwise

### ▼ Circuit diagram DA1D3/DA2D3<sup>1)</sup>

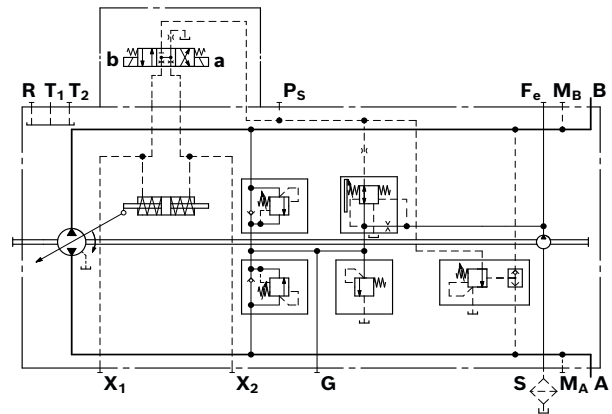

<sup>1)</sup> Size 63 with MH port

16 **A10VG Series 10** | Axial piston variable pump  
DA – Automatic control, speed related


**DA..7 – DA control valve, fixed setting, ports for pilot control device as inch valve**

Any reduction of the pilot pressure possible, independent of the drive speed is achieved by the mechanical actuation of the pilot control device.

The pilot control device is installed separately from the pump (for example in the driver's cabin) and connected to the pump by two hydraulic control lines via ports **P<sub>S</sub>** and **Y**. A suitable pilot control device must be ordered separately and is not included in the scope of delivery.

Notice: Rotary inch valves, see page 54.

▼ **Circuit diagram DA1D7/DA2D7<sup>1)</sup>**

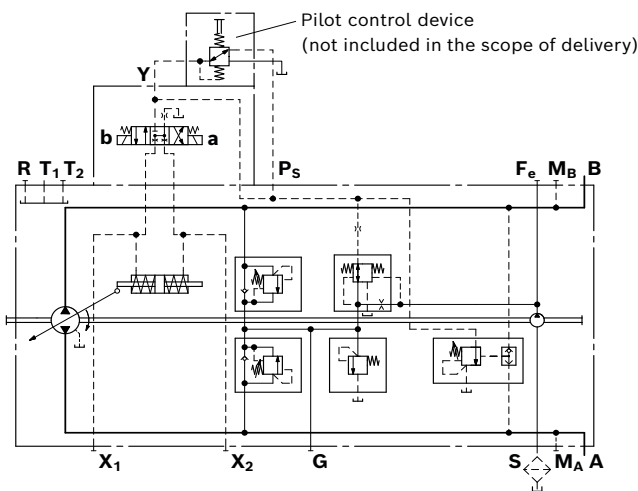

**DA..8 – DA control valve, fixed setting and brake inch valve mounted**


Only for pumps with DA control module

Permits reduction of the pilot pressure, independently of the drive speed, hydraulically controlled (port **Z**).

Control at port **Z** by means of brake fluid based on mineral oil.

Maximum permissible pilot pressure at port **Z**: 80 bar

▼ **Circuit diagram DA1D8/DA2D8<sup>1)</sup>**

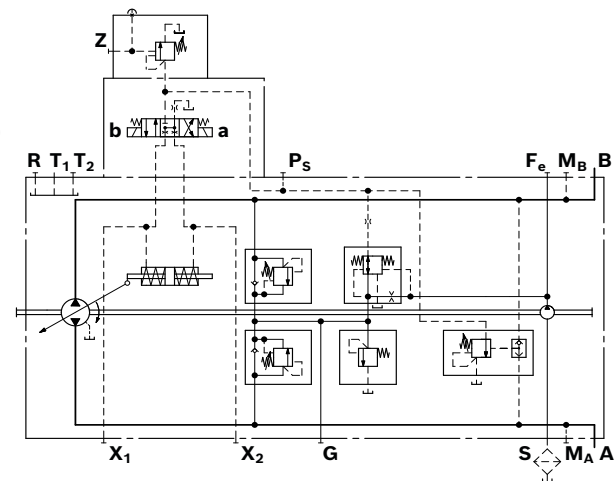

<sup>1)</sup> Size 63 with MH port

## DG – Hydraulic control, direct operated

With the direct operated hydraulic control (DG), the output flow of the pump is controlled by a hydraulic control pressure, applied directly to the stroking piston through either port **X<sub>1</sub>** or **X<sub>2</sub>**.

Flow direction is determined by which control pressure port is pressurized.

Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.


In order to use the optional built-in pressure cut-off, port **P<sub>S</sub>** must be used as source of the control pressure **X<sub>1</sub>**, **X<sub>2</sub>** generated on the customer side.

See page 46 for a functional description of the pressure cut-off.


Maximum permissible control pressure: 40 bar

Use of the DG control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all DG applications be reviewed by a Bosch Rexroth application engineer. If the pump is also equipped with a DA control valve (see page 14), automotive operation is possible for travel drives.

### ▼ Circuit diagram, version without pressure cut-off

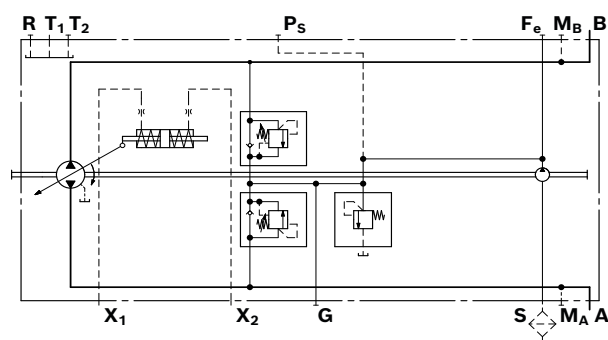


### ▼ Circuit diagram, version with pressure cut-off

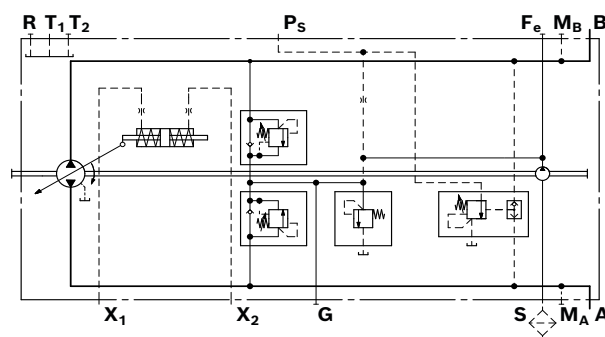

### Correlation of direction of rotation, control and flow direction

| Direction of rotation | Clockwise            |                      | Counter-clockwise    |                      |
|-----------------------|----------------------|----------------------|----------------------|----------------------|
| Control pressure      | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> |
| Flow direction        | <b>A to B</b>        | <b>B to A</b>        | <b>B to A</b>        | <b>A to B</b>        |
| Working pressure      | <b>M<sub>B</sub></b> | <b>M<sub>A</sub></b> | <b>M<sub>A</sub></b> | <b>M<sub>B</sub></b> |

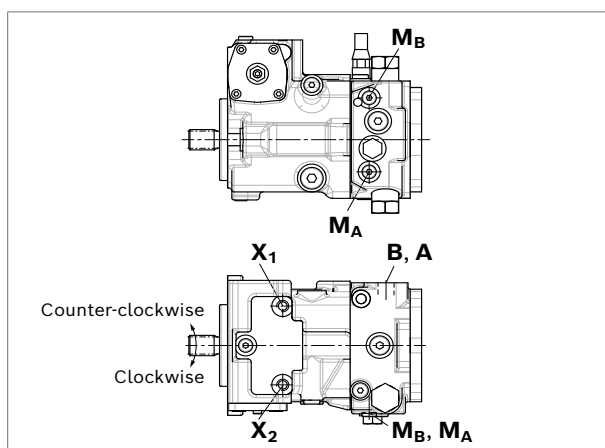

## 18 A10VG Series 10 | Axial piston variable pump EP – Proportional control, electric

### EP – Proportional control, electric


The output flow of the pump is infinitely variable between 0 and 100%, proportional to the electrical current supplied to solenoid **a** or **b**.

The electrical energy is converted into a force acting on the control spool.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given current within the control range.

If the pump is also equipped with a DA control valve (see page 14), automotive operation is possible for travel drives.

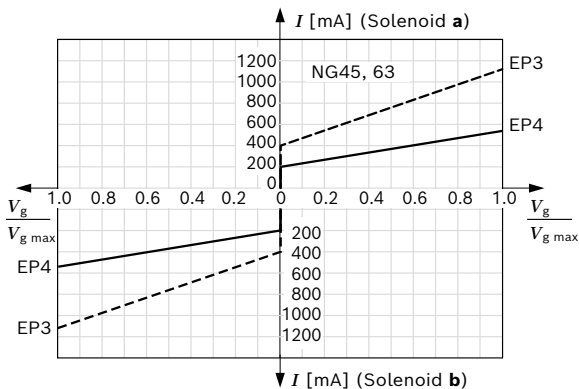

#### Notice

The proportional solenoids do not have manual override. Proportional solenoids with manual override and spring return are available on request.

#### Control current

| EP3              | NG | 18   | 28   | 45   | 63   |
|------------------|----|------|------|------|------|
| Start of control | mA | 400  | 400  | 400  | 400  |
| End of control   | mA | 1130 | 1140 | 1115 | 1115 |
| EP4              | NG | 18   | 28   | 45   | 63   |
| Start of control | mA | 200  | 200  | 200  | 200  |
| End of control   | mA | 565  | 570  | 560  | 560  |


<sup>1)</sup> Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)

| Technical data, proportional solenoid             | EP3                 | EP4                 |
|---|---------------------|---------------------|
| Voltage   | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| Control current                                   |                     |                     |
| Start of control at $V_g = 0$                     | 400 mA              | 200 mA              |
| End of control at $V_{g \max}$                    | 1200 mA             | 600 mA              |
| Current limit                                     | 1.54 A              | 0.77 A              |
| Nominal resistance (at 20 °C)                     | 5.5 $\Omega$        | 22.7 $\Omega$       |
| Dither  |                     |                     |
| Frequency   | 100 Hz              | 100 Hz              |
| Minimum oscillation range <sup>1)</sup>           | 240 mA              | 120 mA              |
| Duty cycle  | 100%                | 100%                |
| Type of protection: see connector version page 53 |                     |                     |


Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)


#### ▼ Circuit diagram, version without pressure cut-off

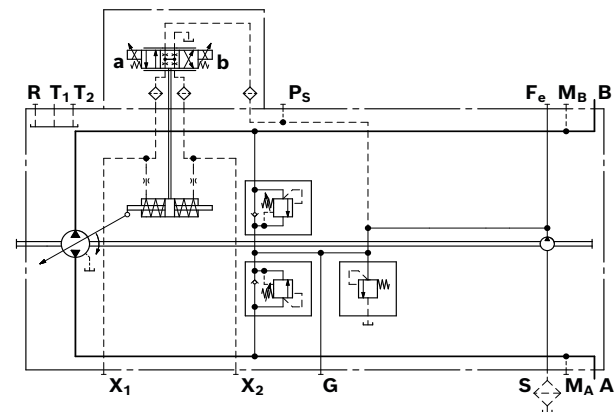

#### ▼ Circuit diagram, version with pressure cut-off

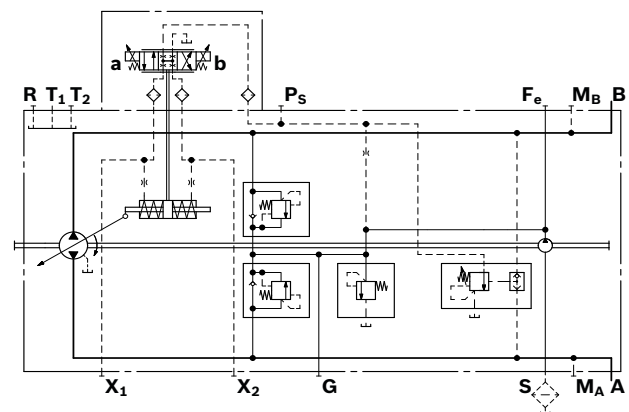

| Correlation of direction of rotation, control and flow direction |                      |                      |                      |                      |
|--|----------------------|----------------------|----------------------|----------------------|
| Direction of rotation  | Clockwise            |                      | Counter-clockwise    |                      |
| Actuation of proportional solenoid                               | <b>a</b>             | <b>b</b>             | <b>a</b>             | <b>b</b>             |
| Control pressure   | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> |
| Flow direction   | <b>A to B</b>        | <b>B to A</b>        | <b>B to A</b>        | <b>A to B</b>        |
| Working pressure   | <b>M<sub>B</sub></b> | <b>M<sub>A</sub></b> | <b>M<sub>A</sub></b> | <b>M<sub>B</sub></b> |

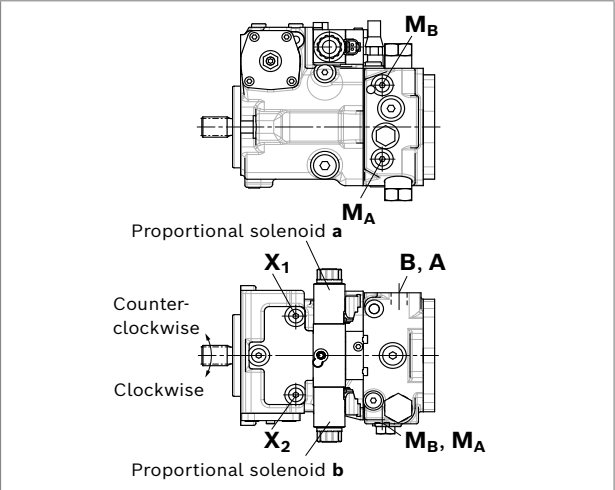


20 **A10VG Series 10** | Axial piston variable pump  
EZ – Two-point control, electric

## EZ – Two-point control, electric


By actuating either switching solenoid **a** or **b**, internal control pressure is applied directly to the stroking piston and the pump swivels to maximum displacement. The EZ control enables pump flow to be switched between  $V_g = 0$  and  $V_{g \max}$ . Flow direction is determined by which solenoid is energized.

| Technical data, switching solenoid                | EZ1                 | EZ2                 |
|---|---------------------|---------------------|
| Voltage   | 12 V ( $\pm 20\%$ ) | 24 V ( $\pm 20\%$ ) |
| Neutral position $V_g = 0$                        | de-energized        | de-energized        |
| Position $V_{g \max}$                             | Current switched on | Current switched on |
| Nominal resistance (at 20 °C)                     | 5.5 $\Omega$        | 21.7 $\Omega$       |
| Nominal power                                     | 26.2 W              | 26.5 W              |
| Minimum active current required                   | 1.32 A              | 0.67 A              |
| Duty cycle  | 100%                | 100%                |
| Type of protection: see connector version page 53 |                     |                     |

### ▼ Circuit diagram, version without pressure cut-off

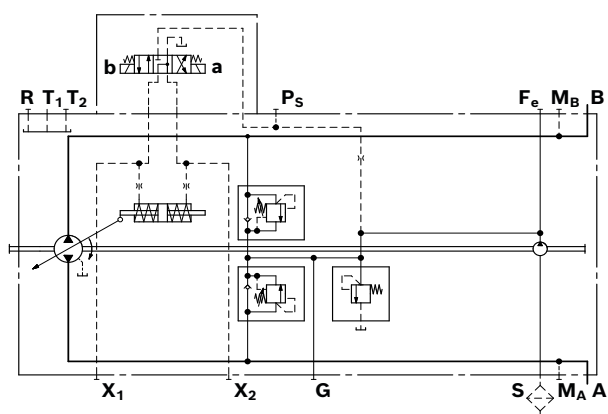


### ▼ Circuit diagram, version with pressure cut-off

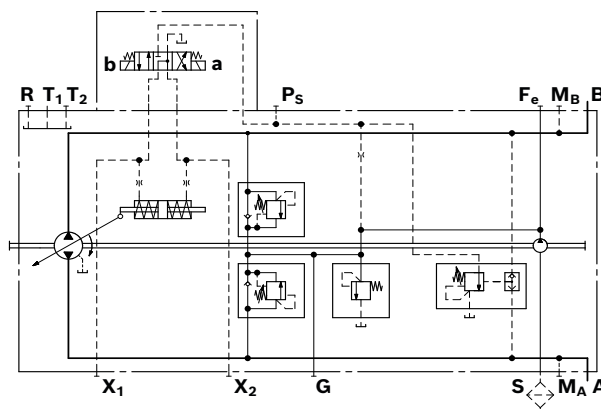

### Correlation of direction of rotation, control and flow direction

| Direction of rotation | Clockwise            |                      | Counter-clockwise    |                      |
|-----------------------|----------------------|----------------------|----------------------|----------------------|
| Actuation             | <b>a</b>             | <b>b</b>             | <b>a</b>             | <b>b</b>             |
| Switching solenoid    |                      |                      |                      |                      |
| Control pressure      | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> | <b>X<sub>2</sub></b> | <b>X<sub>1</sub></b> |
| Flow direction        | <b>B to A</b>        | <b>A to B</b>        | <b>A to B</b>        | <b>B to A</b>        |
| Working pressure      | <b>M<sub>A</sub></b> | <b>M<sub>B</sub></b> | <b>M<sub>B</sub></b> | <b>M<sub>A</sub></b> |

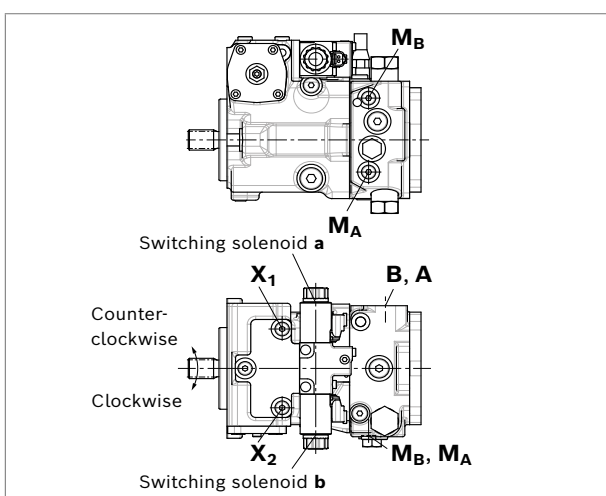


## ET – Electric control, direct operated

The output flow of the pump is infinitely variable in the range between 0 and 100%. Depending on the preselected current  $I$  at solenoids **a** and **b** of the pressure reducing valves, the stroking cylinder of the pump is proportionally supplied with control pressure. The two control pressures  $X_1$  and  $X_2$  can be controlled independently. The pump displacement that arises at a certain control current is dependent on the rotational speed and working pressure of the pump. A different flow direction is associated with each pressure reducing valve.

Maximum permissible control pressure  $P_S$ : 40 bar.


| Technical data, pressure reducing valve <sup>1)</sup> | ET3            | ET4  |
|---|----------------|------|
| On-board voltage in the vehicle                       | 12 V           | 24 V |
| Permissible voltage <i>U</i>                          | 9.6 ... 28.8 V |      |
| Current limit   | 1.8 A          |      |
| Nominal resistance (at 20 °C)                         | 2.4 Ω          |      |
| Dither  |                |      |
| Frequency   | 100 Hz         |      |
| Minimum oscillation range <sup>2)</sup>               | 360 mA         |      |
| Duty cycle  | 100%           |      |
| Type of protection: see connector version page 53     |                |      |

### ▼ Circuit diagram, standard version

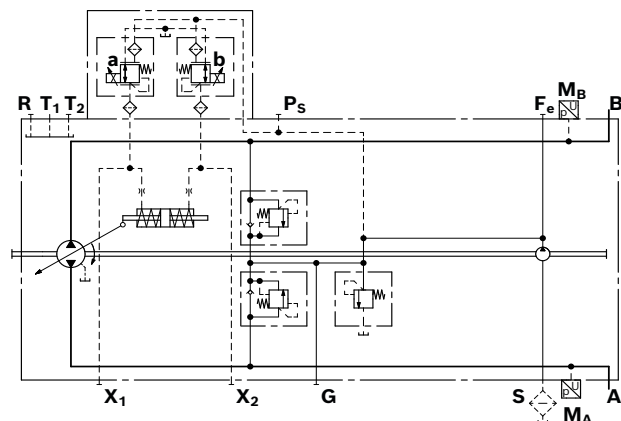


ET is preferably used with BODAS eDA (data sheet 95315). To this end, pressure sensors are required. One prerequisite for the combination with pressure sensors is a port plate version with  $M_A/M_B$  according to ISO 6149 M14  $\times$  1.5. This design is only available for selected port plates, please contact us.

### ▼ Circuit diagram, version without pressure sensors

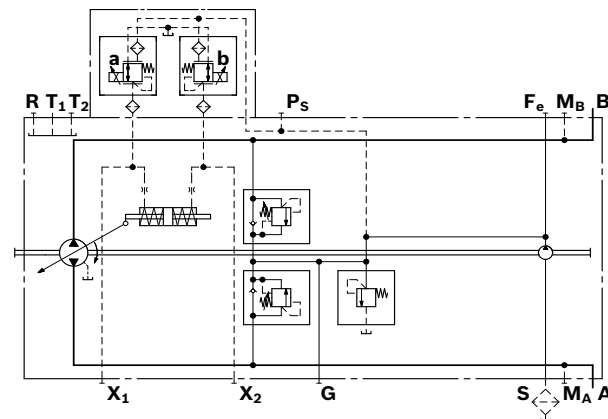

### Correlation of direction of rotation, control and flow direction

| Direction of rotation   | Clockwise |        | Counter-clockwise |        |
|-------------------------|-----------|--------|-------------------|--------|
| Actuation               | a         | b      | a                 | b      |
| Pressure reducing valve |           |        |                   |        |
| Control pressure        | $X_1$     | $X_2$  | $X_1$             | $X_2$  |
| Flow direction          | A to B    | B to A | B to A            | A to B |
| Working pressure        | $M_B$     | $M_A$  | $M_A$             | $M_B$  |

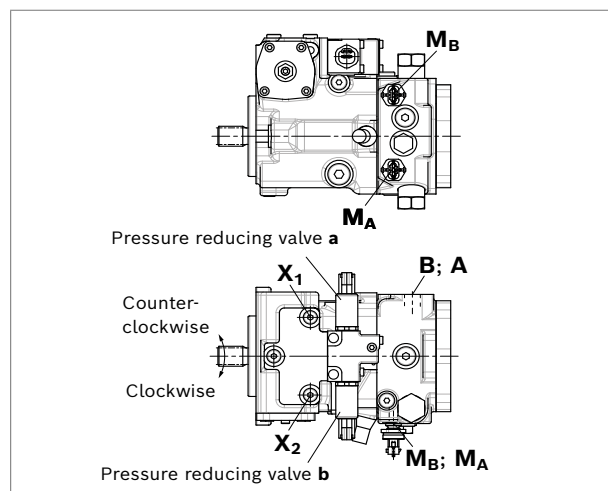

1) For further information on the pressure reducing valve, see data sheet 58032.

**Notice:** The leakage flow and the control flow differ from the parameter in data sheet 58032.

2) Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)

**ED – Electric pressure control**

The working pressure of the electric pressure control ED can be set continuously via a pressure reducing valve. The pressure value depends on the control current pressurizing the solenoid at the pressure reducing valve. The ED pressure control holds the set working pressure on a constant level. Each load pressure change at the consumer changes the stroking piston and thus the flow until the pressure deviation is corrected according to the specified current.

The higher the control current, the lower the set pressure value. For maximum control current, high and low-pressure sides are balanced and the pump swivels into its central position (neutral position). If the pressure reducing valve is not pressurized with control current, the pressure is limited by the mechanical pressure setting at the pressure cut-off. By actuating the electric 4/2 directional valve, supply of the stroking chambers is exchanged, and the flow direction of the pump is inverted.


The maximum permissible pressure setting of the pressure cut-off combined with the ED pressure control is 350 bar.

| Technical data, pressure reducing valve                  | ED2, ED4       |
|--|----------------|
| Voltage  | 24 V (±20%)    |
| Current limit  | 0.77 A         |
| Nominal resistance (at 20 °C)                            | 22.7 Ω         |
| Dither   |                |
| Frequency  | 100 Hz         |
| Minimum oscillation range <sup>1)</sup>                  | 120 mA         |
| Duty cycle   | 100%           |
| Type of protection according to<br>DIN VDE 0470/EN 60529 | IP67 and IP69K |
| Applies to connector DEUTSCH DT04-2P,<br>see page 53     |                |


| Technical data, switching solenoid   | ED2, ED4       |
|--|----------------|
| Voltage  | 24 V (±20%)    |
| Nominal resistance (at 20 °C)  | 21.7 Ω         |
| Nominal power  | 26.5 W         |
| Minimum active current required  | 0.67A          |
| Duty cycle   | 100%           |
| Type of protection according to<br>DIN VDE 0470/EN 60529                   | IP67 and IP69K |
| Applies to connector DEUTSCH DT04-2P with<br>suppressor diode, see page 53 |                |

The values given are dependent on pressure, rotational speed, spring assembly, tolerances and therefore may differ.

▼ **Circuit diagram, standard version ED2**

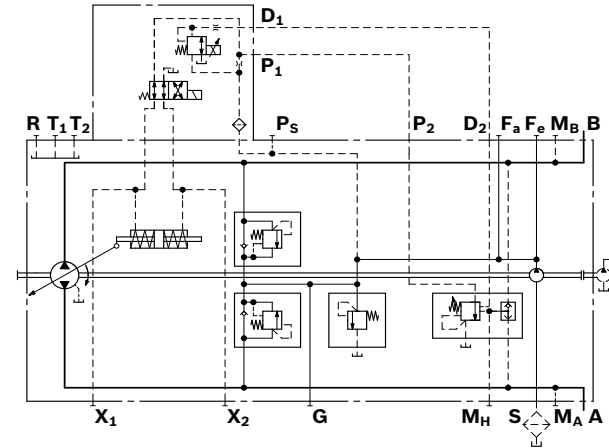

▼ **Circuit diagram, standard version ED4**

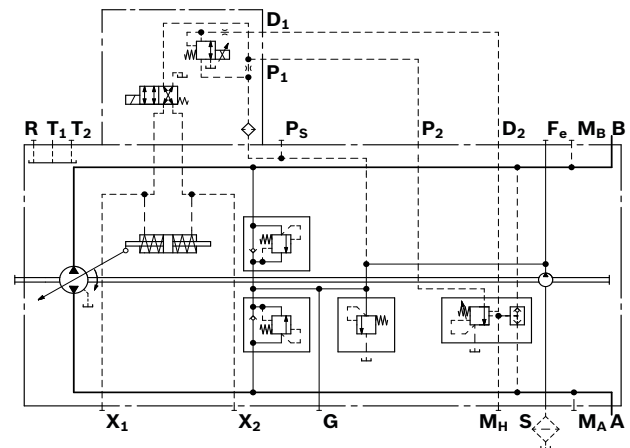


Dimensions [mm]


Axial piston variable pump | **A10VG Series 10** 23  
ED – Electric pressure control

| Correlation of direction of rotation, control and flow direction <sup>1)</sup> |                |                   |                |                   |
|--|----------------|-------------------|----------------|-------------------|
| Version  | ED2            | ED2               | ED4            | ED4               |
| Direction of rotation  | Clockwise      | Counter-clockwise | Clockwise      | Counter-clockwise |
| Stroking chamber   | X <sub>1</sub> | X <sub>1</sub>    | X <sub>2</sub> | X <sub>2</sub>    |
| Flow direction   | A to B         | B to A            | B to A         | A to B            |
| Working pressure   | M <sub>B</sub> | M <sub>A</sub>    | M <sub>A</sub> | M <sub>B</sub>    |

▼ Version ED2

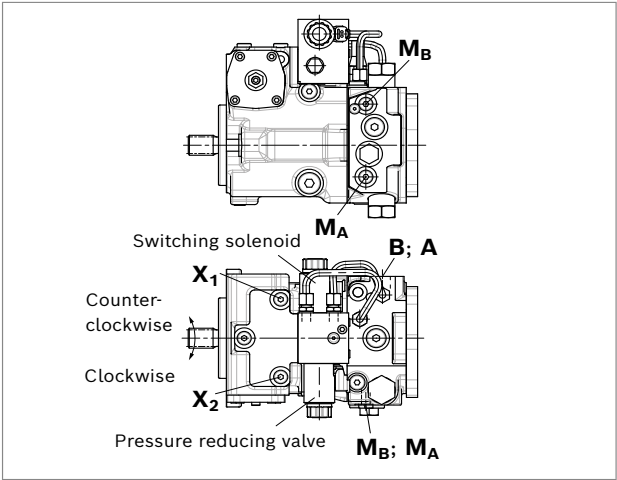

▼ Version ED4

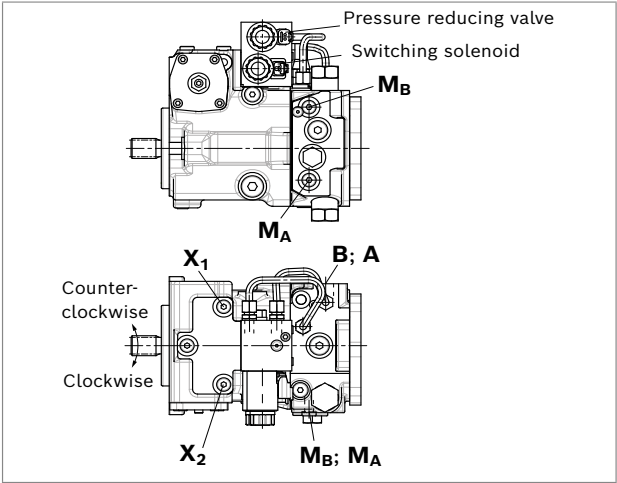


<sup>1)</sup> Parameters apply to switching solenoid and pressure reducing valve in de-energized condition

### Dimensions, size 18

**EP – Proportional control, electric**

Standard: Threaded port **A** and **B**, same side right, suction port **S** bottom (16)

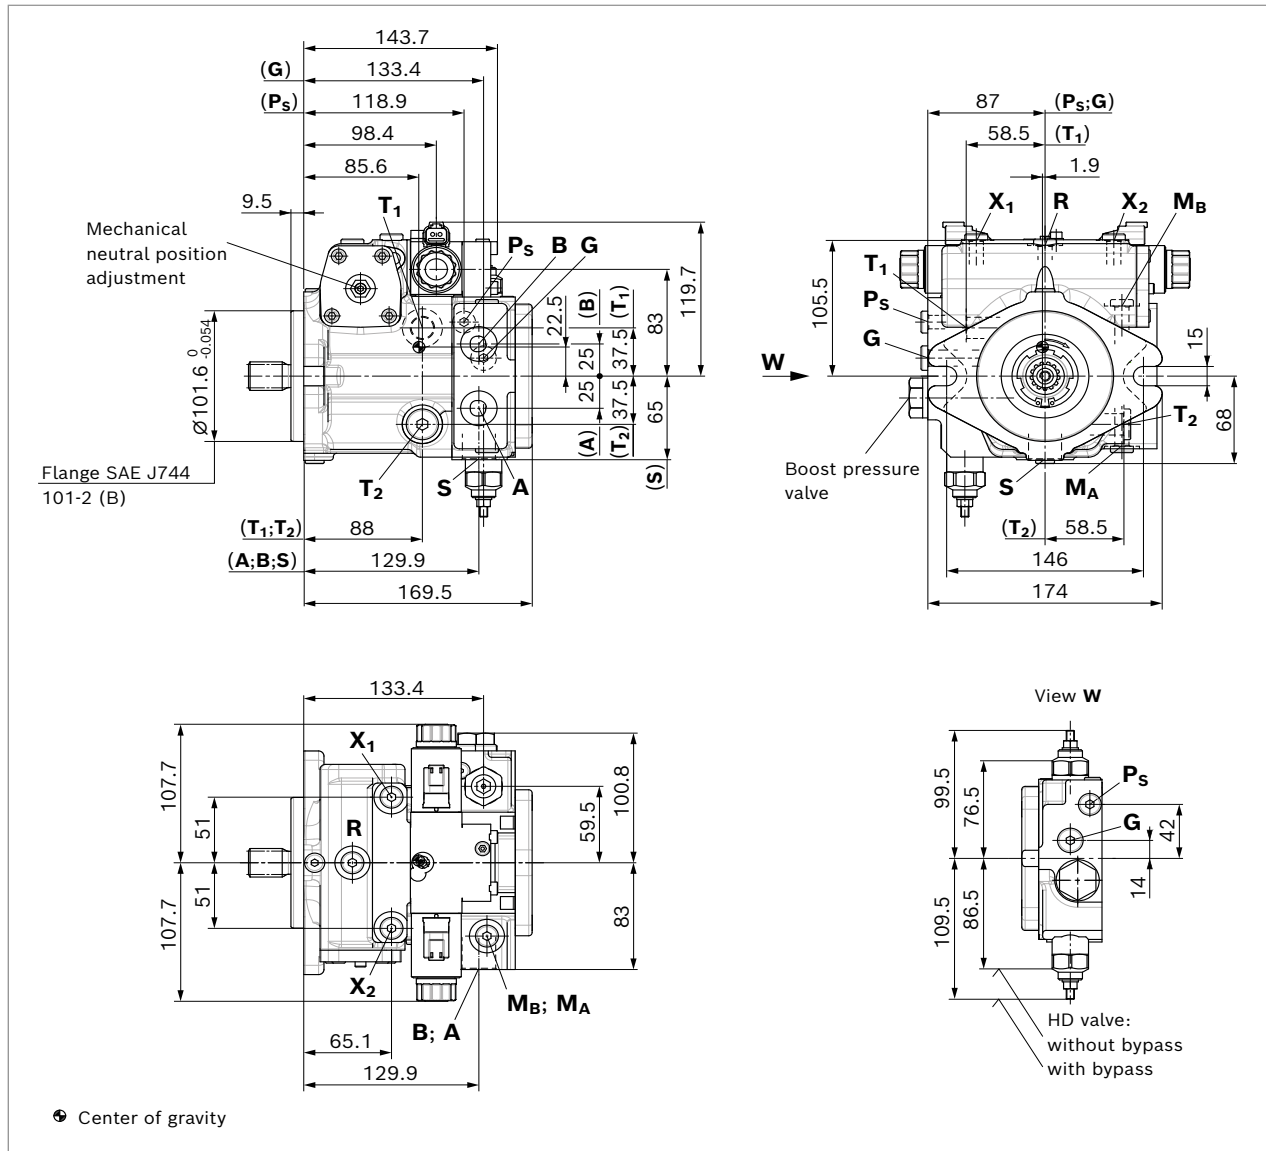


Dimensions [mm]

Axial piston variable pump | **A10VG Series 10** 25  
Dimensions, size 18

▼ **Splined shaft ANSI B92.1a**

**S** – 7/8 in 13T 16/32DP<sup>1)</sup>

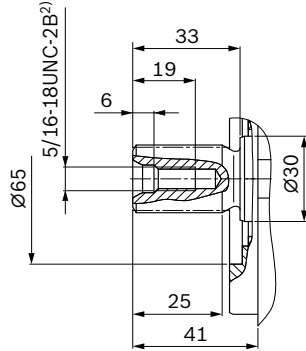

| Ports                               |   | Standard               | Size               | $p_{\max}$ [bar] <sup>3)</sup> | State <sup>7)</sup> |
|-------------------------------------|---|------------------------|--------------------|--------------------------------|---------------------|
| <b>A, B</b>                         | Working port                                | DIN 3852 <sup>6)</sup> | M27 × 2; 16 deep   | 350                            | O                   |
| <b>S</b>                            | Suction port                                | DIN 3852 <sup>6)</sup> | M26 × 1.5; 16 deep | 5                              | O <sup>4)</sup>     |
| <b>T<sub>1</sub></b>                | Drain port                                  | DIN 3852 <sup>6)</sup> | M18 × 1.5; 12 deep | 3                              | O <sup>5)</sup>     |
| <b>T<sub>2</sub></b>                | Drain port                                  | DIN 3852 <sup>6)</sup> | M18 × 1.5; 12 deep | 3                              | X <sup>5)</sup>     |
| <b>R</b>                            | Air bleed port                              | DIN 3852 <sup>6)</sup> | M12 × 1.5; 12 deep | 3                              | X                   |
| <b>X<sub>1</sub>, X<sub>2</sub></b> | Control pressure port (upstream of orifice) | DIN 3852 <sup>6)</sup> | M12 × 1.5; 12 deep | 25                             | X                   |
| <b>G</b>                            | Boost pressure port inlet                   | DIN 3852 <sup>6)</sup> | M14 × 1.5; 12 deep | 25                             | X                   |
| <b>P<sub>S</sub></b>                | Pilot pressure port                         | DIN 3852 <sup>6)</sup> | M12 × 1.5; 12 deep | 25                             | X                   |
| <b>M<sub>A</sub>, M<sub>B</sub></b> | Measuring port pressure A, B                | DIN 3852 <sup>6)</sup> | M12 × 1.5; 12 deep | 350                            | X                   |
| <b>Y<sub>1</sub>, Y<sub>2</sub></b> | Pilot pressure port (pilot signal HD only)  | DIN 3852 <sup>6)</sup> | M14 × 1.5; 12 deep | 40                             | O                   |

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Plugged for external boost pressure supply.
- 5) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 56).

- 6) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E
- 7) O = Must be connected (comes plugged)  
X = Plugged (observe installation instructions)

RE 92750/2020-03-03, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


26 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 18

Dimensions [mm]


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

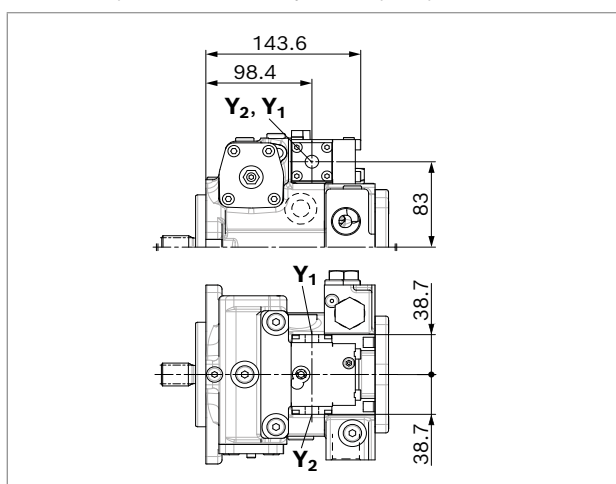


▼ **HW** – Proportional control, hydraulic, mechanical servo

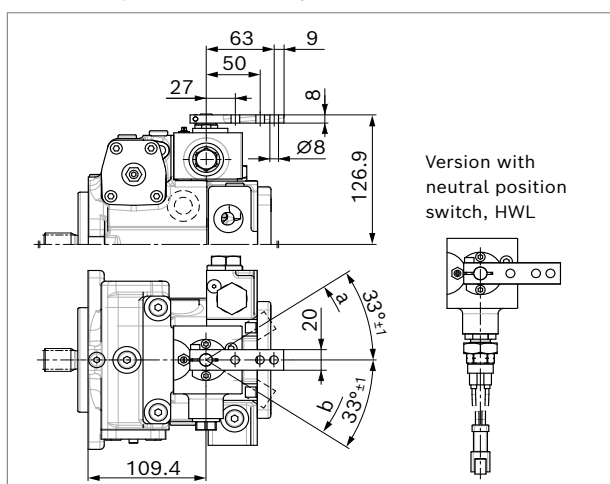

▼ **DG** – Hydraulic control, direct operated

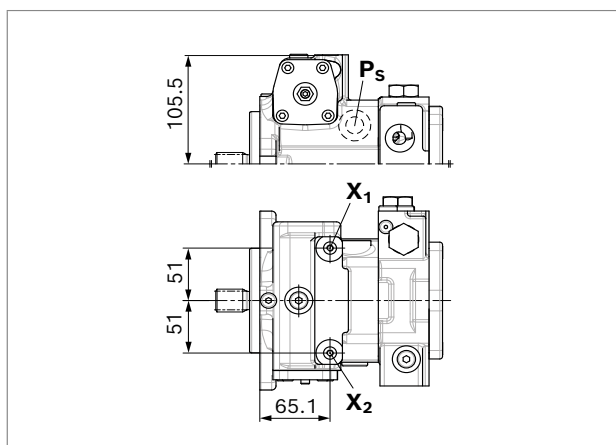

▼ **EZ** – Two-point control, electric

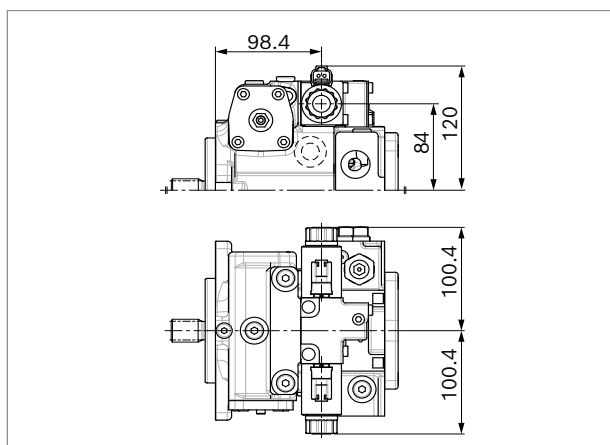

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 28

27

## Dimensions, size 28

### EP – Proportional control, electric

Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (10)

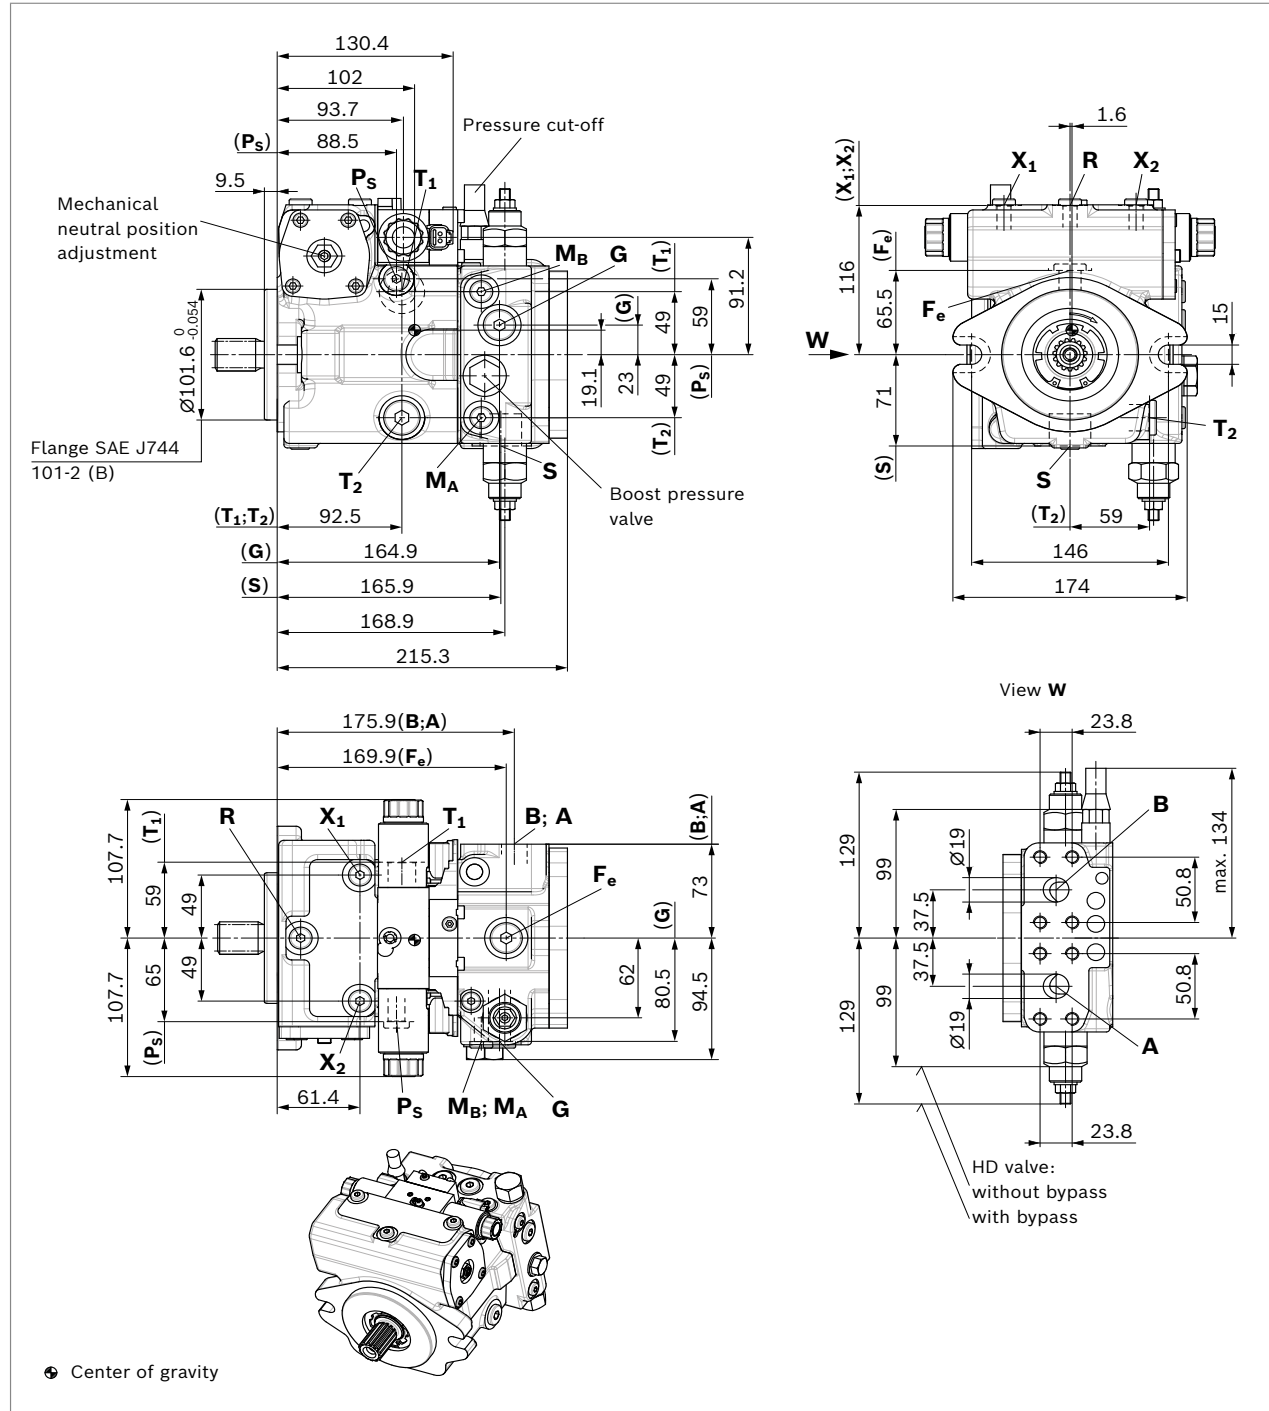

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

28 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 28

Dimensions [mm]


▼ **Splined shaft ANSI B92.1a**

**S** – 1 in 15T 16/32DP<sup>1)</sup>



▼ **Splined shaft ANSI B92.1a**

**T** – 1 1/4 in 14T 12/24DP<sup>1)</sup>

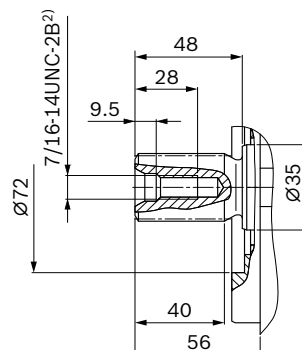

| Ports   | Standard  | Size                            | $p_{max}$ [bar] <sup>3)</sup> | State <sup>9)</sup>  |
|---|---|---------------------------------|-------------------------------|----------------------|
| <b>A, B</b>                                       | Working port<br>Fastening thread                  | SAEJ518 <sup>4)</sup><br>DIN 13 | 3/4 in<br>M10 × 1.5; 17 deep  | 350<br>O             |
| <b>S</b>  | Suction port                                      | DIN 3852 <sup>7)</sup>          | M33 × 2; 18 deep              | 5<br>O <sup>5)</sup> |
| <b>T<sub>1</sub></b>                              | Drain port  | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep            | 3<br>O <sup>6)</sup> |
| <b>T<sub>2</sub></b>                              | Drain port  | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep            | 3<br>X <sup>6)</sup> |
| <b>R</b>  | Air bleed port                                    | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep            | 3<br>X               |
| <b>X<sub>1</sub>, X<sub>2</sub></b>               | Control pressure port (upstream of orifice)       | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep            | 40<br>X              |
| <b>X<sub>3</sub>, X<sub>4</sub></b> <sup>8)</sup> | Stroking chamber pressure port                    | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep               | 40<br>X              |
| <b>G (F<sub>a</sub>)</b>                          | Boost pressure port inlet                         | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep            | 40<br>X              |
| <b>G</b>  | Boost pressure port inlet (only DA control valve) | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep               | 40<br>X              |
| <b>P<sub>s</sub></b>                              | Pilot pressure port                               | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep            | 40<br>X              |
| <b>Y</b>  | Pilot pressure port outlet (only DA..7)           | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep            | 40<br>O              |
| <b>M<sub>A</sub>, M<sub>B</sub></b>               | Measuring port pressure A, B                      | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep            | 350<br>X             |
| <b>F<sub>e</sub></b>                              | Boost pressure port outlet                        | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep            | 40<br>X              |
| <b>Y<sub>1</sub>, Y<sub>2</sub></b>               | Pilot pressure port (pilot signal HD only)        | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep            | 40<br>O              |
| <b>Z</b>  | Pilot pressure port (inch signal only DA..8)      | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep               | 80<br>X              |

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.
- 5) Plugged for external boost pressure supply.

- 6) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 56).
- 7) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E
- 8) Optional, see page 49
- 9) O = Must be connected (comes plugged)  
X = Plugged (in normal operation)

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
 Dimensions, size 28

29


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

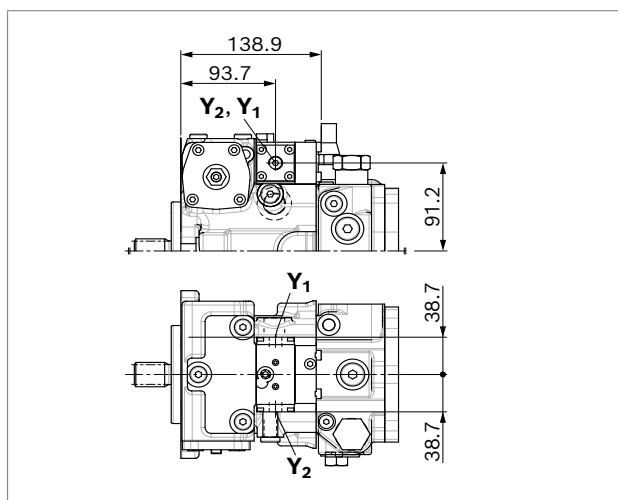


▼ **HW** – Proportional control, hydraulic, mechanical servo

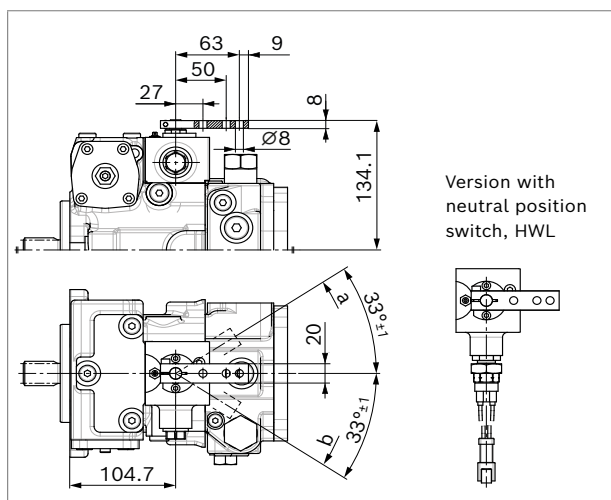


▼ **DG** – Hydraulic control, direct operated

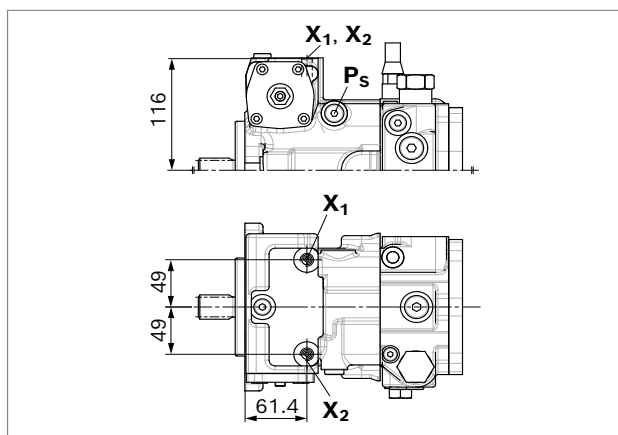

▼ **EZ** – Two-point control, electric

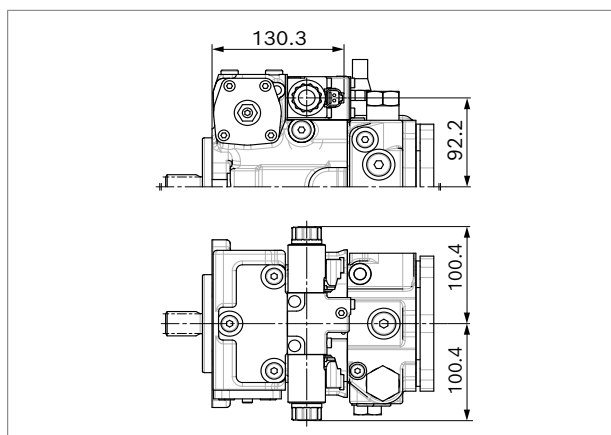

▼ **ET** – Electric control, direct operated

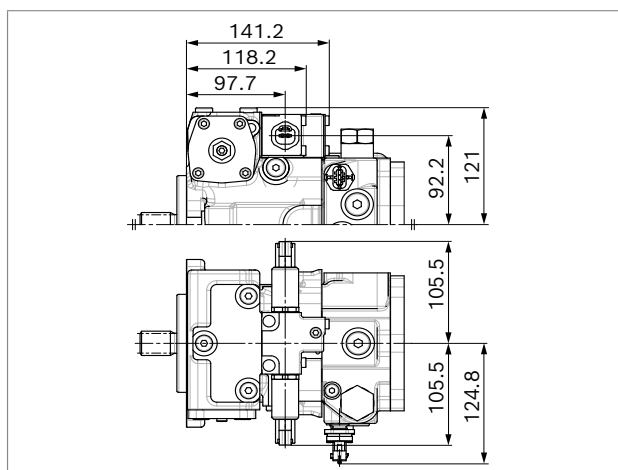

RE 92750/2020-03-03, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


30 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 28

Dimensions [mm]

▼ **ED2** – Electric pressure controller

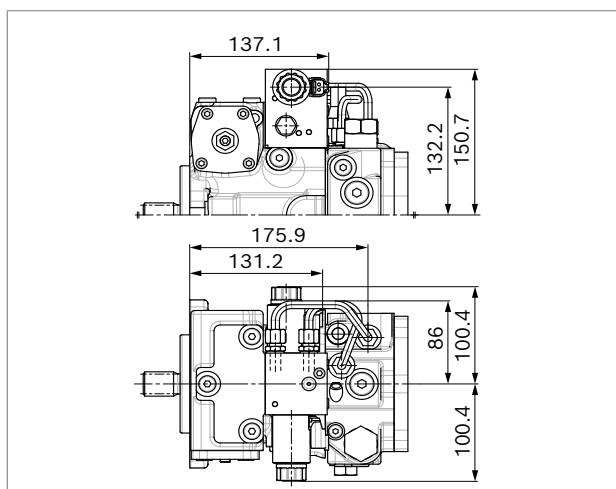

▼ **ED4** – Electric pressure controller

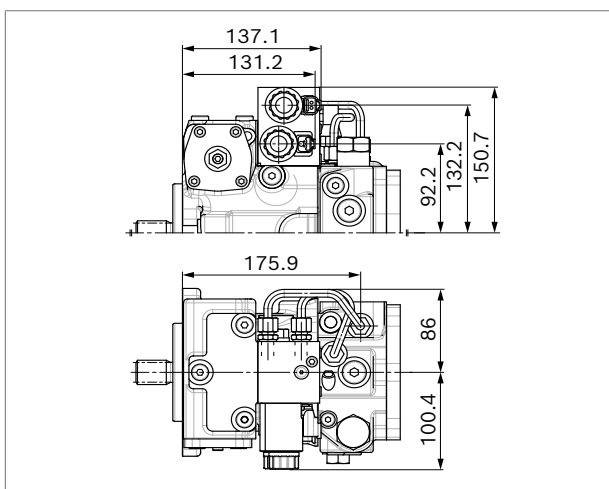

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 28


31

## DA control valve


### ▼ DA..2 – fixed setting

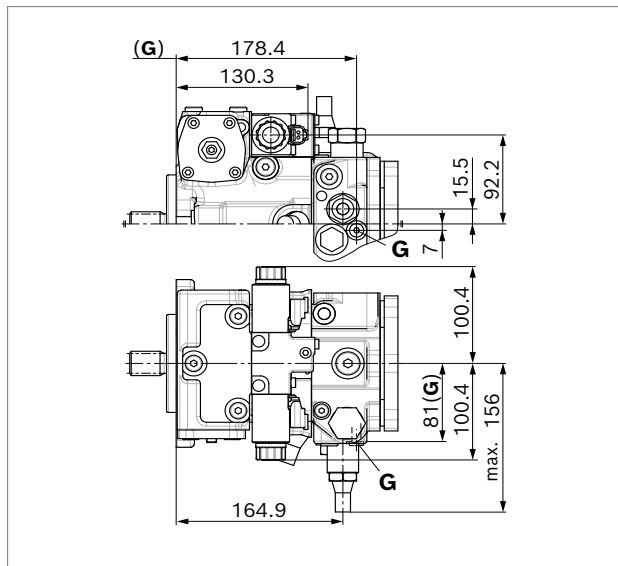


### ▼ DA..3 – mechanically adjustable with position lever

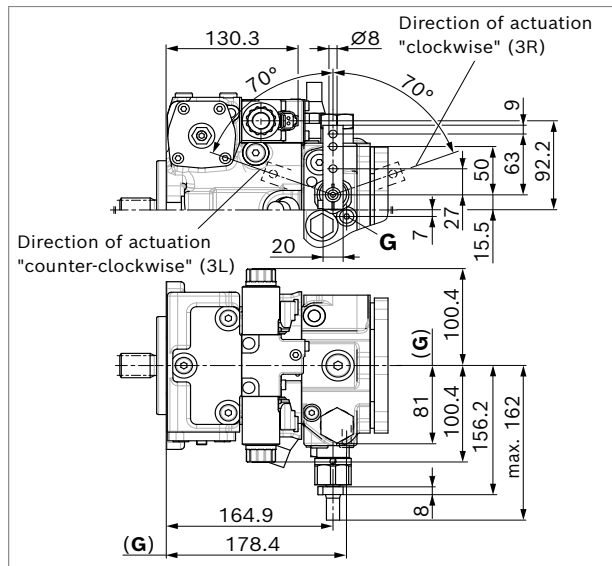

### ▼ DA..7 – fixed setting and ports for pilot control device

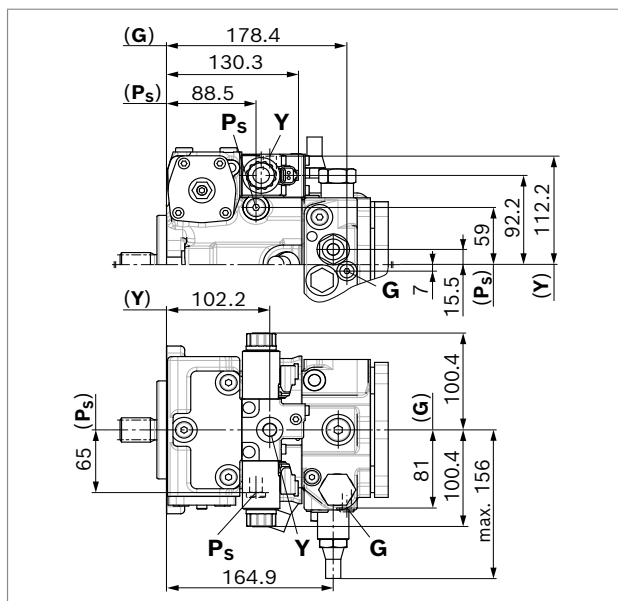

### ▼ DA..8 – fixed setting and inch valve mounted

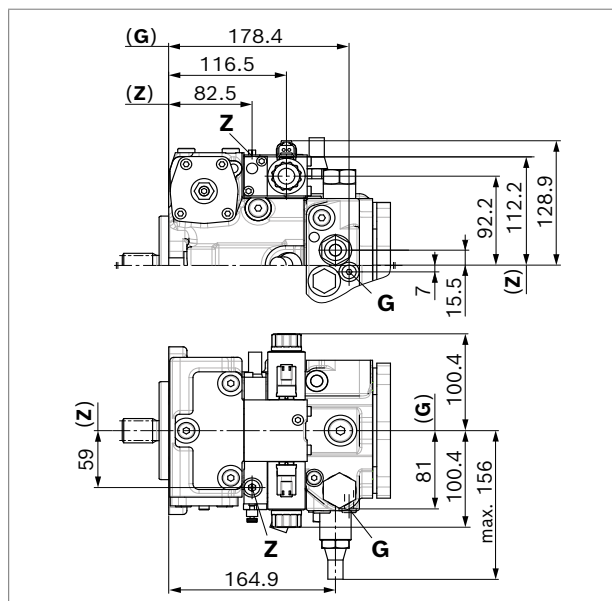

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


32 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 45

Dimensions [mm]

## Dimensions, size 45

### EP – Proportional control, electric

Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (10)

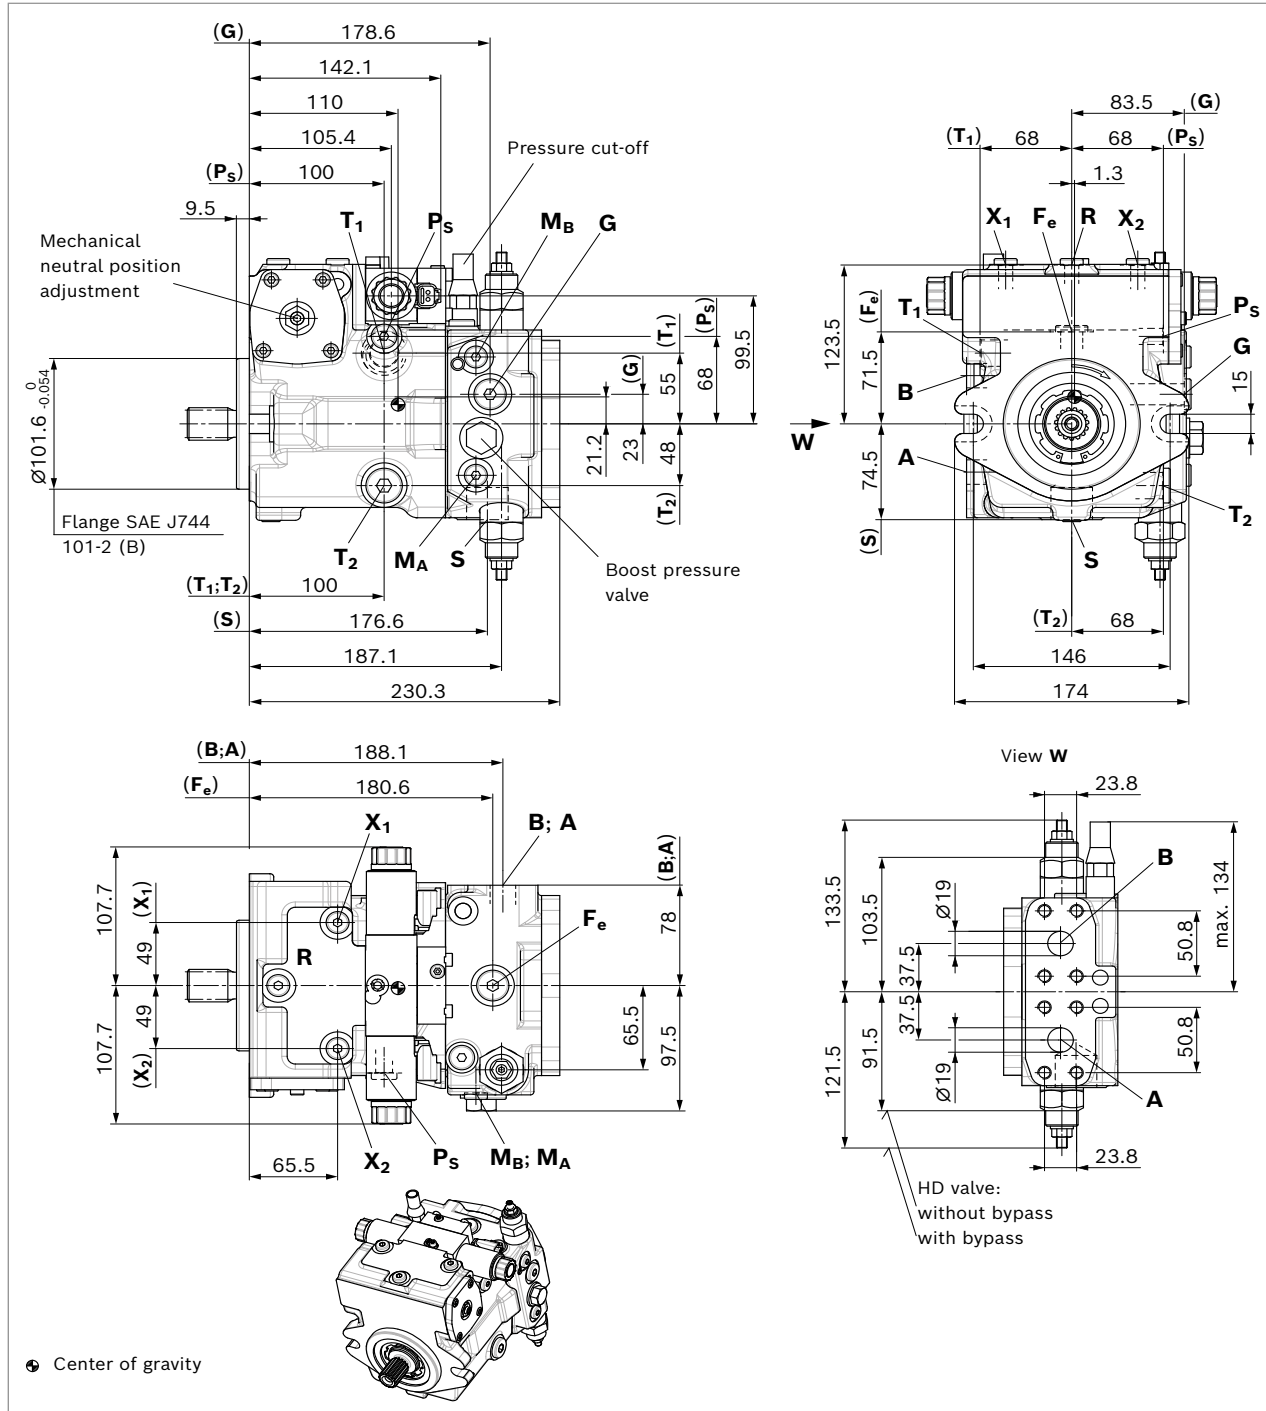

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 45

33


▼ **Splined shaft ANSI B92.1a**

**S – 1 in 15T 16/32DP<sup>1)</sup>**



▼ **Splined shaft ANSI B92.1a**

**T – 1 1/4 in 14T 12/24DP<sup>1)</sup>**



| Ports  | Standard                        | Size                         | $p_{\max}$ [bar] <sup>3)</sup> | State <sup>9)</sup> |
|--|---------------------------------|------------------------------|--------------------------------|---------------------|
| <b>A, B</b>                                      | SAEJ518 <sup>4)</sup><br>DIN 13 | 3/4 in<br>M10 × 1.5; 17 deep | 350                            | O                   |
| <b>S</b>   | DIN 3852 <sup>7)</sup>          | M33 × 2; 18 deep             | 5                              | O <sup>5)</sup>     |
| <b>T<sub>1</sub></b>                             | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep           | 3                              | O <sup>6)</sup>     |
| <b>T<sub>2</sub></b>                             | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep           | 3                              | X <sup>6)</sup>     |
| <b>R</b>   | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 3                              | X                   |
| <b>X<sub>1</sub>, X<sub>2</sub></b>              | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 40                             | X                   |
| <b>X<sub>3</sub>, X<sub>4</sub><sup>8)</sup></b> | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep              | 40                             | X                   |
| <b>G (F<sub>a</sub>)</b>                         | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep           | 40                             | X                   |
| <b>G</b>   | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                             | X                   |
| <b>P<sub>S</sub></b>                             | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                             | X                   |
| <b>Y</b>   | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                             | O                   |
| <b>M<sub>A</sub>, M<sub>B</sub></b>              | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 350                            | X                   |
| <b>F<sub>e</sub></b>                             | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep           | 40                             | X                   |
| <b>Y<sub>1</sub>, Y<sub>2</sub></b>              | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                             | O                   |
| <b>Z</b>   | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep              | 80                             | X                   |

<sup>1)</sup> Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>2)</sup> Thread according to ASME B1.1

<sup>3)</sup> Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

<sup>4)</sup> Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

<sup>5)</sup> Plugged for external boost pressure supply.

<sup>6)</sup> Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 56).

<sup>7)</sup> The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E

<sup>8)</sup> Optional, see page 49

<sup>9)</sup> O = Must be connected (comes plugged)

X = Plugged (in normal operation)

RE 92750/2020-03-03, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


34 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 45

Dimensions [mm]


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

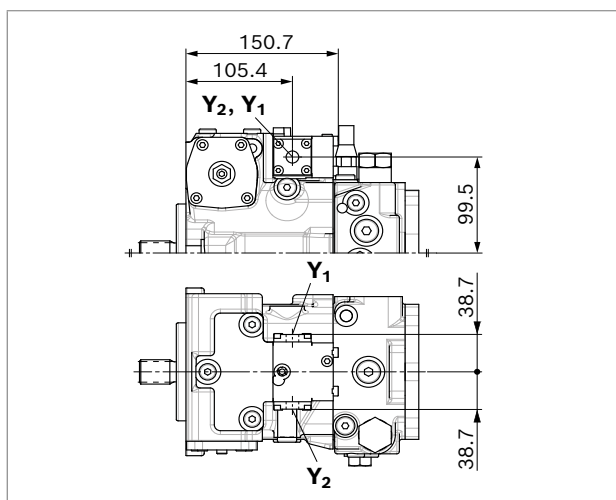


▼ **HW** – Proportional control, hydraulic, mechanical servo

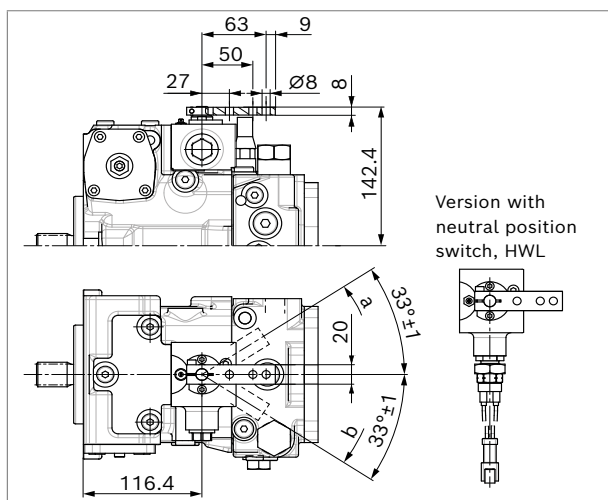


▼ **DG** – Hydraulic control, direct operated

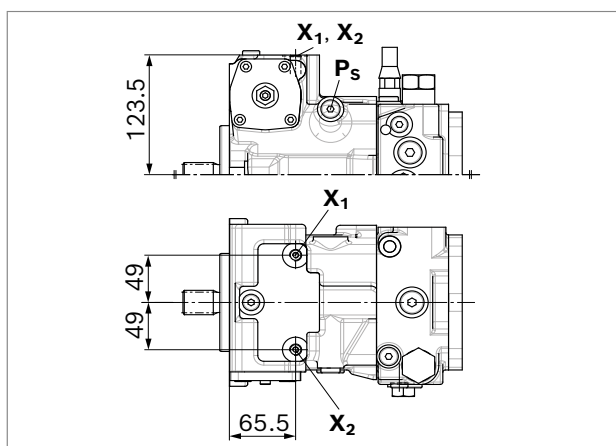

▼ **EZ** – Two-point control, electric

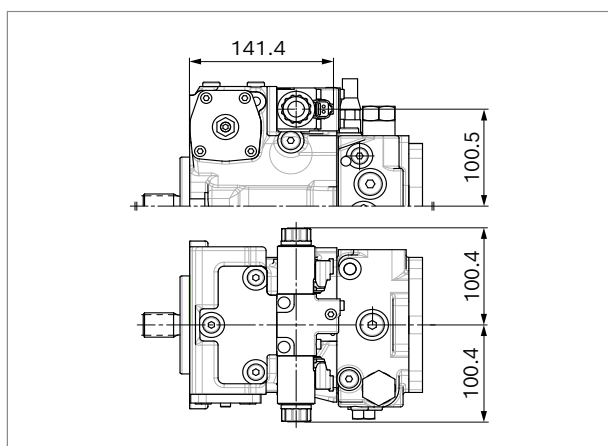

▼ **ET** – Electric control, direct operated

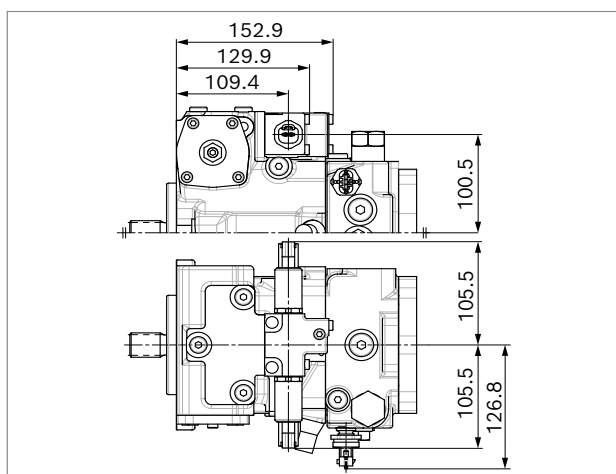

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 45

35

▼ **ED2** – Electric pressure controller

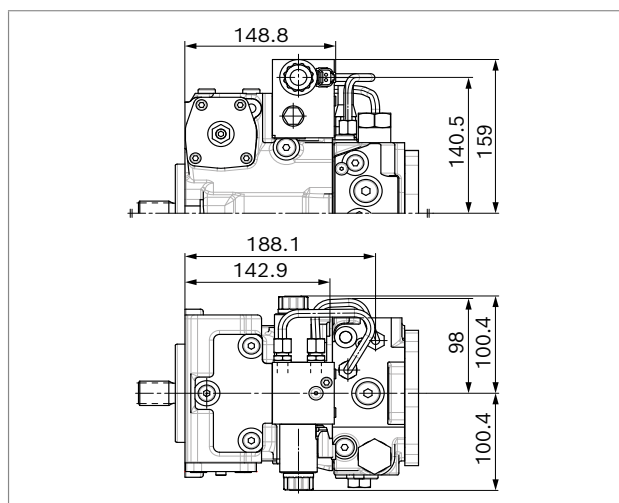

▼ **ED4** – Electric pressure controller

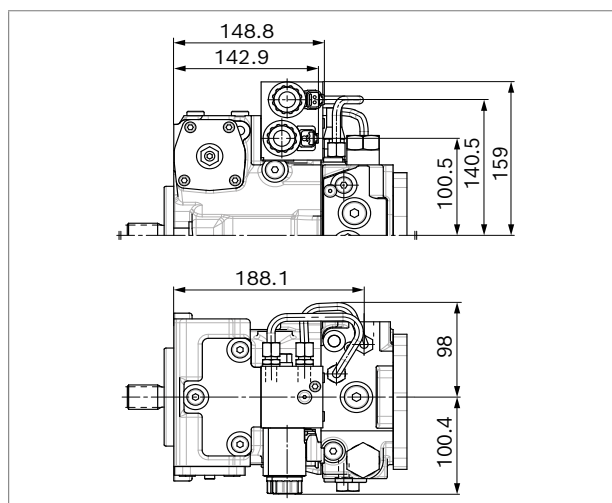


RE 92750/2020-03-03, Bosch Rexroth AG


Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

▼ **DA..3** – mechanically adjustable with position lever

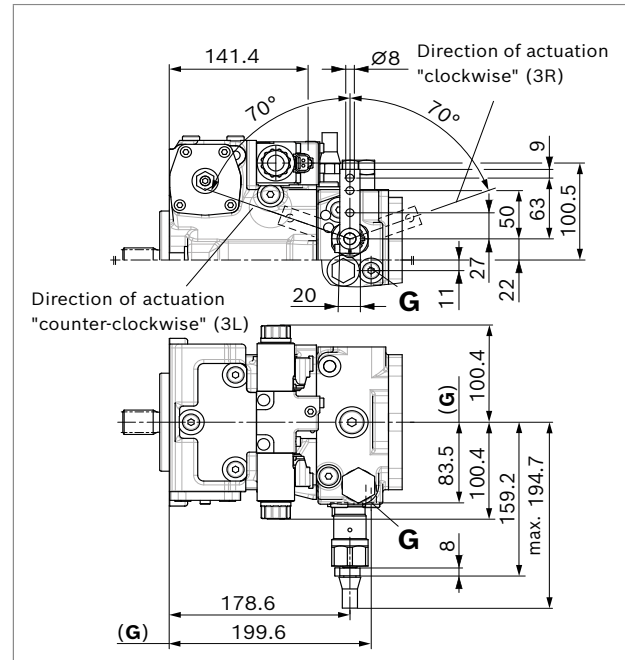

▼ **DA..8** – fixed setting and inch valve mounted

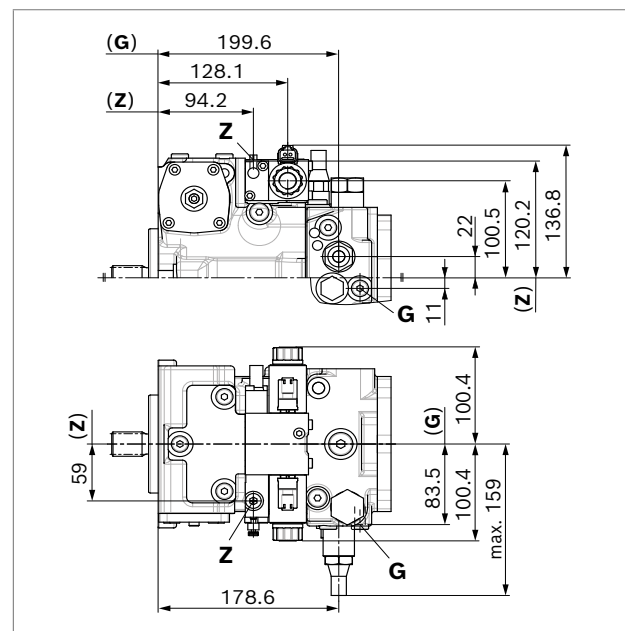

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 63

37

## Dimensions, size 63

### EP – Proportional control, electric

Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (10)

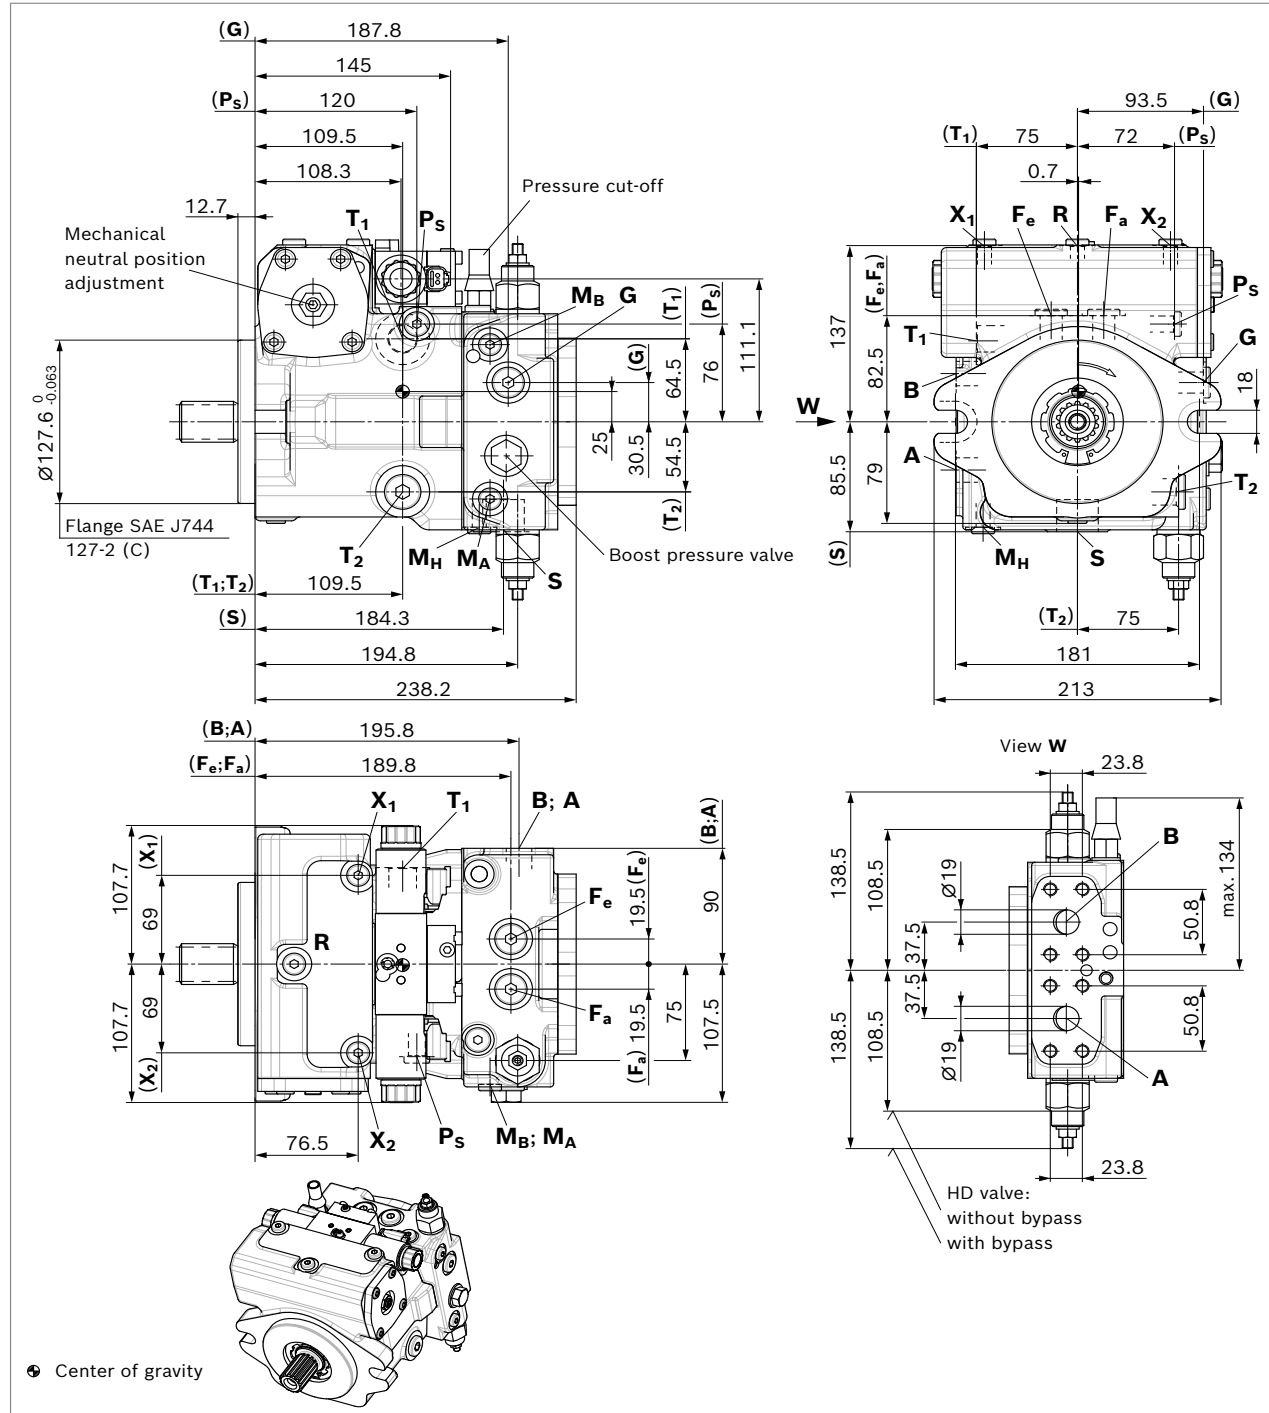

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 38 A10VG Series 10 | Axial piston variable pump Dimensions, size 63

Dimensions [mm]


### ▼ Splined shaft ANSI B92.1a

S – 1 1/4 in 14T 12/24DP<sup>1)</sup>

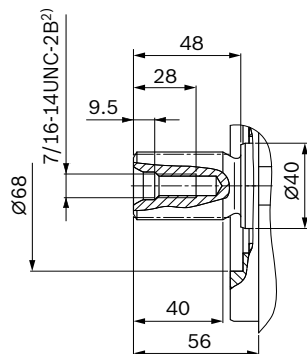

### ▼ Splined shaft ANSI B92.1a

T – 1 3/8 in 21T 16/32DP<sup>1)</sup>

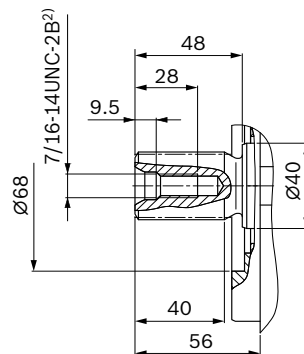

| Ports  | Standard                        | Size                         | $p_{max}$ [bar] <sup>3)</sup> | State <sup>9)</sup> |
|--|---------------------------------|------------------------------|-------------------------------|---------------------|
| <b>A, B</b> Working port<br>Fastening thread                                     | SAEJ518 <sup>4)</sup><br>DIN 13 | 3/4 in<br>M10 × 1.5; 17 deep | 350                           | O                   |
| <b>S</b> Suction port  | DIN 3852 <sup>7)</sup>          | M33 × 2; 18 deep             | 5                             | O <sup>5)</sup>     |
| <b>T<sub>1</sub></b> Drain port  | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep           | 3                             | O <sup>6)</sup>     |
| <b>T<sub>2</sub></b> Drain port  | DIN 3852 <sup>7)</sup>          | M22 × 1.5; 15 deep           | 3                             | X <sup>6)</sup>     |
| <b>R</b> Air bleed port  | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 3                             | X                   |
| <b>X<sub>1</sub>, X<sub>2</sub></b> Control pressure port (upstream of orifice)  | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 40                            | X                   |
| <b>X<sub>3</sub>, X<sub>4</sub></b> <sup>8)</sup> Stroking chamber pressure port | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 40                            | X                   |
| <b>G</b> Boost pressure port inlet   | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep           | 40                            | X                   |
| <b>P<sub>S</sub></b> Pilot pressure port   | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                            | X                   |
| <b>Y</b> Pilot pressure port outlet (only DA..7)                                 | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                            | O                   |
| <b>M<sub>A</sub>, M<sub>B</sub></b> Measuring port pressure A, B                 | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 350                           | X                   |
| <b>M<sub>H</sub></b> Measuring port, high pressure                               | DIN 3852 <sup>7)</sup>          | M12 × 1.5; 12 deep           | 350                           | X                   |
| <b>F<sub>a</sub></b> Boost pressure port inlet                                   | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep           | 40                            | X                   |
| <b>F<sub>e</sub></b> Boost pressure port outlet                                  | DIN 3852 <sup>7)</sup>          | M18 × 1.5; 12 deep           | 40                            | X                   |
| <b>Y<sub>1</sub>, Y<sub>2</sub></b> Pilot pressure port outlet (only HD)         | DIN 3852 <sup>7)</sup>          | M14 × 1.5; 12 deep           | 40                            | O                   |
| <b>Z</b> Pilot pressure port (inch signal only DA..8)                            | DIN 3852 <sup>7)</sup>          | M10 × 1; 8 deep              | 80                            | X                   |

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.
- 5) Plugged for external boost pressure supply.

- 6) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 56).
- 7) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E
- 8) Optional, see page 49
- 9) O = Must be connected (comes plugged)  
X = Plugged (in normal operation)

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
Dimensions, size 63

39


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

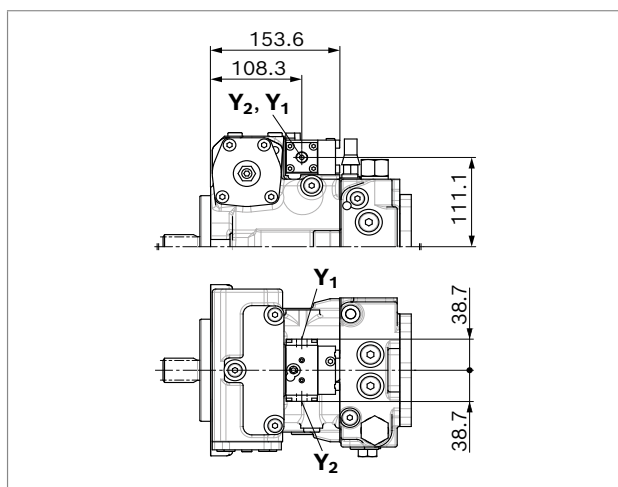


▼ **HW** – Proportional control, hydraulic, mechanical servo

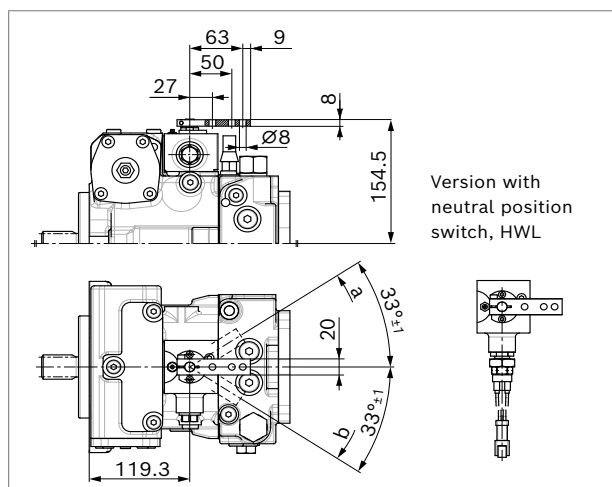


▼ **DG** – Hydraulic control, direct operated

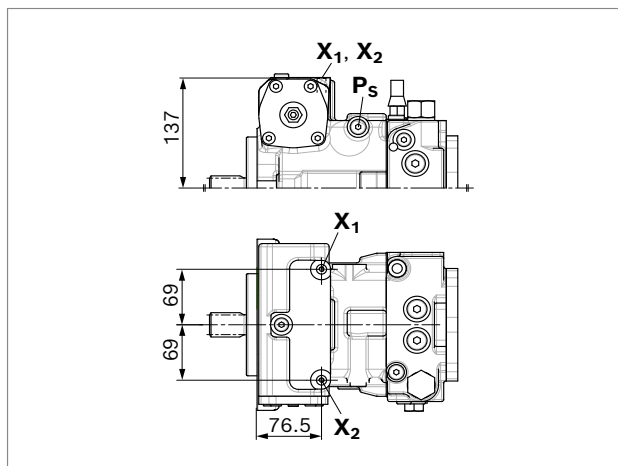


▼ **EZ** – Two-point control, electric

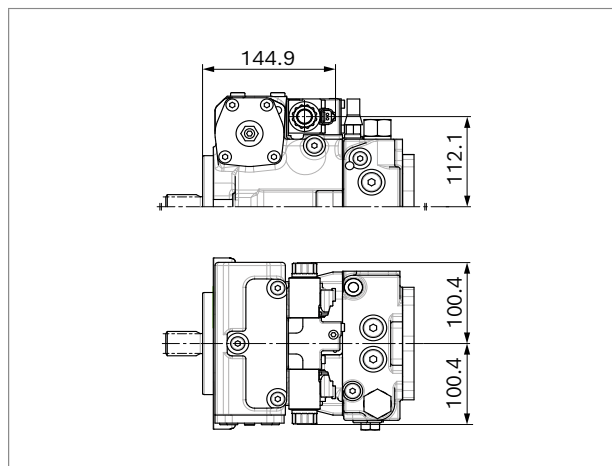

▼ **ED2** – Electric pressure controller

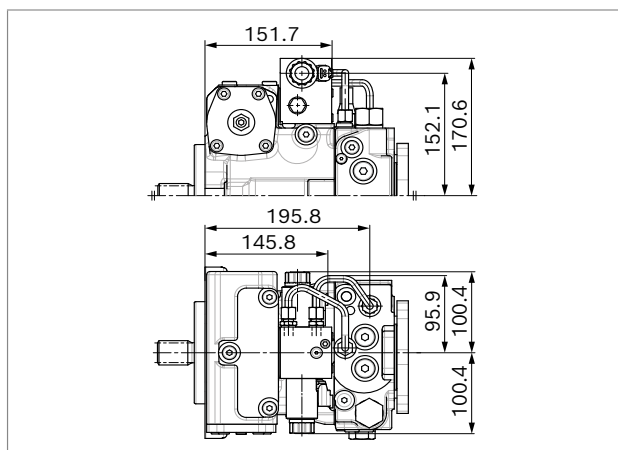

▼ **ED4** – Electric pressure controller

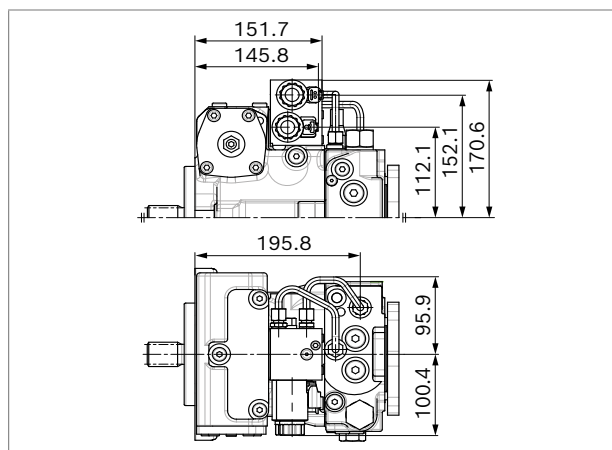

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

40 **A10VG Series 10** | Axial piston variable pump  
Dimensions, size 63


Dimensions [mm]

**DA control valve**


▼ **DA..2** – fixed setting

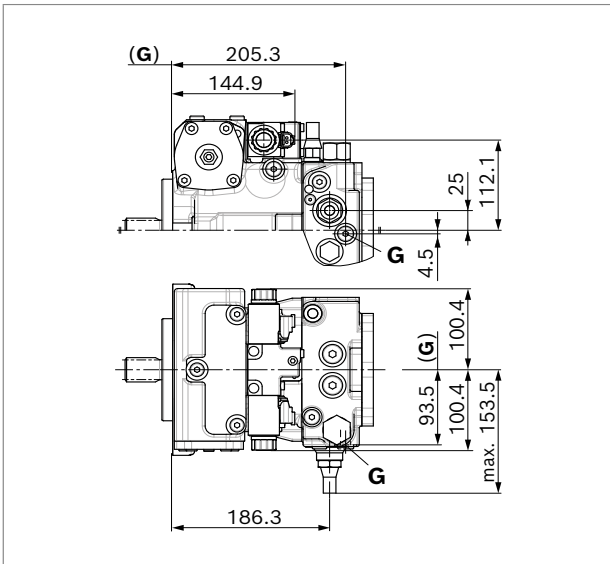


▼ **DA..3** – mechanically adjustable with position lever

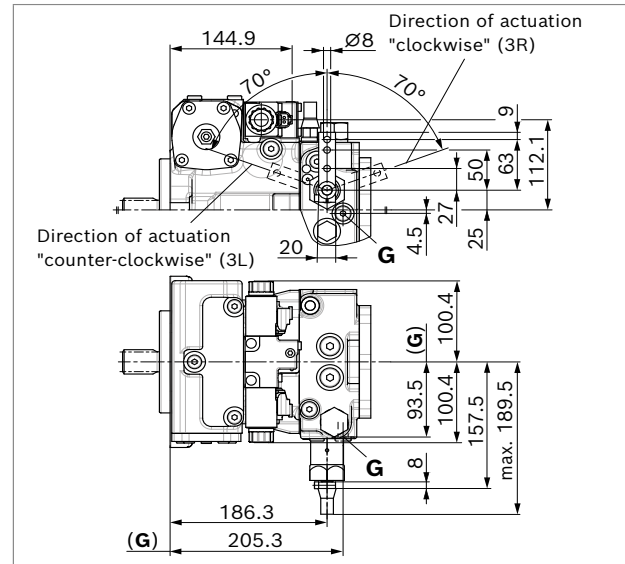

▼ **DA..7** – fixed setting and ports for pilot control device

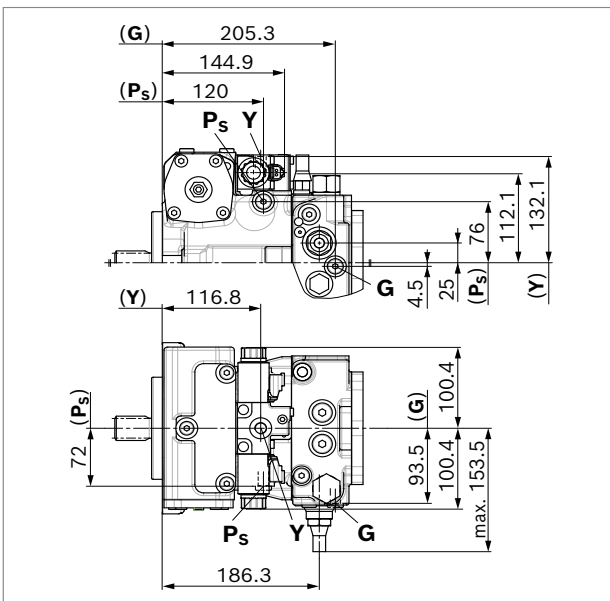

▼ **DA..8** – fixed setting and inch valve mounted

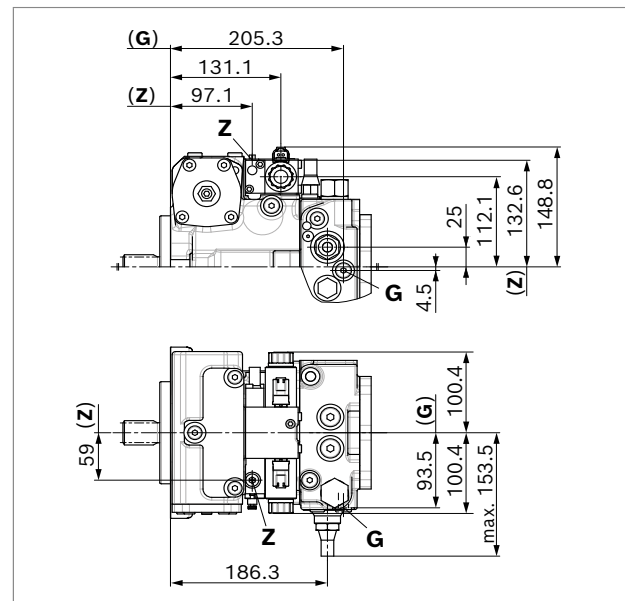

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston variable pump | **A10VG Series 10** 41  
Dimensions, through drive

## Dimensions, through drive


| Flange SAE J744       | Hub for splined shaft <sup>1)</sup> | 18 | 28 | 45 | 63 | Code |
|-----------------------|-------------------------------------|----|----|----|----|------|
| Without through drive |                                     | •  | •  | •  | •  | 00   |
| 82-2 (A)              | 5/8 in 9T 16/32DP                   | •  | •  | •  | •  | 01   |

▼ **N00** – without boost pump, without through drive / **F00** – with boost pump, without through drive

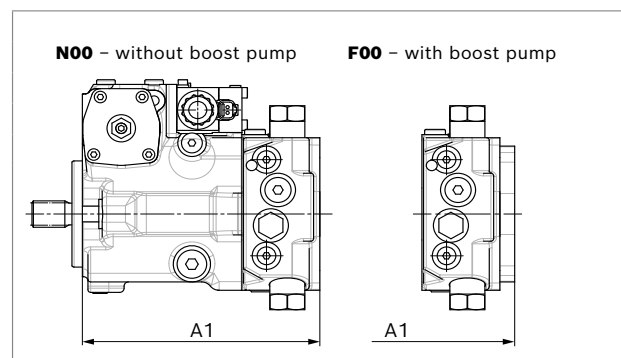

| NG | A1 (N00) | A1 (F00) |
|----|----------|----------|
| 18 | 169.4    | 169.4    |
| 28 | 201.7    | 215.3    |
| 45 | 216.8    | 230.5    |
| 63 | 224.5    | 238.2    |

▼ **F01/K01<sup>5)</sup>**

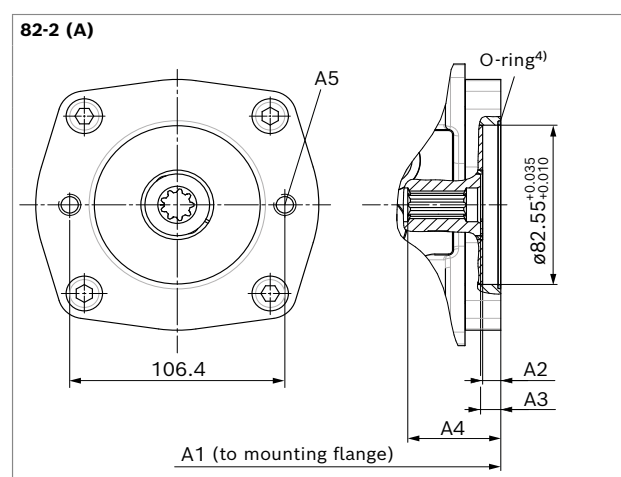

| NG | A1    | A2 <sup>2)</sup> | A3 | A4   | A5 <sup>3)</sup>   |
|----|-------|------------------|----|------|--------------------|
| 18 | 178.4 | min. 8.8         | 9  | 32   | M10 × 1.5; 13 deep |
| 28 | 219.2 | min. 8.8         | 9  | 35.7 |                    |
| 45 | 234.5 | min. 8.8         | 9  | 46   |                    |
| 63 | 242.2 | min. 8.8         | 9  | 45   |                    |

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) According to SAE J744
- 3) Thread according to DIN 13
- 4) O-ring included in the scope of delivery
- 5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

42 **A10VG Series 10** | Axial piston variable pump  
Dimensions, through drive

Dimensions [mm]


| Flange SAE J744 | Hub for splined shaft <sup>1)</sup> | 18 | 28 | 45 | 63 | Code      |
|-----------------|-------------------------------------|----|----|----|----|-----------|
| 82-2 (A)        | 3/4 in 11T16/32DP                   | –  | ●  | ●  | ●  | <b>52</b> |
| 101-2 (B)       | 7/8 in 13T 16/32DP                  | ●  | ●  | ●  | ●  | <b>02</b> |
|                 | 1 in 15T 16/32DP                    | –  | ●  | ●  | ●  | <b>04</b> |

**F52/K52<sup>5)</sup>**

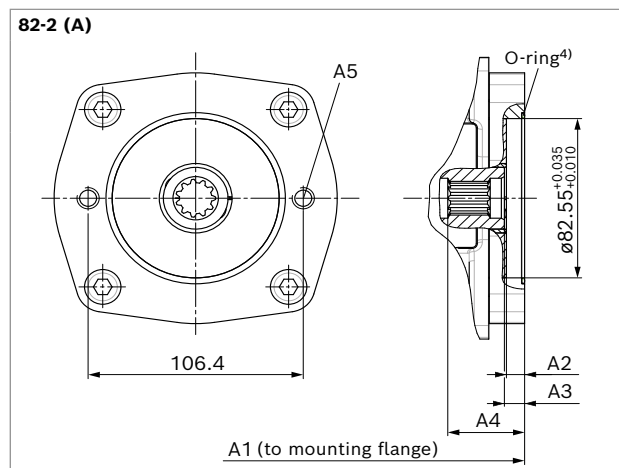

| NG        | A1    | A2 <sup>2)</sup> | A3 | A4   | A5 <sup>3)</sup>   |
|-----------|-------|------------------|----|------|--------------------|
| <b>28</b> | 219.1 | min. 8.8         | 9  | 37.6 | M10 × 1.5; 13 deep |
| <b>45</b> | 234.5 | min. 8.8         | 9  | 38   |                    |
| <b>63</b> | 242   | min. 8.8         | 9  | 37   |                    |

▼ **F02/K02; F04/K04<sup>5)</sup>**

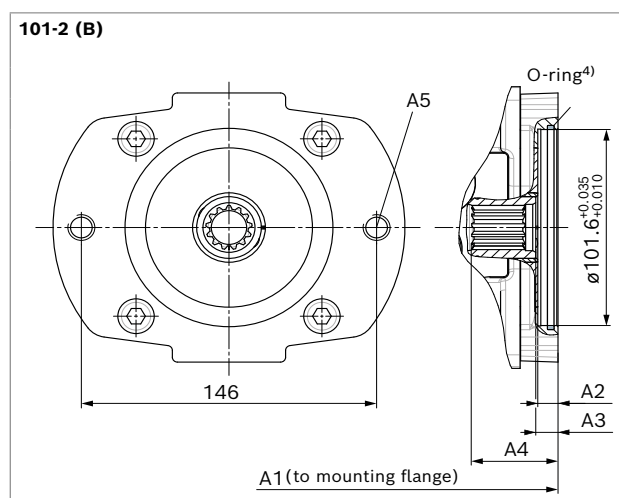

| NG        | A1    | A2 <sup>2)</sup> | A3 | A4<br>(02) | A4<br>(04) | A5 <sup>3)</sup>      |
|-----------|-------|------------------|----|------------|------------|-----------------------|
| <b>18</b> | 187.4 | min. 8.8         | 10 | 39.7       | –          | M12 × 1.75; 18 deep   |
| <b>28</b> | 220.2 | min. 8.8         | 10 | 43.7       | 43.7       | M12 × 1.75; 18.5 deep |
| <b>45</b> | 235.5 | min. 8.8         | 10 | 47.6       | 50.0       |                       |
| <b>63</b> | 243.2 | min. 8.8         | 10 | 51.9       | 43.7       |                       |

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) According to SAE J744
- 3) Thread according to DIN 13
- 4) O-ring included in the scope of delivery
- 5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business


HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]

Axial piston variable pump | **A10VG Series 10** 43  
Dimensions, through drive

| Flange SAE J744 | Hub for splined shaft <sup>1)</sup> | 18 | 28 | 45 | 63 | Code |
|-----------------|-------------------------------------|----|----|----|----|------|
| 127-2 (C)       | 1 1/4 in 14T 12/24DP                | -  | -  | -  | ●  | 07   |

▼ **F07/K07<sup>5)</sup>**

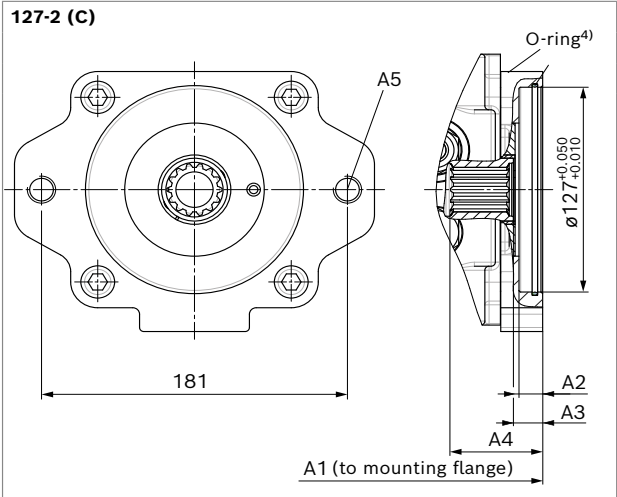

| NG | A1    | A2 <sup>2)</sup> | A3 | A4   | A5 <sup>3)</sup>   |
|----|-------|------------------|----|------|--------------------|
| 63 | 249.5 | min. 8.8         | 14 | 53.9 | M16 × 2; 24.8 deep |

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) According to SAE J744  
3) Thread according to DIN 13  
4) O-ring included in the scope of delivery  
5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

44 **A10VG Series 10** | Axial piston variable pump  
Overview of mounting options

Dimensions [mm]

## Overview of mounting options

| Through drive <sup>1)</sup> |                       | Mounting option – 2nd pump |                     |                    |                         |                         |                    |         |   |
|-----------------------------|-----------------------|----------------------------|---------------------|--------------------|-------------------------|-------------------------|--------------------|---------|---|
| Flange                      | Hub for splined shaft | Code                       | A10VG/10 NG (shaft) | A4VG/32 NG (shaft) | A10V(S) O/3X NG (shaft) | A10V(S) O/5X NG (shaft) | A11VO/1 NG (shaft) | A1VO/10 | External gear pump <sup>2)</sup>            |
| 82-2 (A)                    | 5/8 in                | F/K01                      | –                   | –                  | 18 (U)                  | 10, 18 (U)              | –                  | –       | AZPF, AZPS NG4 ... 28<br>AZPW NG5 ... 22    |
|                             | 3/4 in                | F/K52                      | –                   | –                  | –                       | –                       | –                  | –       | AZPF NG4 ... 28                             |
| 101-2 (B)                   | 7/8 in                | F/K02                      | 18 (S)              | –                  | 28 (S)<br>45 (U)        | 28 (S)<br>45 (U)        | –                  | 35 (S4) | AZPN-11 NG20 ... 25<br>AZPG-22 NG28 ... 100 |
|                             | 1 in                  | F/K04                      | 28, 45 (S)          | 28 (S)             | 45 (S)                  | 45 (S)<br>60, 63 (U)    | 40 (S)             | 35 (S5) | –   |
| 127-2 (C)                   | 1 1/4 in              | F/K09                      | 63 (S)              | 40, 56 (S)         | –                       | –                       | –                  | –       | –   |

### Notice

The mounting options listed only apply for drive shaft versions with undercut. Please contact us for drive shafts without undercut.

<sup>1)</sup> Availability of the individual sizes, see type code on page 4.

<sup>2)</sup> Bosch Rexroth recommends special versions of the gear pumps. Please contact us.

Dimensions [mm]


Axial piston variable pump | **A10VG Series 10**  
Combination pumps A10VG + A10VG

45

## Combination pumps A10VG + A10VG

### Total length A

| A10VG    | A10VG 2nd pump <sup>1)</sup> |       |       |       |
|----------|------------------------------|-------|-------|-------|
| 1st pump | NG18                         | NG28  | NG45  | NG63  |
| NG18     | 356.8                        | –     | –     | –     |
| NG28     | 389.6                        | 435.5 | –     | –     |
| NG45     | 404.9                        | 450.8 | 466.0 | –     |
| NG63     | 412.6                        | 458.5 | 473.7 | 487.7 |

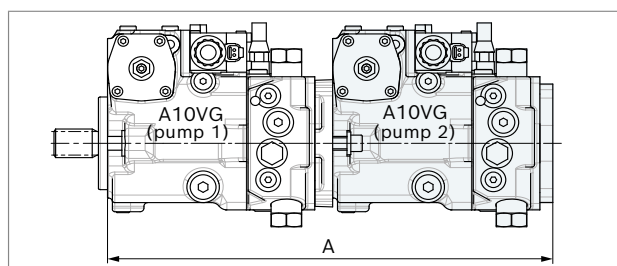

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a "+". Order example:

**A10VG45EP4D1/10R-NTC10F043SP +  
A10VG45EP4D1/10R-NSC10F003SP**

For combination pumps, we recommend a support. Without additional support from the second pump, calculation of the mounting flange is necessary for every load case, please contact us.

### Notice

- ▶ The combination pump type code is shown in shortened form in the order confirmation.
- ▶ The permissible through-drive torques are to be observed (see page 9).

<sup>1)</sup> 2. pump without through drive and with boost pump, F00

## 46 A10VG Series 10 | Axial piston variable pump High-pressure relief valves

### High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overloading. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves. High-pressure relief valves are not working valves and are only suitable for pressure peaks or high rates of pressure change.

#### Setting ranges


| High-pressure relief valve, direct operated     | Differential pressure setting $\Delta p_{HD}$ |
|---|---|
| Setting range valve 3, 5                        | 320 bar                                       |
| $\Delta p_{HD}$ 250 ... 320 bar (see type code) | 300 bar                                       |
|   | 270 bar                                       |
| Setting range valve 4, 6                        | 250 bar                                       |
| $\Delta p_{HD}$ 100 ... 250 bar (see type code) | 230 bar                                       |
|   | 200 bar                                       |
|   | 150 bar                                       |
|   | 100 bar                                       |

#### Settings on high-pressure relief valve A and B

|  |  |
|--|--|
| Differential pressure setting                    | $\Delta p_{HD} = \dots$ bar            |
| Cracking pressure of the HD valve (at $q_{v1}$ ) | $p_{max} = \dots$ bar                  |
|  | ( $p_{max} = \Delta p_{HD} + p_{Sp}$ ) |

- The valve settings are made at  $n = 1000$  rpm and at  $V_{g \max}$  ( $q_{v1}$ ). There may be deviations in the cracking pressures with other operating parameters.
- When ordering, state the differential pressure setting  $\Delta p_{HD}$  in the plain text.

#### ▼ Circuit diagram

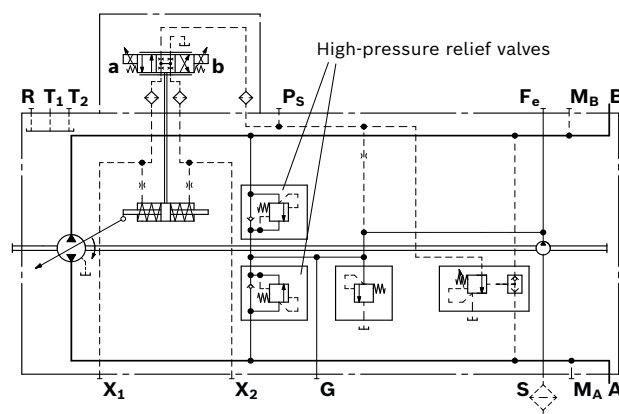


#### Example: $\Delta p$ drive design = 270 bar ( $p_{A, B} - p_{Sp}$ )

| Working pressure | - | Boost pressure | + | Safety | = | Differential pressure |
|------------------|---|----------------|---|--------|---|-----------------------|
| $p_{A, B}$       |   | $p_{Sp}$       |   |        |   | $\Delta p_{HD}$       |
| 290 bar          | - | 20 bar         | + | 30 bar | = | 300 bar               |

- Cracking pressure of the HD valve (at  $q_{v1}$ ):  
 $p_{max} = 320$  bar ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

#### ▼ Setting diagram

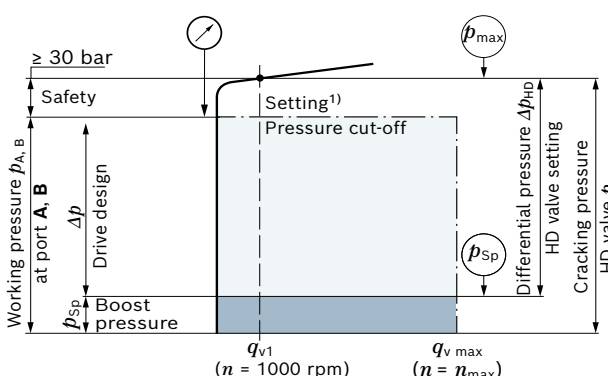

| Key  |   |
|--|---|
| HD valve                                       | High-pressure relief valve  |
| Cracking pressure of the HD valve $p_{max}$    | When the set pressure value is reached, the HD valve opens and thus protects the hydrostatic gear (pump and motor) from overloading   |
| Differential pressure HD valve $\Delta p_{HD}$ | Cracking pressure HD valve (abs.) minus the boost pressure setting  |
| Working pressure $p_{A, B}$                    | The total design of the customer machine is based on this pressure value. It comprises the boost pressure setting and the $\Delta p$ drive design.  |
| $\Delta p$ drive design                        | Differential pressure value determining the available torque at the hydraulic motor ( $p_{A, B} - p_{Sp}$ ).  |
| Boost pressure $p_{Sp}$                        | Boost pressure setting of the low-pressure valve  |
| Safety   | Required distance between working pressure (and/or pressure cut-off) and cracking pressure of the high-pressure relief valve to ensure the intended function of the high-pressure relief valve. |

#### Notice

Upon response of the high-pressure relief valve, the permissible temperature and viscosity must be complied with.

1) Omitted with version without pressure cut-off

## Bypass function

A connection between the two high-pressure passages **A** and **B** can be established using the bypass function (e.g. for machine towing).

### ► Towing speed

The maximum towing speed depends on the gear ratio in the vehicle and must be calculated by the vehicle manufacturer. The corresponding flow of  $q_v = 30$  l/min may not be exceeded.

### ► Towing distance

Only tow the vehicle out of the immediate danger zone. For further information on the bypass function, see the instruction manual.

## Notice

The bypass function is not illustrated in the circuit diagrams.

## Pressure cut-off

The pressure cut-off is a pressure control which, after reaching the set pressure, adjusts the displacement of the pump back to  $V_{g \min}$ .

This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.

The high-pressure relief valves protect against the pressure peaks which occur during fast swiveling of the swashplate and limit the maximum pressure in the system.


The setting range of the pressure cut-off may be anywhere within the entire working pressure range. However, it must at least be set 30 bar lower than the setting value of the high-pressure relief valves (see setting diagram, page 46).

The function of the pressure cut-off in combination with a DG control is described on page 17.


Please state the setting value of the pressure cut-off in plain text when ordering.

### ▼ Circuit diagram with pressure cut-off Electric control, EP\_D

Sizes 28 and 45

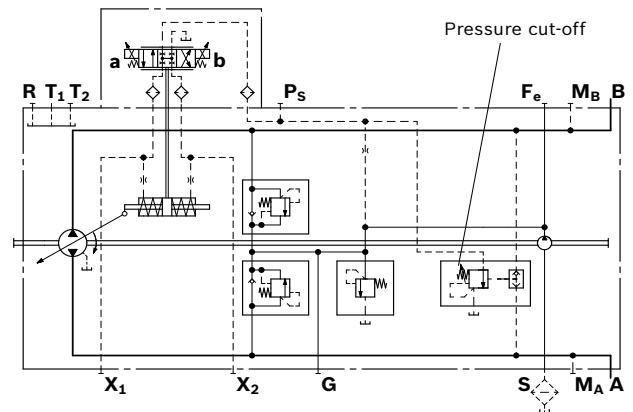

Size 63

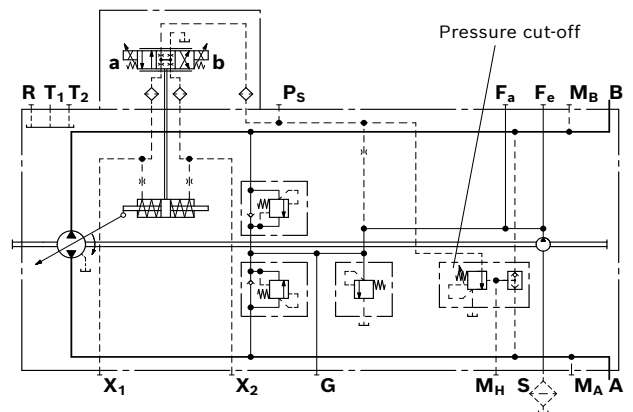

RE 92750/2020-03-03, Bosch Rexroth AG

48 **A10VG Series 10** | Axial piston variable pump  
Mechanical stroke limiter

Dimensions [mm]


## Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used. By means of two threaded pins, the stroke of the stroking piston and thus the maximum swivel angle of the pump can be limited.

### Notice


Threaded pins are mounted from the inside (screw-out protection) and can no longer be removed from the outside.

## Dimensions

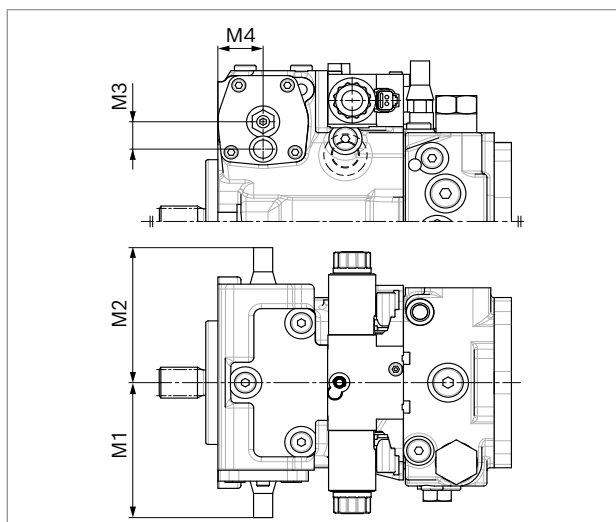

| NG | M1         | M2         | M3   | M4   |
|----|------------|------------|------|------|
| 18 | max. 107   | max. 109   | 18   | 42.1 |
| 28 | max. 104.5 | max. 108   | 21.5 | 35   |
| 45 | max. 113   | max. 113   | 22.5 | 35.5 |
| 63 | max. 134.5 | max. 136.5 | 26.5 | 43   |

### ▼ Circuit diagram sizes 28 and 45

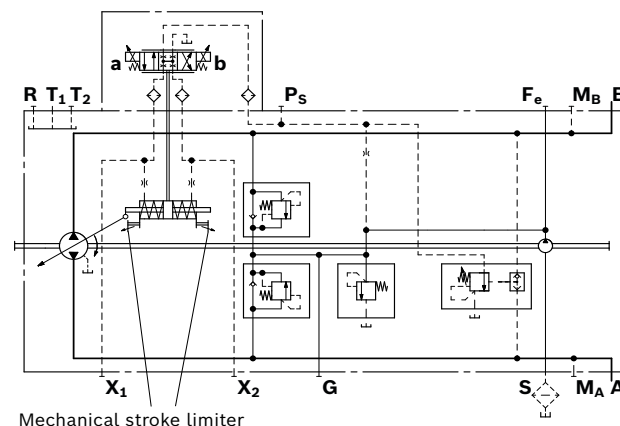


Dimensions [mm]

Axial piston variable pump | **A10VG Series 10** 49  
Stroking chamber pressure port X3 and X4


Stroking chamber pressure port X3 and X4

Dimensions

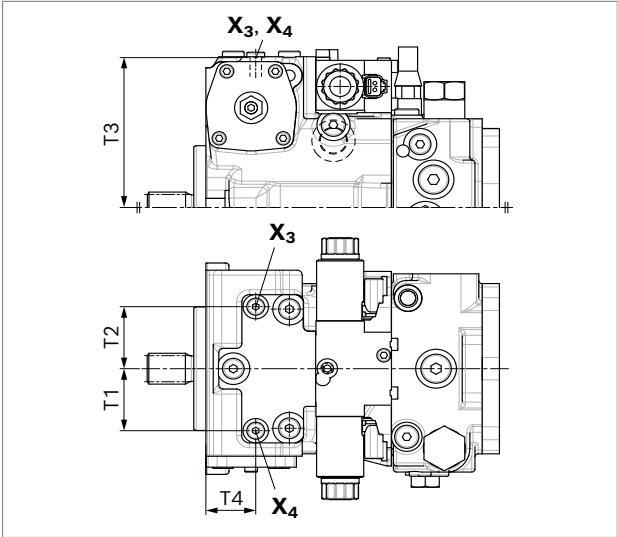

| NG | T1   | T2   | T3    | T4   |
|----|------|------|-------|------|
| 28 | 51.5 | 51.5 | 116   | 35   |
| 45 | 51   | 51   | 123.7 | 39.1 |
| 63 | 69   | 69   | 137   | 49.5 |

▼ Circuit diagram size 63

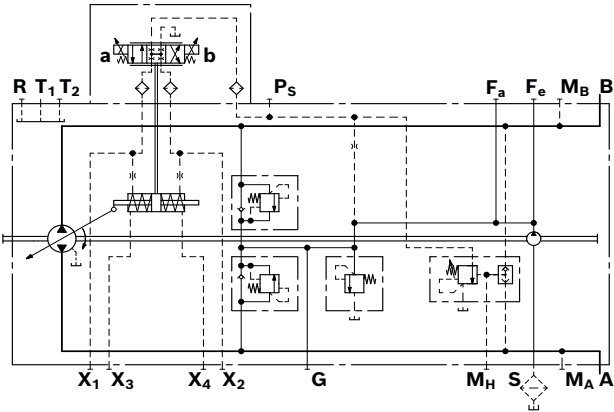

| NG     | Ports  | Standard <sup>1)</sup> | Size               | p <sub>max</sub> [bar] <sup>2)</sup> | State <sup>3)</sup> |
|--------|--|------------------------|--------------------|--------------------------------------|---------------------|
| 28, 45 | X <sub>3</sub> , X <sub>4</sub> Stroking chamber pressure port | DIN 3852               | M10 × 1; 8 deep    | 40                                   | X                   |
| 63     | X <sub>3</sub> , X <sub>4</sub> Stroking chamber pressure port | DIN 3852               | M12 × 1.5; 12 deep | 40                                   | X                   |


1) The countersink may be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E.  
2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
3) X = Plugged (in normal operation)

50 **A10VG Series 10** | Axial piston variable pump  
 Measuring ports MA, MB, MH


Dimensions [mm]

## Measuring ports $M_A$ , $M_B$ , $M_H$


The measuring ports  $M_A$ ,  $M_B$  and  $M_H$  are designed according to DIN 3852 and designed for straight stud ends according to EN ISO 9974-2 type E. The countersink may, however, be deeper than specified in the standard.

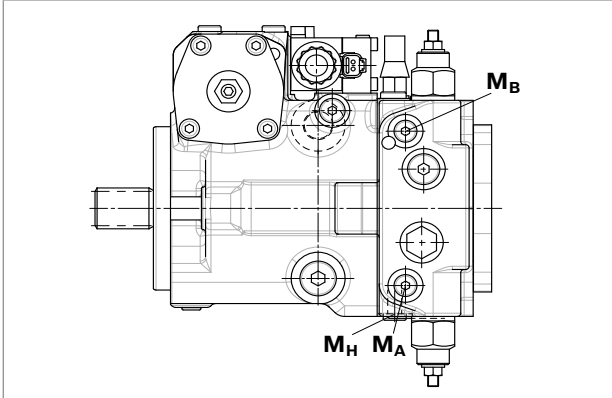


### Countersink of the measuring ports $M_A$ , $M_B$ and $M_H$ <sup>1)</sup>

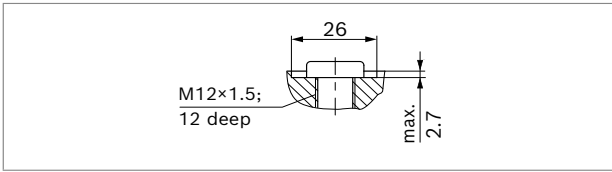

### Circuit diagram sizes 28 and 45

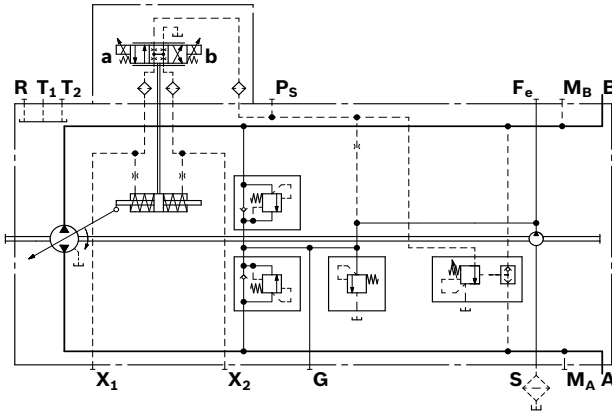

### Circuit diagram size 63

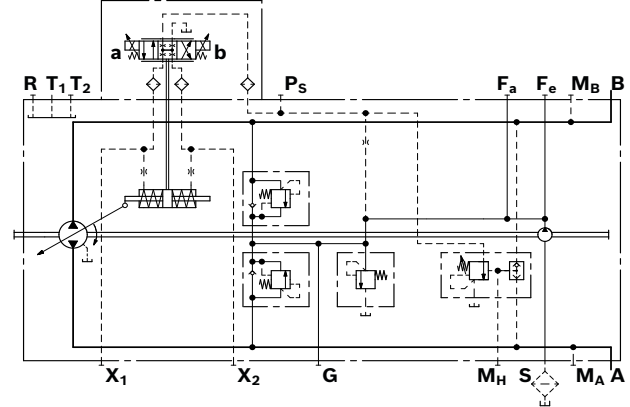

### Notice

In connection with the ET control, a version with pressure sensors is required to be able to realize the preferred control of the unit by means of BODAS eDA (data sheet 95315).

One prerequisite for the combination with pressure sensors is a port plate version with  $M_A/M_B$  according to ISO 6149 M14 × 1.5. This design is only available for selected port plates, please contact us.

For information on the pressure sensor PR4 refer to data sheet 95156.

| Measuring ports                     | Standard <sup>1)</sup> | NG18 ... 45        | NG63               | $p_{max}$ [bar] <sup>2)</sup> | State <sup>3)</sup> |
|-------------------------------------|------------------------|--------------------|--------------------|-------------------------------|---------------------|
| $M_A$ Measuring port pressure A     | DIN 3852               | M12 × 1.5; 12 deep | M12 × 1.5; 12 deep | 350                           | X                   |
| $M_B$ Measuring port pressure B     | DIN 3852               | M12 × 1.5; 12 deep | M12 × 1.5; 12 deep | 350                           | X                   |
| $M_H$ Measuring port, high pressure | DIN 3852               | –                  | M12 × 1.5; 12 deep | 350                           | X                   |

1) The countersink may be deeper than specified in the standard.  
 Ports designed for straight stud ends according to EN ISO 9974-2 type E.

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) X = Plugged (in normal operation)

## Filtration in the boost pump suction line


### Version S

| Filter version   | Suction filter                                      |
|--|---|
| Recommendation   | With contamination indicator, with cold start valve |
| Recommended flow resistance at filter element                        |   |
| At $v = 30 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$             | $\Delta p = 0.1 \text{ bar}$                        |
| At $v = 1000 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$           | $\Delta p = 0.3 \text{ bar}$                        |
| Pressure at suction port S   |   |
| Continuous $p_{S \text{ min}}$ ( $v \leq 30 \text{ mm}^2/\text{s}$ ) | $\geq 0.8 \text{ bar absolute}$                     |
| Short-term, at a cold start ( $t < 3 \text{ min}$ )                  | $\geq 0.5 \text{ bar absolute}$                     |
| Maximum pressure $p_{S \text{ max}}$                                 | $\leq 5 \text{ bar absolute}$                       |


Use of version S is preferred.

The suction filter is not included in the scope of delivery.

### ▼ Circuit diagram sizes 28 and 45

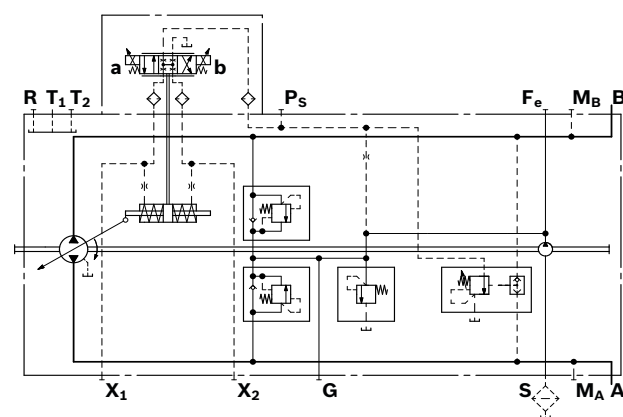

### ▼ Circuit diagram size 63

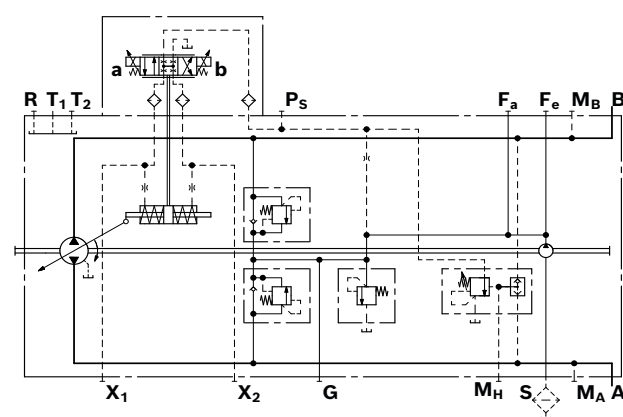

## Filtration in the boost pump pressure line

### Version D

#### Ports for external boost circuit filtration


| Ports                 |   |  |
|-----------------------|---|--|
| Boost pressure inlet  | NG 28, 45   | Port <b>G</b> ( <b>F<sub>a</sub></b> ) |
|                       | NG 63   | Port <b>F<sub>a</sub></b>              |
| Boost pressure outlet |   | Port <b>F<sub>e</sub></b>              |
| Filter version        | Boost pressure filter                               |  |
| Recommendation        | With contamination indicator, with cold start valve |  |
| Filter arrangement    | Separate in the pressure line (inline filter)       |  |

The boost pressure filter is not included in the scope of delivery.

### Notice

- ▶ In connection with a DA control valve, no pressure filtration is possible with NG28 and 45.
- ▶ For NG28 and 45, port **G** serves as "boost pressure port inlet".
- ▶ Filters with bypass are **not recommended**, (exception DG, see below). Please contact us for applications with a bypass.
- ▶ On versions with DG control (with pilot pressure not from a boost circuit), a filter must be used that fulfills the requirements with regard to filtration of the hydraulic fluid (see page 6).
- ▶ The pressure drop at the filter is viscosity- and contamination-dependent. Note the maximum permissible pressure of the boost pump in combination with the set feed pressure.


### ▼ Circuit diagram sizes 28 and 45

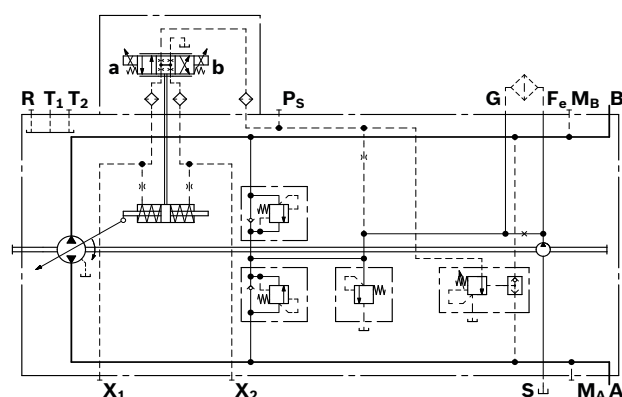

## 52 A10VG Series 10 | Axial piston variable pump External boost pressure supply

Dimensions [mm]

### ▼ Circuit diagram size 63

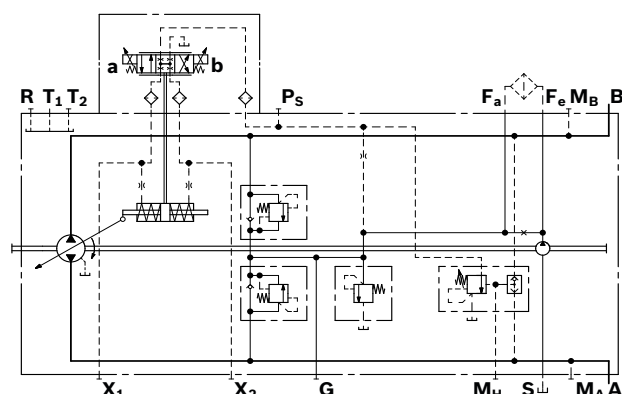

### Notice

Bosch Rexroth has a comprehensive filter range on offer. An inline filter, e.g. the 110 LEN (see data sheet 51448), is suitable for charge pressure filtration. Further information can also be found at [www.boschrexroth.com/filter](http://www.boschrexroth.com/filter).

## External boost pressure supply

### Version E

This variation should be used in versions without integrated boost pump (N and/or K).

With sizes 28, 45 and 63, port S is plugged.

### ▼ Boost pressure supply


| Size                              | Port           |
|-----------------------------------|----------------|
| 18                                | S              |
| 28, 45 (without DA control valve) | G              |
| 28, 45 (with DA control valve)    | F <sub>e</sub> |
| 63                                | F <sub>a</sub> |

The filter should be installed separately on port F<sub>a</sub>, F<sub>e</sub>, G or S before the boost pressure supply.

To ensure the functional reliability, maintain the required cleanliness level for the boost pressure fluid fed in at port F<sub>a</sub>, F<sub>e</sub>, G or S (see page 6).


### ▼ Circuit diagram sizes 28 and 45

#### Boost pressure supply at port G

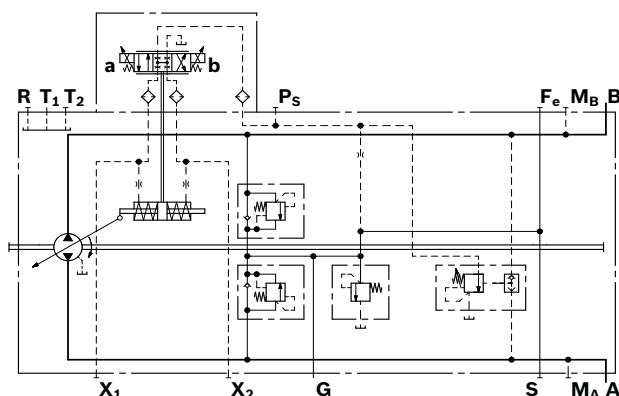

### ▼ Circuit diagram size 63

#### Boost pressure supply at port F<sub>a</sub>

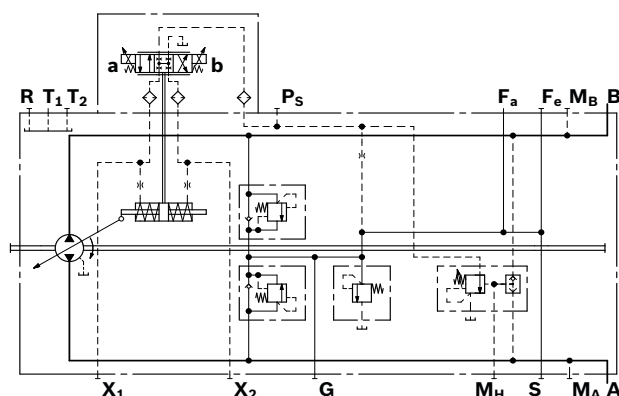

Connector for solenoids

DEUTSCH DT04-2P-EP04

- ▶ **P:** Molded, 2-pin, without bidirectional suppressor diode (standard).
- ▶ **Q:** Molded, 2-pin, with bidirectional suppressor diode (only for switching solenoids on control module EZ, DA and ED)


The following type of protection ensues with the installed mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)


The protection circuit with bidirectional suppressor diode is needed to limit overvoltages. Overvoltages are caused by switching off the current with switches, relay contacts or by disconnecting the mating connector while voltage is applied.

Switching symbol

without bidirectional suppressor diode



with bidirectional suppressor diode



Mating connector DEUTSCH DT06-2S-EP04

| Consisting of | DT designation |
|---------------|----------------|
| 1 housing     | DT06-2S-EP04   |
| 1 wedge       | W2S            |
| 2 sockets     | 0462-201-16141 |

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid body.
- ▶ The procedure is defined in the instruction manual.

54 **A10VG Series 10** | Axial piston variable pump  
 Rotary inch valve

Dimensions [mm]

## Rotary inch valve

The rotary inch valve allows for any reduction of pilot pressure, independently of drive speed, through mechanical actuation of the control lever. The control lever is equipped with an internal rotational limiter  $\pm 90^\circ$  (drawing item **1** and **2**).

The valve is arranged separately from the pump and is connected to the pump by a hydraulic control line via port **P<sub>s</sub>** (maximum line length: approx. 2 m).

The rotary inch valve must be ordered separately.


| Material number | Direction of actuation of the position control lever | Throttle cross-section $\varnothing$ |
|-----------------|--|--------------------------------------|
| R902048734      | Clockwise  | 4.6                                  |
| R902048735      | Counter-clockwise                                    | 4.6                                  |
| R902070172      | Clockwise  | 2.7                                  |
| R902066994      | Counter-clockwise                                    | 2.7                                  |

### Notice


The rotary inch valve can be used regardless of the control module. If necessary, the position of the control lever can be changed.

### ▼ Circuit diagram

**Hydraulic control, speed related**  
**DA with separately attached rotary inch valve**

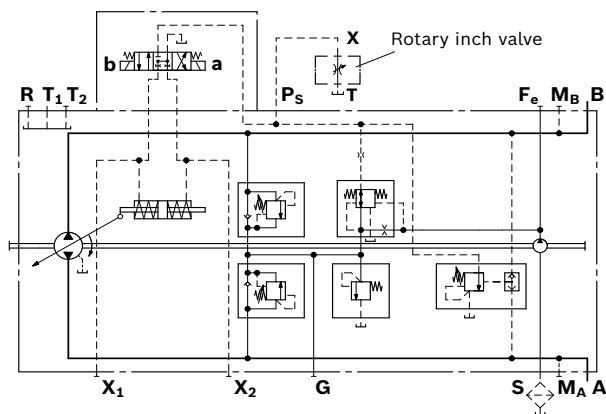

## Dimensions

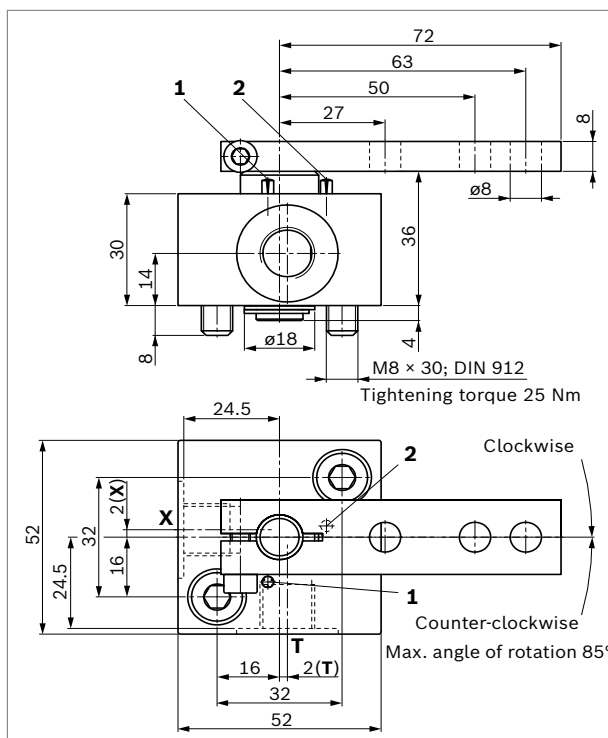

### Notice

To prevent damage to the rotary inch valve, a positive mechanical stop of  $\pm 85^\circ$  must be provided for the control lever on the customer side.

| Ports                        | Standard <sup>1)</sup> | Size               | $p_{\max}$ [bar] <sup>2)</sup> | State <sup>3)</sup> |
|------------------------------|------------------------|--------------------|--------------------------------|---------------------|
| <b>X</b> Pilot pressure port | DIN 3852               | M14 × 1.5; 12 deep | 40                             | O                   |
| <b>T</b> Drain port          | DIN 3852               | M14 × 1.5; 12 deep | 3                              | O                   |

1) The countersink may be deeper than specified in the standard.  
 Ports designed for straight stud ends according to EN ISO 9974-2 type E.

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) O = Must be connected (plugged on delivery)

Dimensions [mm]

Axial piston variable pump | **A10VG Series 10**  
Installation dimensions for coupling assembly

55


## Installation dimensions for coupling assembly

To ensure that rotating components (coupling hub) and fixed components (housing, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the pump size and the splined shaft.

### SAE splined shaft (spline according to ANSI B92.1a)

Splined shaft **S** and/or **T**

The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring (dimension  $d_2$ ) in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).  
Observe diameter of relief on sizes 18, 28 and 45.

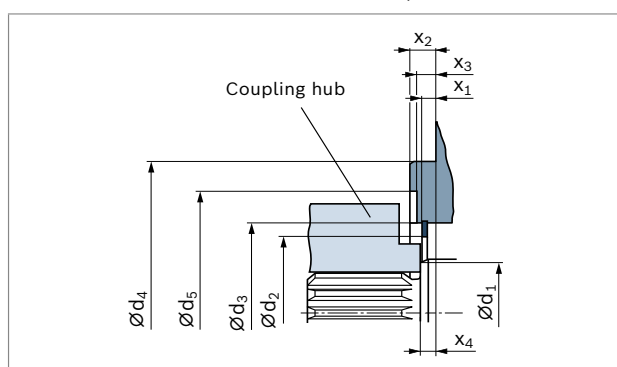

| NG | $\phi d_1$ | $\phi d_{2 \text{ min}}$ | $\phi d_3$ | $\phi d_4$                           | $\phi d_5$ | $x_1$               | $x_2$                | $x_3$ | $x_4$                             |
|----|------------|--------------------------|------------|--------------------------------------|------------|---------------------|----------------------|-------|-----------------------------------|
| 18 | 28.5       | 36.1                     | 49±0.1     | 101.6 <sup>0</sup> <sub>-0,054</sub> | 65         | 5.9 <sup>+0.2</sup> | 9.5 <sub>-0.5</sub>  | 7     | 8 <sup>+0.9</sup> <sub>-0.6</sub> |
| 28 | 33.5       | 43.4                     | 55±0.1     | 101.6 <sup>0</sup> <sub>-0,054</sub> | 72         | 3.9 <sup>+0.2</sup> | 9.5 <sub>-0.5</sub>  | 7     | 8 <sup>+0.9</sup> <sub>-0.6</sub> |
| 45 | 38.5       | 51.4                     | 63±0.1     | 101.6 <sup>0</sup> <sub>-0,054</sub> | 80         | 4.3 <sup>+0.2</sup> | 9.5 <sub>-0.5</sub>  | 7     | 8 <sup>+0.9</sup> <sub>-0.6</sub> |
| 63 | 38.5       | 54.4                     | 68±0.1     | 127.0 <sup>0</sup> <sub>-0,063</sub> | —          | 7.0 <sup>+0.2</sup> | 12.7 <sub>-0.5</sub> | —     | 8 <sup>+0.9</sup> <sub>-0.6</sub> |

RE 92750/2020-03-03, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position "drive shaft upwards", filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The leakage in the housing area must be directed to the reservoir via the highest drain port (**T<sub>1</sub>**, **T<sub>2</sub>**).

For combination pumps, the leakage must be drained off at each single pump.

If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain lines must be laid, if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

Under all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the total pressure loss; it must not, however, be higher than  $h_{s \max} = 800 \text{ mm}$ .

The suction pressure at port **S** must also not fall below the minimum value of 0.8 bar absolut during operation (cold start 0.5 bar absolute).

### Installation position

See the following examples 1 to 12.

Further installation positions are available upon request.



Recommended installation position: 1 and 2.


### Notice

- If filling the stroking chambers via **X<sub>1</sub>** to **X<sub>2</sub>** is not possible in the final installation position, then this must take place before installation, e.g. in installation position 2.
- To prevent unexpected actuation and damage, the stroking chambers must be air bled via the ports **X<sub>1</sub>**, **X<sub>2</sub>** depending on the installation position.
- In certain installation positions, an influence on the adjustment or control can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.

### Below-reservoir installation (standard)


Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.
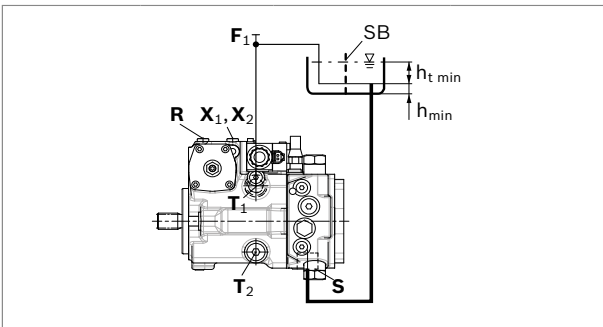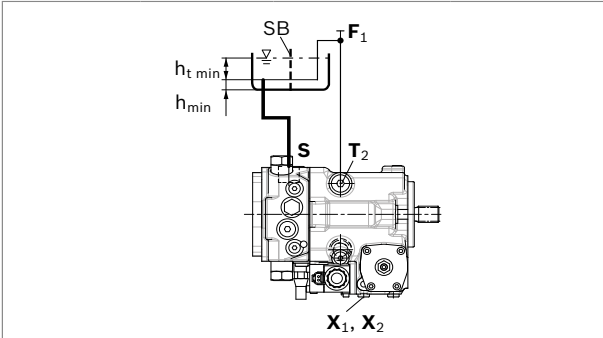
| Installation position  | Air bleed the housing | Air bleed the stroking chamber              | Filling   |
|--|-----------------------|---|---|
| 1  | R                     | <b>X<sub>1</sub></b> + <b>X<sub>2</sub></b> | <b>S</b> + <b>T<sub>1</sub></b> + <b>X<sub>1</sub></b> + <b>X<sub>2</sub></b> |
|  |                       |   |   |
| 2  | -                     | -   | <b>S</b> + <b>T<sub>2</sub></b> + <b>X<sub>1</sub></b> + <b>X<sub>2</sub></b> |
|  |                       |   |   |

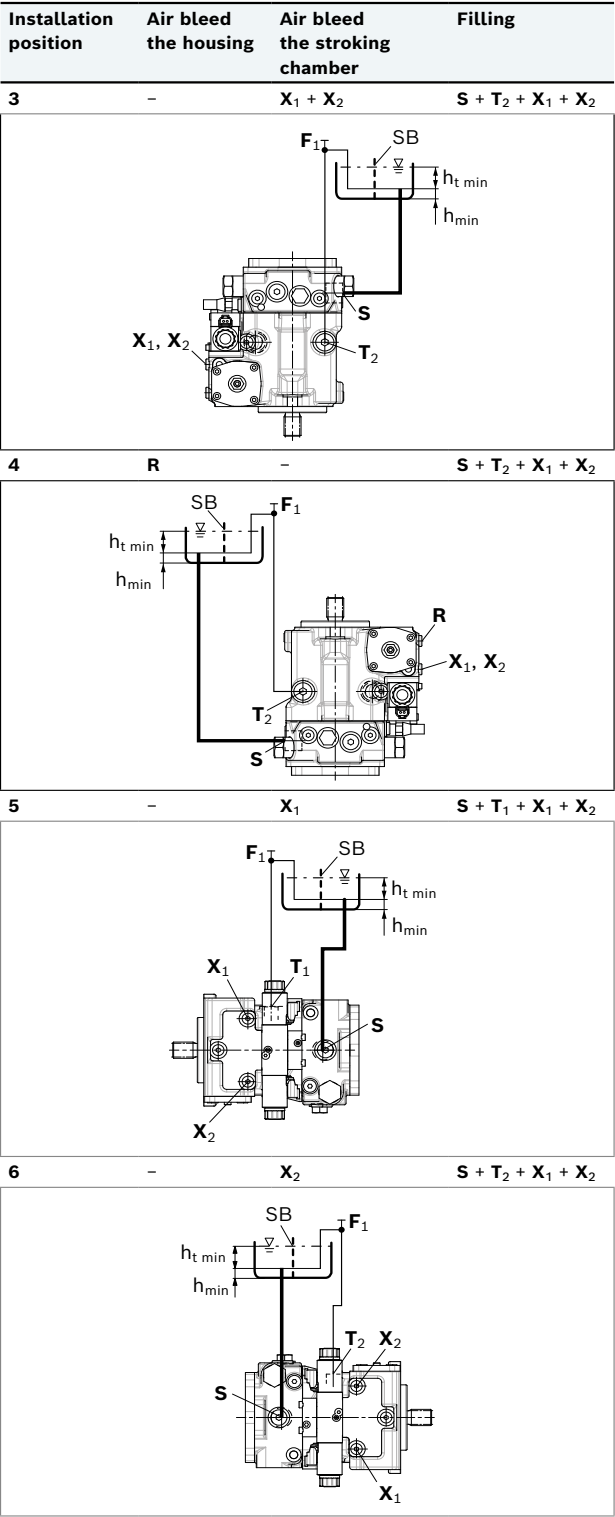




**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. Observe the maximum permissible suction height  $h_{S \max} = 800 \text{ mm}$ . Recommendation for installation position 10 (drive shaft upward): A check valve in the drain line (cracking pressure 0.5 bar) can prevent the housing area from draining.

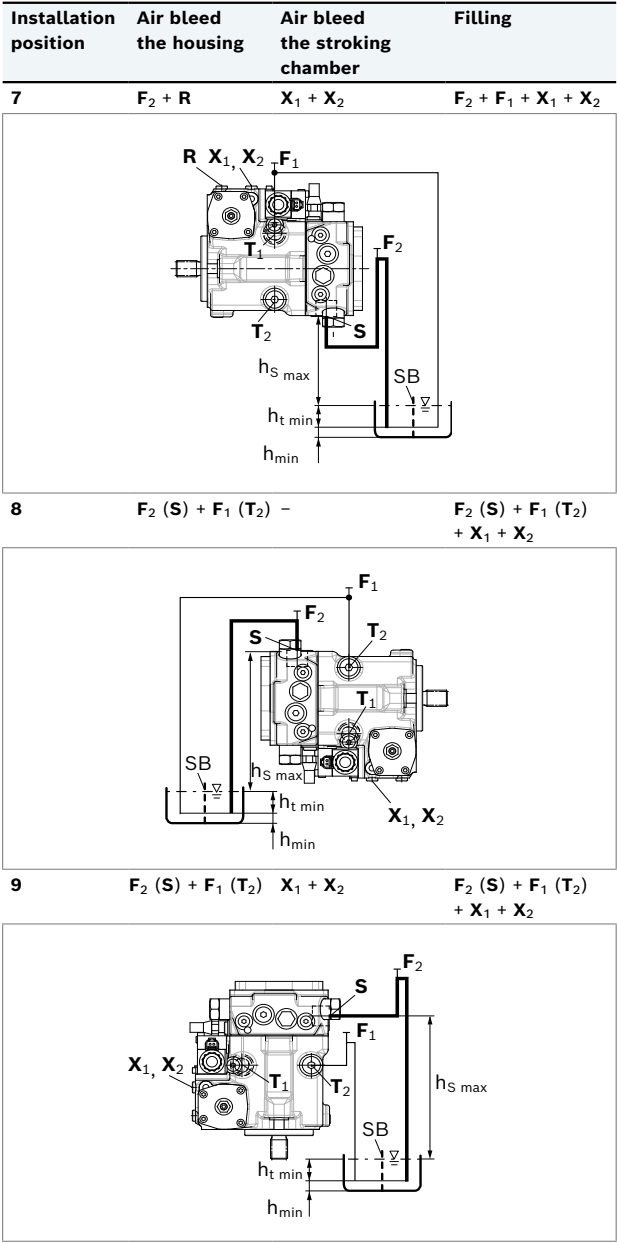

58    **A10VG Series 10** | Axial piston variable pump  
Installation instructions

| Installation position | Air bleed the housing | Air bleed the stroking chamber | Filling |
|-----------------------|-----------------------|--------------------------------|---------|
|-----------------------|-----------------------|--------------------------------|---------|

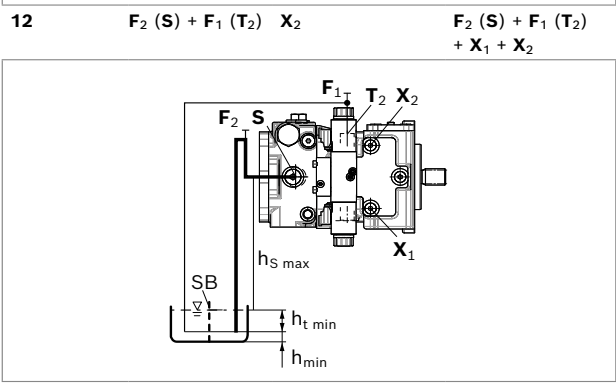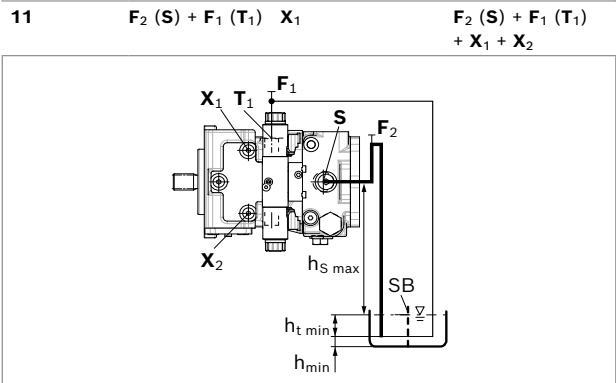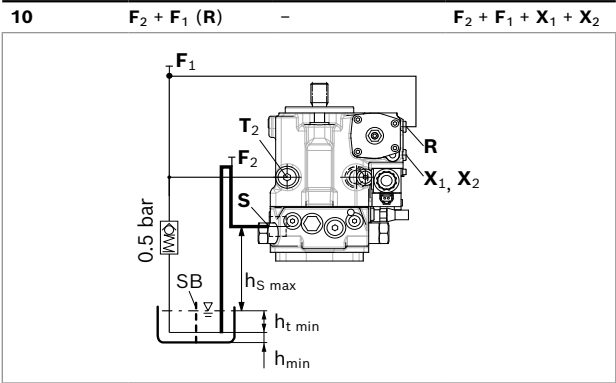

| Key         |  |
|-------------|--|
| $F_1, F_2$  | Filling/air bleeding                                   |
| $R$         | Air bleed port   |
| $S$         | Suction port   |
| $T_1, T_2$  | Drain port   |
| $X_1, X_2$  | Control pressure port                                  |
| $SB$        | Baffle (baffle plate)                                  |
| $h_{t min}$ | Minimum required immersion depth (200 mm)              |
| $h_{min}$   | Minimum required distance to reservoir bottom (100 mm) |
| $h_{S max}$ | Maximum permissible suction height (800 mm)            |

**Notice**  
Ports  $F_1$  and  $F_2$  are part of the external piping and must be provided by the customer to make filling and air bleeding easier.

## Project planning notes

- ▶ The pump is designed to be used in a closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit require the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservation is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in data sheet 90312 or in the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>D</sub>) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. Applying a direct voltage signal (DC) to solenoids does not create electromagnetic interference (EMI) nor is the solenoid affected by EMI. Electromagnetic interference (EMI) potential exists when operating and controlling a solenoid with a modulated direct voltage signal (e.g. PWM signal). Appropriate testing and measures should be taken by the machine manufacturer to ensure other components or operators (e.g. with pacemaker) are not affected by this potential.
- ▶ The pressure cut-off is not a safeguard against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ With dynamic power flow (switch of pumps to operation as a motor) a maximum of 95%  $V_{g \max}$  is permissible. We recommend configuring the software accordingly.
- ▶ For drives that are operated for a long period with constant rotational speed, the natural frequency of the hydraulic system can be stimulated by the stimulator frequency of the pump (rotational speed frequency × 9). This can be prevented with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

60 **A10VG Series 10** | Axial piston variable pump  
Safety instructions

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.
- ▶ Moving parts in high-pressure relief valves may in certain circumstances become stuck in an undefined position due to contamination (e.g. impure hydraulic fluid). This can result in restriction or loss of load-holding functions in lifting winches.  
The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to keep the load in a safe position and ensure they are properly implemented.

Bosch Rexroth AG, RE 92750/2020-03-03

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK