

The Drive & Control Company


**Rexroth**  
**Bosch Group**

## Axial piston variable double pump A28VO Series 10

**RE 93105**

Edition: 02.2018

Replaces: –.–

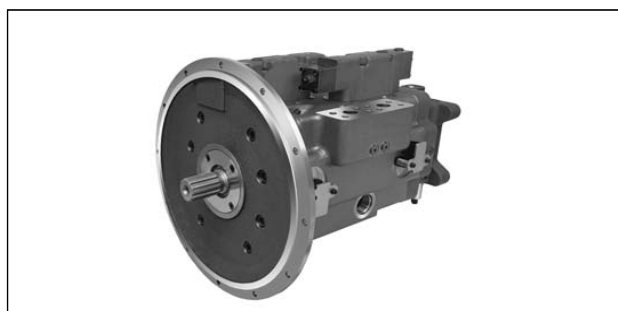

- ▶ Size 130
- ▶ Nominal pressure 380 bar
- ▶ Maximum pressure 420 bar
- ▶ Open circuit

### Features

- ▶ Variable axial piston double pump of swashplate design for hydrostatic drives in open circuit.
- ▶ For use preferably in mobile applications eg. excavator.
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swashplate angle.
- ▶ One common suction port, two pressure ports.
- ▶ Special control devices program for mobile applications, with different control and regulation functions.
- ▶ Compact design for limited installation space
- ▶ High efficiency
- ▶ High power density due to increased pressure level
- ▶ Low noise level

### Contents

|                            |    |
|----------------------------|----|
| Ordering code              | 2  |
|                            | 3  |
| Hydraulic fluids           | 4  |
| Auxiliary pump             | 5  |
| Operating pressure range   | 6  |
| Technical data             | 7  |
| Power controller           | 9  |
| Stroke control             | 10 |
| Dimensions, size 130       | 13 |
| Dimensions, size 130       | 14 |
| Connector for solenoids    | 18 |
| Dimensions, through drives | 19 |
| Installation instructions  | 20 |
| Project planning notes     | 22 |
| Safety instructions        | 23 |

RE 93105/02.2018, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 2 A28VO Series 10 | Axial piston variable double pump Ordering code

### Ordering code

|      |    |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 01   | 02 | 03  | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| A28V | O  | 130 |    |    | 1  |    |    |    | /  | 10 |    | R  | V  |    | R1 | 2  |    | 0  | -  |

#### Axial piston unit

|    |   |      |
|----|---|------|
| 01 | Double pump, variable swashplate design | A28V |
|----|---|------|

#### Operation mode

|    |                    |   |
|----|--------------------|---|
| 02 | Pump, open circuit | O |
|----|--------------------|---|

#### Sizes (NG)

|    |  |     |
|----|--|-----|
| 03 | Geometric displacement, see "Technical data" on page 7 | 130 |
|----|--|-----|

#### Pump 1: control devices: basic controller

|    |                            |                                 |   |   |    |
|----|----------------------------|---------------------------------|---|---|----|
| 04 | Summation power controller | override hydraulic-proportional | negative control                                    | • | C5 |
|    | Stroke control             | override electric-proportional  | positive control                                    | ○ | E1 |
|    |                            |                                 | $U = 12 \text{ V } 400 \text{ to } 1200 \text{ mA}$ | ○ | E2 |
|    |                            |                                 | $U = 24 \text{ V } 200 \text{ to } 600 \text{ mA}$  | ○ | E7 |
|    |                            |                                 | $U = 24 \text{ V } 400 \text{ to } 1500 \text{ mA}$ | • |    |

#### Pump 1: additional control for basic controller C5: stroke control

|    |                                 |   |    |
|----|---------------------------------|---|----|
| 05 | Without additional control      | ○ | 00 |
|    | Stroke control                  | • | H4 |
|    | override hydraulic-proportional |   |    |

#### Pump 2: control combination

|    |                       |   |   |
|----|-----------------------|---|---|
| 06 | Identical with pump 1 | • | 1 |
|----|-----------------------|---|---|

#### Depressurized basic position and external control pressure supply

|    |  |   |   |
|----|--|---|---|
| 07 | Maximum swivel angle ( $V_{g \max}$ )  |   |   |
|    | Without external control pressure supply (standard for power and pressure controllers)               | • | A |
|    | Minimum swivel angle ( $V_{g \min}$ )  |   |   |
|    | With external control pressure supply (integrated check valve, standard for positive stroke control) | • | C |

#### Connector for solenoids<sup>1)</sup> (see page 18)

|    |   |   |   |
|----|---|---|---|
| 08 | Without connector (only for hydraulic controls) | • | 0 |
|    | DEUTSCH connector                               | • | P |

#### Swivel angle indicator

|    |   |   |                            |
|----|---|---|----------------------------|
| 09 | Without sensor  | • | 0                          |
|    | With electric swivel angle sensor <sup>2)</sup> as per data sheet 95150 | • | B                          |
|    |   | ○ | K                          |
|    |   |   | Power supply 5 V DC        |
|    |   |   | Power supply 8 V - 32 V DC |

#### Series

|    |                   |   |    |
|----|-------------------|---|----|
| 10 | Series 1, Index 0 | • | 10 |
|----|-------------------|---|----|

• = Available    ○ = On request    - = Not available

<sup>1)</sup> Connectors for other electric may deviate

<sup>2)</sup> Please contact us if the swivel angle sensor is use for control

Axial piston variable double pump | **A28VO Series 10**  
Ordering code

3

|             |          |            |    |    |          |    |    |    |          |           |    |          |          |    |           |          |    |          |          |
|-------------|----------|------------|----|----|----------|----|----|----|----------|-----------|----|----------|----------|----|-----------|----------|----|----------|----------|
| 01          | 02       | 03         | 04 | 05 | 06       | 07 | 08 | 09 | 10       | 11        | 12 | 13       | 14       | 15 | 16        | 17       | 18 | 19       | 20       |
| <b>A28V</b> | <b>O</b> | <b>130</b> |    |    | <b>1</b> |    |    |    | <b>/</b> | <b>10</b> |    | <b>R</b> | <b>V</b> |    | <b>R1</b> | <b>2</b> |    | <b>0</b> | <b>-</b> |

**Configuration of port and fastening threads**

**130**

|    |  |   |          |
|----|--|---|----------|
| 11 | JIS (Japan), fastening threads at SAE port (working ports <b>A</b> and <b>S</b> ), transport thread and through drive fastening threads are metric. Drain, measurement and pilot pressure ports are JIS B2351. | • | <b>J</b> |
|    | ANSI, fastening threads at SAE port (working ports <b>A</b> and <b>S</b> ), transport thread and through drive fastening threads are metric. Drain, measurement and pilot pressure ports are ISO 11926.        | • | <b>D</b> |

**Direction of rotation**

|    |                          |           |   |          |
|----|--------------------------|-----------|---|----------|
| 12 | With view on drive shaft | clockwise | • | <b>R</b> |
|----|--------------------------|-----------|---|----------|

**Sealing material**

|    |                        |   |          |
|----|------------------------|---|----------|
| 13 | FKM (fluor-caoutchouc) | • | <b>V</b> |
|----|------------------------|---|----------|

**Mounting flanges**

|    |          |        |   |           |
|----|----------|--------|---|-----------|
| 14 | SAE J744 | 165-4  | ○ | <b>E4</b> |
|    | SAE J617 | 409-12 | • | <b>G3</b> |

**Drive shaft** (permissible input torque see page 8)

|    |  |                    |   |           |
|----|--|--------------------|---|-----------|
| 15 | Splined shaft according to ANSI B92.1a | 1 3/4in 13T 8/16DP | • | <b>R1</b> |
|----|--|--------------------|---|-----------|

**Working port**

|    |  |   |          |
|----|--|---|----------|
| 16 | SAE service line port <b>A</b> <sub>1</sub> , <b>A</b> <sub>2</sub> at side, SAE-suction port <b>S</b> at bottom | • | <b>2</b> |
|----|--|---|----------|

**Auxiliary pump (pilot pressure pump) and valves**

|    |  |   |           |
|----|--|---|-----------|
| 17 | Without integrated auxiliary pump, without pressure-relief valve                       | • | <b>K0</b> |
|    | With integrated auxiliary pump, with pressure-relief valve                             | • | <b>F1</b> |
|    | With integrated auxiliary pump, with pressure-relief valve and pressure reducing valve | • | <b>F4</b> |

**Through drive**

|    |                       |                                     |             |                    |             |               |
|----|-----------------------|-------------------------------------|-------------|--------------------|-------------|---------------|
| 18 | Flange SAE J744       | Hub for splined shaft <sup>3)</sup> |             |                    |             |               |
|    | Diameter              | Attachment                          | Designation | Diameter           | Designation |               |
|    | 82-2 (A)              | ø                                   | A5          | 7/8 in 13T 16/32DP | S4          | • <b>A5S4</b> |
|    | 101-2 (B)             | ∞                                   | B2          | 7/8 in 13T 16/32DP | S4          | • <b>B2S4</b> |
|    | Without through drive |                                     |             |                    |             | • <b>0000</b> |

**Speed sensor**

|    |         |   |          |
|----|---------|---|----------|
| 19 | Without | • | <b>0</b> |
|----|---------|---|----------|

**Standard/special version**

|    |                  |   |          |
|----|------------------|---|----------|
| 20 | Standard version | • | <b>0</b> |
|    | Special version  | • | <b>S</b> |

**Note**

- Note the project planning notes on page 22.
- In addition to the ordering code, please specify the relevant technical data when placing your order.

• = Available    ○ = On request    - = Not available

<sup>3)</sup> According to ANSI B92.1a

## 4 A28VO Series 10 | Axial piston variable double pump Hydraulic fluids

### Hydraulic fluids

The A28VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

|                                    | Viscosity   | Temperature                                   | Comment  |
|------------------------------------|---|---|--|
| Cold start                         | $v_{max} \leq 1600 \text{ mm}^2/\text{s}$           | $\theta_{st} \geq -40 \text{ °C}^{1)}$        | $t \leq 3 \text{ min}$ , without load ( $20 \text{ bar} \leq p \leq 50 \text{ bar}$ , $n \leq 1000 \text{ rpm}$ )                          |
| Permissible temperature difference |   | $\Delta T \leq 25 \text{ K}$                  | between axial piston unit and hydraulic fluid  |
| Warm-up phase                      | $v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$    | $\theta = -40 \text{ °C to } -25 \text{ °C}$  | at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$   |
| Continuous operation               | $v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$      | $\theta = -25 \text{ °C to } +110 \text{ °C}$ | This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)                              |
|                                    |   |   | measured at port T   |
|                                    |   |   | Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between bearing/shaft seal and port T) |
|                                    | $v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$ |   | Range of optimum operating viscosity and efficiency  |
| Short-term operation               | $v_{min} \geq 7 \text{ mm}^2/\text{s}$              |   | $t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$   |

### ▼ Selection diagram

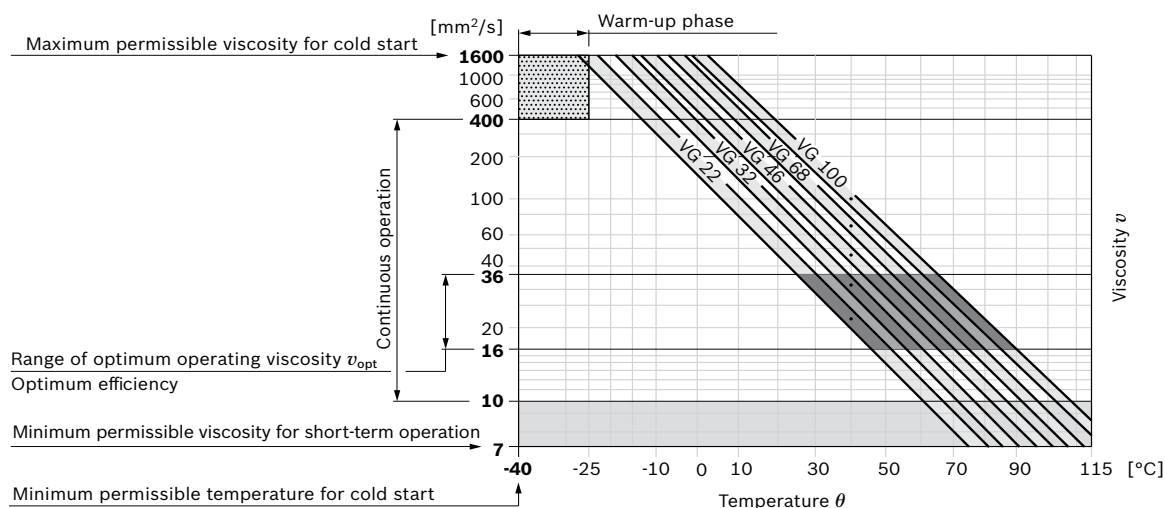

1) At temperatures below -25 °C, an NBR shaft seal is required (permissible temperature range -40 °C bis +90 °C)

## Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

In order to guarantee the functional reliability of the axial piston unit it is necessary to carry out a gravimetric evaluation of the hydraulic fluid to determine the particle contamination and the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 must be maintained. At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness class of at least 19/17/14 according to ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

## Auxiliary pump

The integrated auxiliary pump of the A28VO 130 has a fixed displacement of 15 ccm. The pressure-relief valve is set at a standard value of 42 bar (lower values on request).

Inlet pressure at suction port **S<sub>3</sub>**

► Minimum pressure  $p_{S \min}$ : X bar

► Maximum pressure  $p_{S \max}$ : X bar

An electrically proportional reducing valve can be used, for example to override the power setting (load limiting control).

Nominal voltage of the pressure reducing valve:


► 24 V DC

► Recommended chopper frequency 200 Hz

Variation possibilities see also type code page 3


### ▼ with pressure-relief valve

.....F1



### ▼ with pressure-relief valve and pressure reducing valve

.....F4




## 6 A28VO Series 10 | Axial piston variable double pump Operating pressure range


### Operating pressure range

| Pressure at working port A  |                         | Definition   |
|---|-------------------------|--|
| Nominal pressure $p_{nom}$  | 380 bar                 | The nominal pressure corresponds to the maximum design pressure.   |
| Maximum pressure $p_{max}$  | 420 bar                 | The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period (maximum number of cycles: approx. 1 million). |
| Single operating period   | 1 s                     |  |
| Total operating period  | 300 h                   |  |
| Minimum pressure $p_{A abs}$<br>(high-pressure side)                    |                         | Minimum pressure on the high-pressure side (A) which is required in order to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and the swivel angle (see diagram on page 7).               |
| Rate of pressure change $R_{A max}$                                     | 16000 bar/s             | Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.  |
| Pressure at suction port S (inlet)                                      |                         |  |
| Minimum pressure $p_{S min}$  | $\geq 0.8$ bar absolute | Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.                                    |
| Maximum pressure $p_{S max}$  | $\leq 10$ bar absolute  |  |
| Drain pressure at port T <sub>1</sub> , T <sub>2</sub> , T <sub>3</sub> |                         |  |
| Maximum pressure $p_{L max}$  | 2.2 bar absolute        | Maximum 1.2 bar higher than inlet pressure at port S, but not higher than $p_{L max}$ .<br>A case drain line to the reservoir is required.   |
| Peak Pressure $p_{L peak}$  | 4 bar absolute          | $t < 0.1$ s  |

#### ▼ Rate of pressure change $R_{A max}$



#### ▼ Pressure definition

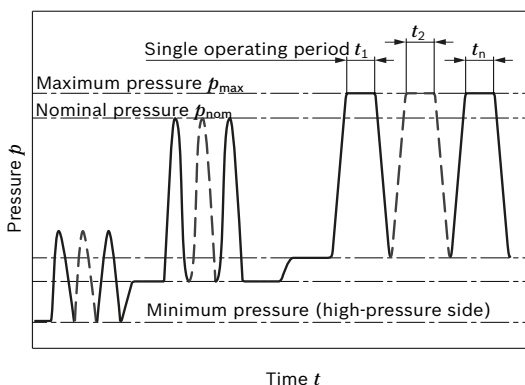


#### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.


## Technical data

| Size  | NG  | 130              |
|---|---|------------------|
| Displacement, geometric, per revolution by rotary group     | $V_{g \max}$  | $\text{cm}^3$    |
|   | $V_{g \min}$  | $\text{cm}^3$    |
| Maximum rotational speed <sup>1)</sup>                      | at $V_{g \max}$ <sup>2)</sup>                                       | $n_{\text{nom}}$ |
|   | at $V_g \leq V_{g \max}$ <sup>3)</sup>                              | $n_{\text{max}}$ |
| Flow  | at $n_{\text{nom}}$ and $V_{g \max}$                                | $q_v$            |
| Power   | at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 380 \text{ bar}$ | $P$              |
| Torque  | at $V_{g \max}$ and $\Delta p = 380 \text{ bar}$ <sup>2)</sup>      | $M$              |
| Rotary stiffness drive shaft                                | 1 3/4 in 13T 8/16DP R1  | $c$              |
| Moment of inertia rotary group                              | $J_{\text{TW}}$   | $\text{kgm}^2$   |
| Maximum angular acceleration <sup>4)</sup>                  | $\alpha$  | $\text{rad/s}^2$ |
| Case volume   | $V$   | $\text{L}$       |
| Weight (without through drive; with auxiliary pump) approx. | $m$   | $\text{kg}$      |

### ▼ Minimum pressure (high-pressure side)

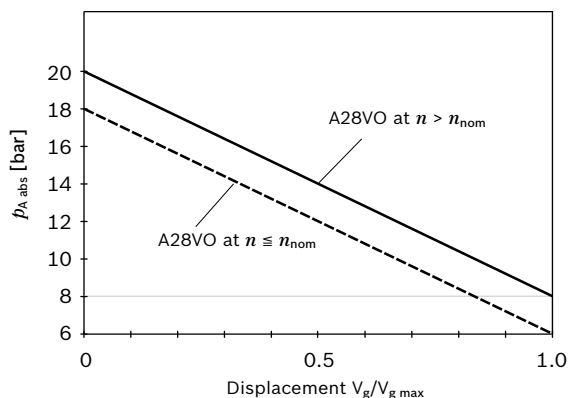

### ▼ Maximum permissible rotational speed (rotational speed limit) ( $p_{s \text{ abs}}$ = inlet pressure [bar])

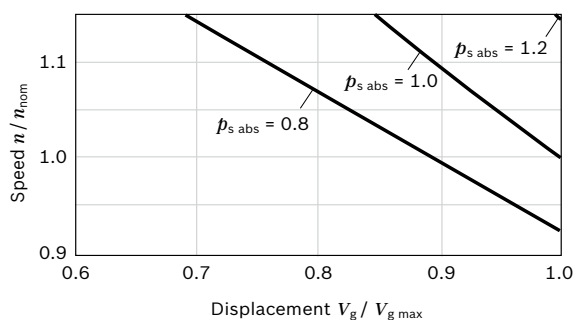

- The values are applicable:
  - for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16 \text{ mm}^2/\text{s}$
  - with hydraulic fluid on the basis of mineral oils
- The values apply at absolute pressure  $p_{\text{abs}} = 1 \text{ bar}$  at suction port **S**.

### Determining the operating characteristics

|        |   |         |
|--------|---|---------|
| Flow   | $q_v = \frac{V_g \times n \times \eta_v}{1000}$   | [l/min] |
| Torque | $M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$                     | [Nm]    |
| Power  | $P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$ | [kW]    |

#### Key

|                    |   |  |
|--------------------|---|--|
| $V_g$              | = | Displacement per revolution [ $\text{cm}^3$ ]                  |
| $\Delta p$         | = | Differential pressure [bar]                                    |
| $n$                | = | Rotational speed [rpm]   |
| $\eta_v$           | = | Volumetric efficiency  |
| $\eta_{\text{hm}}$ | = | Hydraulic mechanical efficiency                                |
| $\eta_t$           | = | Total efficiency ( $\eta_t = \eta_v \times \eta_{\text{hm}}$ ) |

- Maximum rotational speed (rotational speed limit) in the case of increasing the inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ .
- The data are valid for values between the minimum required and maximum permissible speed. Valid for external excitation (e. g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limiting value is only valid for a single pump. The load capacity of the connection parts must be considered.



RE 93105/02.2018, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 8 A28VO Series 10 | Axial piston variable double pump Technical data

### Permissible radial and axial forces of the drive shafts

| Size   | NG  | 130                    |
|--|---|------------------------|
| Drive shaft  |   | 1 3/4                  |
| Maximum radial force at distance a (from shaft collar) |  | $F'_{q \max}$ N 8000   |
|  | a   | mm 33.5                |
| Maximum axial force                                    |  | $+ F_{ax \max}$ N 1200 |
|  |   | $- F_{ax \max}$ N 500  |


#### Note

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.
- Special requirements apply in the case of belt drives. Please contact us.

### Permissible input torques

| Size   | NG           | 130                  |
|--|--------------|----------------------|
| Torque at $V_{g \max}$ and $\Delta p = 350 \text{ bar}^{1)}$ | $M_{\max}$   | Nm 1572              |
| Input torque at drive shaft, maximum <sup>2)</sup>           |              |                      |
| R1   | 1 3/4 in     | $M_{E \max}$ Nm 2240 |
| Maximum through-drive torque                                 | $M_{D \max}$ | Nm 380               |

#### ▼ Distribution of torques

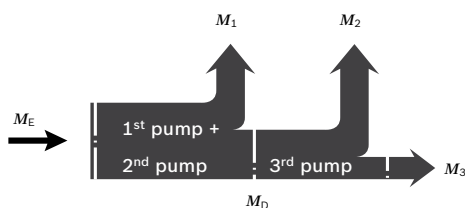

|   |                         |
|---|-------------------------|
| Torque at 1 <sup>st</sup> pump + 2 <sup>nd</sup> pump | $M_1$                   |
| Torque at 3 <sup>rd</sup> pump                        | $M_2$                   |
| Torque at 4 <sup>th</sup> pump                        | $M_3$                   |
| Input torque  | $M_E = M_1 + M_2 + M_3$ |
|   | $M_E < M_{E \max}$      |
| Through-drive torque                                  | $M_D = M_2 + M_3$       |
|   | $M_D < M_{D \max}$      |

1) Efficiency not considered

2) For drive shafts free of radial force



## Power controller

### C5 – Power controller with hydraulic coupling and power override through pilot pressure

The hydraulic coupling of the two individual power controllers is the result of the accumulated power control function.

However, the two rotary groups are not coupled mechanically, but rather hydraulically.

The operating pressures of the two circuits each act on the differential piston of the two individual controllers, swiveling the two rotary groups out and back together.

If one pump is working with less than 50% of the total drive power, the remaining power can be additionally transmitted to the other pump, in borderline cases up to 100% of the total drive power.

The hyperbolic power curve is approximated with two mass springs. The operating pressure acts on the measurement area of a differential piston against the mass springs and of a spring force that can be varied from the outside, which determines the power setting.

If the sum of the hydraulic forces exceeds the forces of the springs, the control fluid is fed to the stroking piston, swiveling the pump back and setting it to a smaller volume flow. In a depressurized state, the pump is swiveled to its initial position to  $V_{g \max}$  by a return spring.

The power override has the possibility to adjust the mechanically basic setting with a hydraulic adjustment with different pilot pressure settings.

This makes different power setting possible. The pilot pressure for power override is generated by an external control element or by the mounted pressure reducing valve.

When ordering, state in plain text:


- ▶ Application: e.g. excavator
- ▶ Drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min]
- ▶ Maximum working pressure

### Note

With the additional function hydraulic stroke limiter, each rotary group can be swiveled back independently of a smaller  $V_g$  than that currently specified by the power control.

See page 10 for the circuit diagram of the C5H4 control

### ▼ Effect of power override through pilot pressure increase

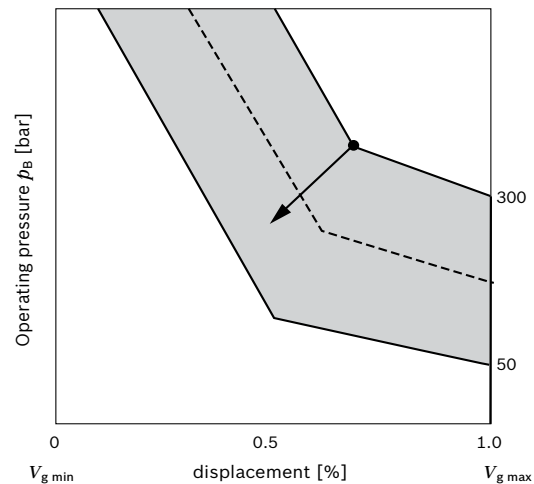

## 10 A28VO Series 10 | Axial piston variable double pump Stroke control

### Stroke control

#### H4 – Stroke limiter, hydraulic, proportional (positive control)

The hydraulic stroke limiter allows the displacement to be steplessly varied or limited over the entire adjustment range of  $V_{g \max}$  to  $V_{g \min}$ .

The displacement is set by a pilot pressure.

The power control overrides the hydraulic stroke limiter control, i.e. below the power characteristic, the displacement is controlled by the pilot pressure. If the set flow or operating pressure exceeds the power characteristic, the power control overrides and reduces the displacement following the spring characteristic.


#### Note

The H4 characteristic is influenced by the design of the power controller!

Hydraulic stroke limiter and external pilot pressure supply (positive control)

- ▶ Control from  $V_{g \min}$  to  $V_{g \max}$ . With increasing pilot pressure the pump swivels to a higher displacement. State start of control in clear text in the order.
- ▶ Initial position in depressurized state:  $V_{g \max}$

#### ▼ Characteristic H4

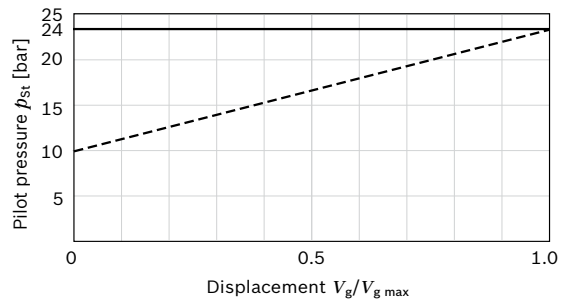


#### Note

If there is no external control pressure applied to **G**, the version "Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply" must be ordered (see ordering code position 07, A).

If the **G** port is available, but no external control pressure applied to **G**, the **G** port must be connected to the Reservoir.

#### ▼ Circuit diagram C5H4

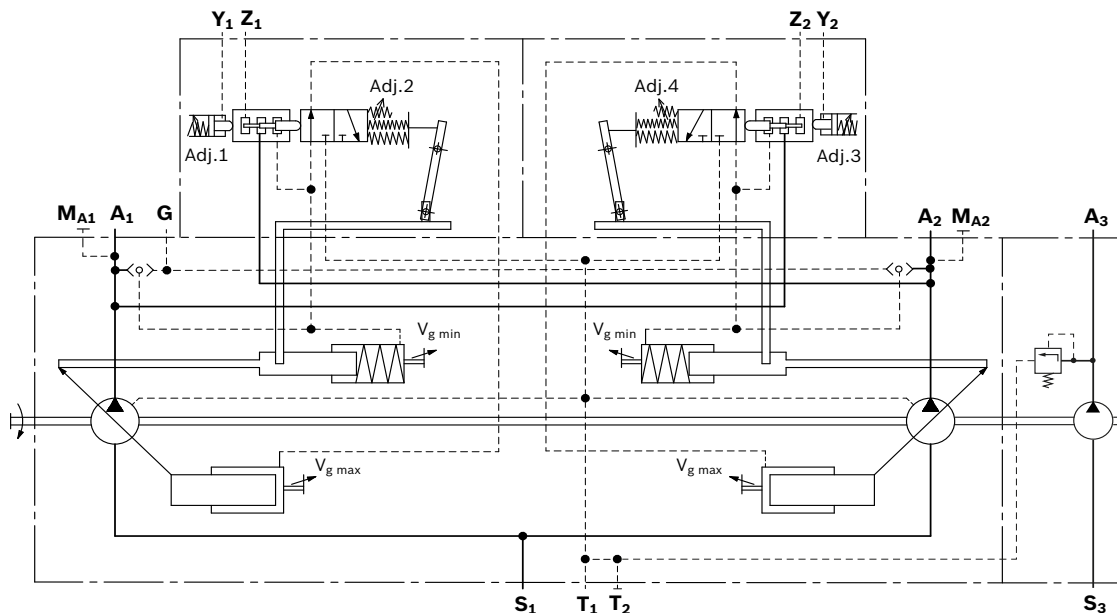

Bosch Rexroth AG, RE 93105/02.2018

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## Axial piston variable double pump | A28VO Series 10 11 Stroke control

### E7 – Stroke control, electric, proportional (positive control)

With the electrical stroke limiter with proportional solenoid, the pump displacement is steplessly adjusted in proportion to the current via the magnetic force. Basic position without pilot signal is  $V_{g \min}$ , which includes the mechanically depressurized basic position  $V_{g \min}$  (see ordering code position 07).

With increasing control current the pump swivels to a higher displacement (from  $V_{g \min}$  to  $V_{g \max}$ ).

The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **G**. If the pump is to be adjusted from the basic position  $V_{g \min}$  at low operating pressure < 30 bar, port **G** must be supplied with an external control pressure of at least 30 bar, maximum 50 bar. (Circuit diagram see page 12).

#### Note

If there is no external control pressure applied to **G**, the version "Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply" must be ordered (see ordering code position 07, A).

BODAS RC controllers with application software and analog amplifier RA are available for controlling the proportional solenoids.


Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

| Technical data, solenoid                          | E7                  |
|---|---------------------|
| Voltage   | 24 V ( $\pm 20\%$ ) |
| Control current                                   |                     |
| Beginning of control at $V_{g \min}$              | 400 mA              |
| End of control at $V_{g \max}$                    | 1500 mA             |
| Limiting current                                  | 1500 mA             |
| Nominal resistance (at 20 °C)                     | 6.5 $\Omega$        |
| Dither frequency                                  | 150 Hz              |
| Duty cycle  | 100%                |
| Type of protection: see connector version page 18 |                     |

When ordering, state in plain text:

- Drive speed  $n$  [rpm]
- Maximum flow  $q_{V \max}$  [l/min]
- Minimum flow  $q_{V \min}$  [l/min]

#### ▼ Characteristic E7

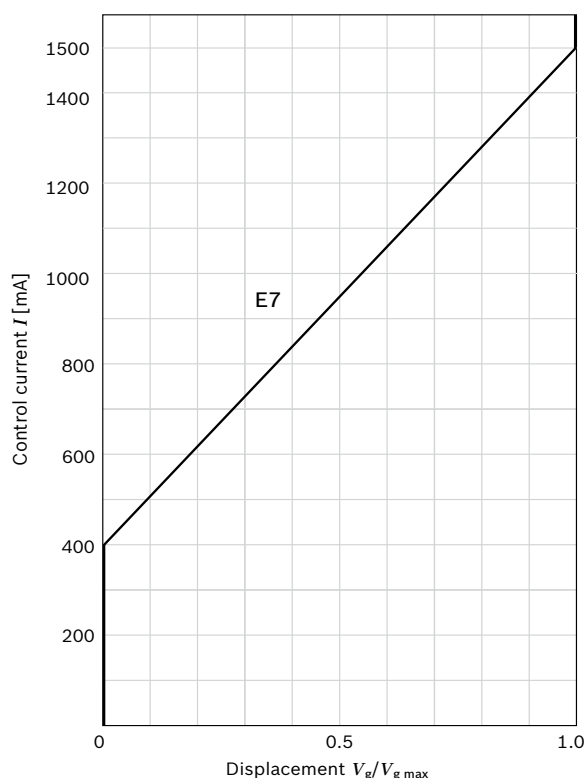


RE 93105/02.2018, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 12 A28VO Series 10 | Axial piston variable double pump Stroke control

### ▼ Circuit diagram E7

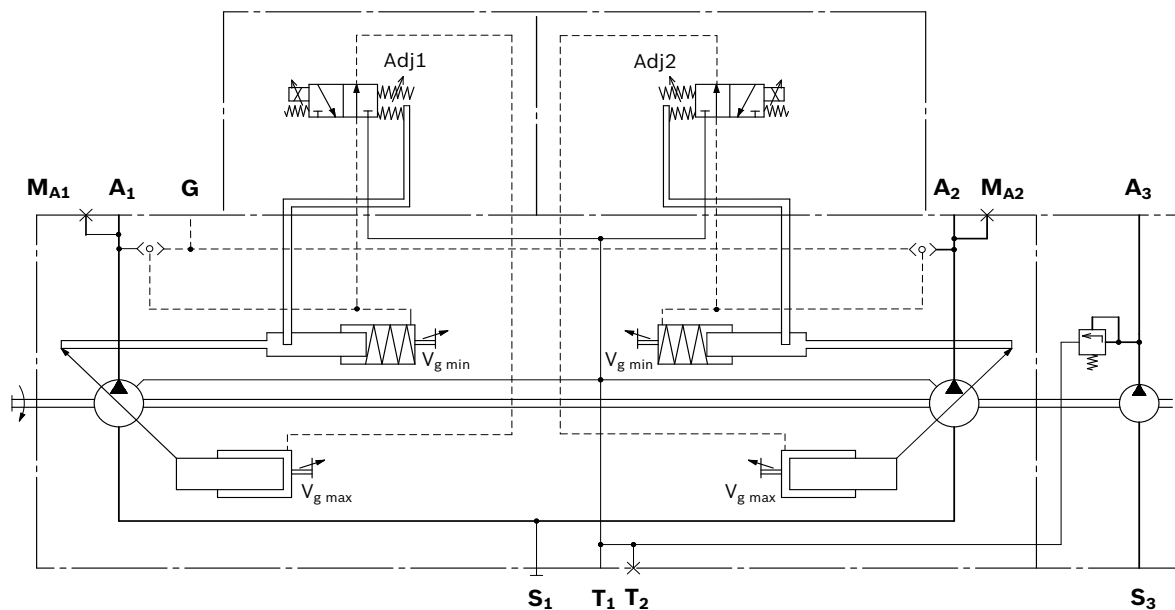

Bosch Rexroth AG, RE 93105/02.2018

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

Dimensions [mm]


Axial piston variable double pump | **A28VO Series 10**  
Dimensions, size 130

13

## Dimensions, size 130

### C5H4

Clockwise rotation (Page 1/2) Additional information about ports and shaft ends can be found on page 15 and 16

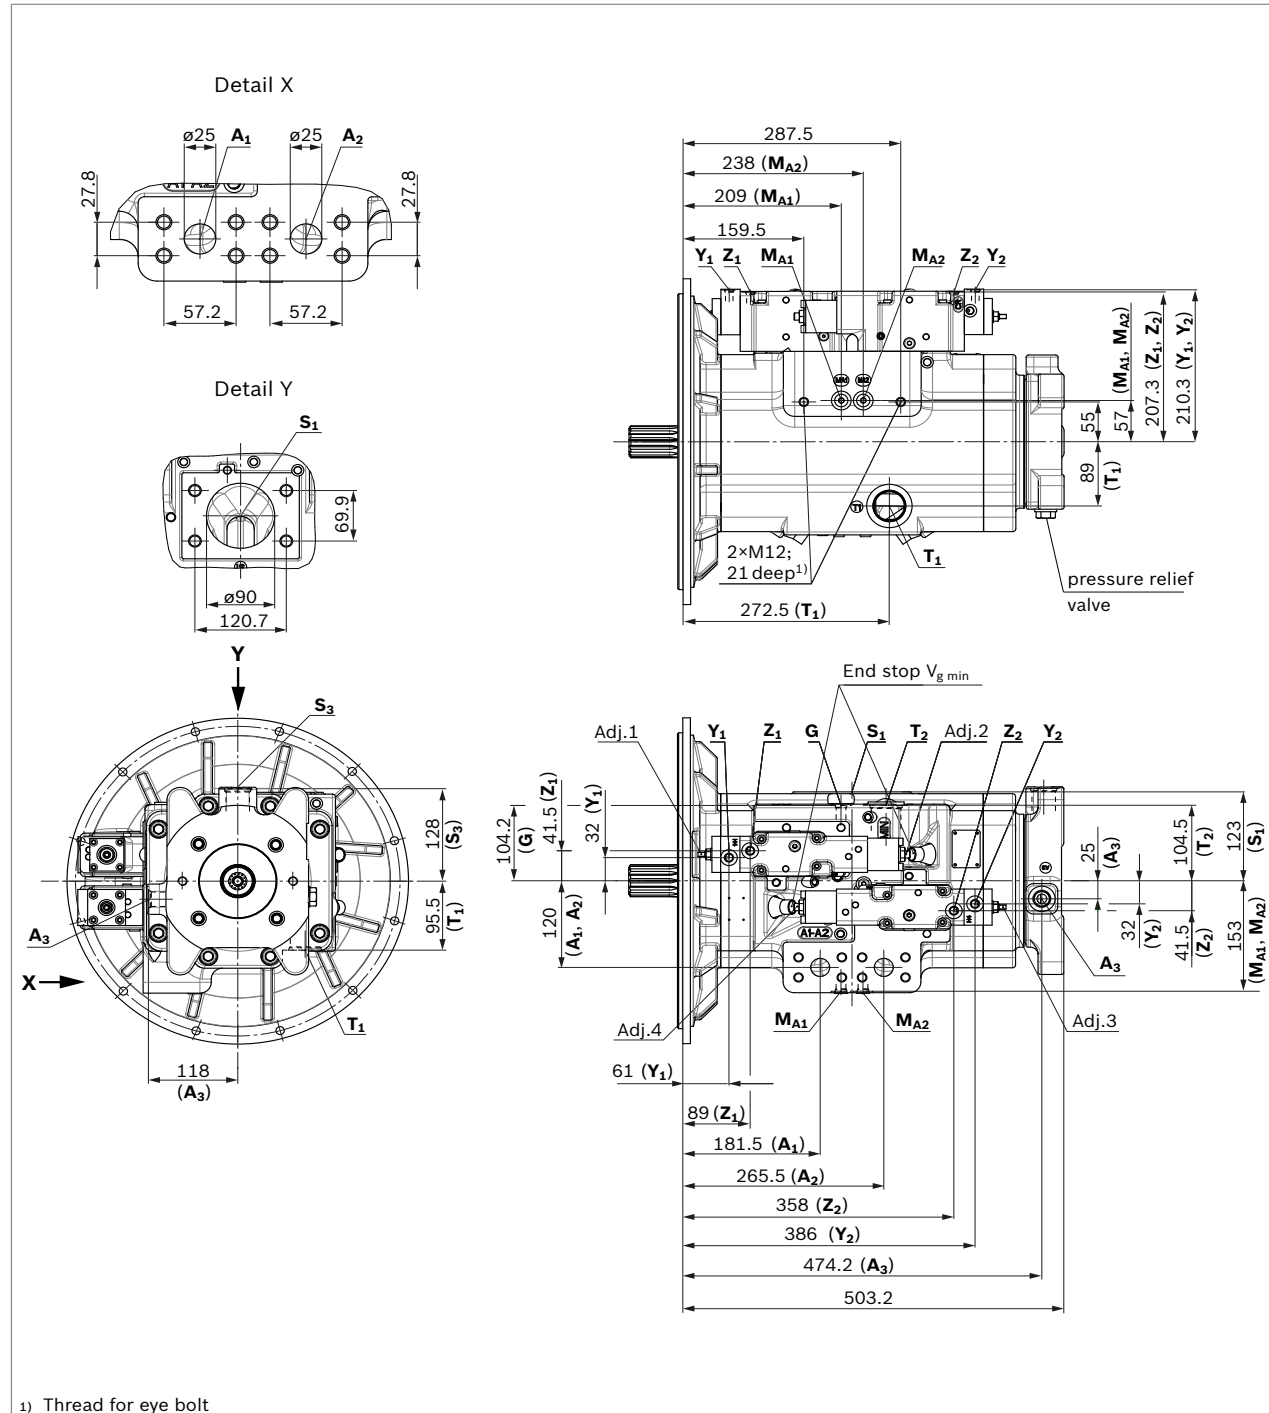

RE 93105/02.2018, Bosch Rexroth AG

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


14 **A28VO Series 10** | Axial piston variable double pump  
Dimensions, size 130

Dimensions [mm]

## Dimensions, size 130

### C5H4

Clockwise rotation (Page 2/2) Additional information about ports and shaft ends can be found on page 15 and 16

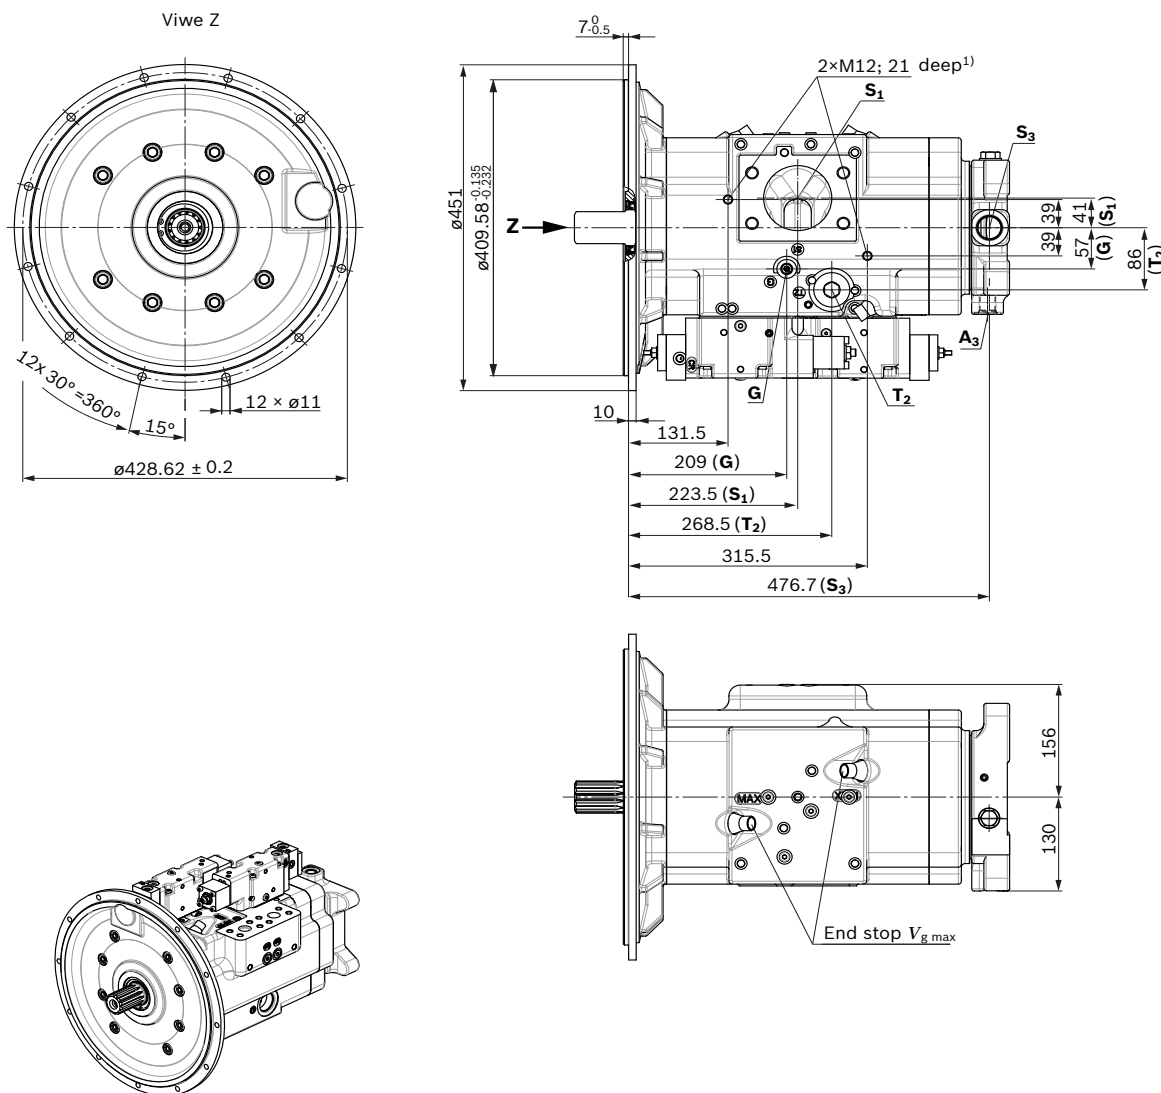

<sup>1)</sup> Thread for eye bolt

Bosch Rexroth AG, RE 93105/02.2018

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK


Dimensions [mm]

Axial piston variable double pump | **A28VO Series 10**  
Dimensions, size 130

15

▼ **Splined shaft SAE J744**

**R1** – 1 3/4 in 13T 8/16DP<sup>1)2)</sup>

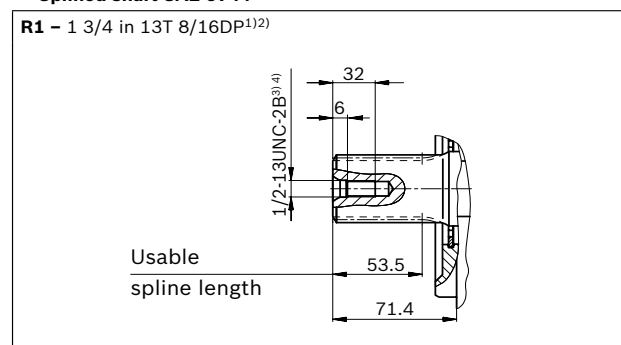

- 1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Spline shaft according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Centering bore according to DIN 332 (thread according to ASME B1.1)

- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.

RE 93105/02.2018, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

16 **A28VO Series 10** | Axial piston variable double pump  
Dimensions, size 130

Dimensions [mm]

**JIS-version**

| Ports                 |                       |  | Standard                | Size <sup>4)</sup>  | $p_{\max \text{ abs}}$<br>[bar] <sup>7)</sup> | State <sup>9)</sup> |        |
|-----------------------|-----------------------|--|-------------------------|---------------------|---|---------------------|--------|
| Pump 1                | Pump 2                |  |                         |                     |   | Pump 1              | Pump 2 |
| <b>A<sub>1</sub></b>  | <b>A<sub>2</sub></b>  | Working port   | SAE J518 <sup>5)</sup>  | 1 in                | 420   | O                   | O      |
|                       |                       | Fastening thread (high pressure series)  | DIN 13                  | M12 × 1.75; 17 deep |   |                     |        |
| <b>S<sub>1</sub></b>  | –                     | Suction port   | SAE J518 <sup>5)</sup>  | 3 1/2 in            | 10  | O                   | –      |
|                       |                       | Fastening thread (standard pressure series)                                      | DIN 13                  | M16 × 2; 24 deep    |   |                     |        |
| <b>T<sub>1</sub></b>  | <b>T<sub>1</sub></b>  | Drain port   | JIS B2351               | G1 1/4; 22 deep     | 10  | O <sup>8)</sup>     | –      |
| <b>T<sub>2</sub></b>  | <b>T<sub>2</sub></b>  | Drain port   | JIS B2351               | G1 1/4; 22 deep     | 10  | X <sup>8)</sup>     | –      |
| <b>Z<sub>1</sub></b>  | <b>Z<sub>2</sub></b>  | Pilot signal (only at C5)  | JIS B2351 <sup>6)</sup> | G1/4, 13 deep       | 40  | O                   | O      |
| <b>Y<sub>1</sub></b>  | <b>Y<sub>2</sub></b>  | Pilot signal (only at H4)  | JIS B2351 <sup>6)</sup> | G1/4, 13 deep       | 40  | O                   | O      |
| <b>M<sub>A1</sub></b> | <b>M<sub>A2</sub></b> | Measuring, operating pressure A <sub>1</sub> , A <sub>2</sub>                    | JIS B2351 <sup>6)</sup> | G1/4, 13 deep       | 420   | X                   | X      |
| <b>G</b>              |                       | External control pressure<br>(only with external control pressure supply<br>“C”) | JIS B2351 <sup>6)</sup> | G1/4, 13 deep       | 50  | O                   | O      |
| <b>Boostpump</b>      |                       |  |                         |                     |   |                     |        |
| <b>A<sub>3</sub></b>  |                       | Working port   | JIS B2351               | G1/2; 17 deep       | 42  | O                   |        |
| <b>S<sub>3</sub></b>  |                       | Suction port   | JIS B2351               | G1; 22 deep         | 5   | O                   |        |

**SAE - version**

| Ports                 |                       |  | Standard                | Size <sup>4)</sup>       | $p_{\max \text{ abs}}$<br>[bar] <sup>7)</sup> | State <sup>9)</sup> |        |
|-----------------------|-----------------------|--|-------------------------|--------------------------|---|---------------------|--------|
| Pump 1                | Pump 1                |  |                         |                          |   | Pump 1              | Pump 1 |
| <b>A<sub>1</sub></b>  | <b>A<sub>2</sub></b>  | Working port   | SAE J518 <sup>5)</sup>  | 1 in                     | 420   | O                   | O      |
|                       |                       | Fastening thread (high pressure series)  | DIN 13                  | M12 × 1.75; 17 deep      |   |                     |        |
| <b>S<sub>1</sub></b>  | –                     | Suction port   | SAE J518 <sup>5)</sup>  | 3 1/2 in                 | 10  | O                   | –      |
|                       |                       | Fastening thread (standard pressure series)                                      | DIN 13                  | M16 × 2; 24 deep         |   |                     |        |
| <b>T<sub>1</sub></b>  | <b>T<sub>1</sub></b>  | Drain port   | ISO 11926               | 1 5/8-12UN-2B; 22 deep   | 10  | O <sup>8)</sup>     | –      |
| <b>T<sub>2</sub></b>  | <b>T<sub>2</sub></b>  | Drain port   | ISO 11926               | 1 5/8-12UN-2B; 22 deep   | 10  | X <sup>8)</sup>     | –      |
| <b>Z<sub>1</sub></b>  | <b>Z<sub>2</sub></b>  | Pilot signal (only at C5)  | ISO 11926 <sup>6)</sup> | 7/16-20UNF-2B; 13 deep   | 40  | O                   | O      |
| <b>Y<sub>1</sub></b>  | <b>Y<sub>2</sub></b>  | Pilot signal (only at H4)  | ISO 11926 <sup>6)</sup> | 7/16-20UNF-2B; 13 deep   | 40  | O                   | O      |
| <b>M<sub>A1</sub></b> | <b>M<sub>A2</sub></b> | Measuring, operating pressure A <sub>1</sub> , A <sub>2</sub>                    | ISO 11926 <sup>6)</sup> | 9/16-18UNF-2B; 13 deep   | 420   | X                   | X      |
| <b>G</b>              |                       | External control pressure<br>(only with external control pressure supply<br>“C”) | ISO 11926 <sup>6)</sup> | 9/16-18UNF-2B; 13 deep   | 50  | O                   | O      |
| <b>Boostpump</b>      |                       |  |                         |                          |   |                     |        |
| <b>A<sub>3</sub></b>  |                       | Working port   | ISO 11926               | 7/8-14UNF-2B; 17 deep    | 42  | O                   |        |
| <b>S<sub>3</sub></b>  |                       | Suction port   | ISO 11926               | 1 5/16-12UNF-2B; 20 deep | 5   | O                   |        |

5) Metric fastening thread is a deviation from standard.

6) The spot face can be deeper than as specified in the standard

7) Depending on the application, momentary pressure peaks may occur.

Keep this in mind when selecting measuring devices and fittings.

8) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected (see also Installation instructions on pages 20 and 21).

9) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)




Dimensions [mm]

Axial piston variable double pump | **A28VO Series 10**  
Dimensions, size 130

17

▼ **E7** – Stroke control, electric, proportional

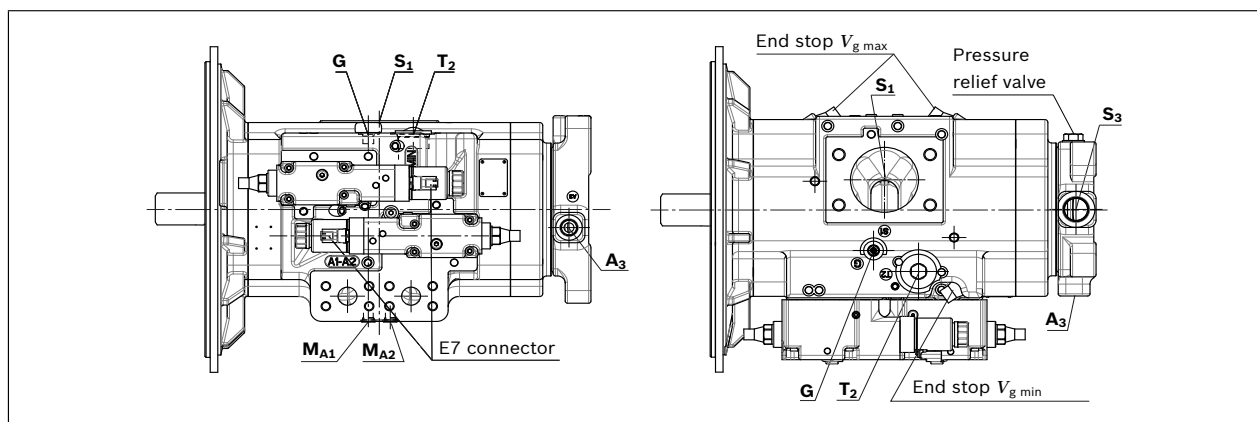

RE 93105/02.2018, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

18 **A28VO Series 10** | Axial piston variable double pump  
 Connector for solenoids

Dimensions [mm]

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit diagram symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

| Consisting of | DT designation |
|---------------|----------------|
| 1 housing     | DT06-2S-EP04   |
| 1 wedge       | W2S            |
| 2 sockets     | 0462-201-16141 |

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

## Changing connector orientation

### Note



If necessary, you can change the position of the connector by turning the solenoid.

The procedure is defined in the instruction manual.

Dimensions [mm]


Axial piston variable double pump | **A28VO Series 10** 19  
Dimensions, through drives

## Dimensions, through drives

| Flange SAE J744 |   |             | Hub for splined shaft <sup>1)</sup> |             |             | Availability over sizes |     | Code |
|-----------------|---|-------------|-------------------------------------|-------------|-------------|-------------------------|-----|------|
| Diameter        | Attachment <sup>2)</sup>  | Designation | Diameter                            |             | Designation |                         | 130 |      |
| 82-2 (A)        |  | A5          | 7/8 in                              | 13T 16/32DP | S4          |                         | ●   | A5S4 |
| 101-2 (B)       |  | B2          | 7/8 in                              | 13T 16/32DP | S4          |                         | ●   | B2S4 |


● = Available

### ▼ 82-2 (A)

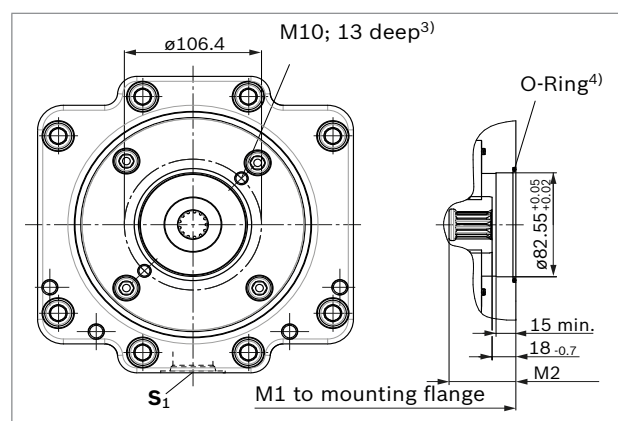

| 82-2 (A)            | NG  | M1    | M2   |
|---------------------|-----|-------|------|
| without charge pump | 130 | 470.2 | 50.6 |
| with charge pump    | 130 | 500.2 | 50.6 |

### ▼ 101-2 (B)

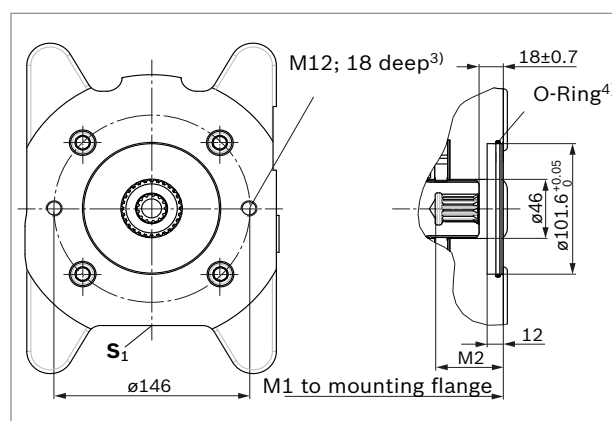

| 101-2 (B)           | NG  | M1    | M2   |
|---------------------|-----|-------|------|
| without charge pump | 130 | 470.2 | 50.6 |
| with charge pump    | 130 | 500.2 | 50.6 |

- 1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting bores pattern viewed from through drive with control at top
- 3) Thread according to DIN 13, observe the instructions in the operating instructions concerning the maximum tightening torques

- 4) O-ring included in the scope of delivery

RE 93105/02.2018, **Bosch Rexroth AG**

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## 20 A28VO Series 10 | Axial piston variable double pump Installation instructions

### Installation instructions

#### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines. Particularly in the installation position “drive shaft upwards”, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The case drain fluid in the case interior must be directed to the reservoir via the highest drain port (**T<sub>1</sub>**, **T<sub>2</sub>**, **T<sub>3</sub>**). For combinations of multiple units, the case drain fluid must be drained off at each pump. If a shared drain line is used for this purpose, make sure that the case pressure in each pump is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation. In all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ mm$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute (without charge pump) during operation and during a cold start. When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

#### Note



In certain installation positions, an influence on the control characteristic curves can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.

#### Installation position

See examples **1** to **6** below.  
Further installation positions are available upon request.  
Recommended installation position: **1** and **2**

#### Below-reservoir installation (standard)


Below-reservoir installation is when the axial piston unit is installed outside of the reservoir and below the minimum fluid level.

| Installation position   | Air bleed      | Filling        |
|---|----------------|----------------|
| 1   | T <sub>1</sub> | T <sub>1</sub> |
|   |                |                |
| 2   | T <sub>2</sub> | T <sub>2</sub> |
|  |                |                |


Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. Observe the maximum permissible suction height  $h_{S\ max} = 800\text{ mm}$ . Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

| Installation position | Air bleeding        | Filling            |
|-----------------------|---------------------|--------------------|
| 3                     | F (T <sub>2</sub> ) | T <sub>2</sub> (F) |



|   |                     |                    |
|---|---------------------|--------------------|
| 4 | F (T <sub>1</sub> ) | T <sub>1</sub> (F) |
|---|---------------------|--------------------|




| Key           |  |
|---------------|--|
| F             | Filling / air bleeding   |
| S             | Suction port   |
| T             | Drain port   |
| SB            | Baffle (baffle plate)  |
| $h_{t\ min}$  | Minimum required immersion depth (200 mm)  |
| $h_{min}$     | Minimum required distance to reservoir base (100 mm)                                     |
| $h_{ES\ min}$ | Minimum necessary height required to protect the axial piston unit from draining (25 mm) |
| $h_{S\ max}$  | Maximum permissible suction height (800 mm)  |

Inside-reservoir installation


Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “Above-reservoir installation”. Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

| Installation position | Air bleed | Filling |
|-----------------------|-----------|---------|
|-----------------------|-----------|---------|

|   |   |  |
|---|---|--|
| 5 | via the highest available port T <sub>2</sub> | automatically via the open port T <sub>2</sub> due to position below hydraulic fluid level |
|---|---|--|



|   |   |  |
|---|---|--|
| 6 | via the highest available port T <sub>1</sub> | automatically via the open port T <sub>1</sub> due to position below hydraulic fluid level |
|---|---|--|



Note

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

## 22 **A28VO Series 10** | Axial piston variable double pump Project planning notes

### Project planning notes

- ▶ The A28VO axial piston variable pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ The characteristic curve may also shift due to the dither frequency or control electronics.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or in the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>d</sub>) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
 Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ For drives that are operated for a long period with constant rotational speed, the natural frequency of the hydraulic system can be stimulated by the stimulator frequency of the pump (rotational speed frequency ×9). This can be prevented with suitably designed hydraulic lines.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

Bosch Rexroth AG, RE 93105/02.2018

Knowledge is POWER – Motion Force Control is our Business

HYQUIP Limited New Brunswick Street Horwich Bolton Lancashire BL6 7JB UK

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether additional measures are required on the machine for the relevant application in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.